Silverado Medium Duty 4500HD/5500HD/6500HD

Configuration Diagrams

CHEVROLET
SILVERADO
4500 HD
DURAMAX

Revised Date :01/11/2021

Table of Contents

GENERAL INFORMATION........3

REGULAR CAB
- 141” WB 5
- 165” WB 10
- 189” WB 17
- 201” WB 32
- 219”WB 47
- 231” WB 62
- 243”WB 77

CREW CAB
- 175” WB 92
- 199” WB 103
- 235” WB 118

REVISION HISTORY 133

Silverado Medium Duty 4500HD/5500HD/6500HD

Configuration Diagrams – General Information

Model:	C56403
Cab:	REGULAR CAB
Rear Suspension Shown in Diagrams	4x2 VARI-RATE

CA	WB
60”	141”
84”	165”
108”	189”
120”	201”
138”	219”
150”	231”
162”	243”

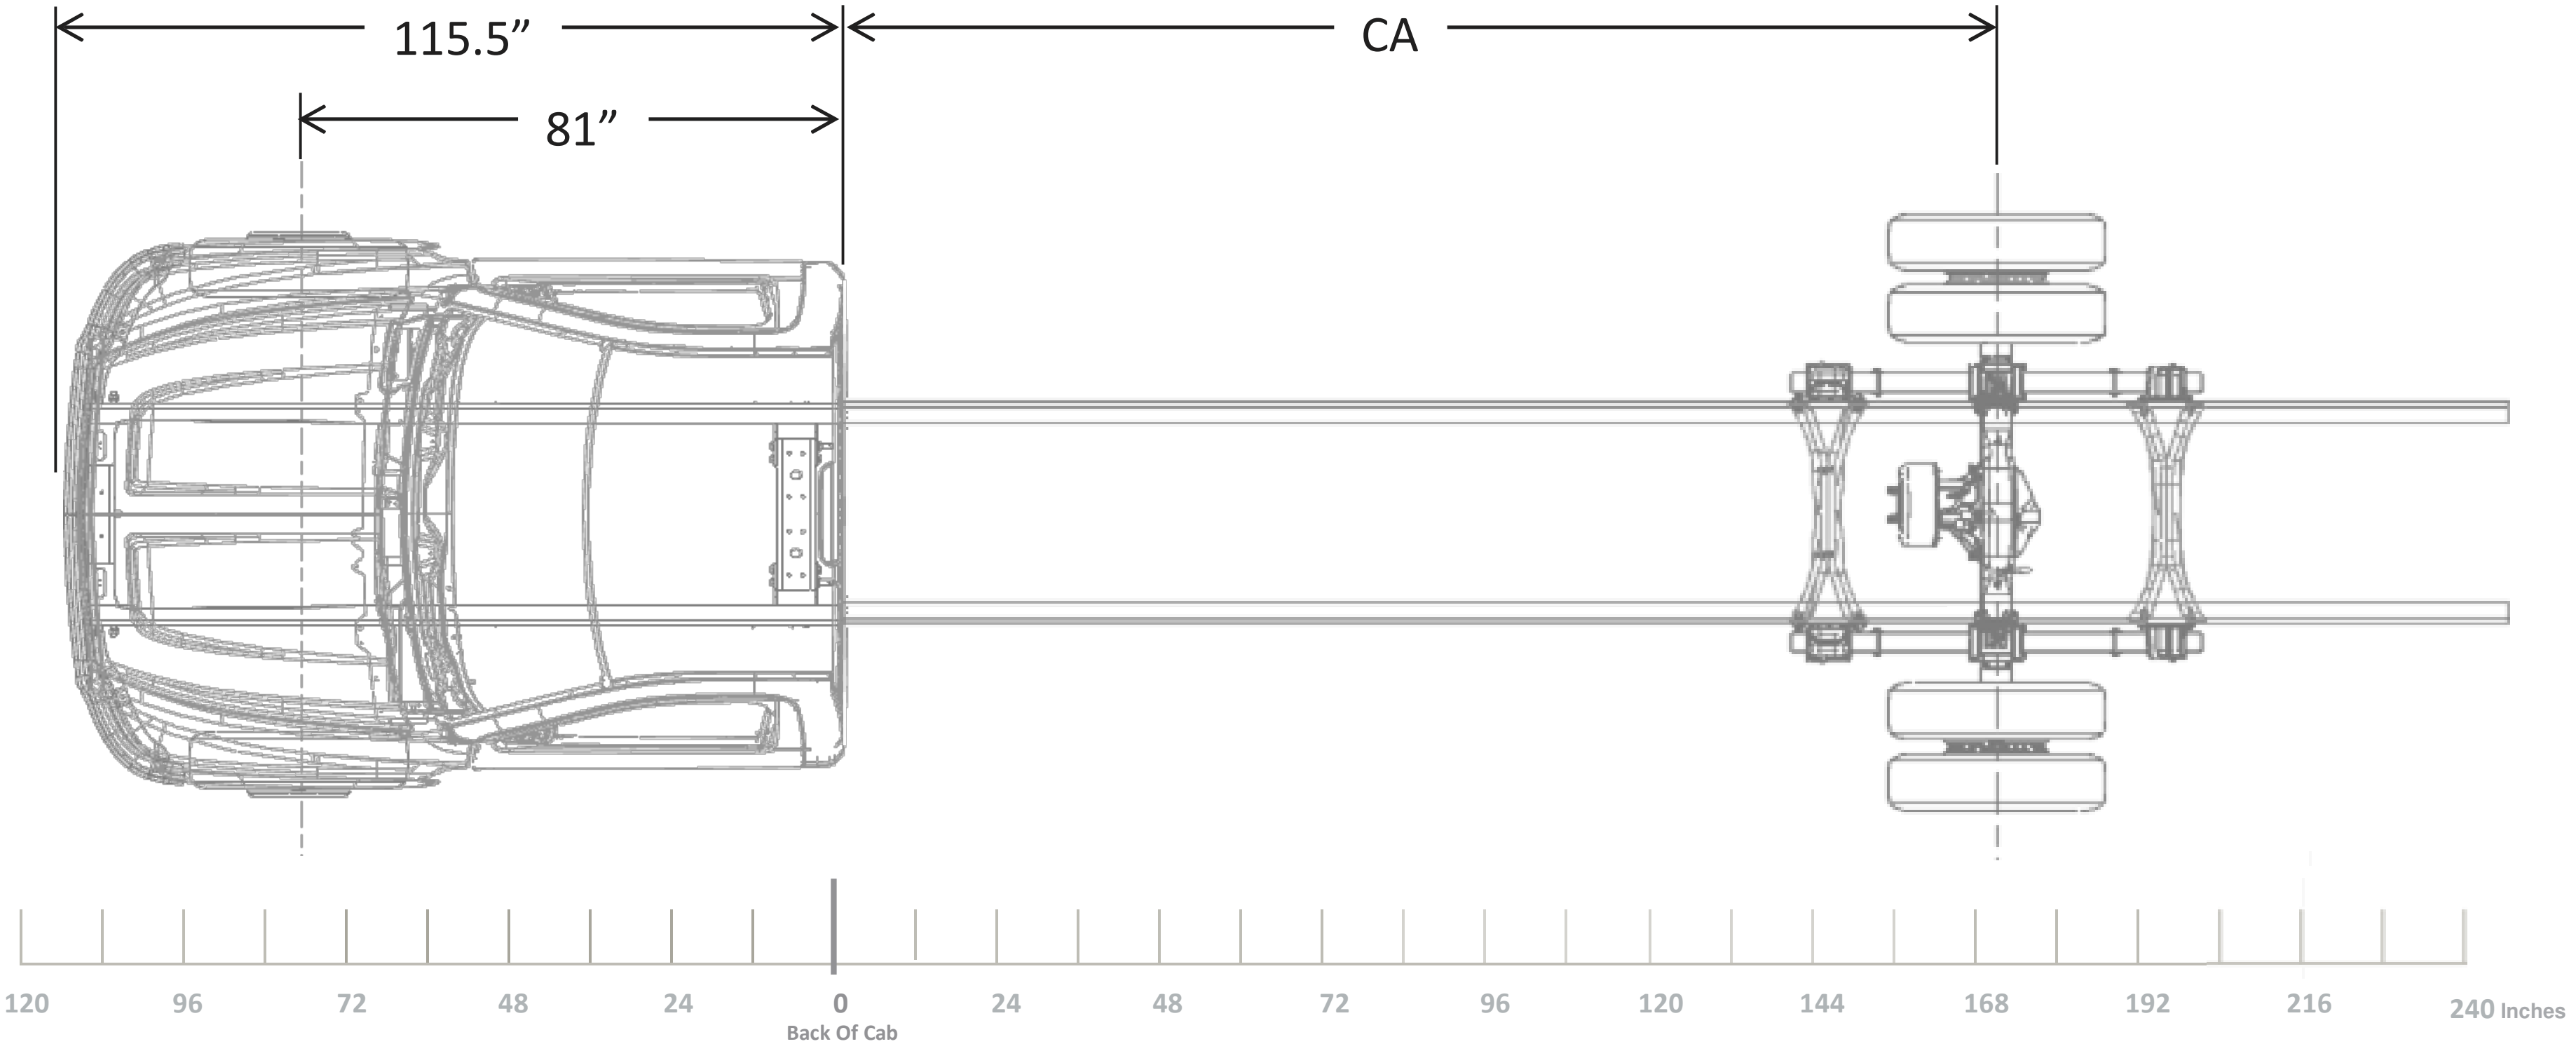

115.5”
81”
CA
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Configuration Diagrams – General Information

Model:	C56043
Cab:	CREW CAB
Rear Suspension Shown in Diagrams	4x2 VARI-RATE

CA	WB
60”	175”
84”	199”
120”	235”

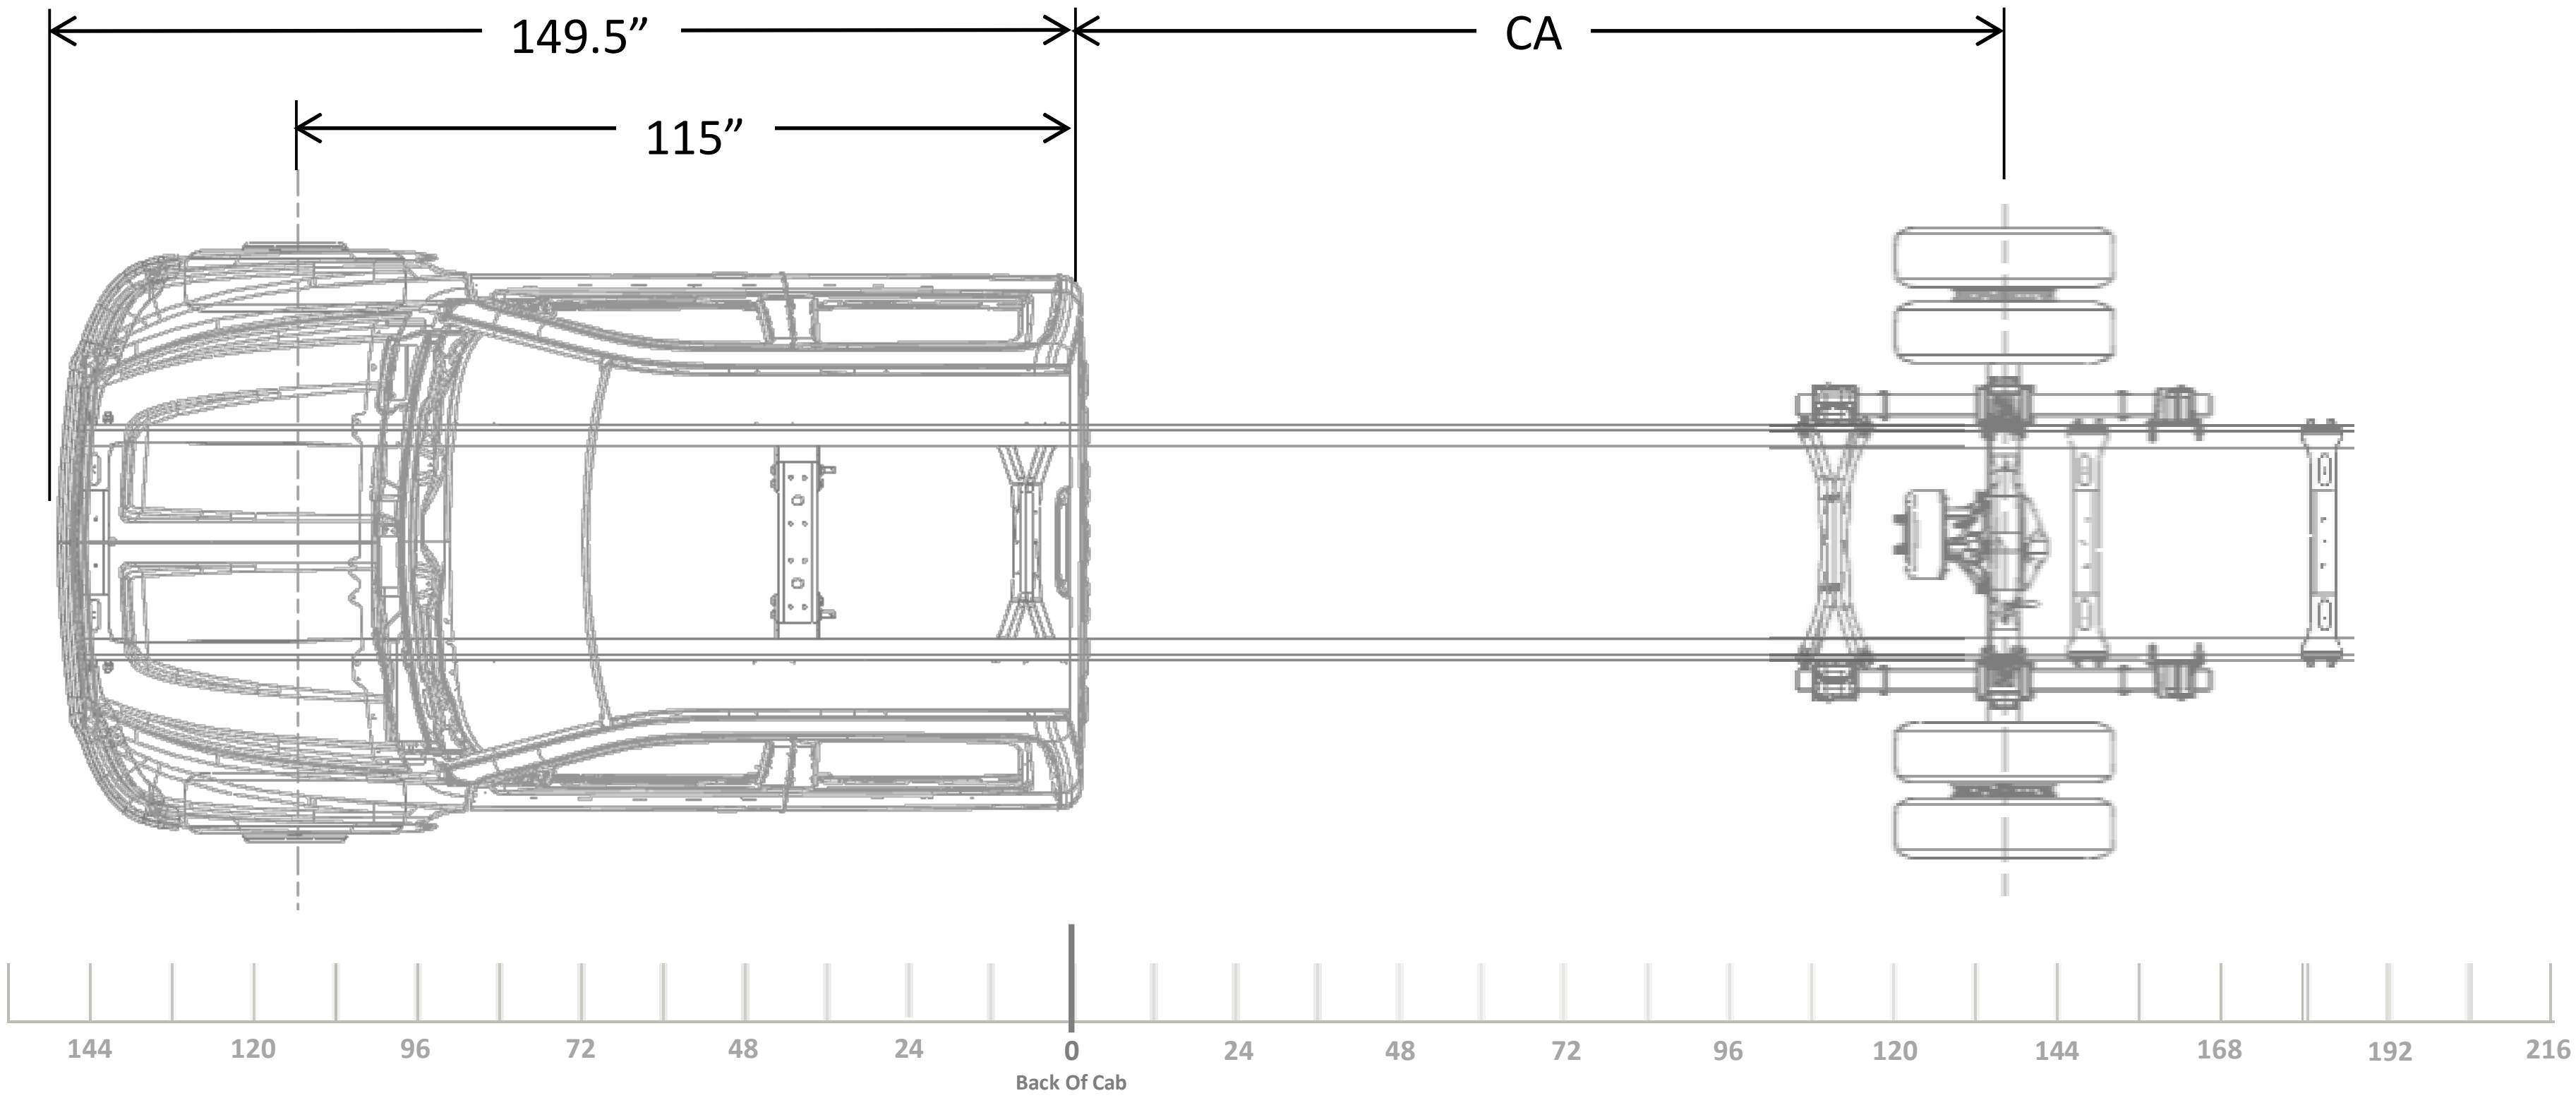
149.5”
CA
115”
144
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216

Regular Cab – 141” WB

Regular Cab – 141” WB

Model/Feature Information		
Model:		C56403
Cab:		REGULAR CAB
Aftertreatment:	STD	HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:	STD	6.75 GAL
Engine:	RPO L5D	6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION NOT AVAILABLE WITH 4X4
RT SIDE TAILPIPE, EXIT BEHIND REAR WHEEL (RPO NPR)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
141” WB (60” CA) 49” AF

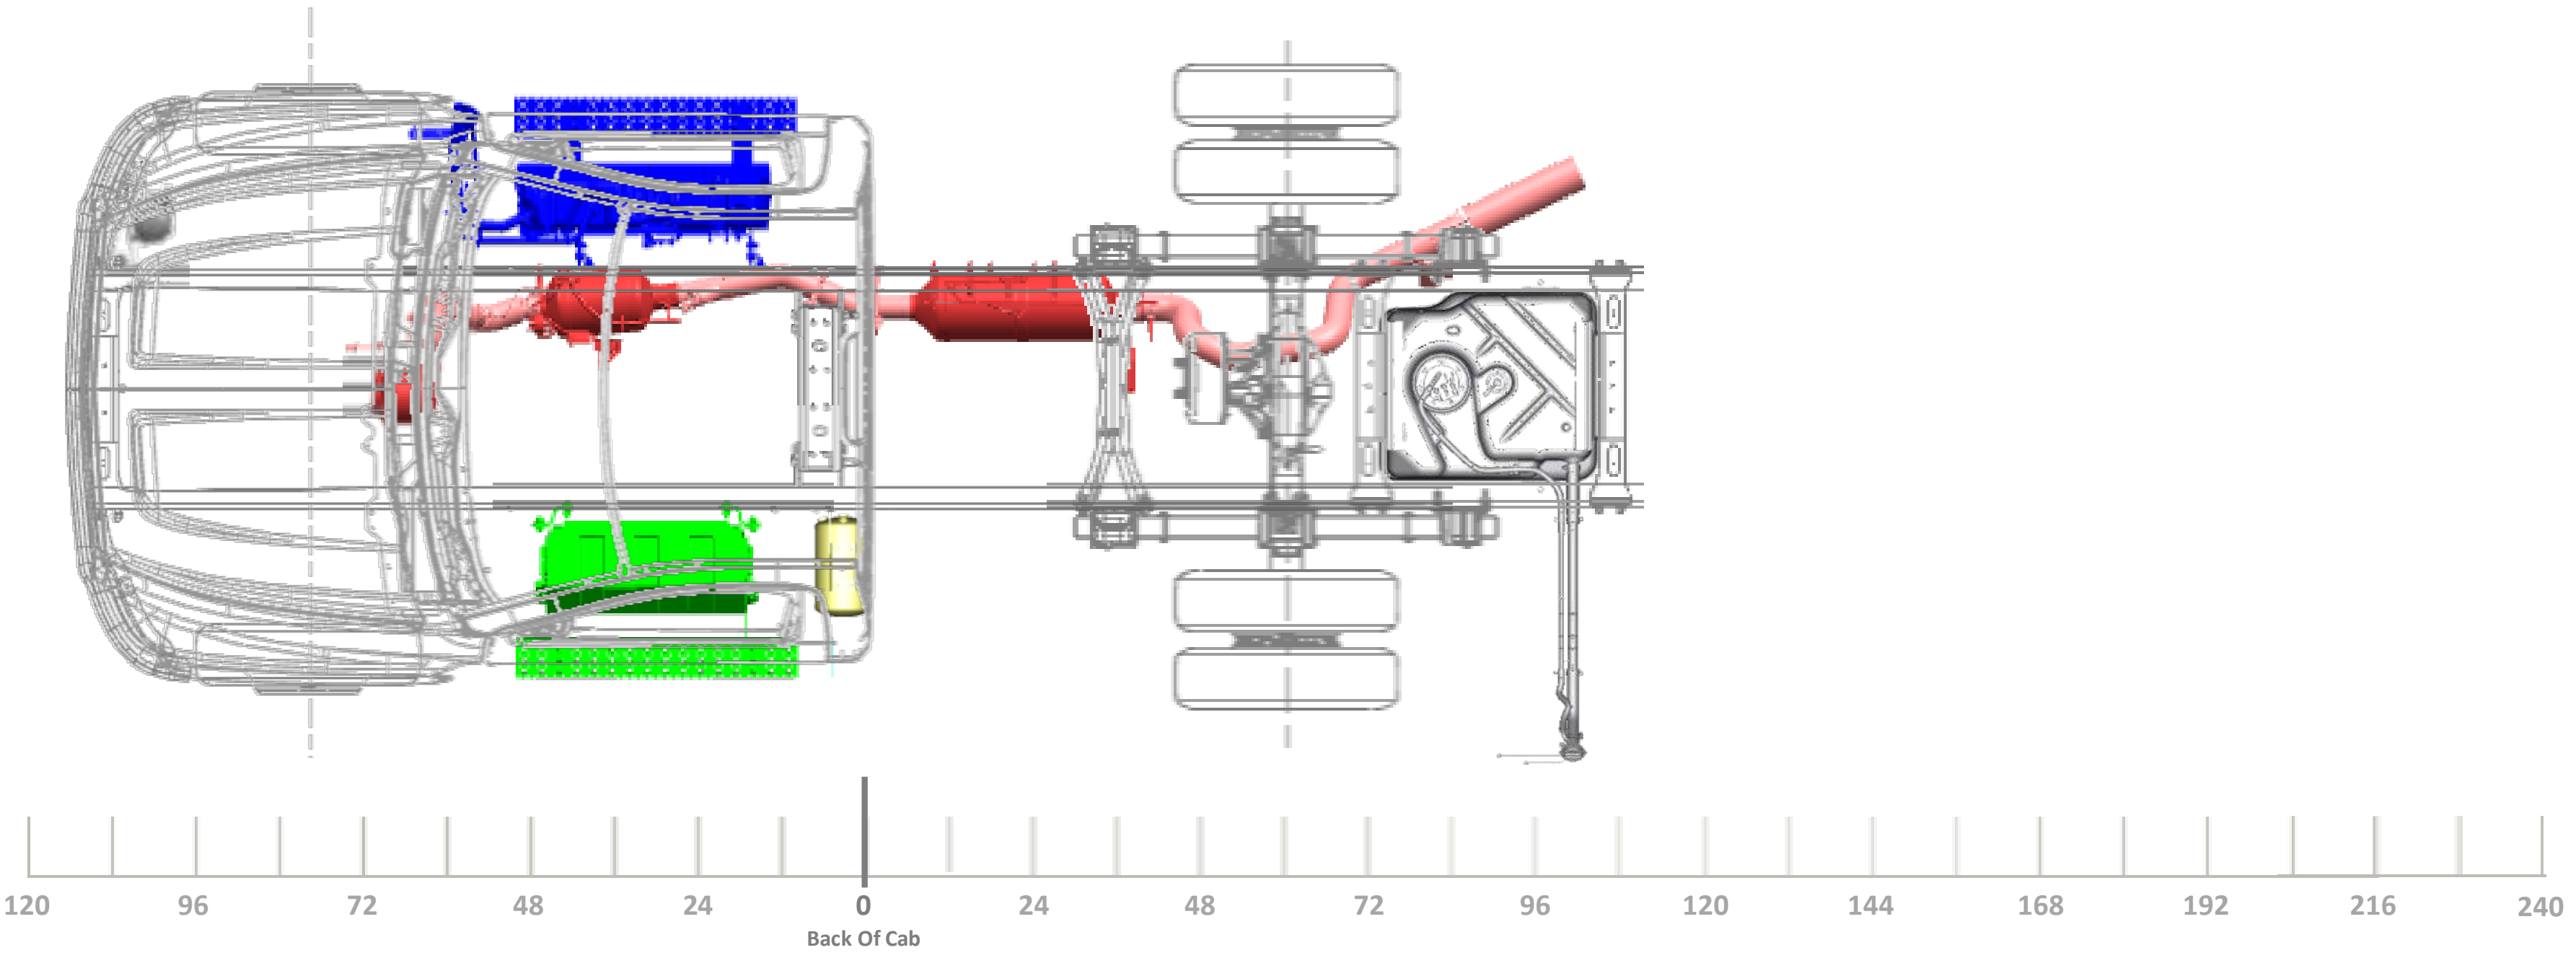

Regular Cab – 141” WB

Model/Feature Information		
Model:		C56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION NOT AVAILABLE WITH 4X4
RT SIDE TAILPIPE, EXIT BEHIND REAR WHEEL (RPO NPR)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
141” WB (60” CA) 49” AF

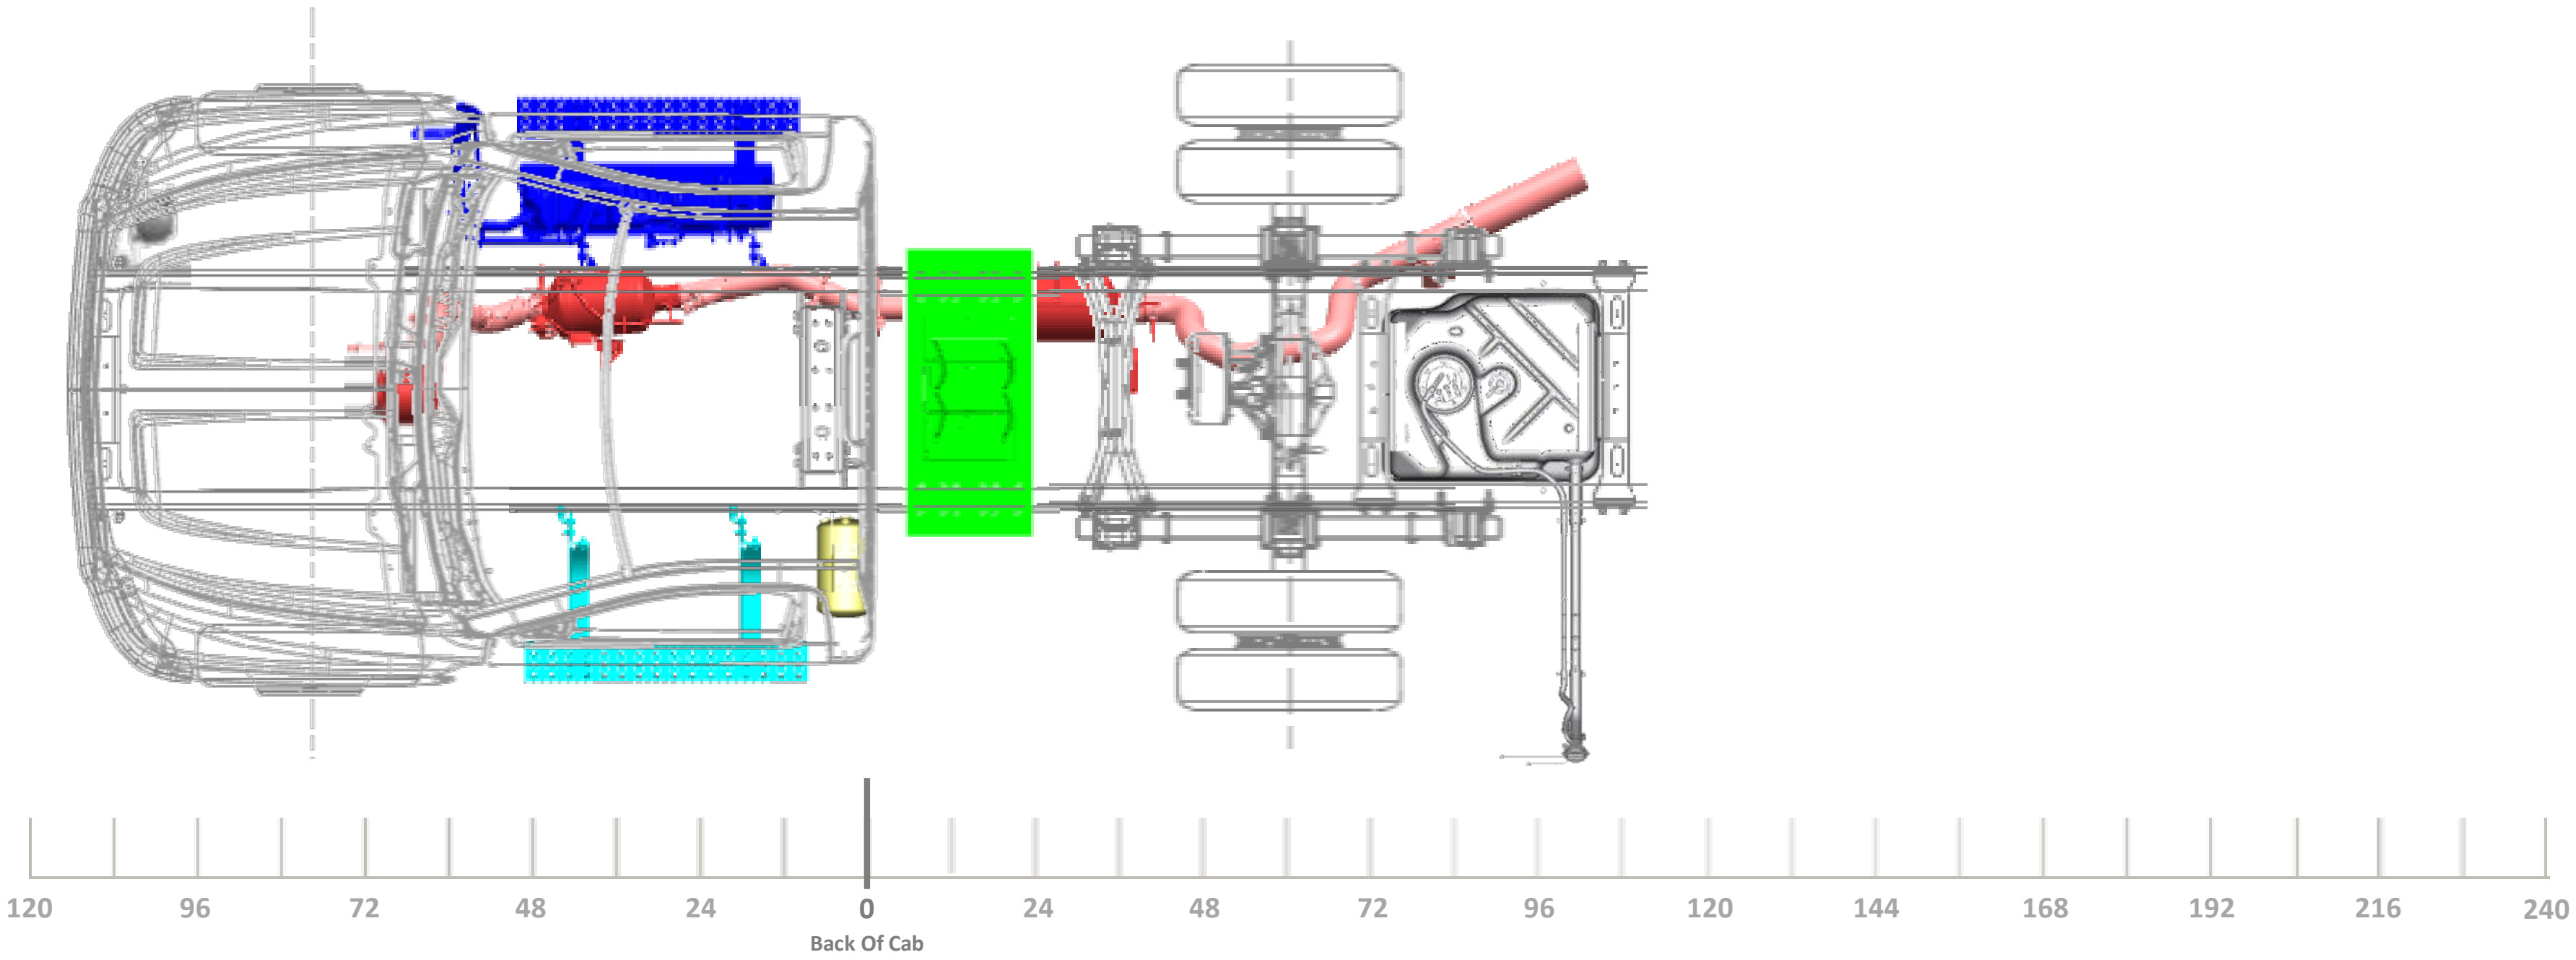

Regular Cab – 141” WB

Model/Feature Information		
Model:		C56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		NONE
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION NOT AVAILABLE WITH 4X4
RT SIDE TAILPIPE, EXIT BEHIND REAR WHEEL (RPO KUT/JPY)

Minimum Wheelbase
141” WB (60” CA) 49” AF

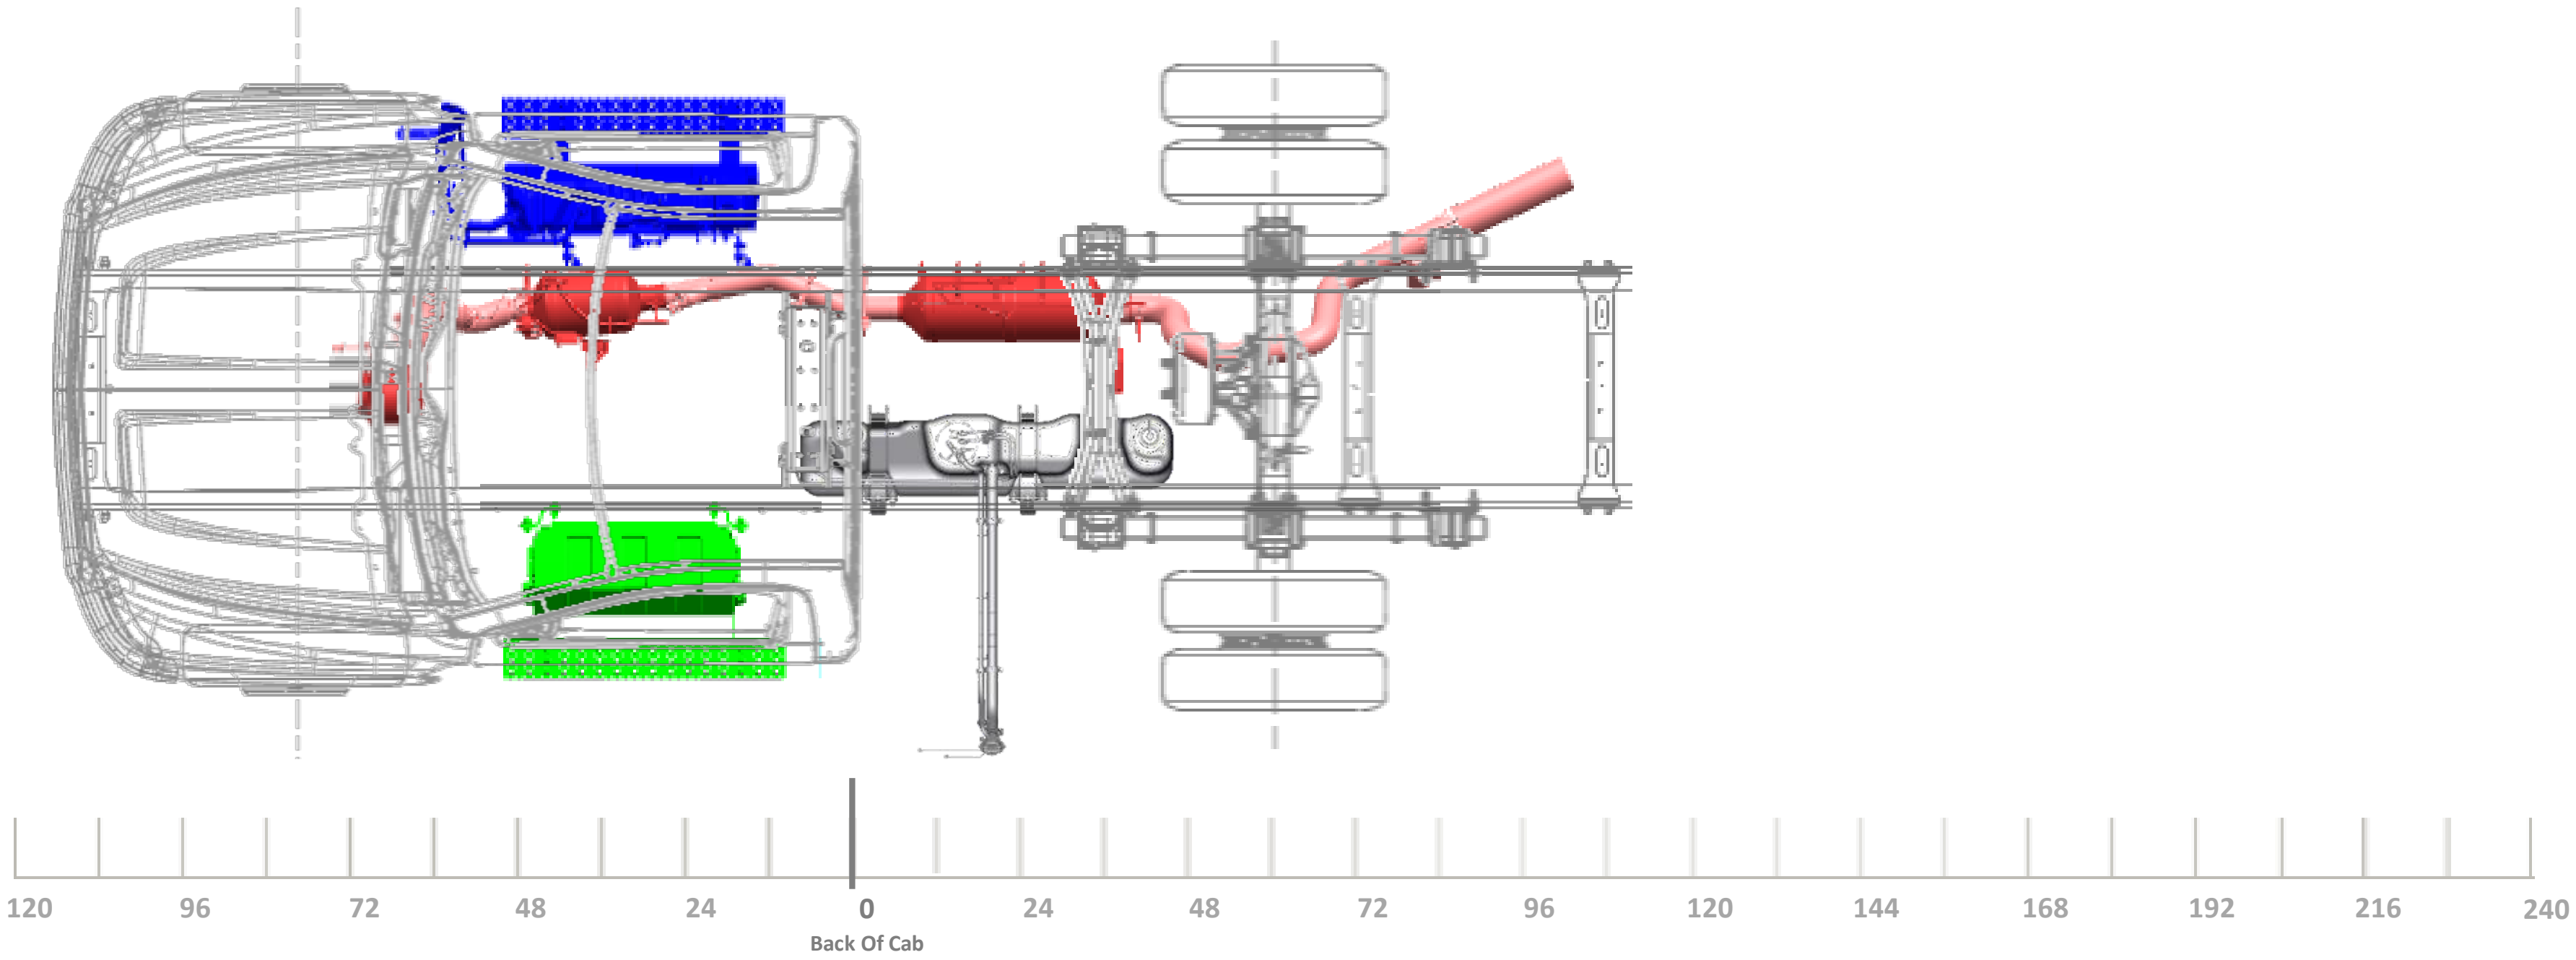

Regular Cab – 141” WB

Model/Feature Information		
Model:		C56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		NONE
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION NOT AVAILABLE WITH 4X4
RT SIDE TAILPIPE, EXIT BEHIND REAR WHEEL (RPO KUT/JPY)

Minimum Wheelbase
141” WB (60” CA) 49” AF

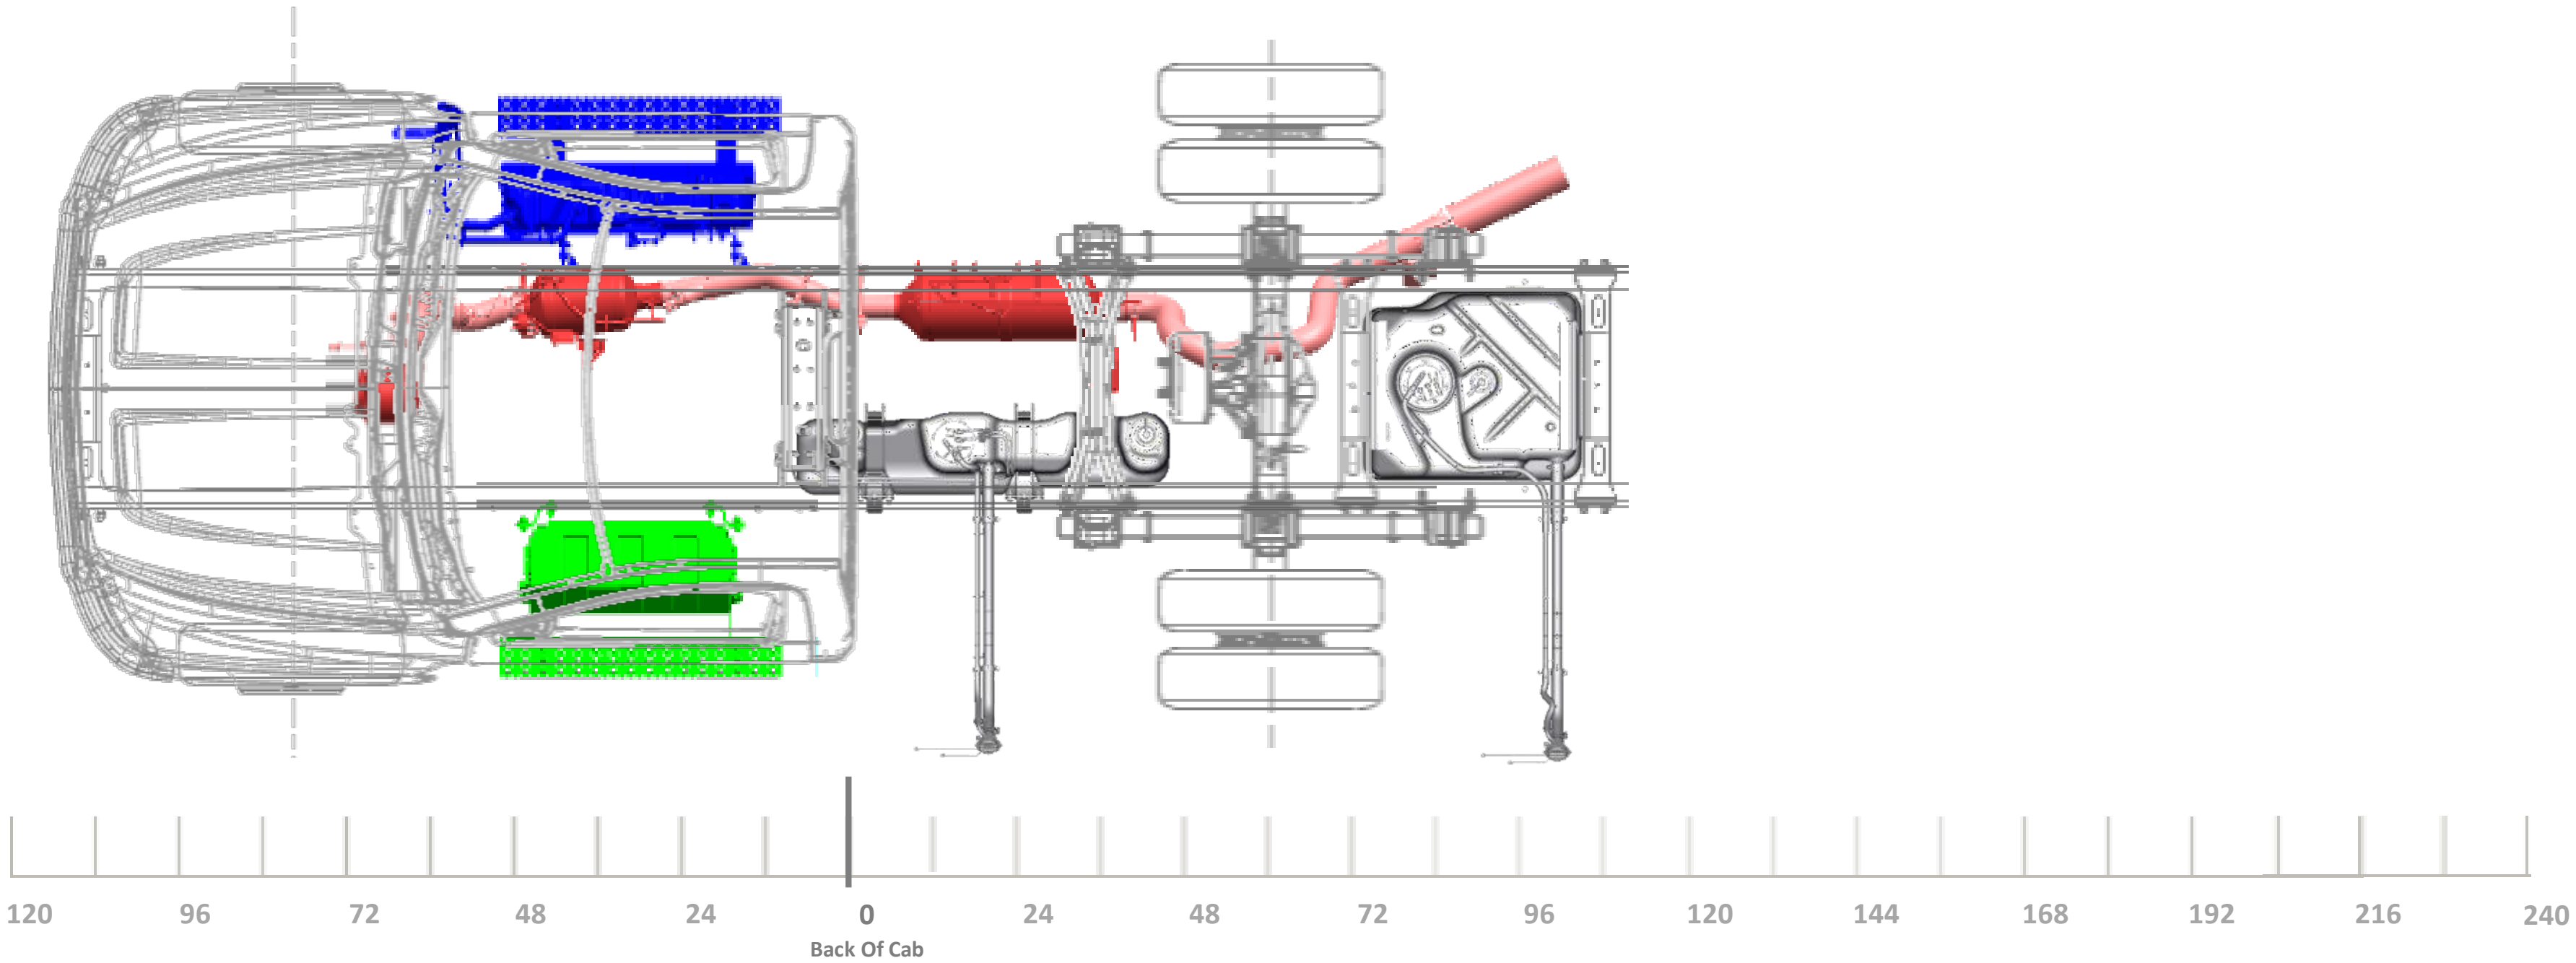

Regular Cab – 165” WB

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 49” OR 63” AF

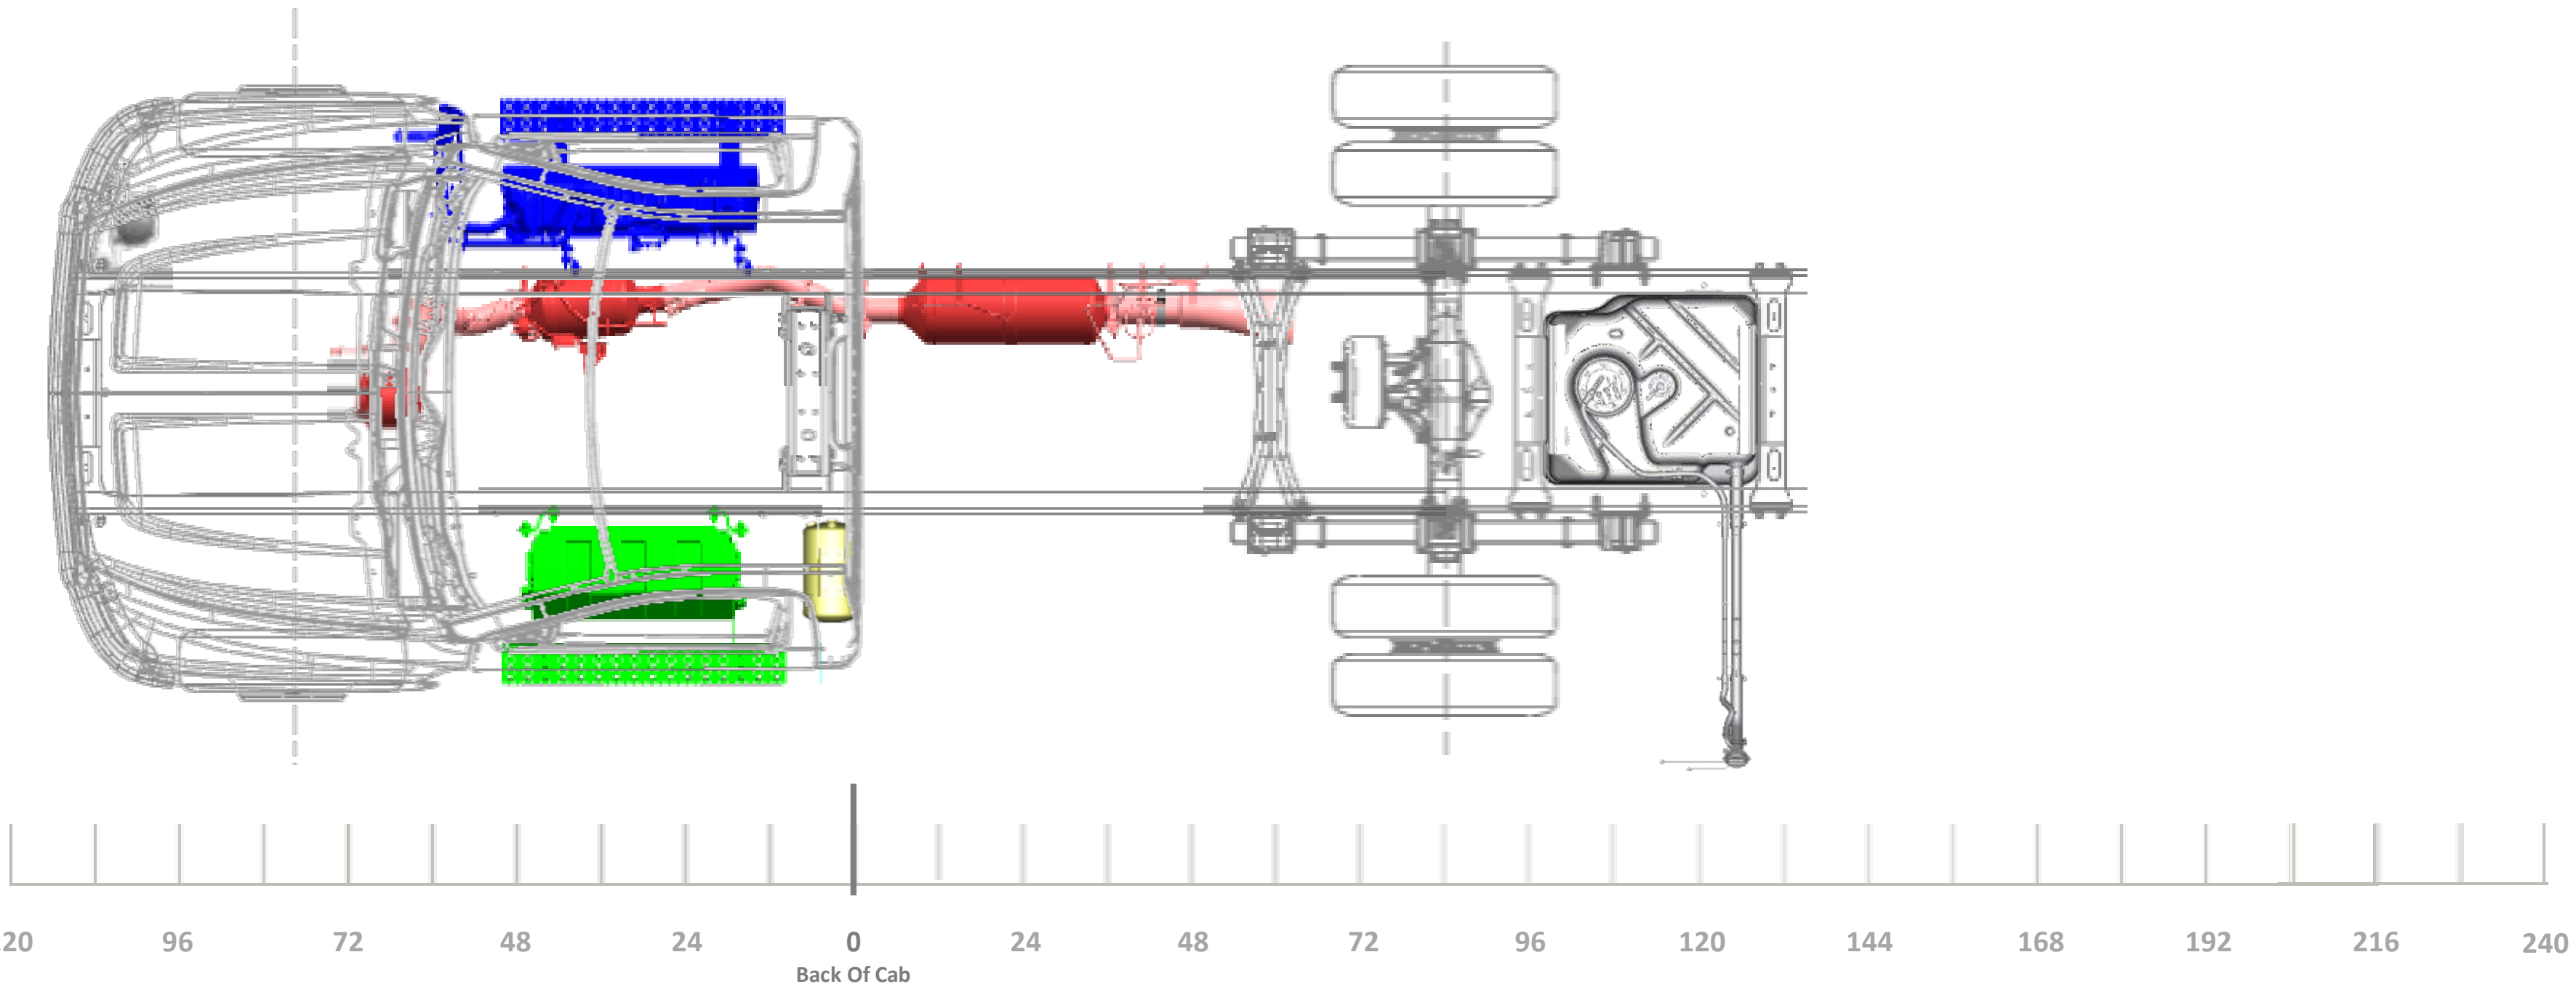

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 49” OR 63” AF

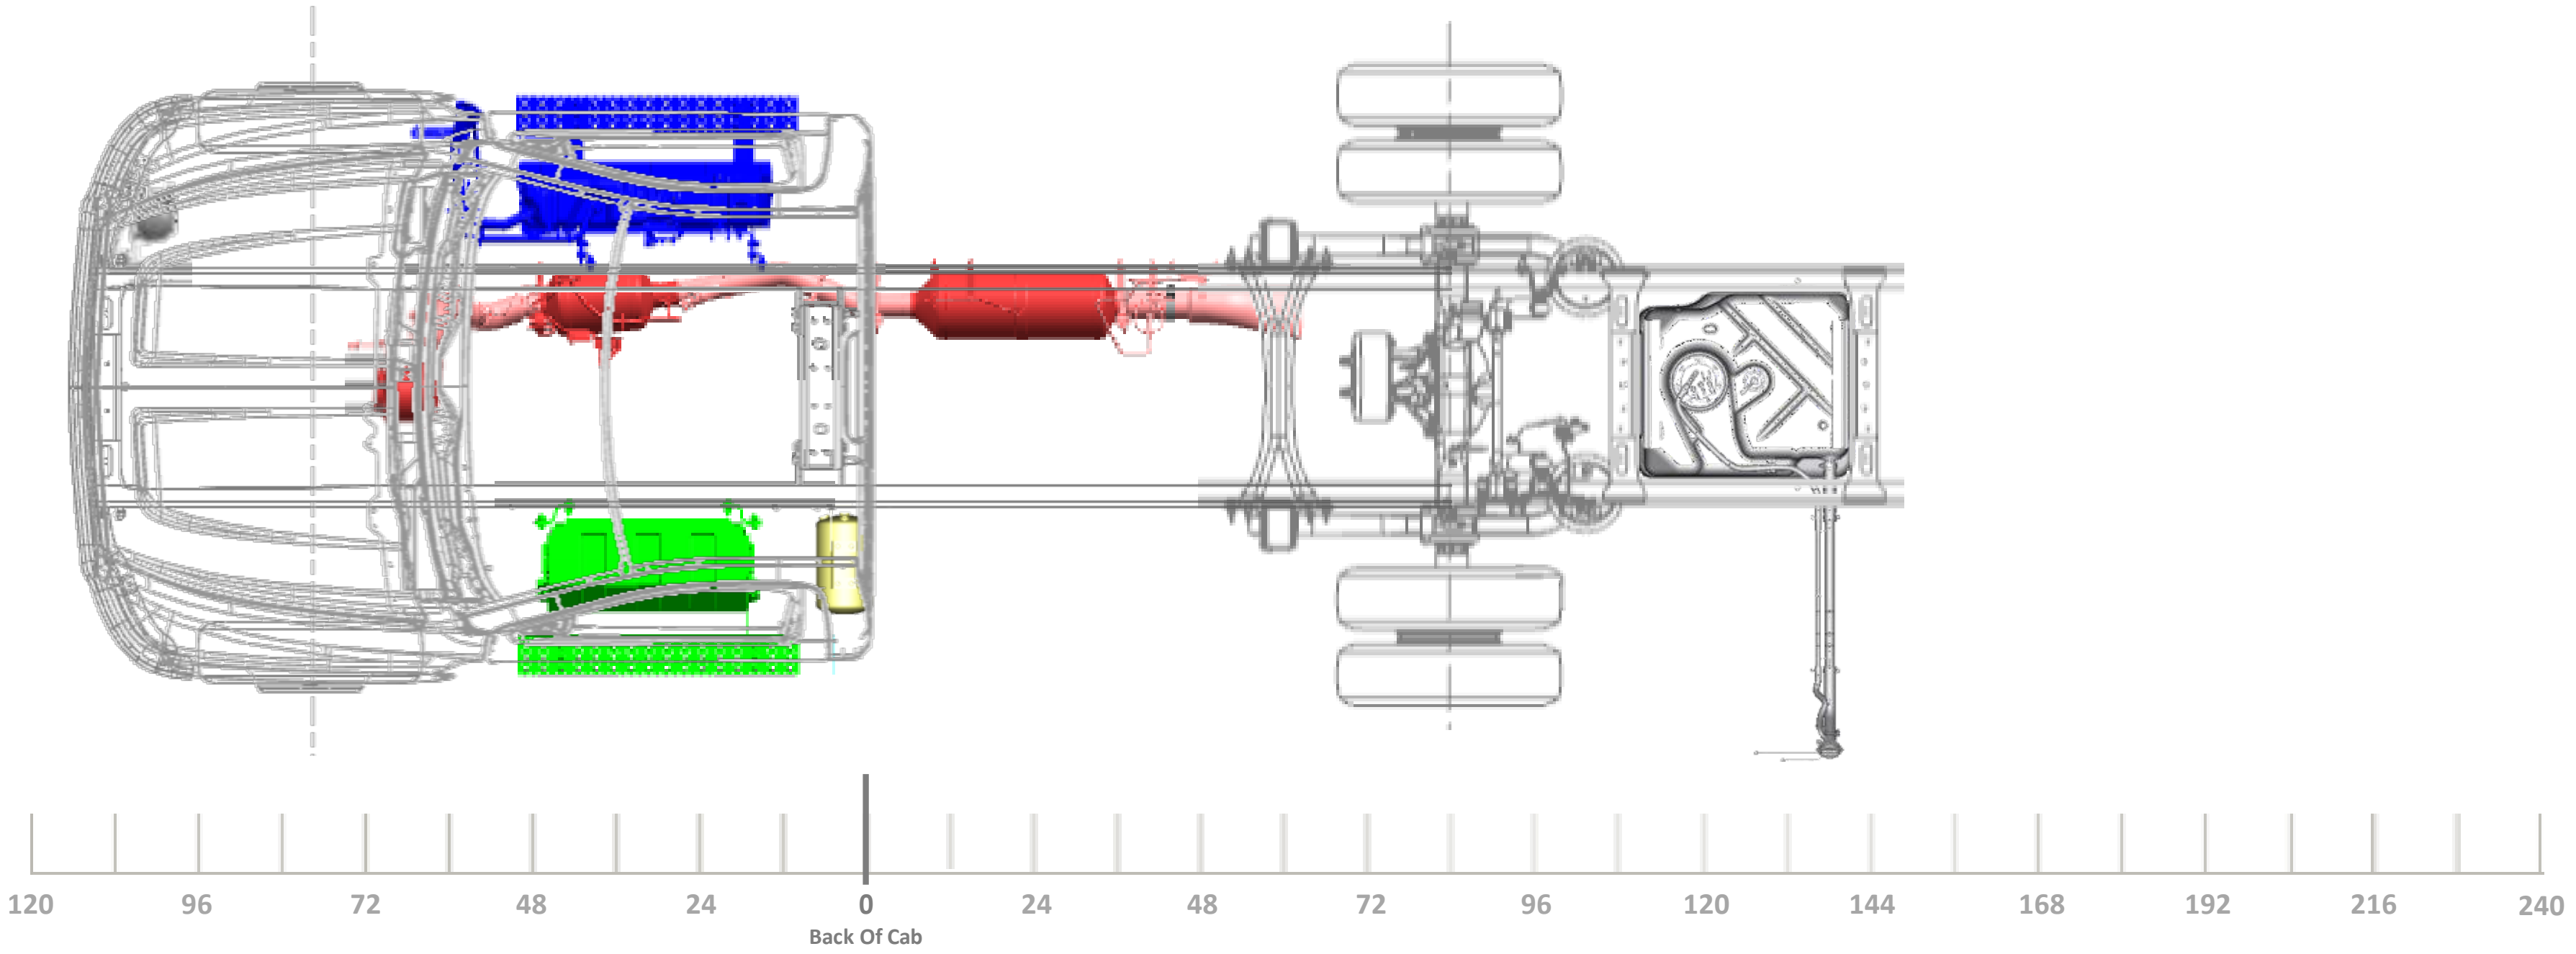

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 49” OR 63” AF

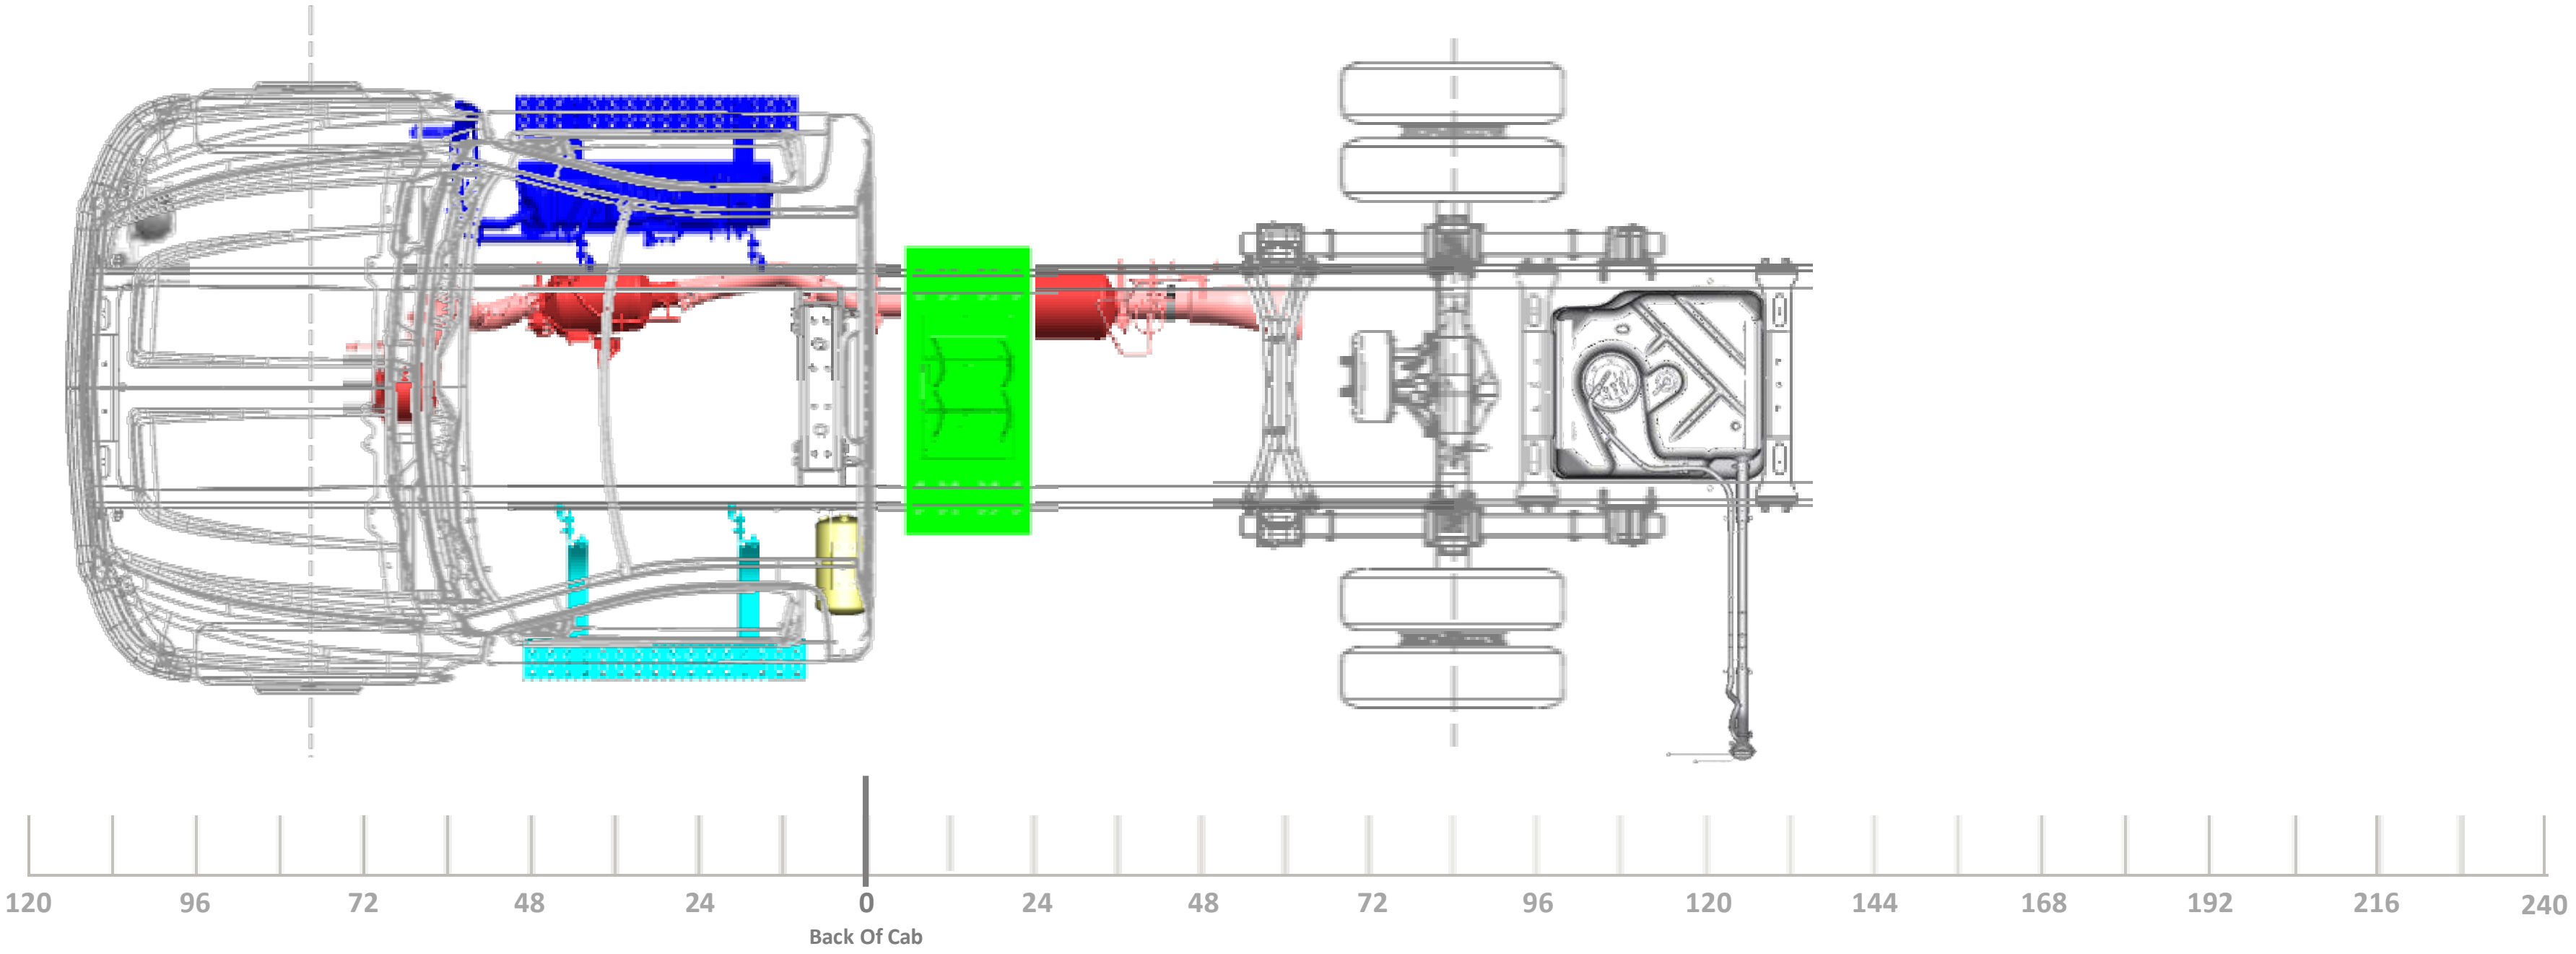

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 63” AF

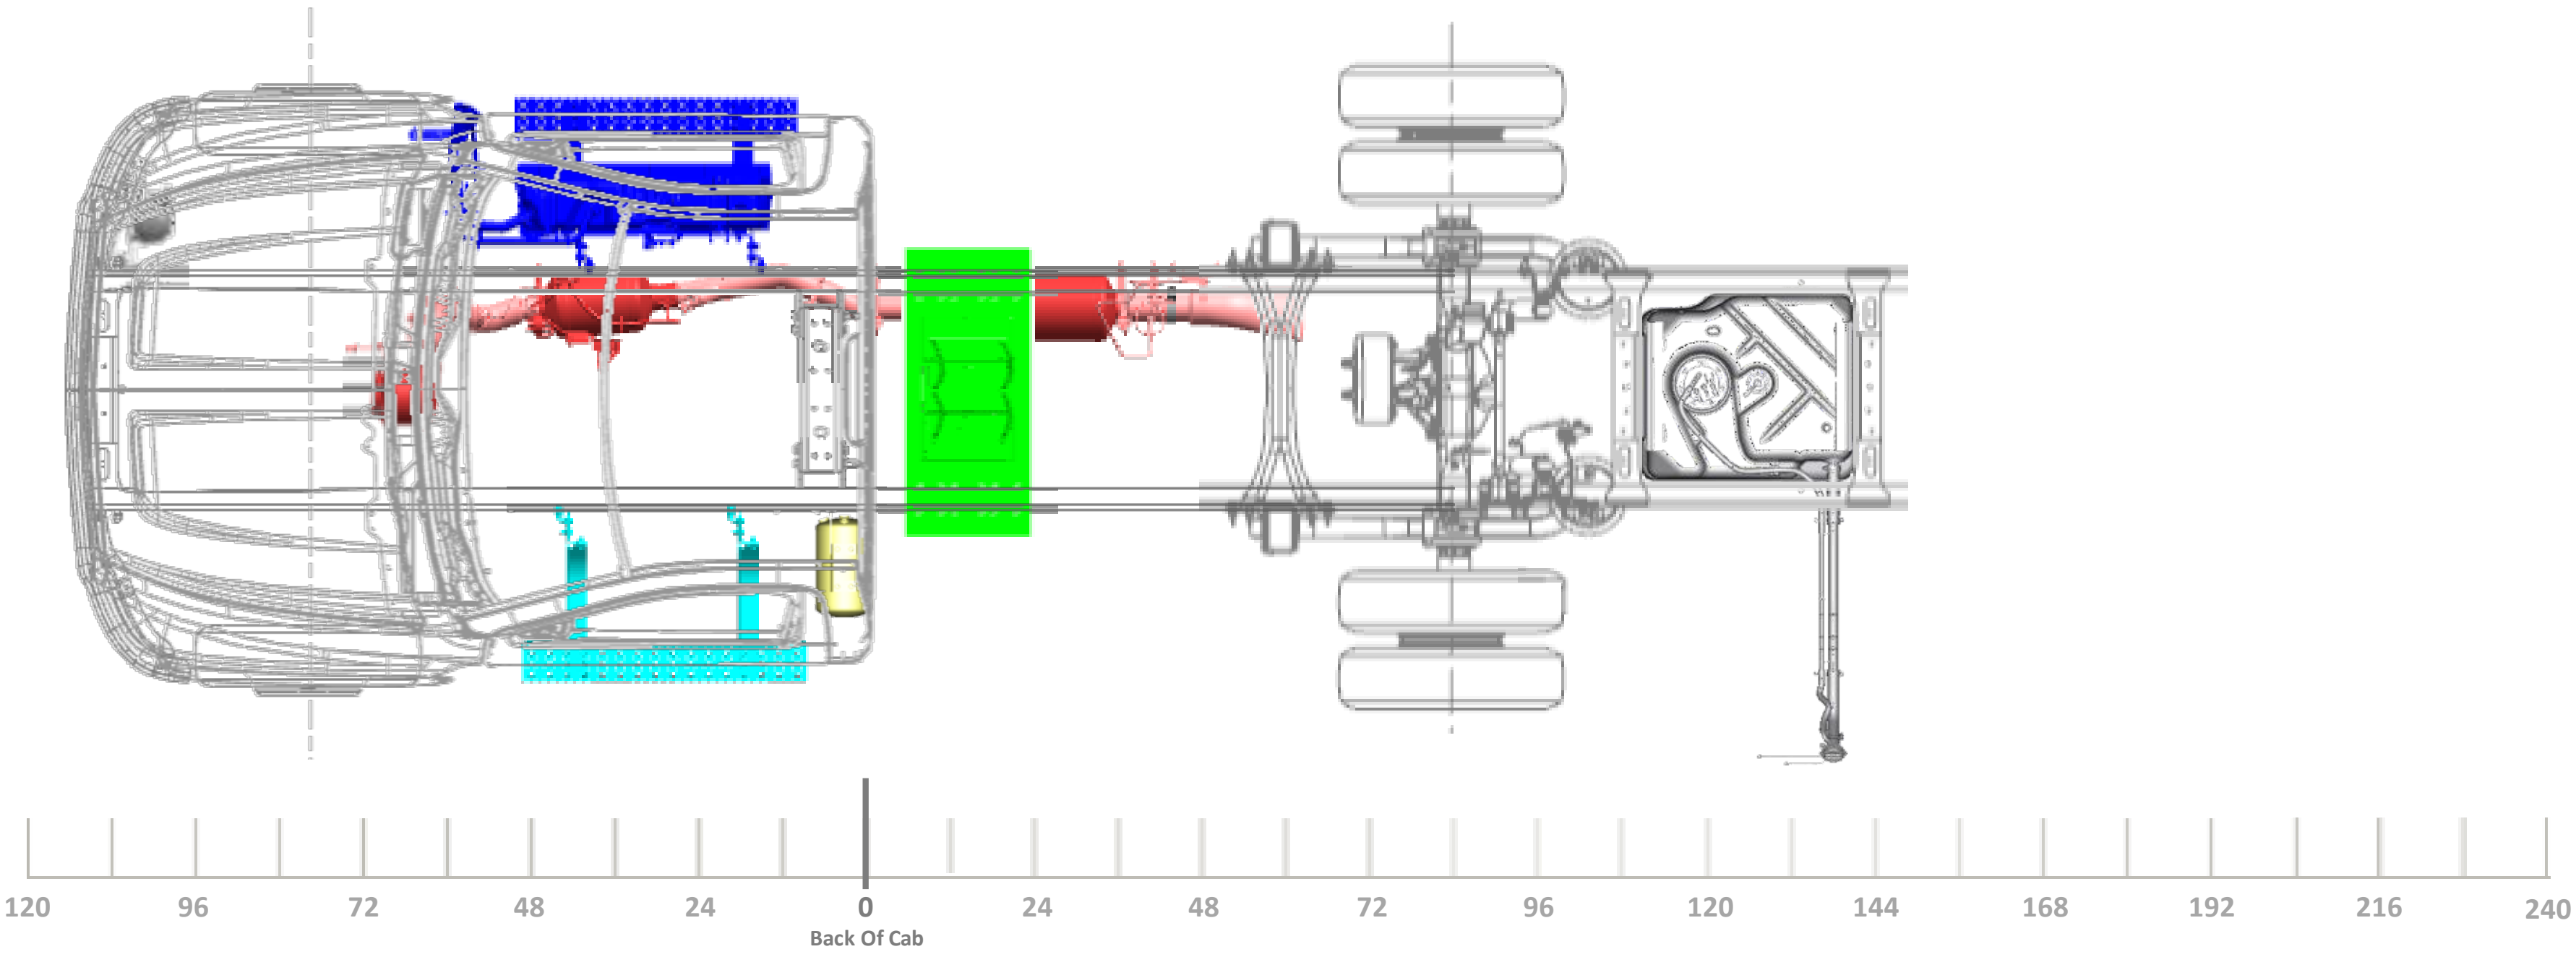

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 49” OR 63” AF

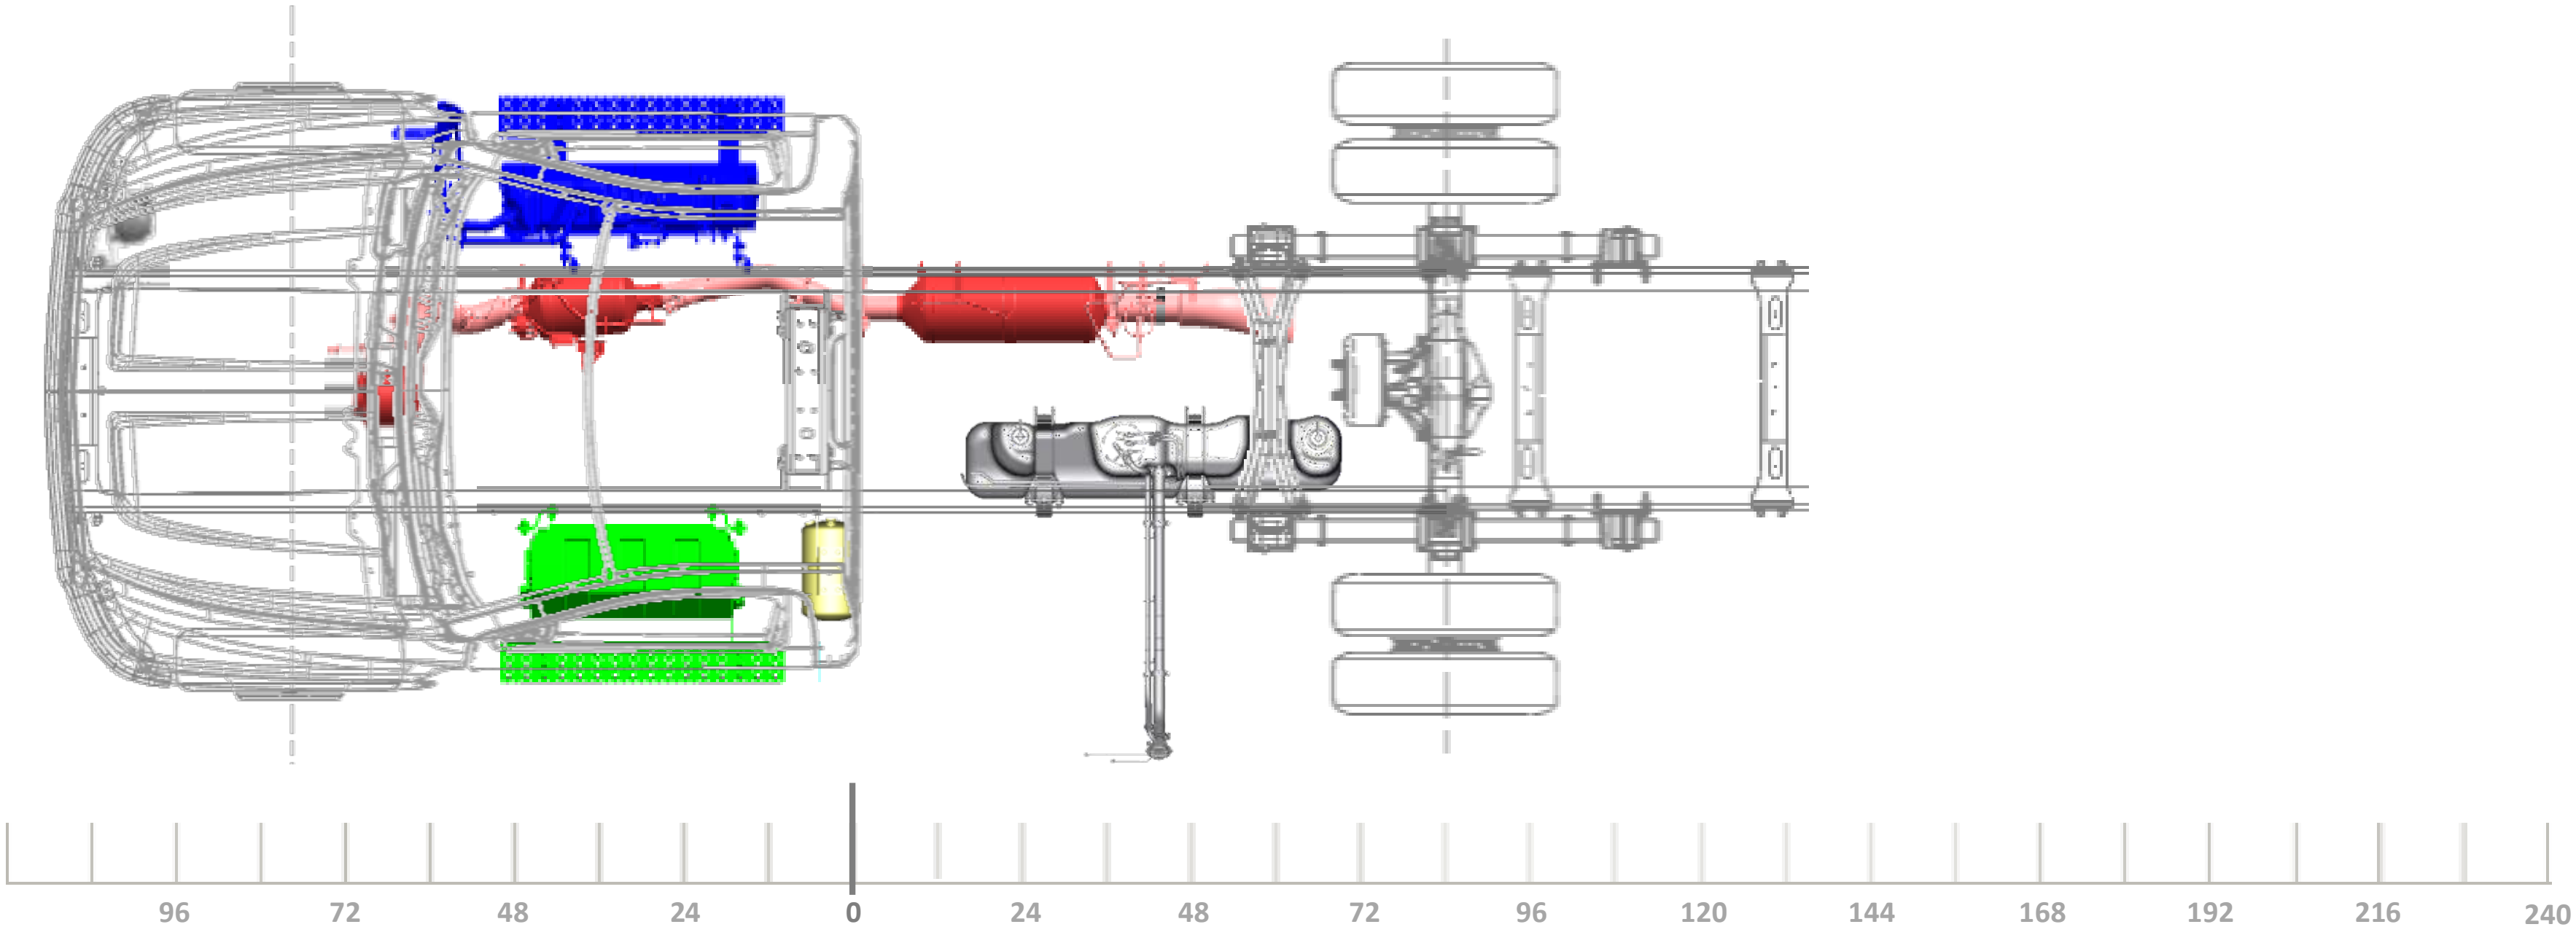

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 63” AF

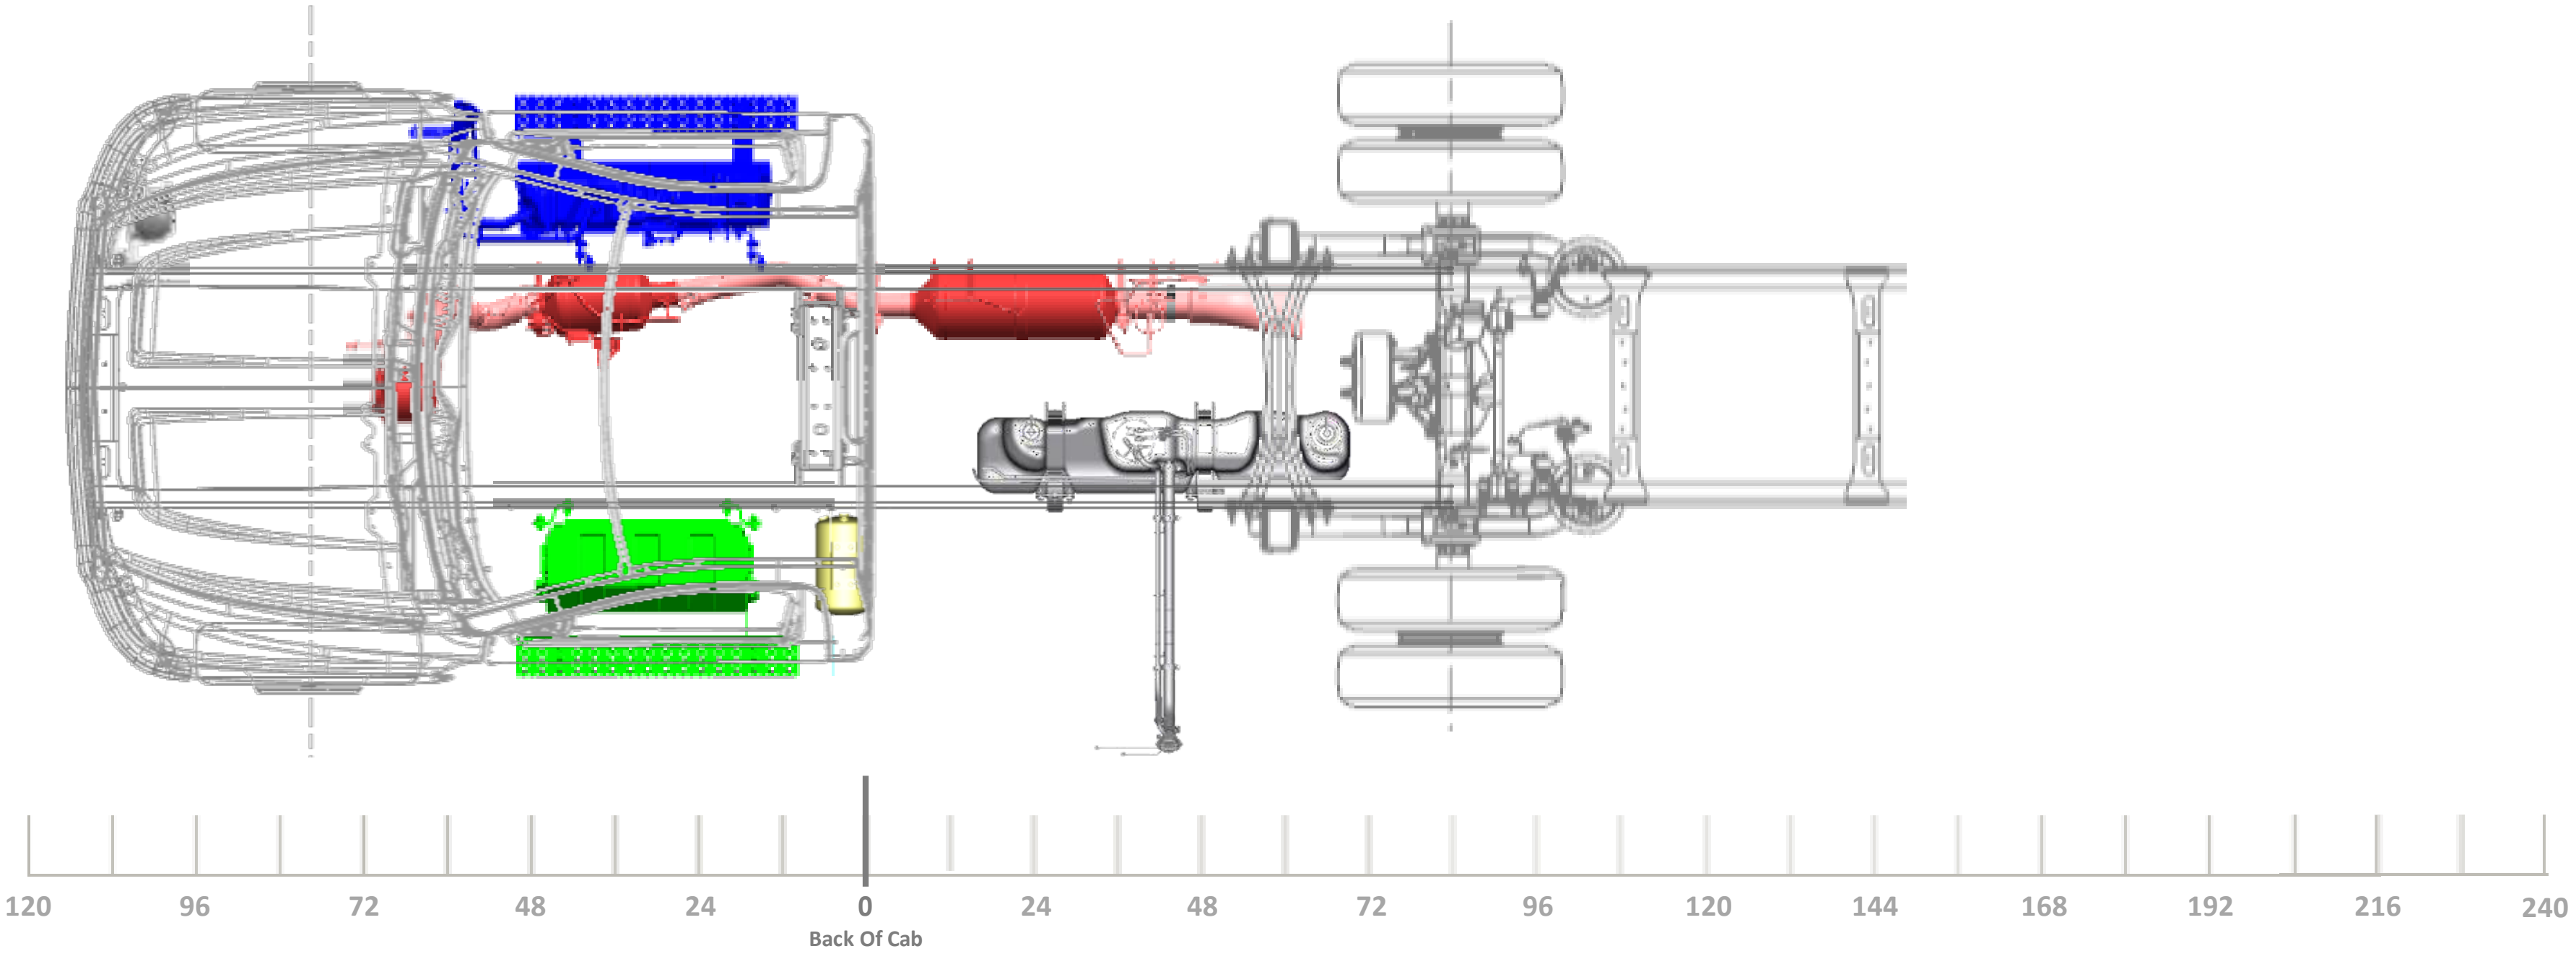

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 49” OR 63” AF

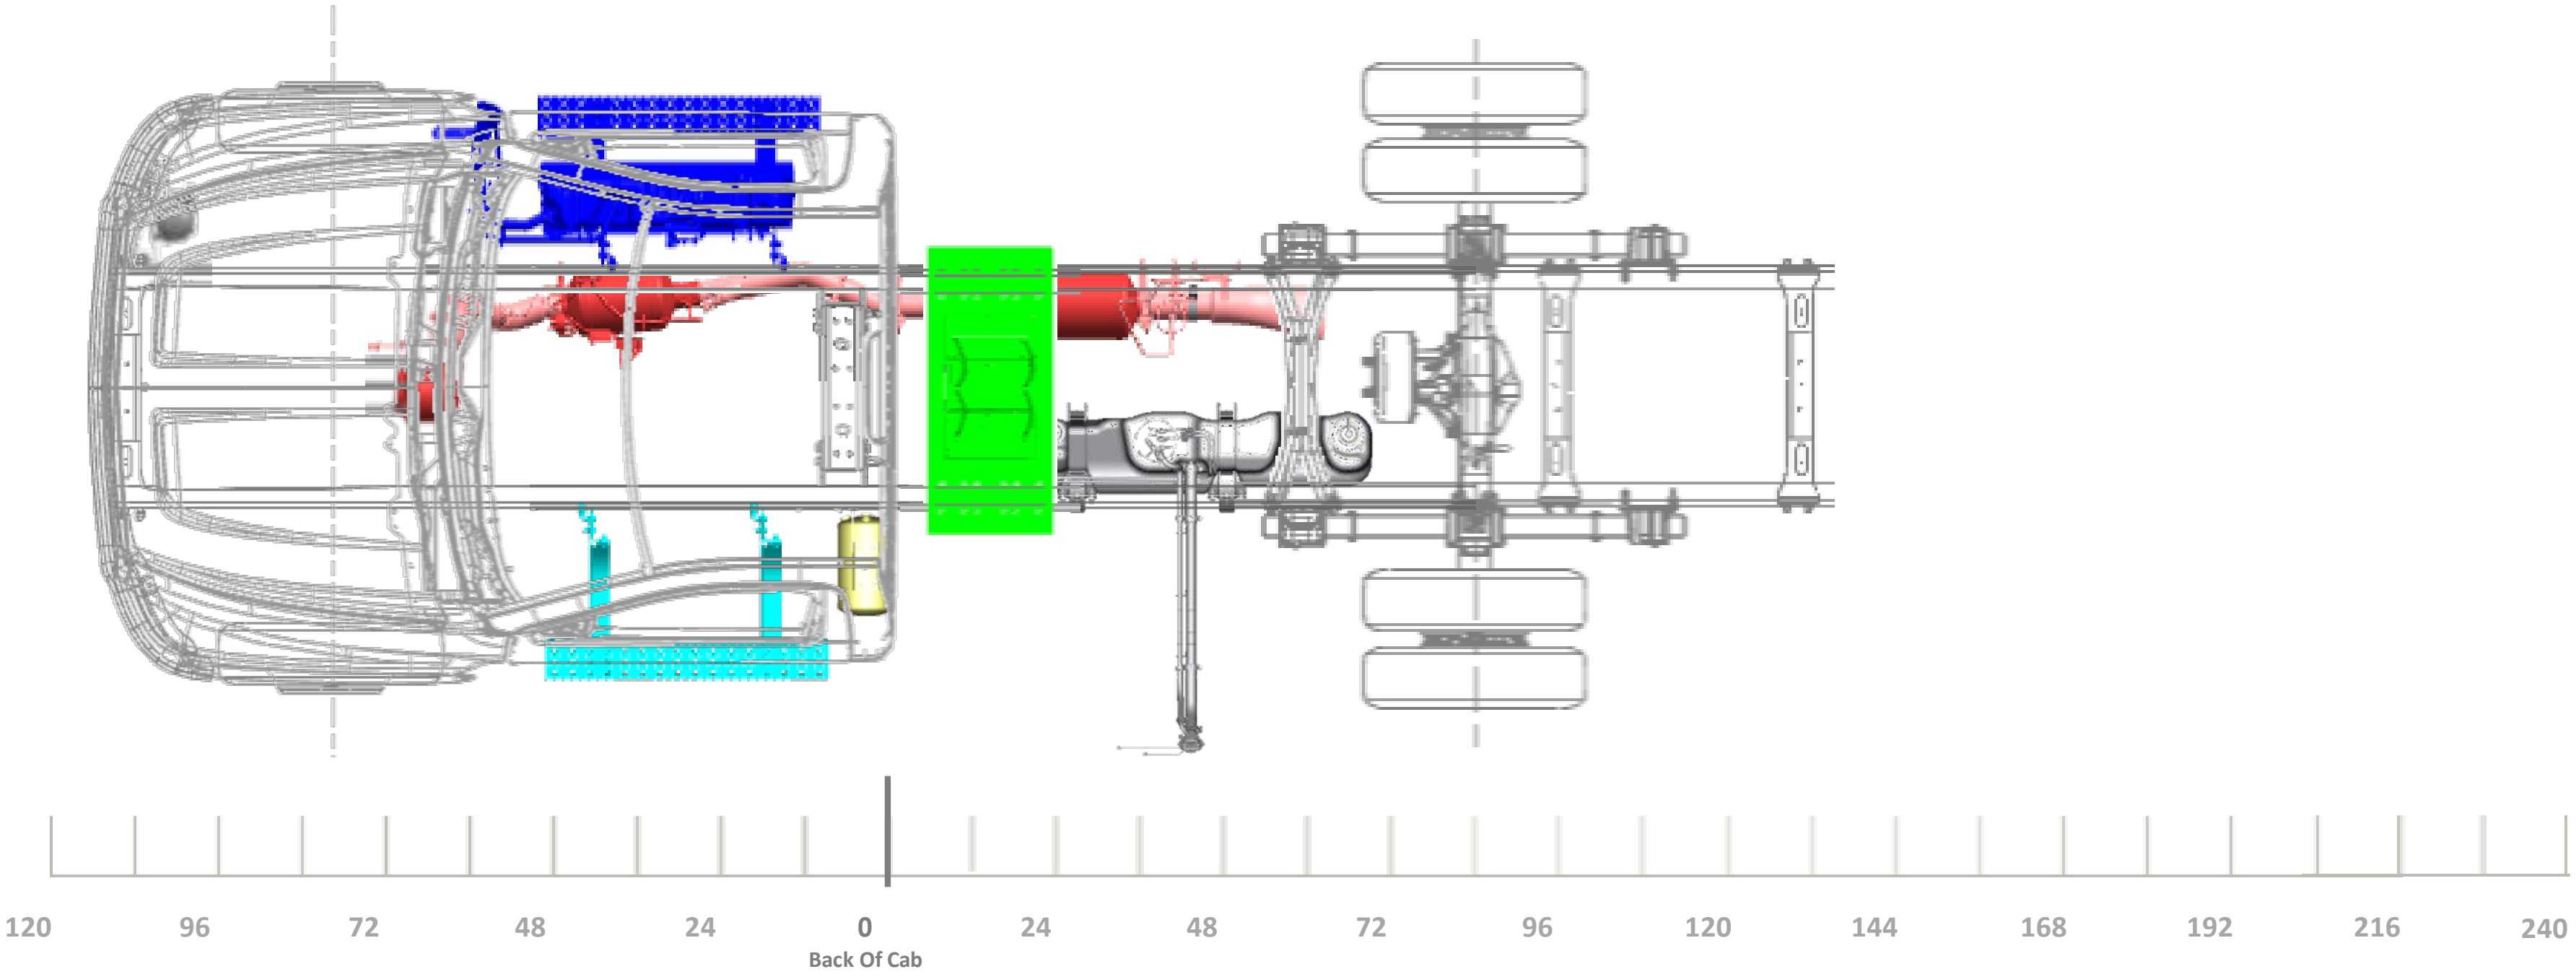

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 63” AF

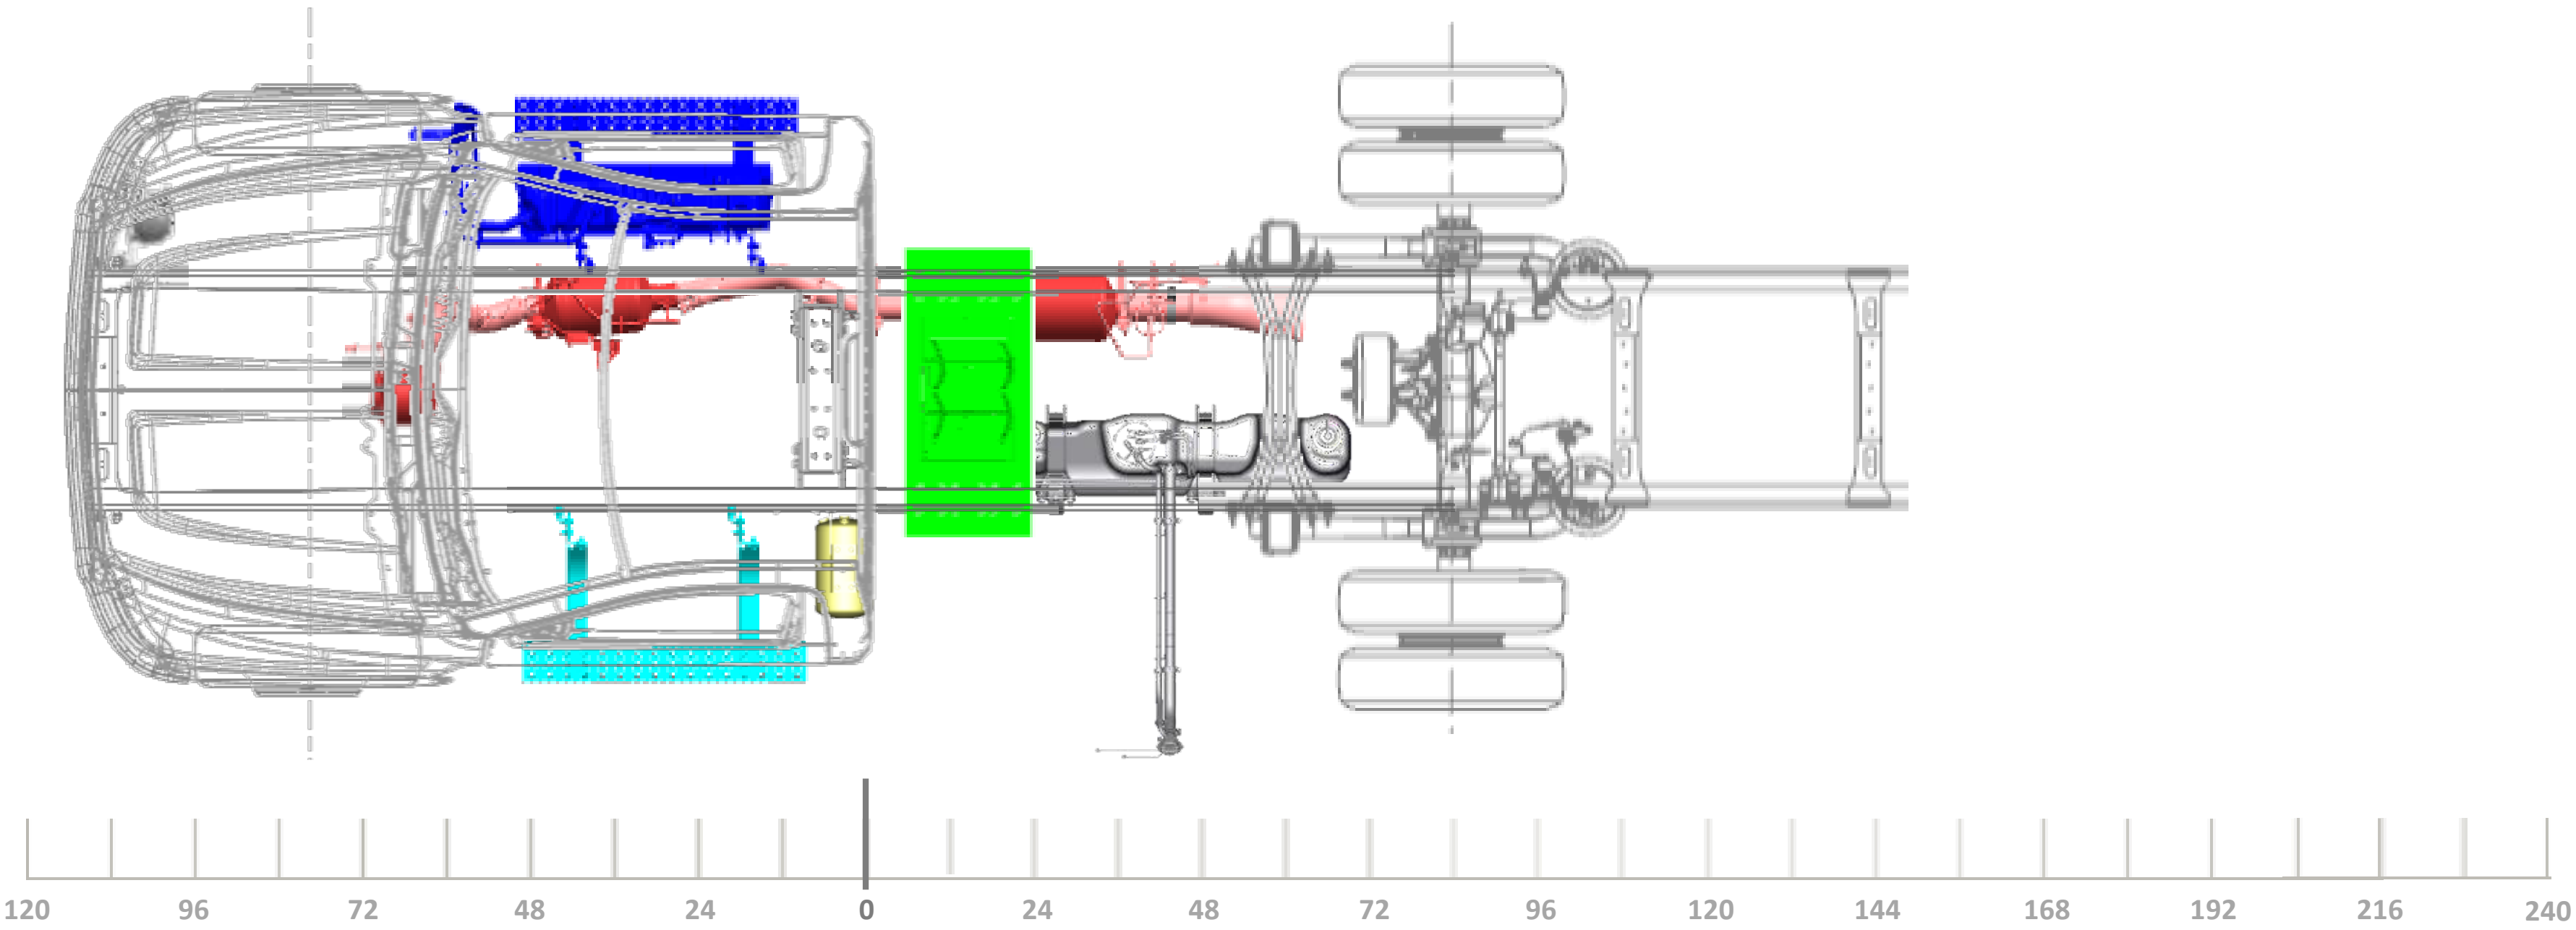

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 49” OR 63” AF

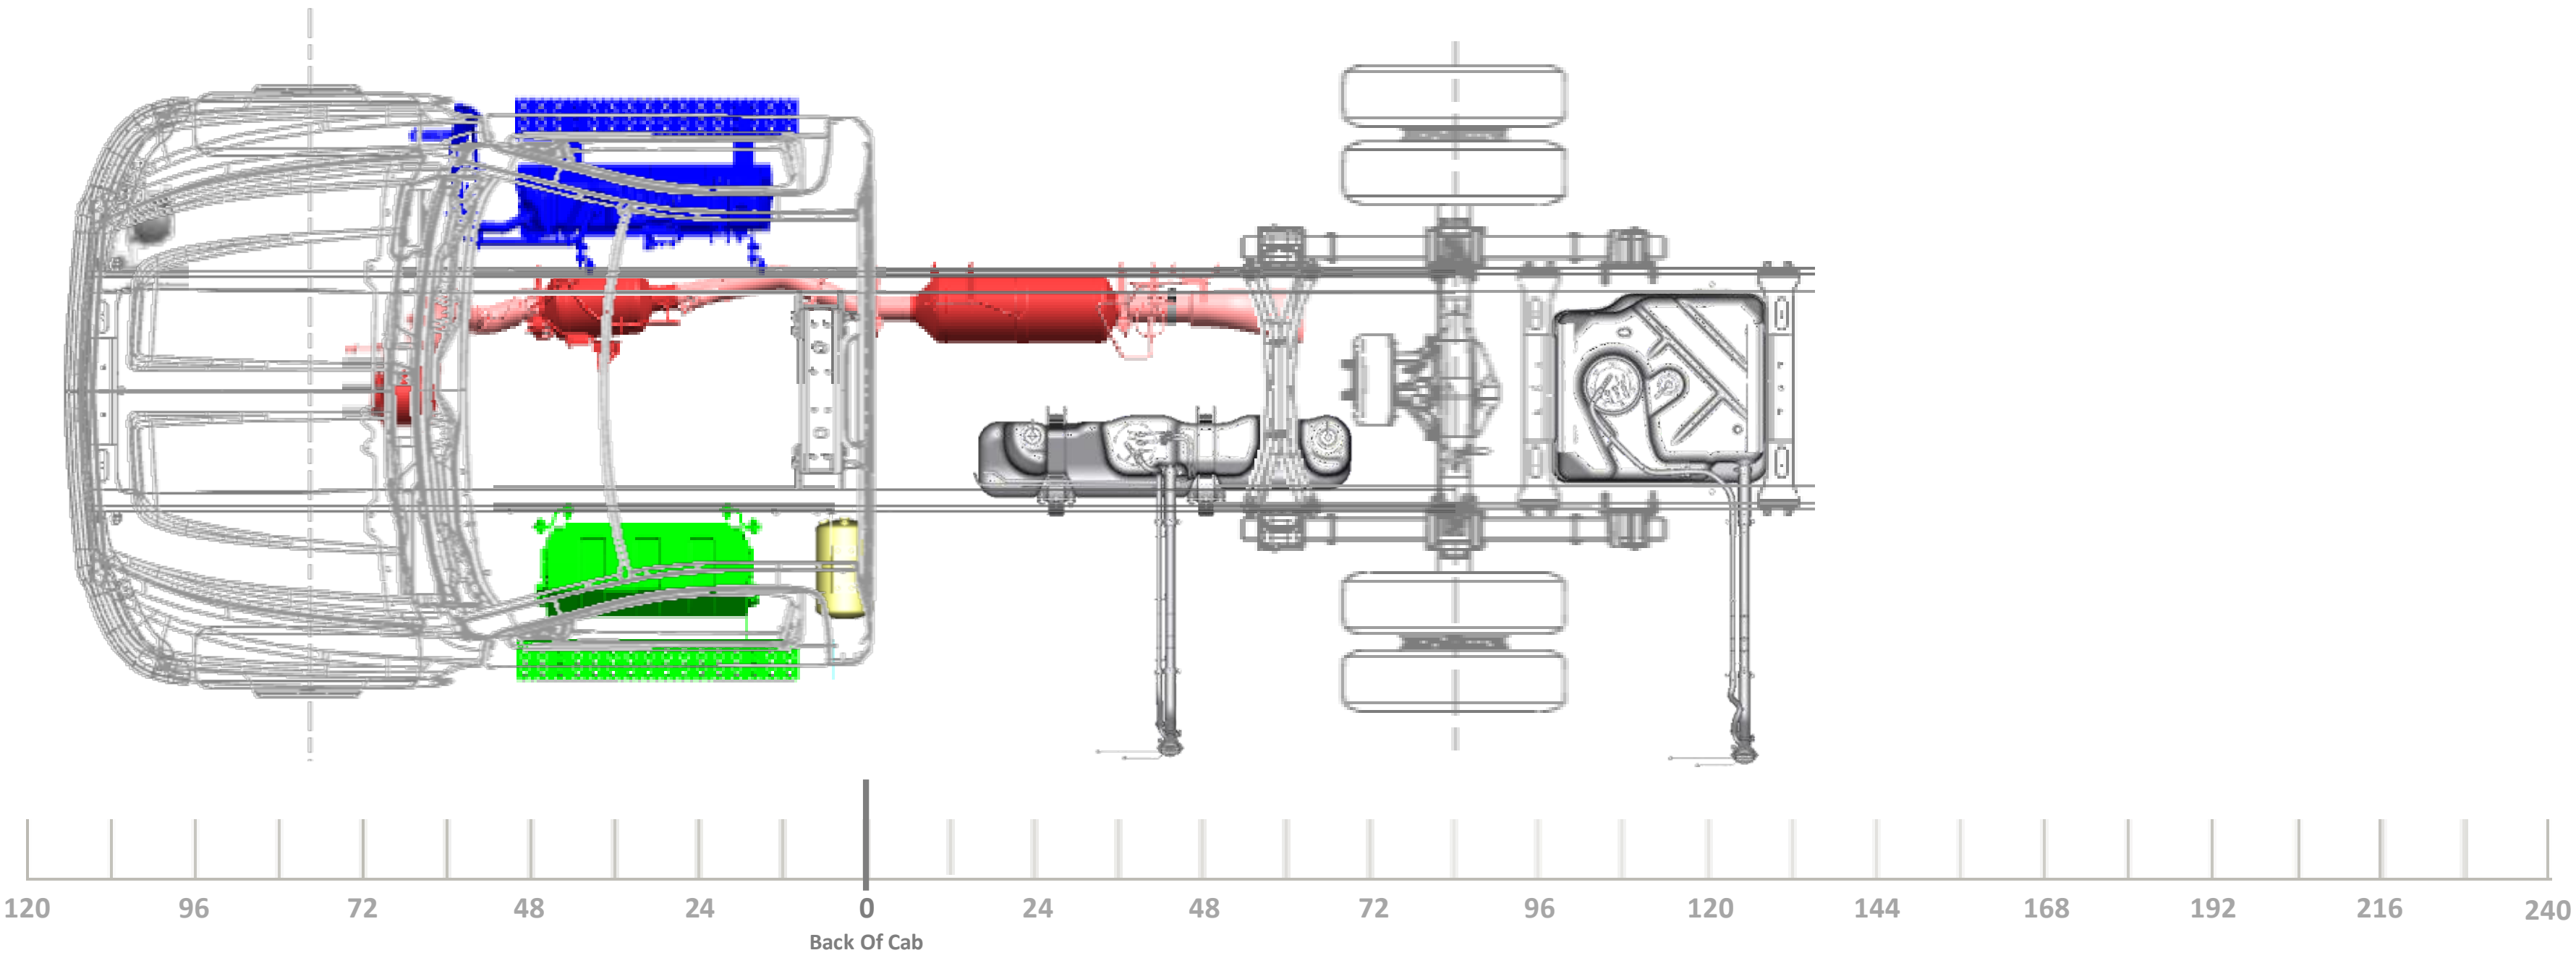

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 63” AF

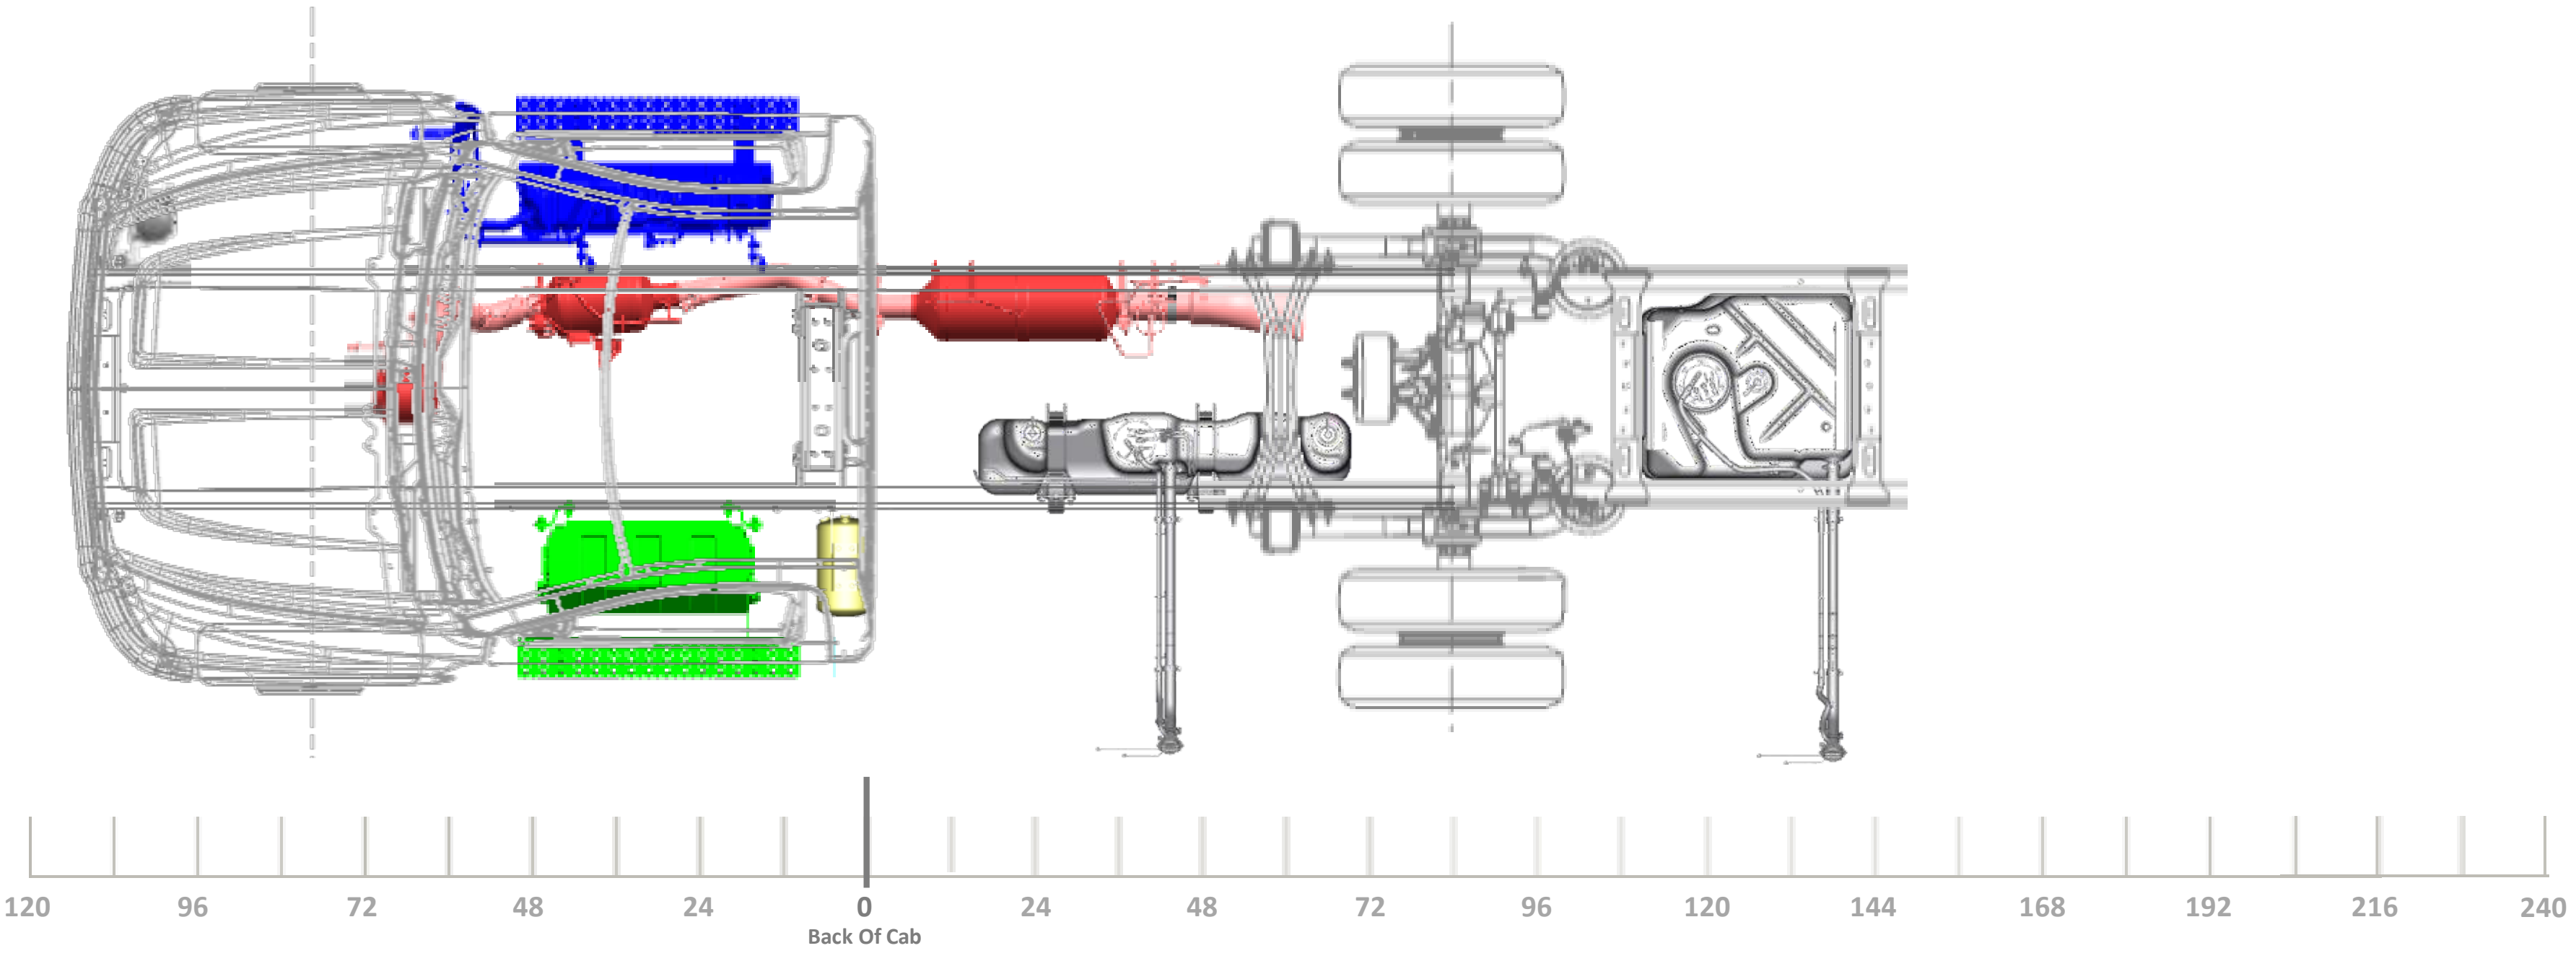

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 49” OR 63” AF

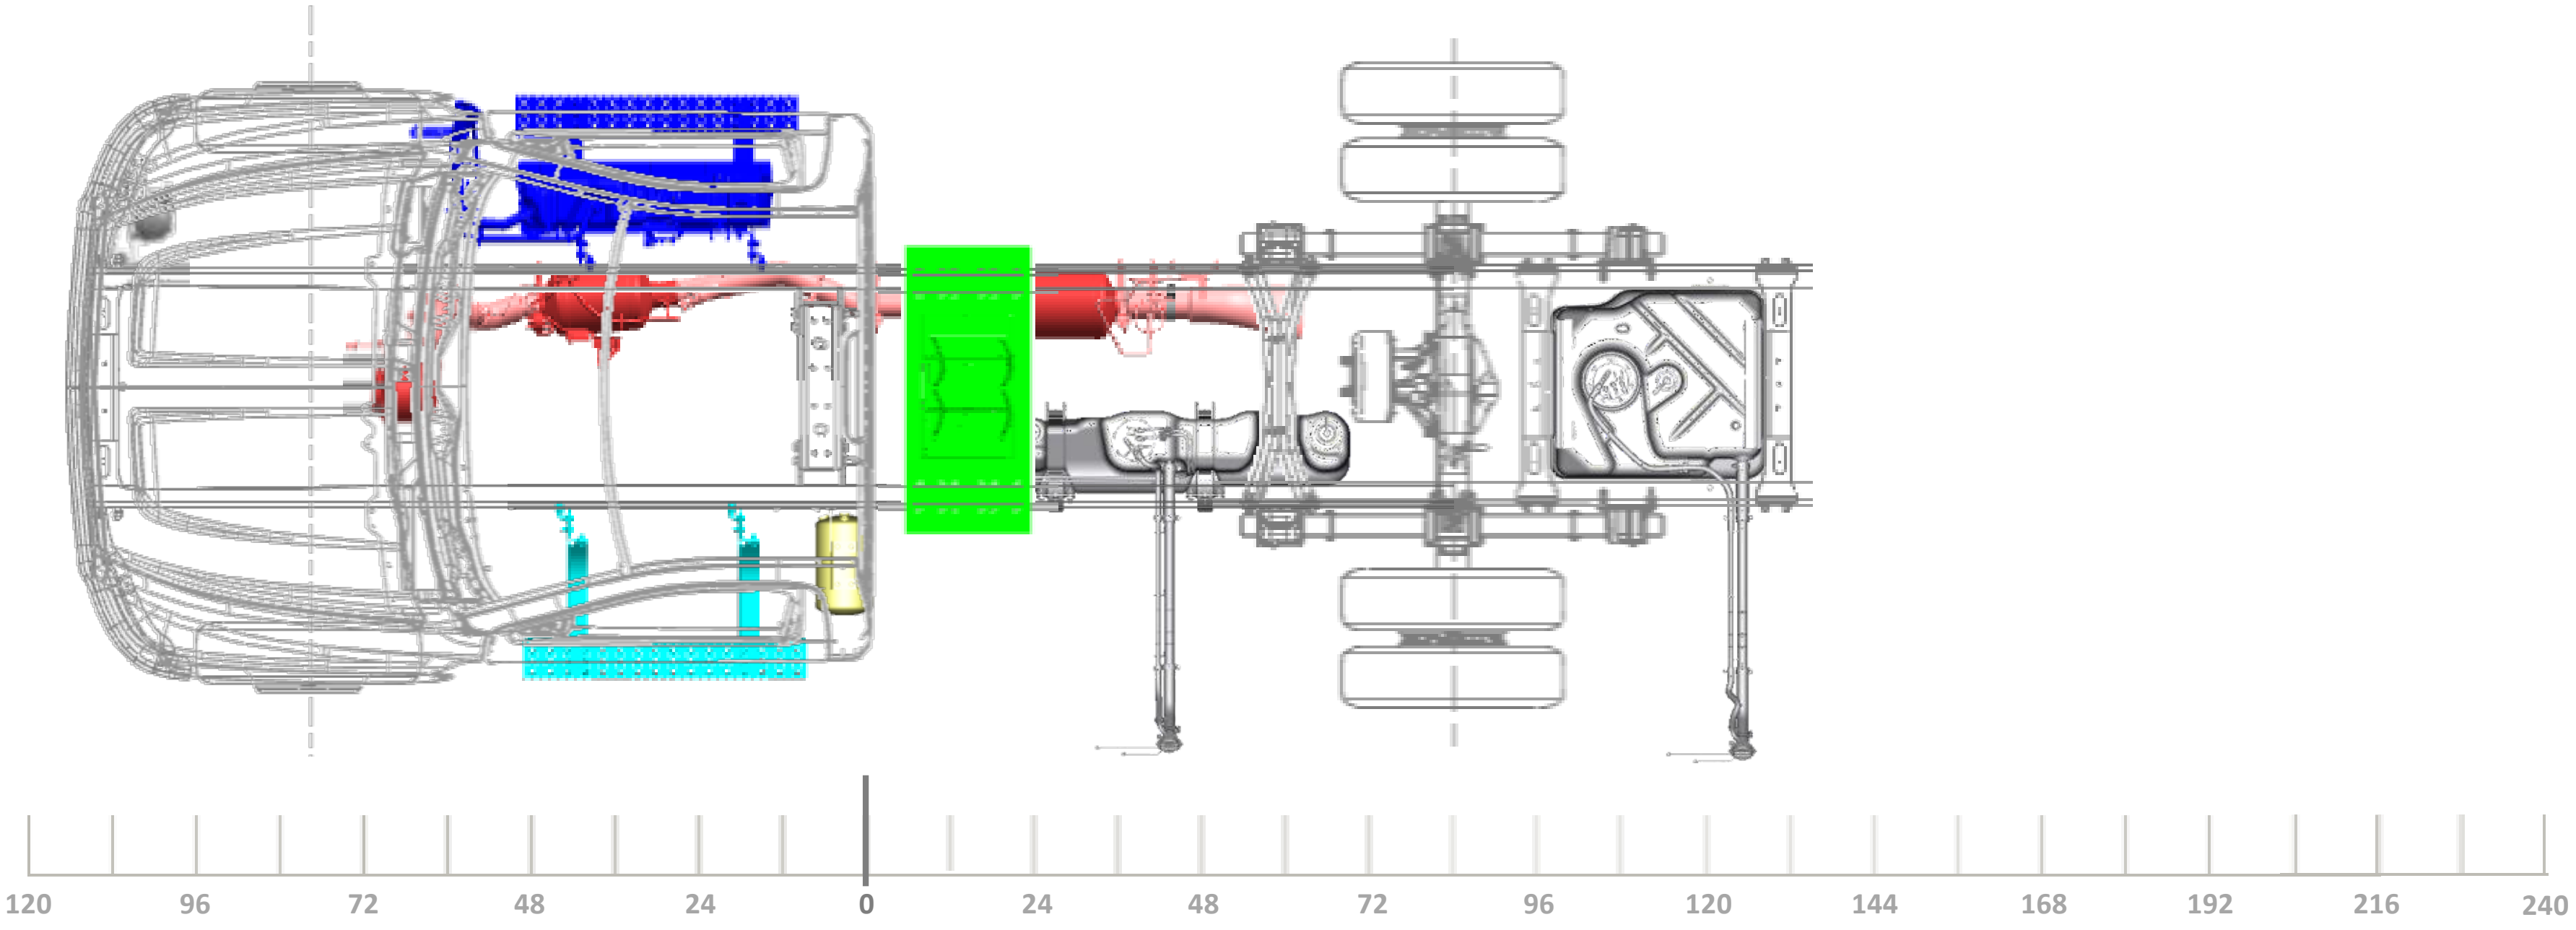

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 63” AF

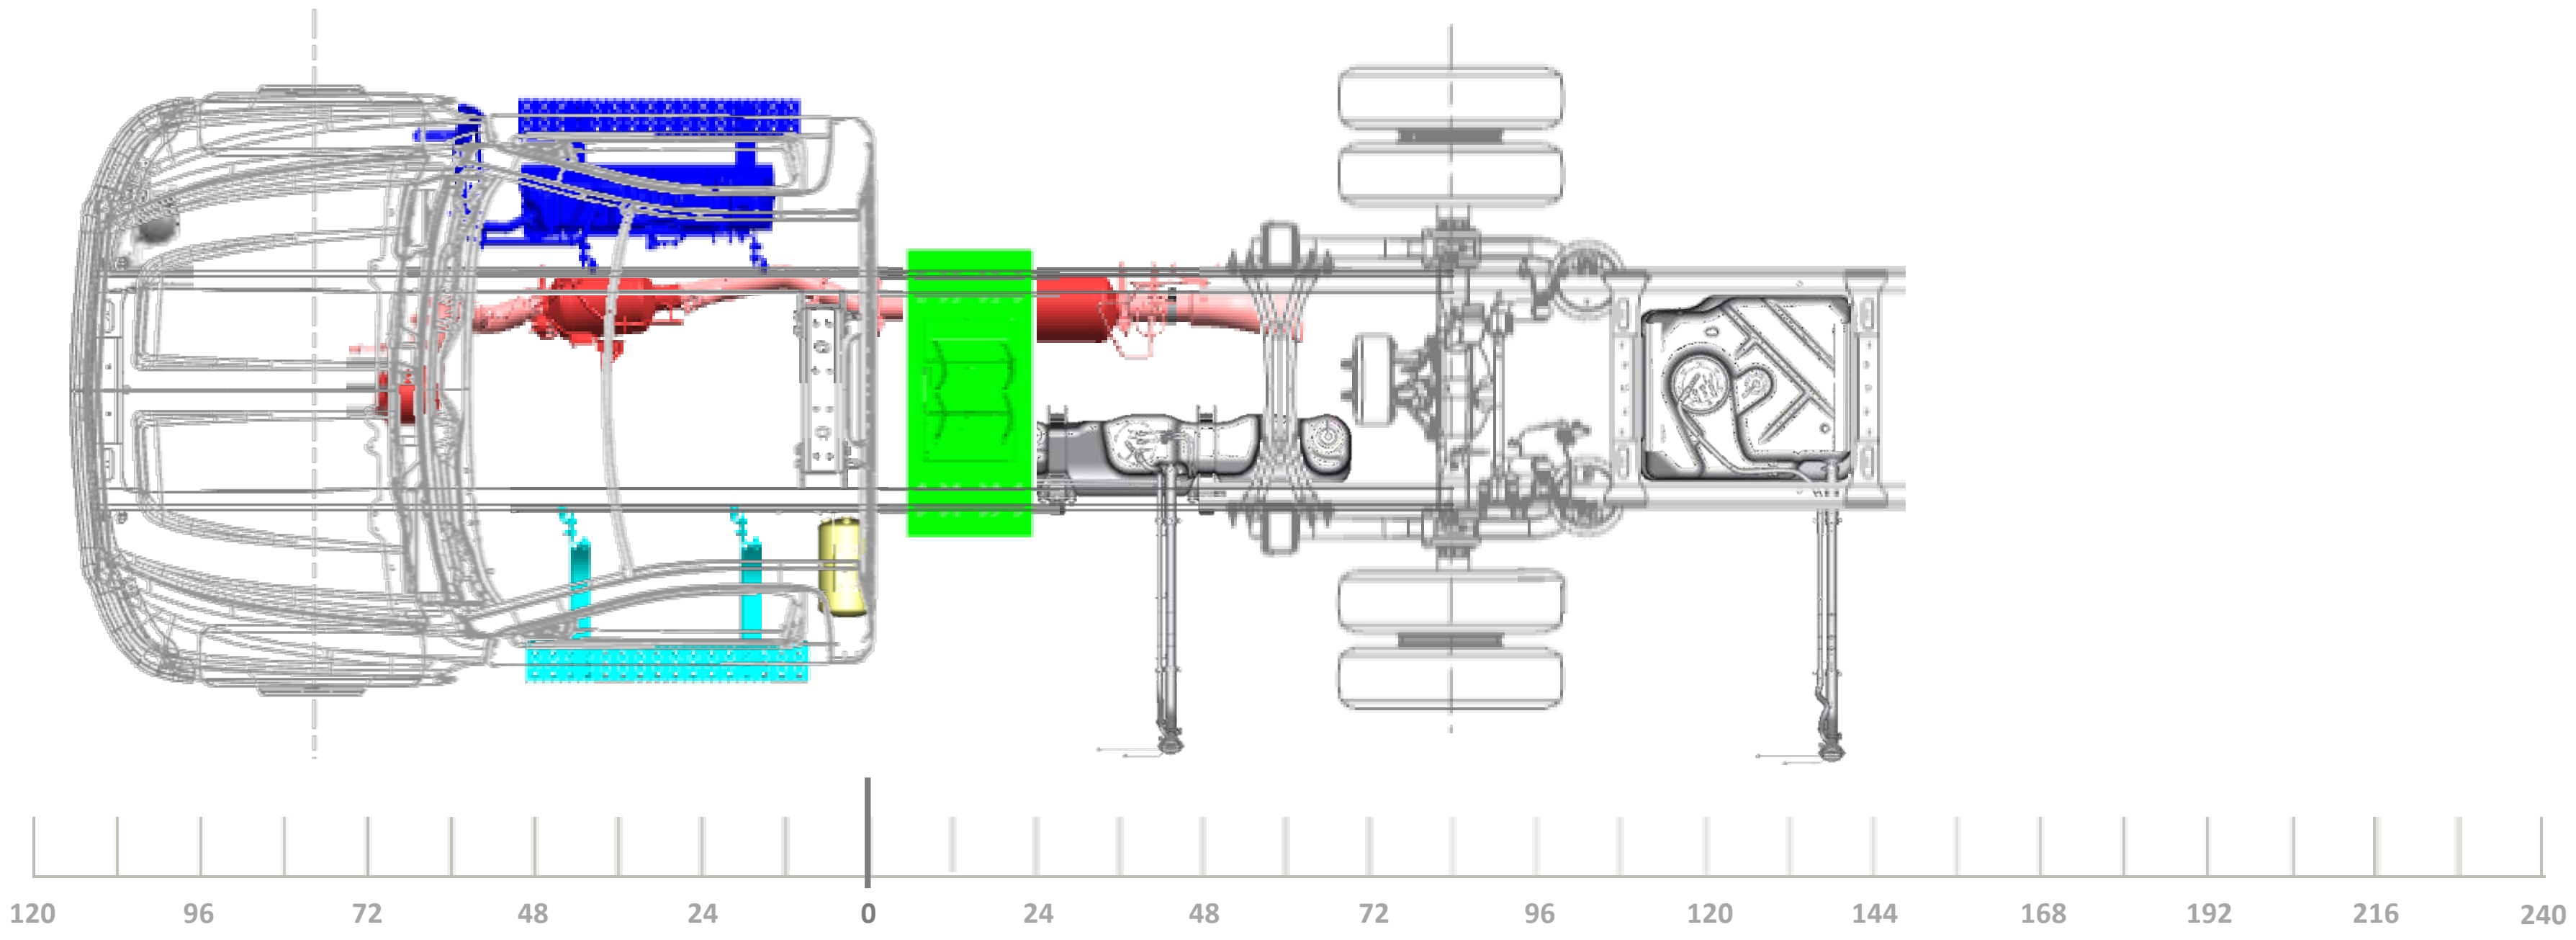

Regular Cab – 189” WB

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

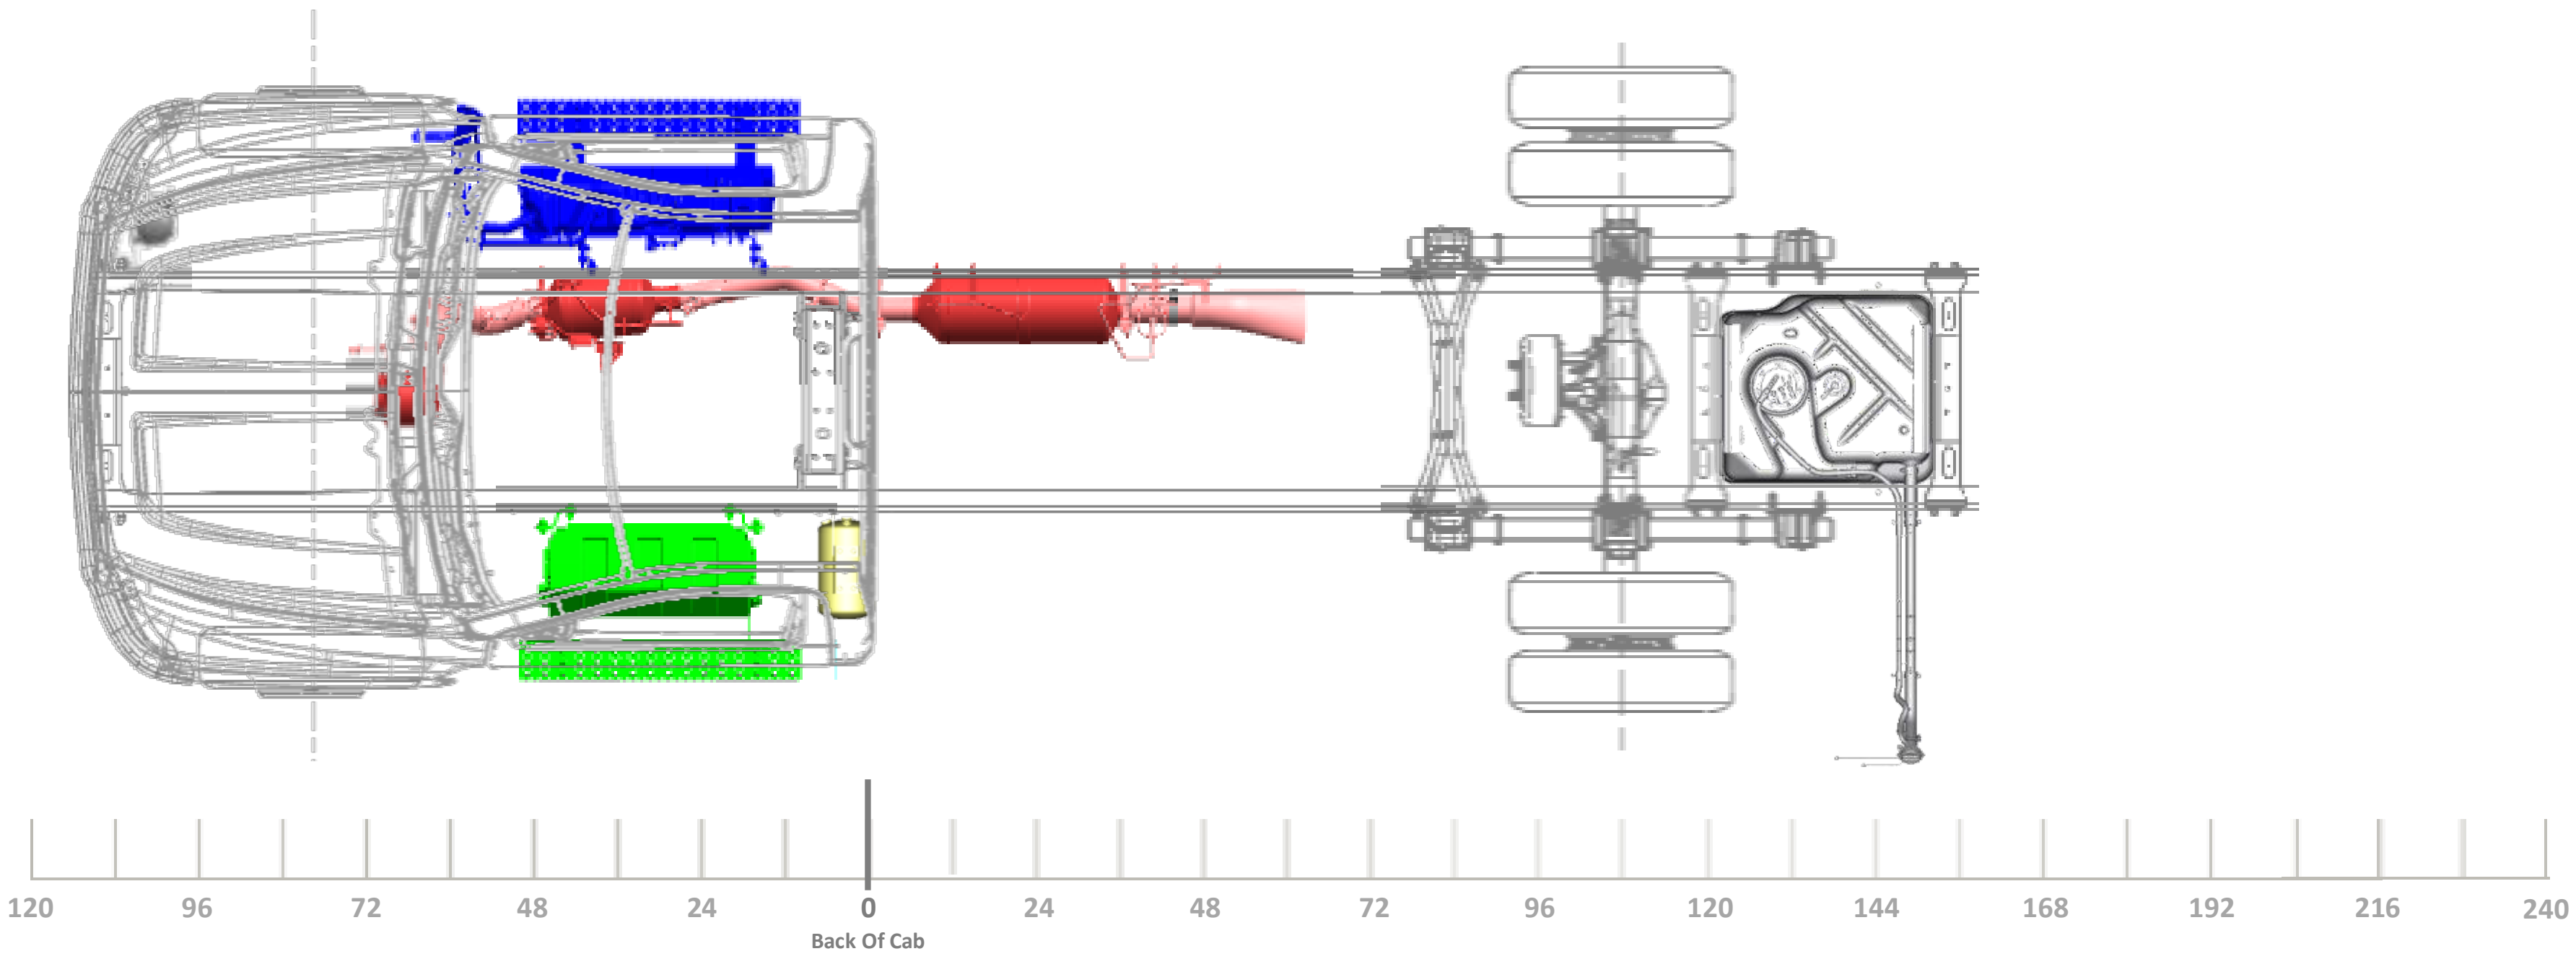

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
165” WB (84” CA) 63” AF

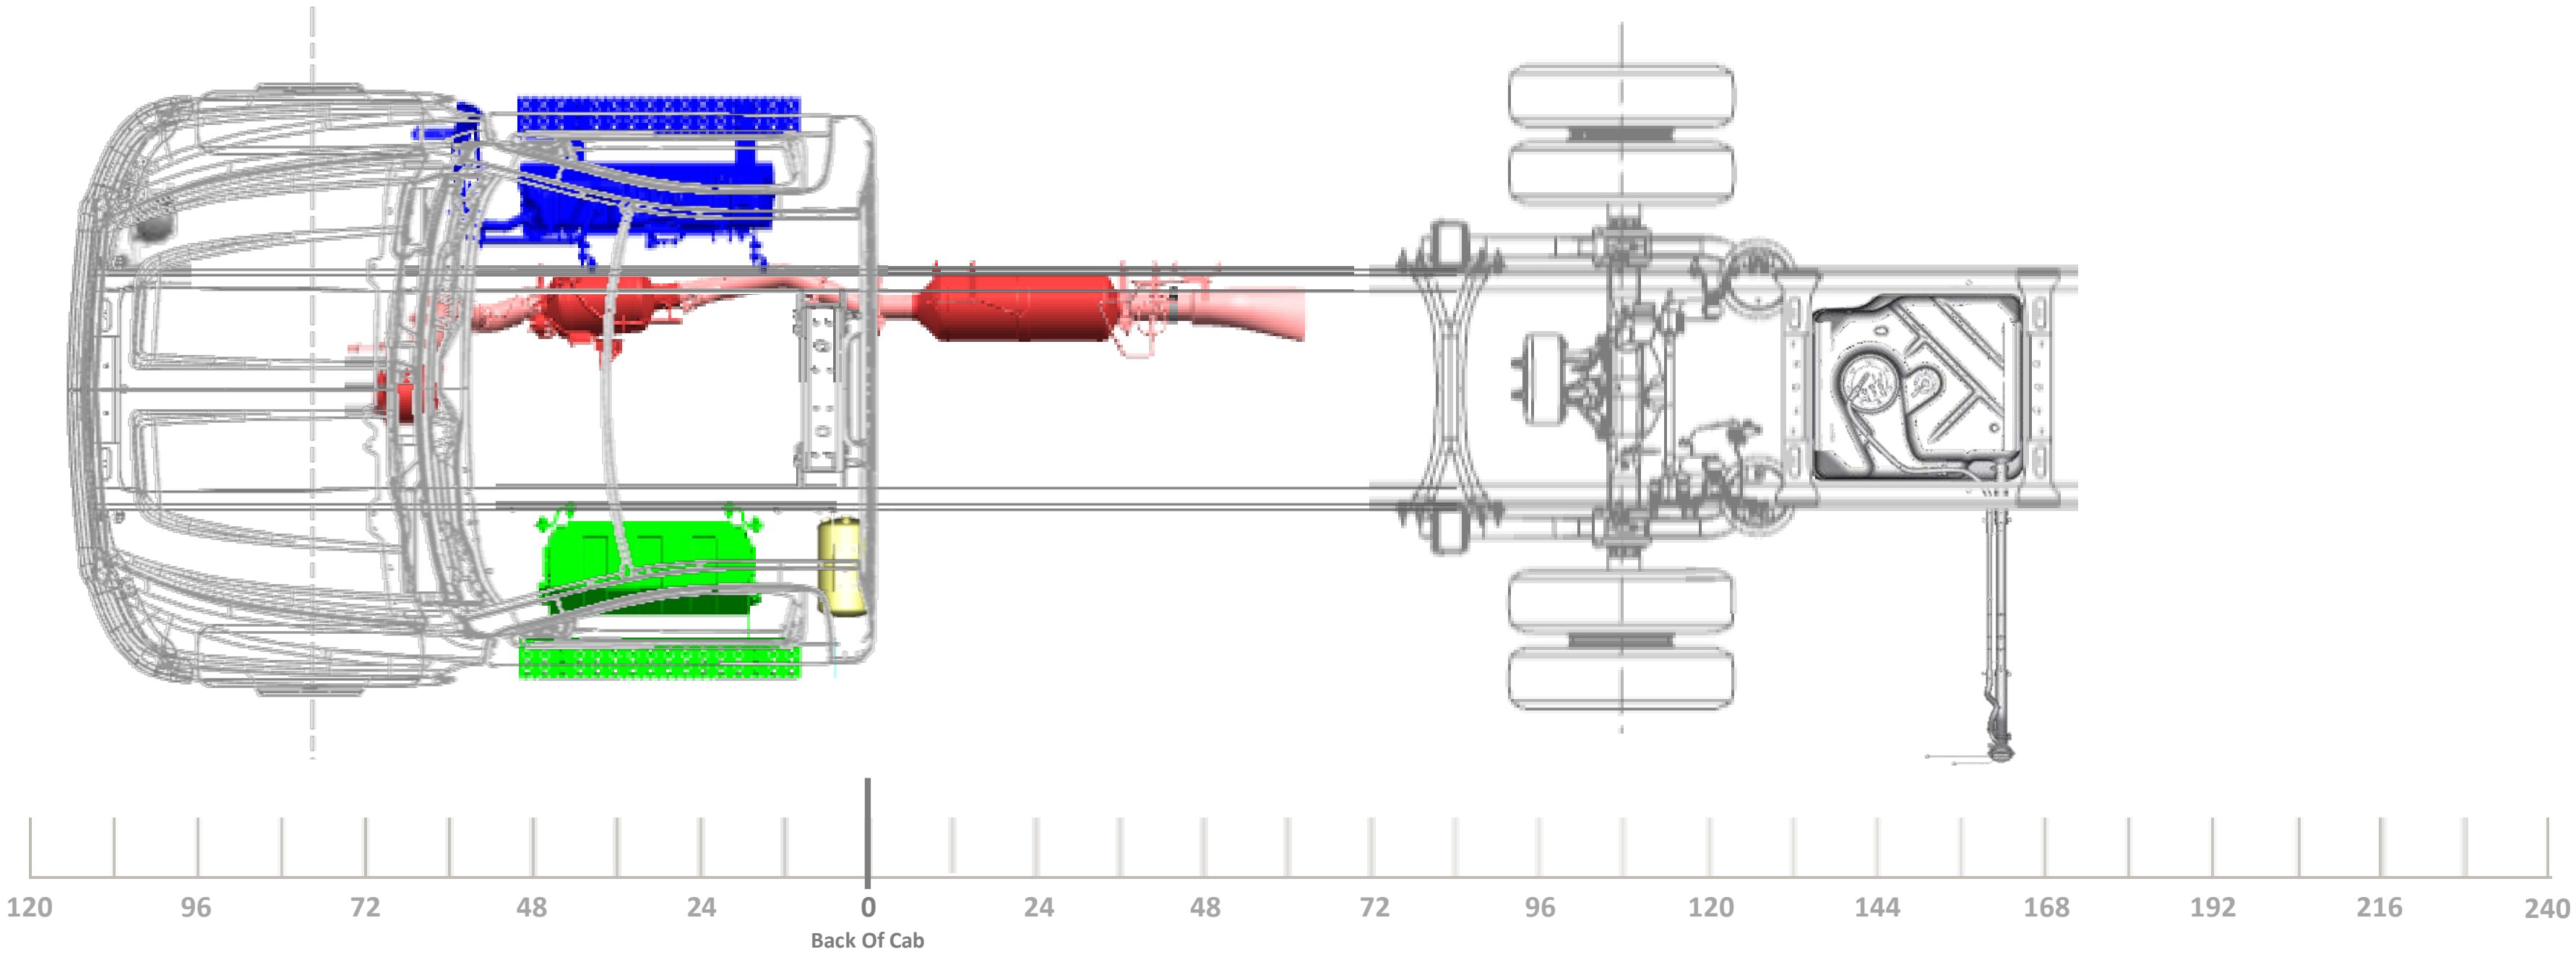

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

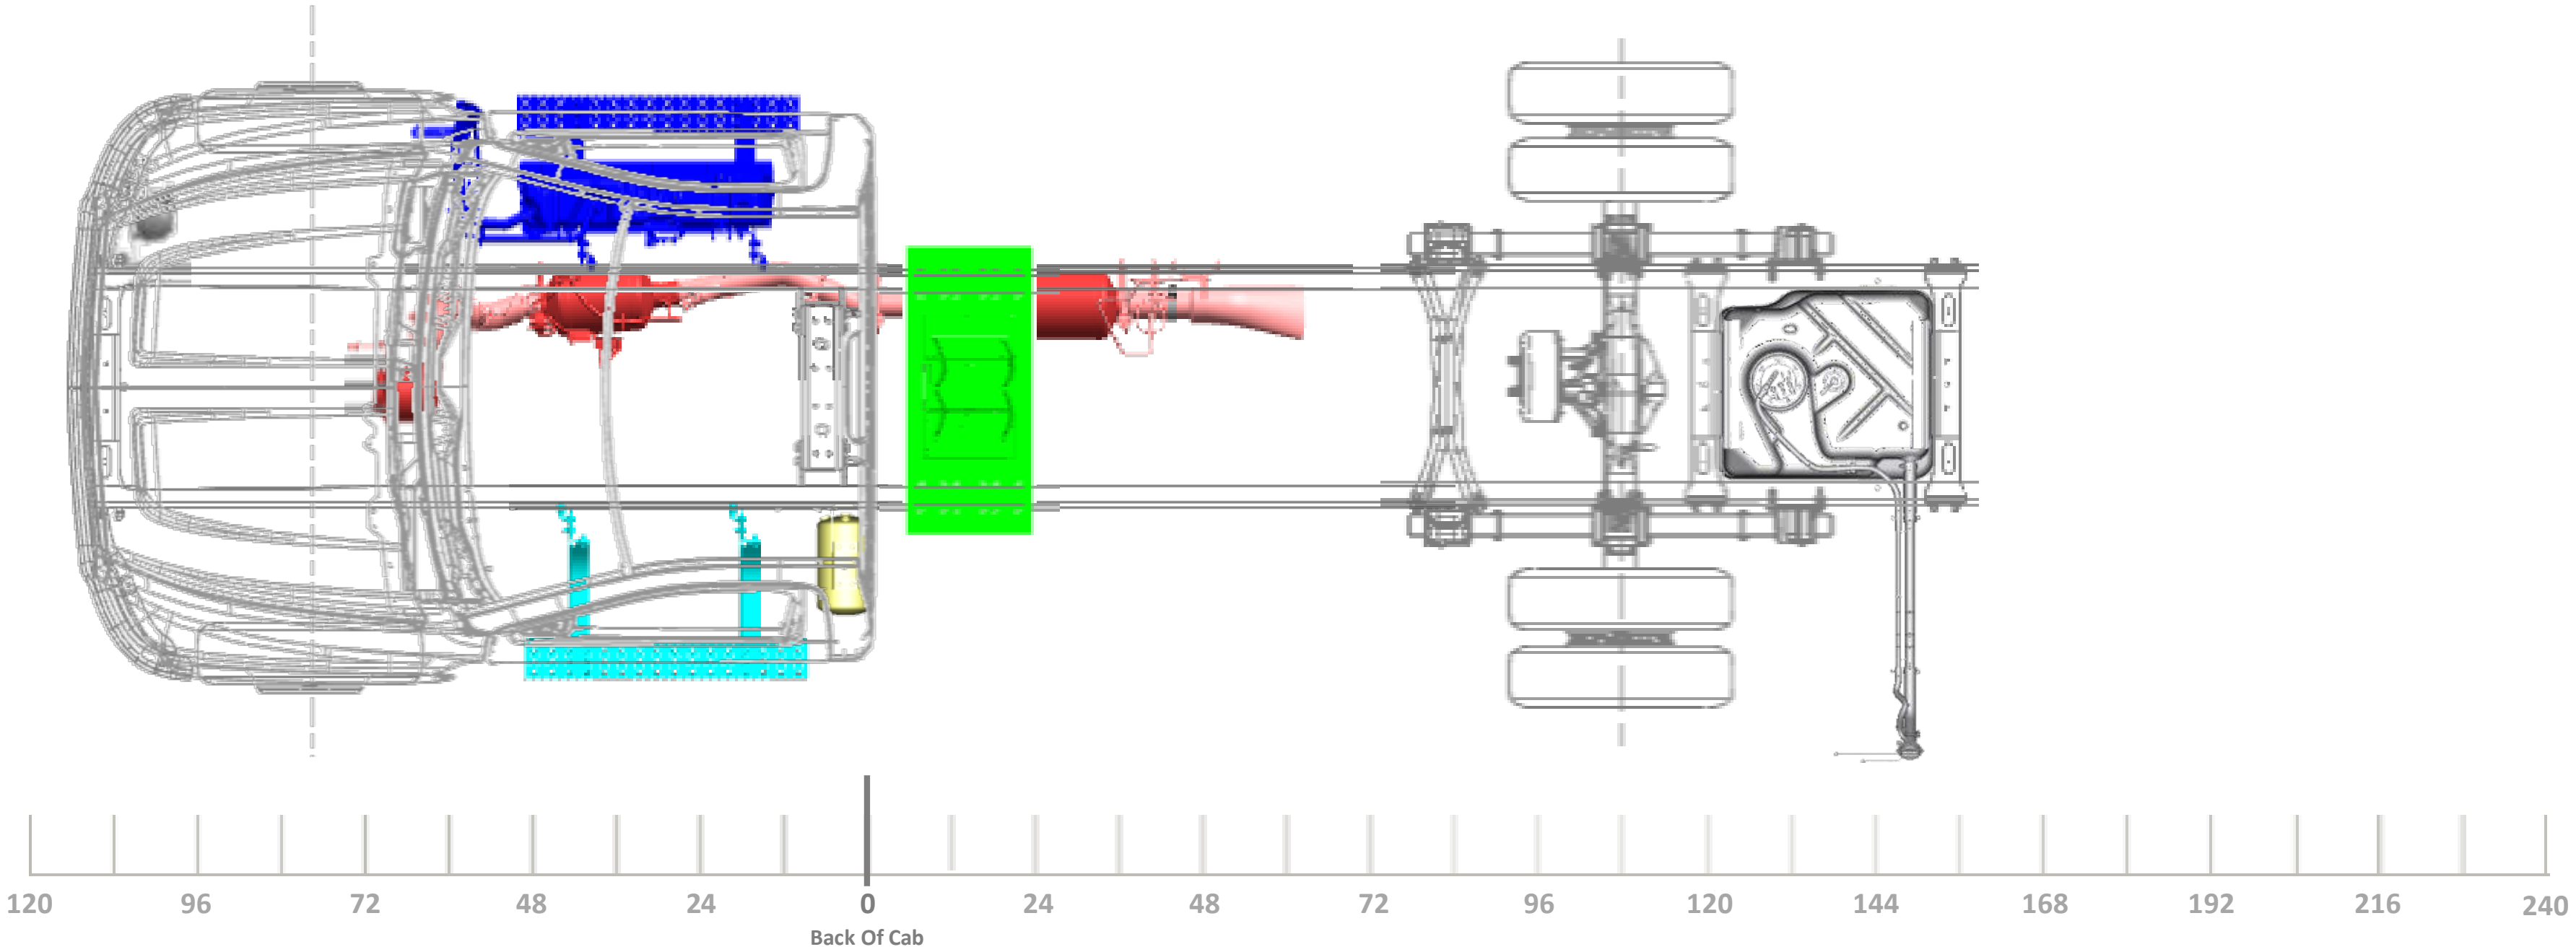

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

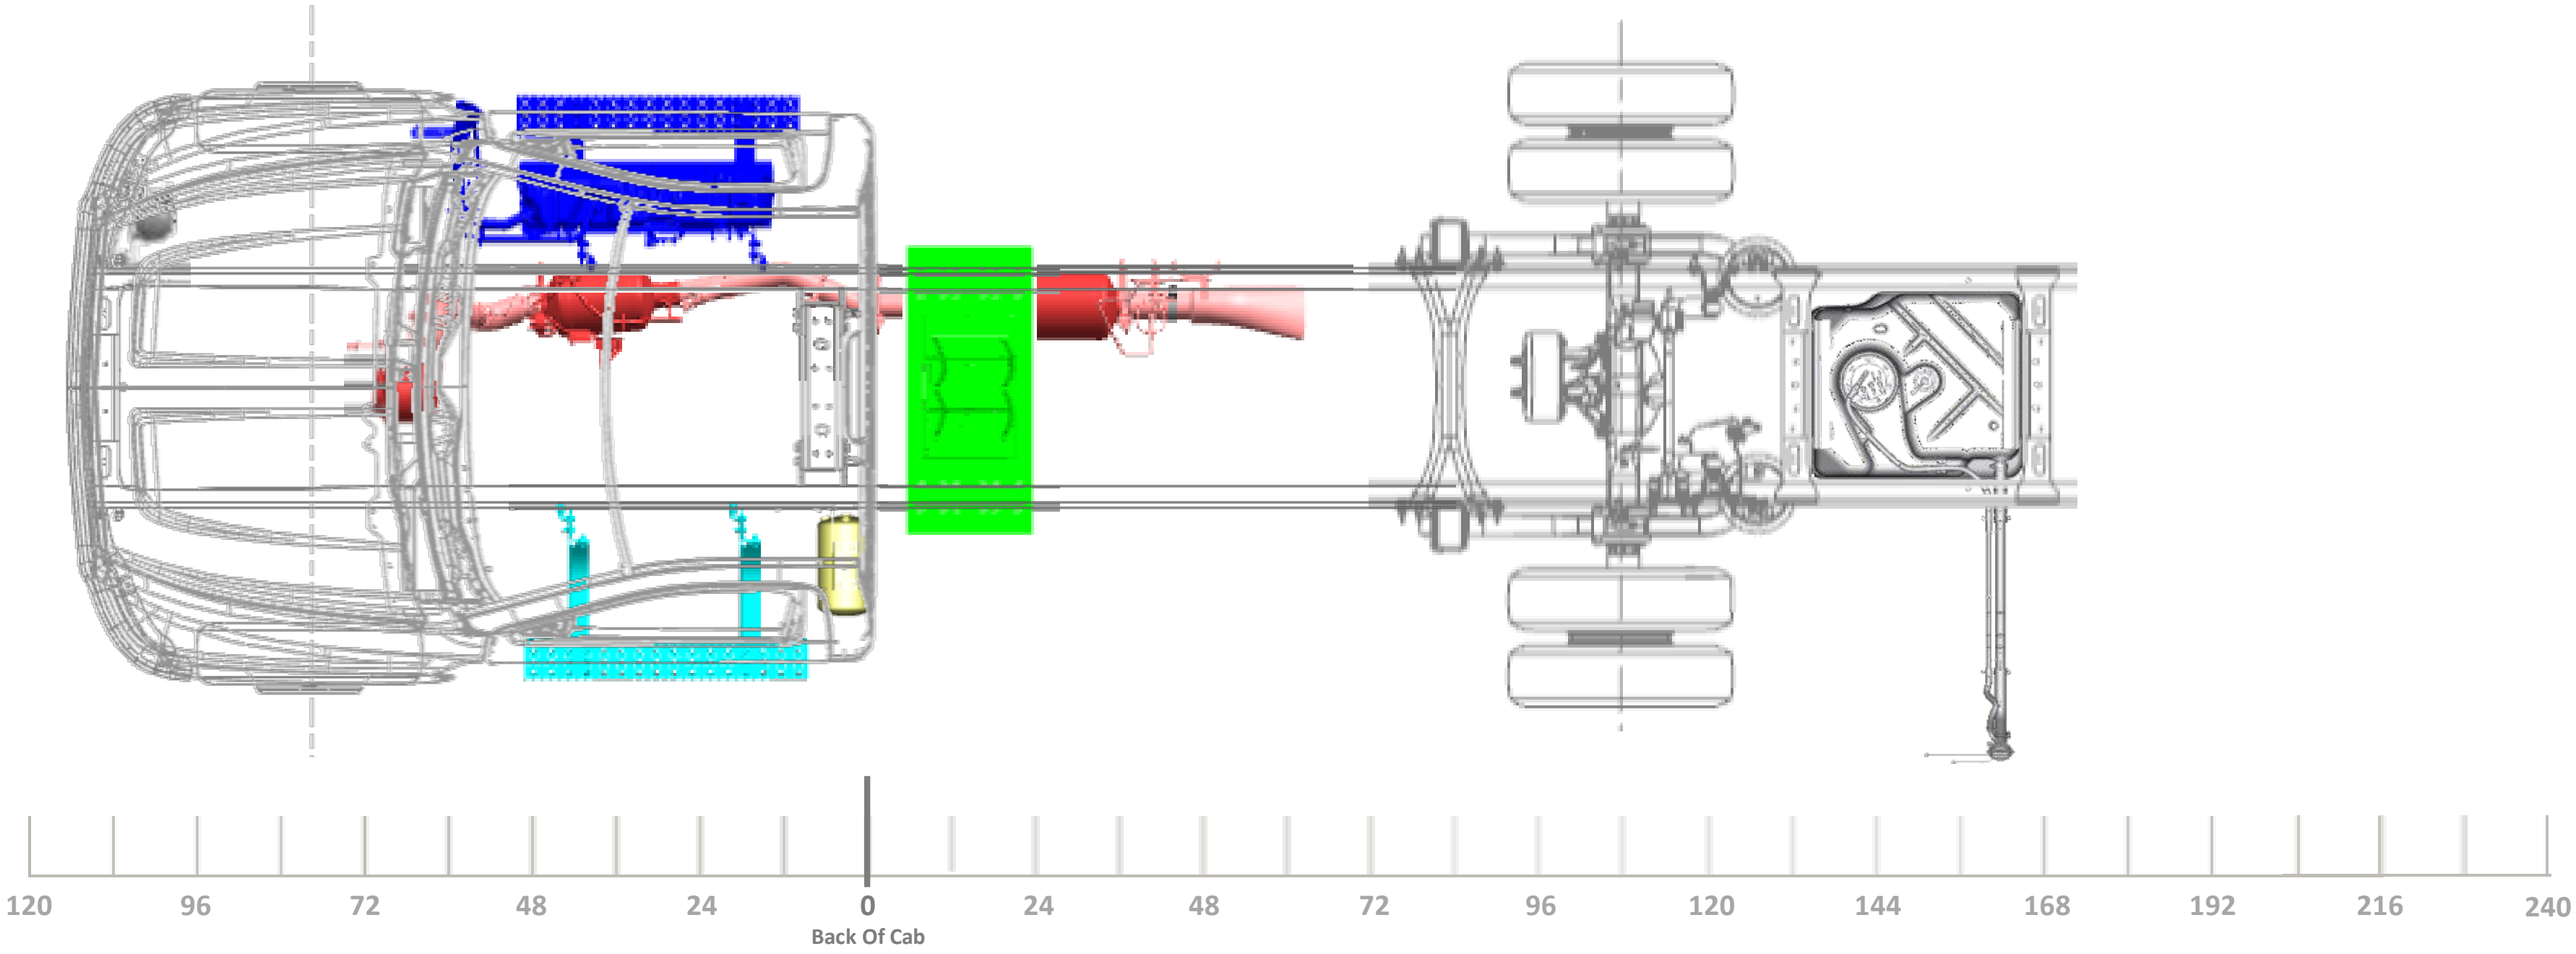

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

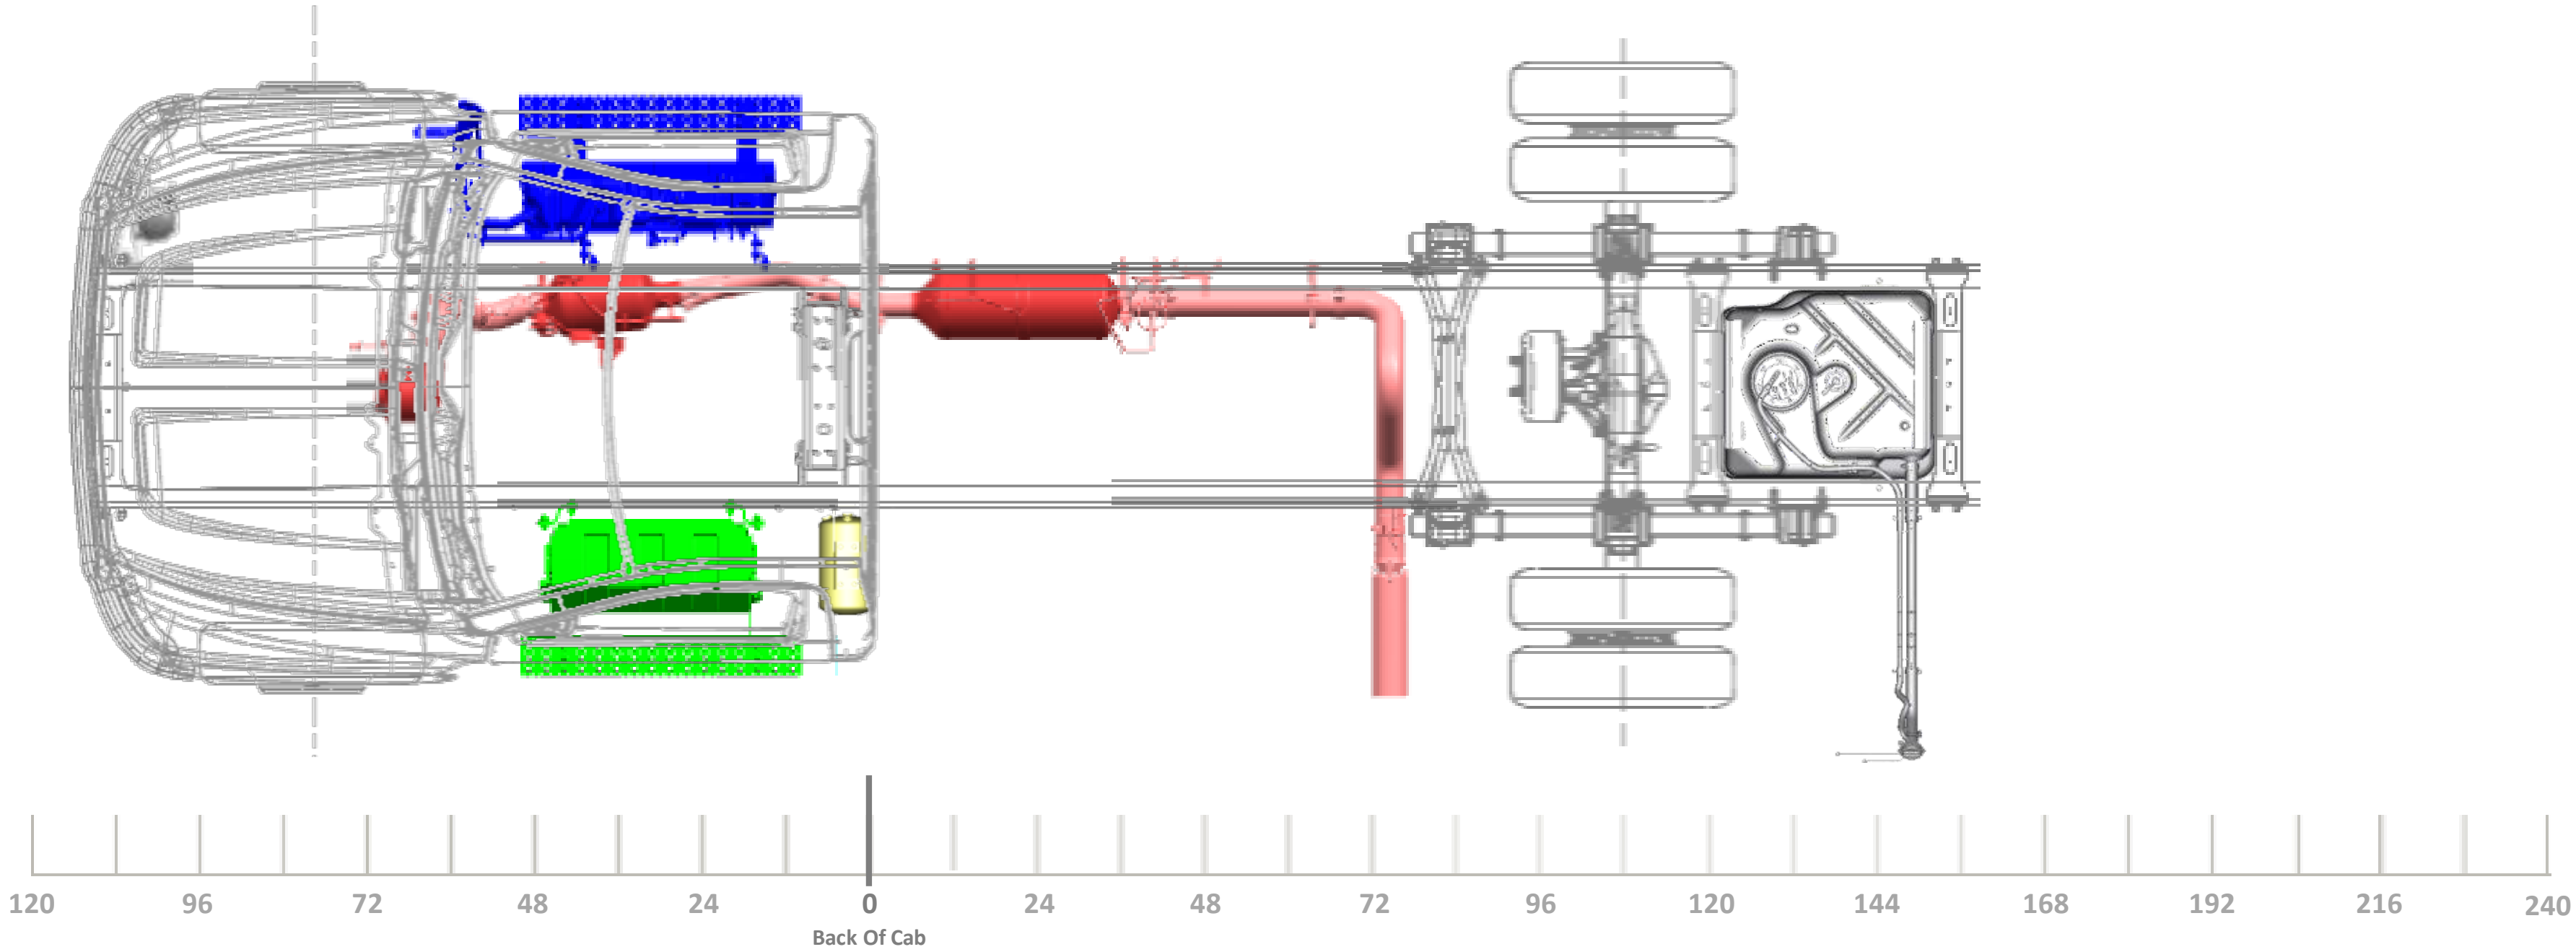

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

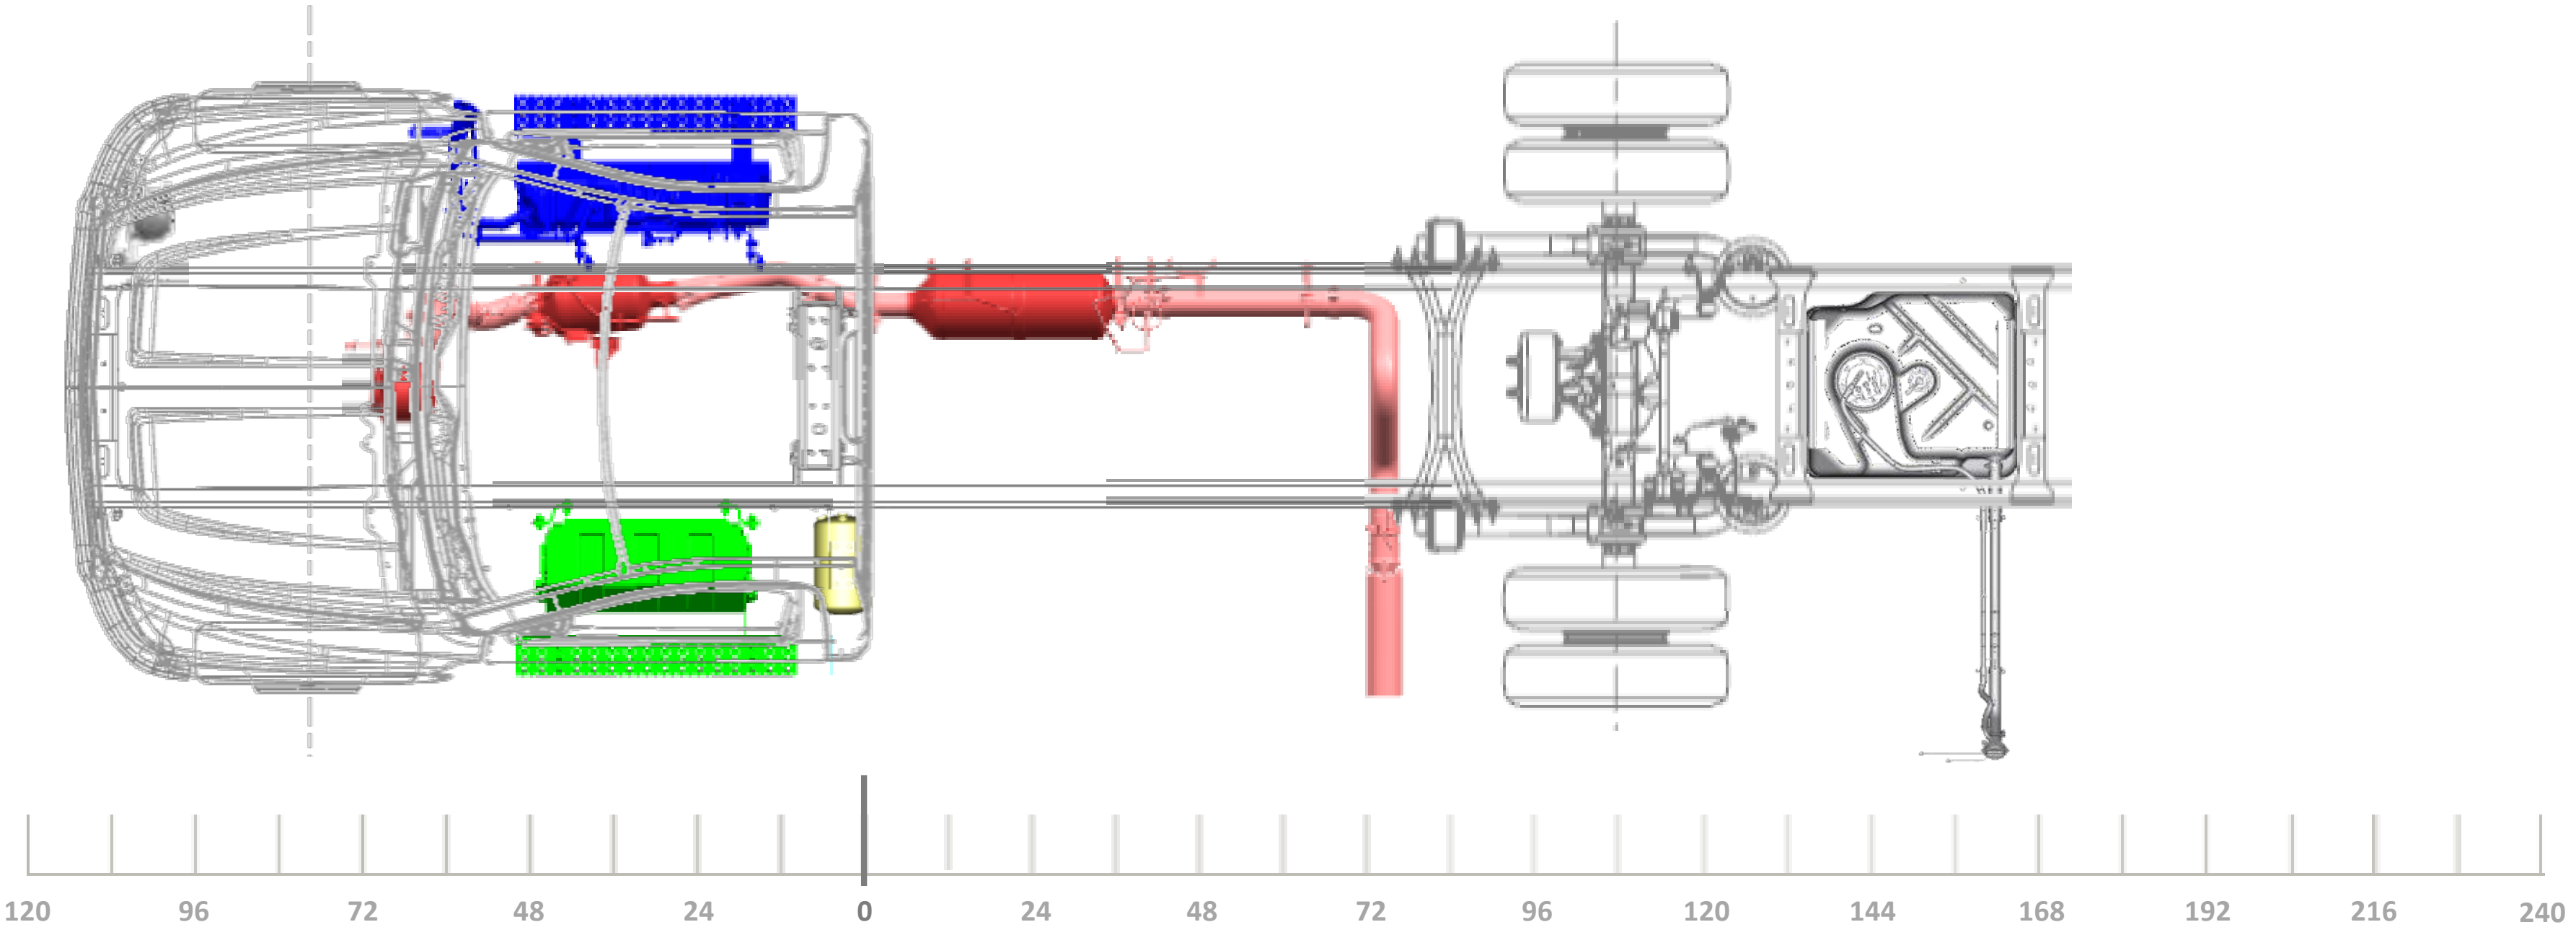

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

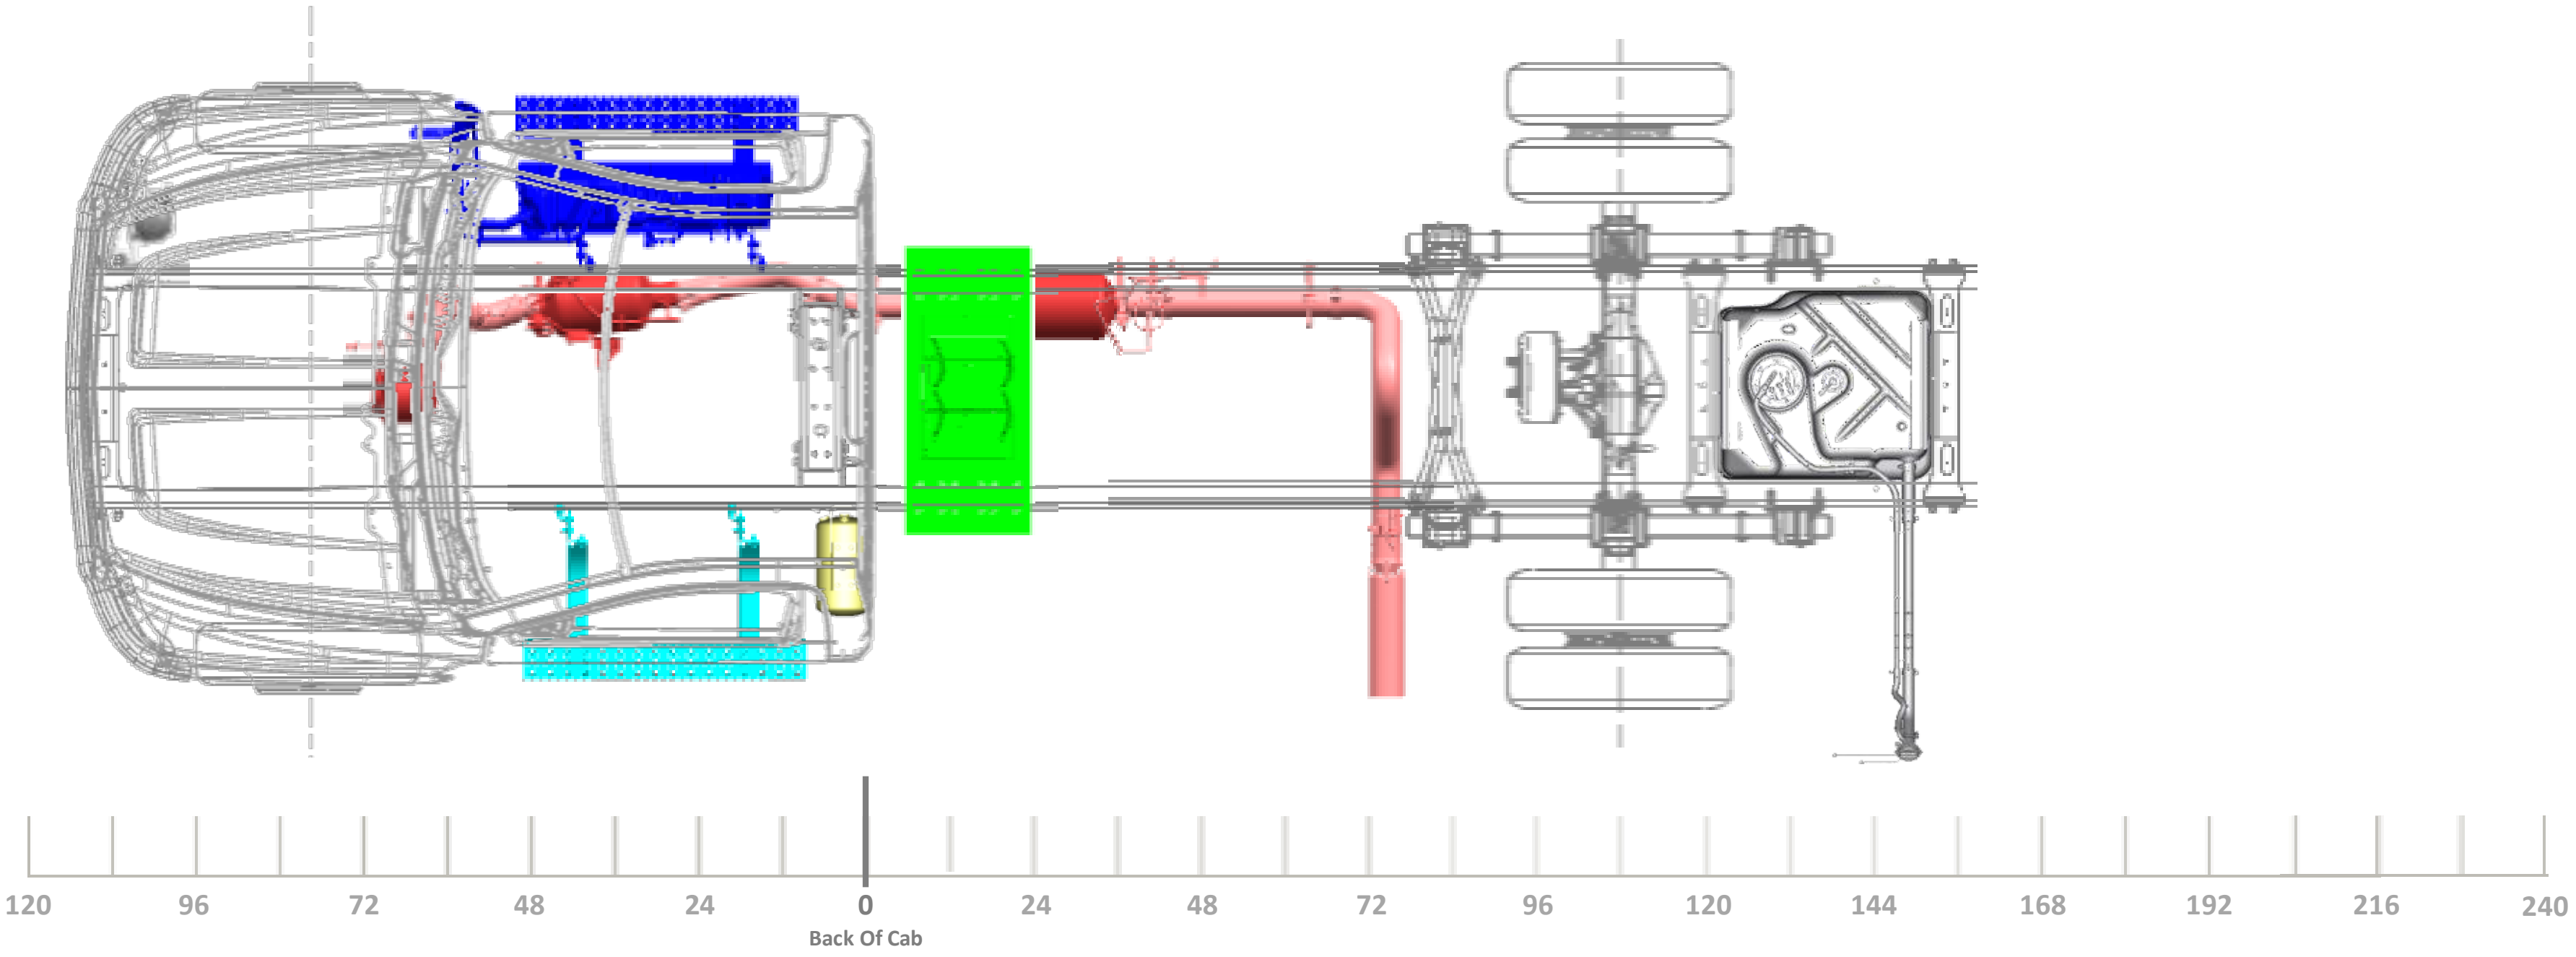

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

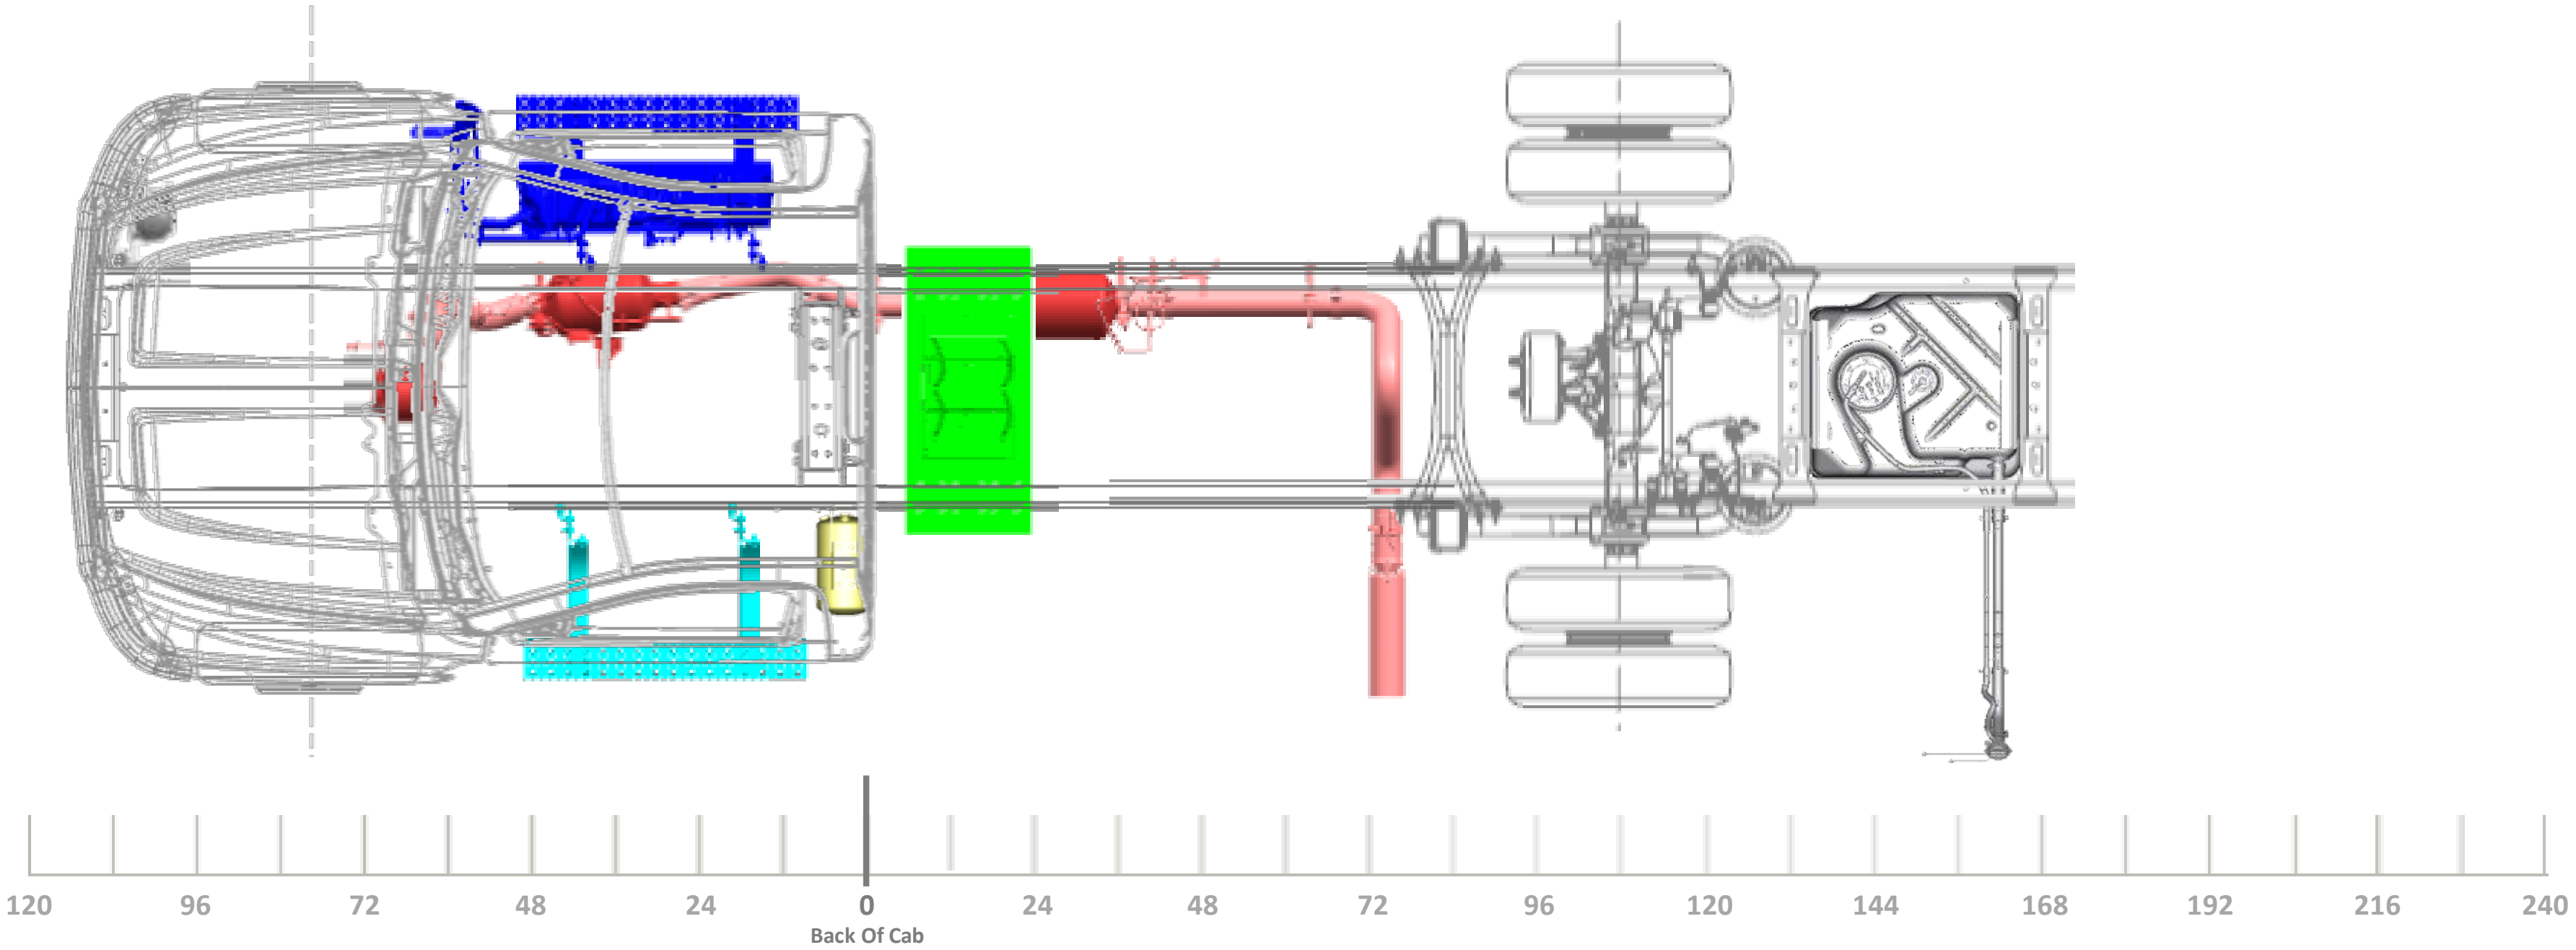

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

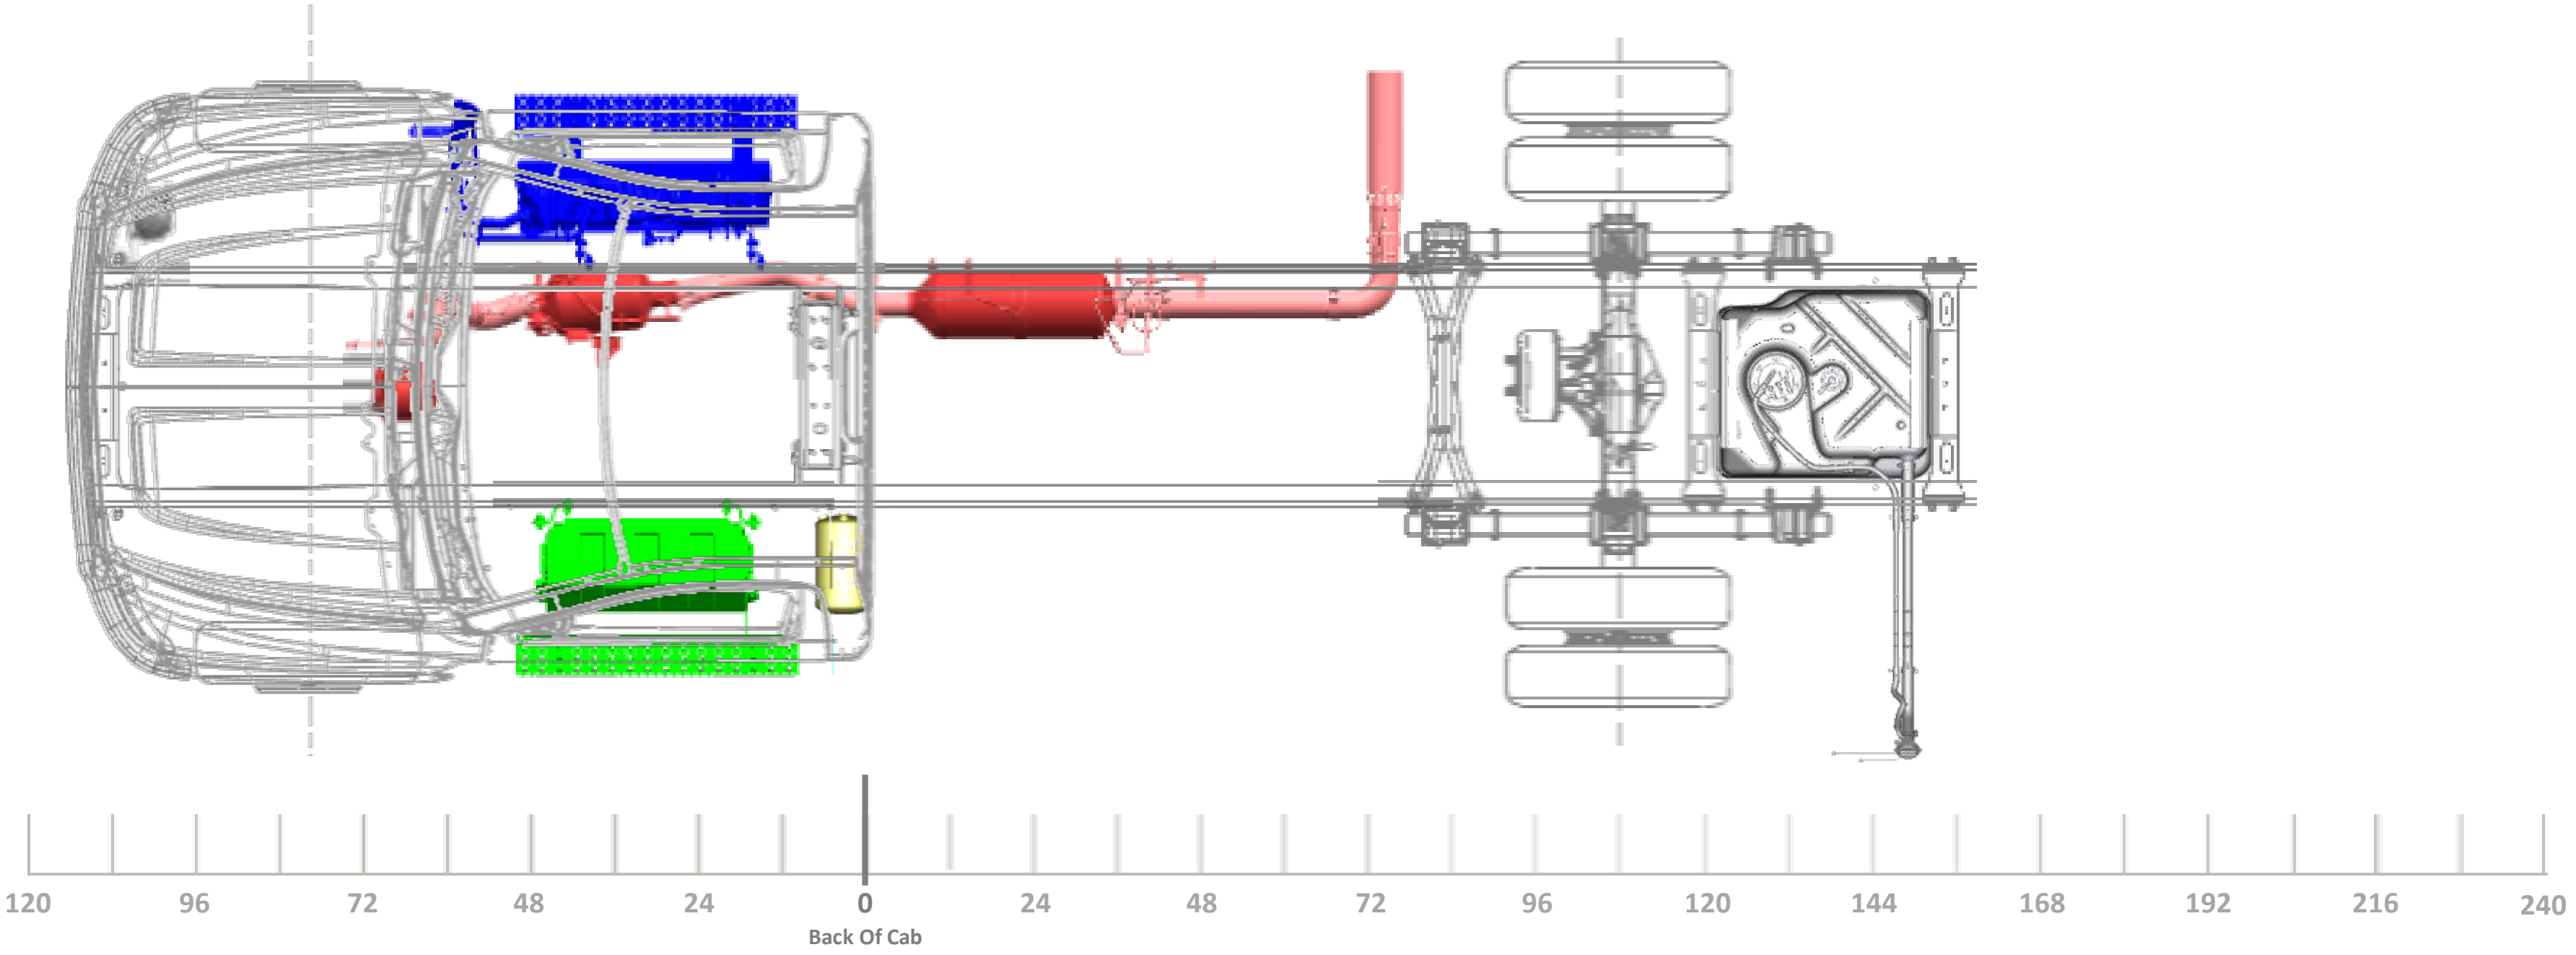

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

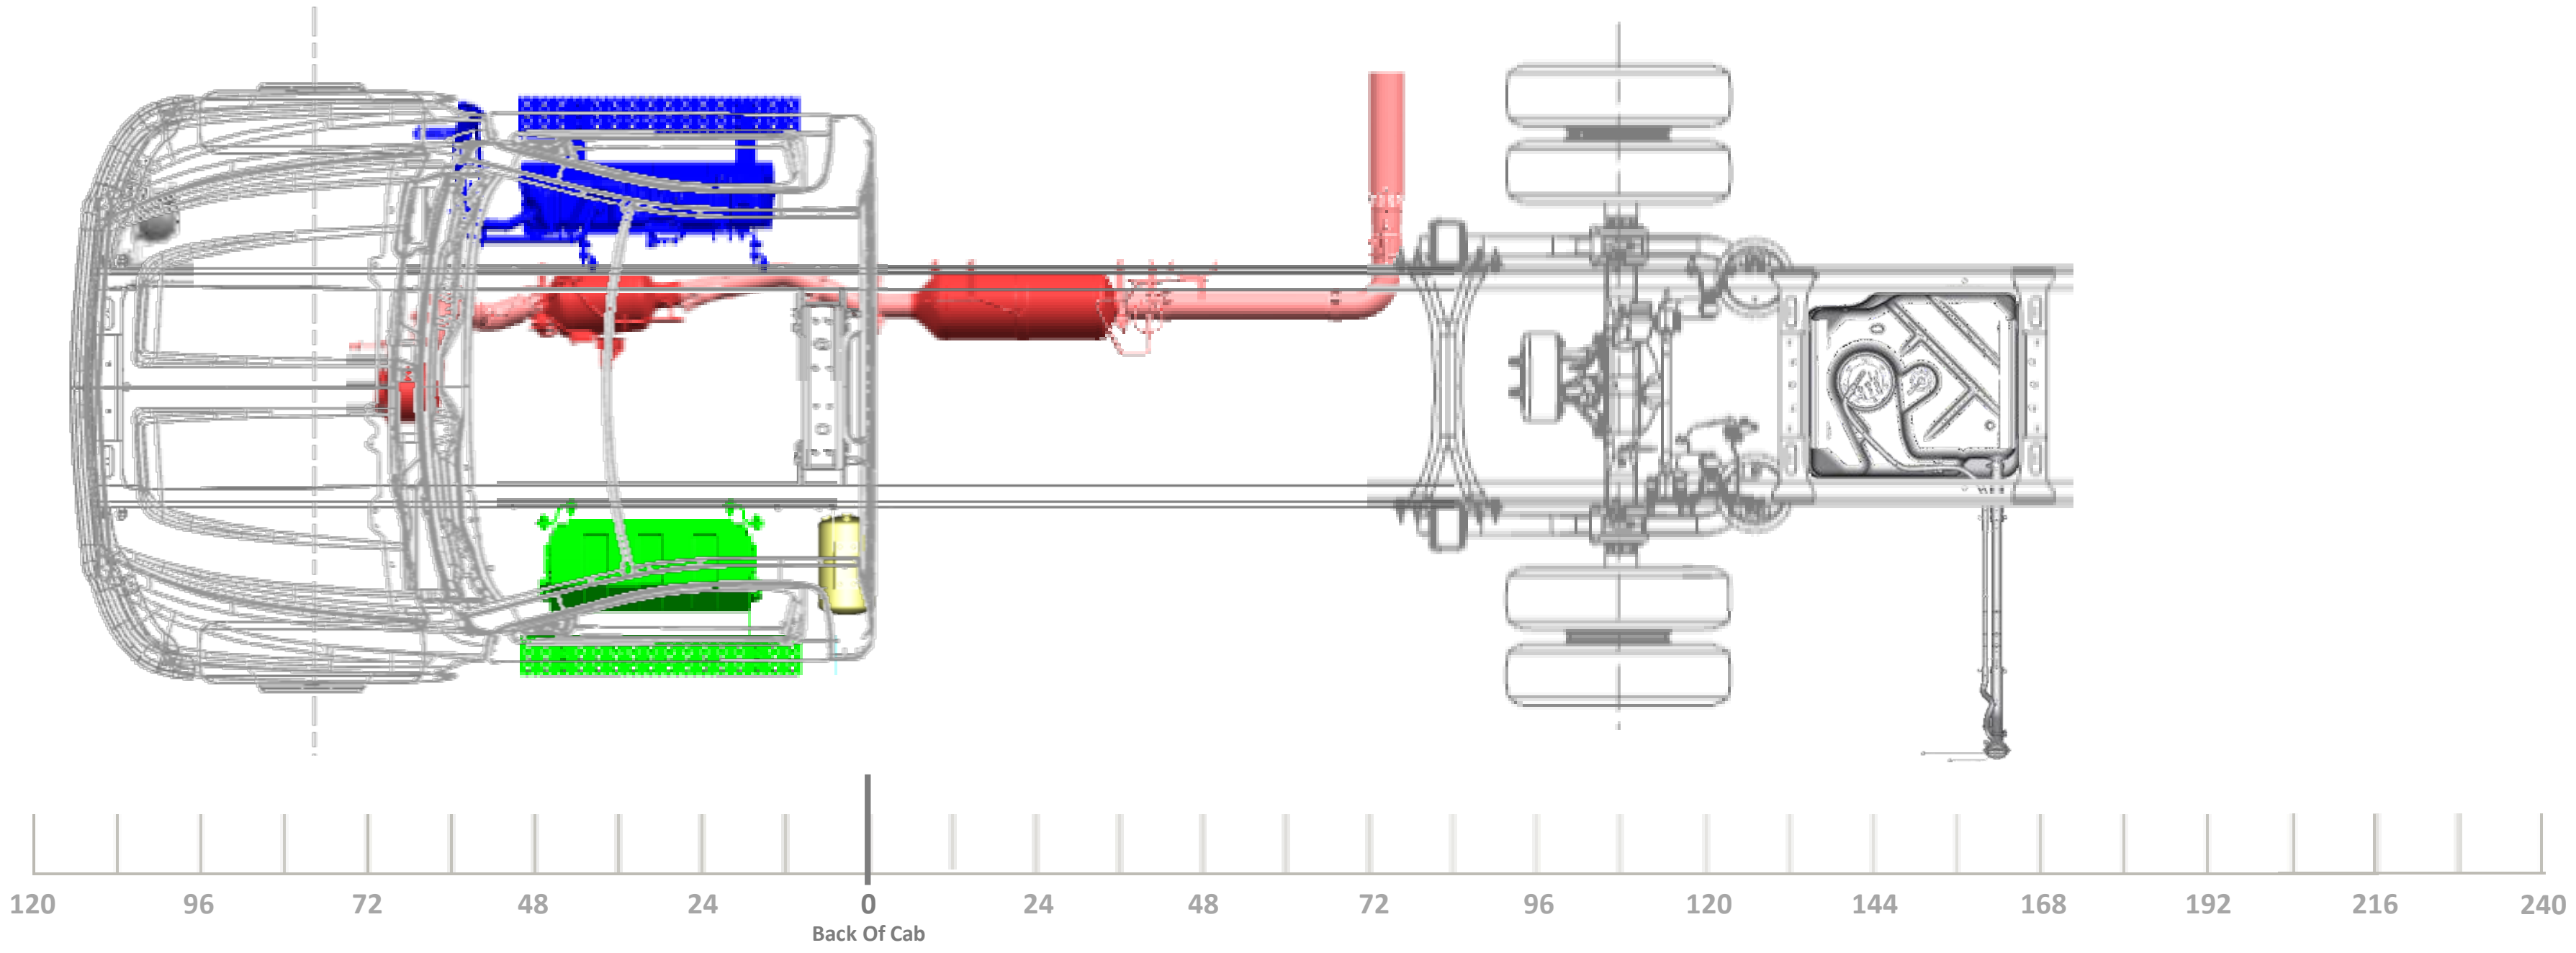

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

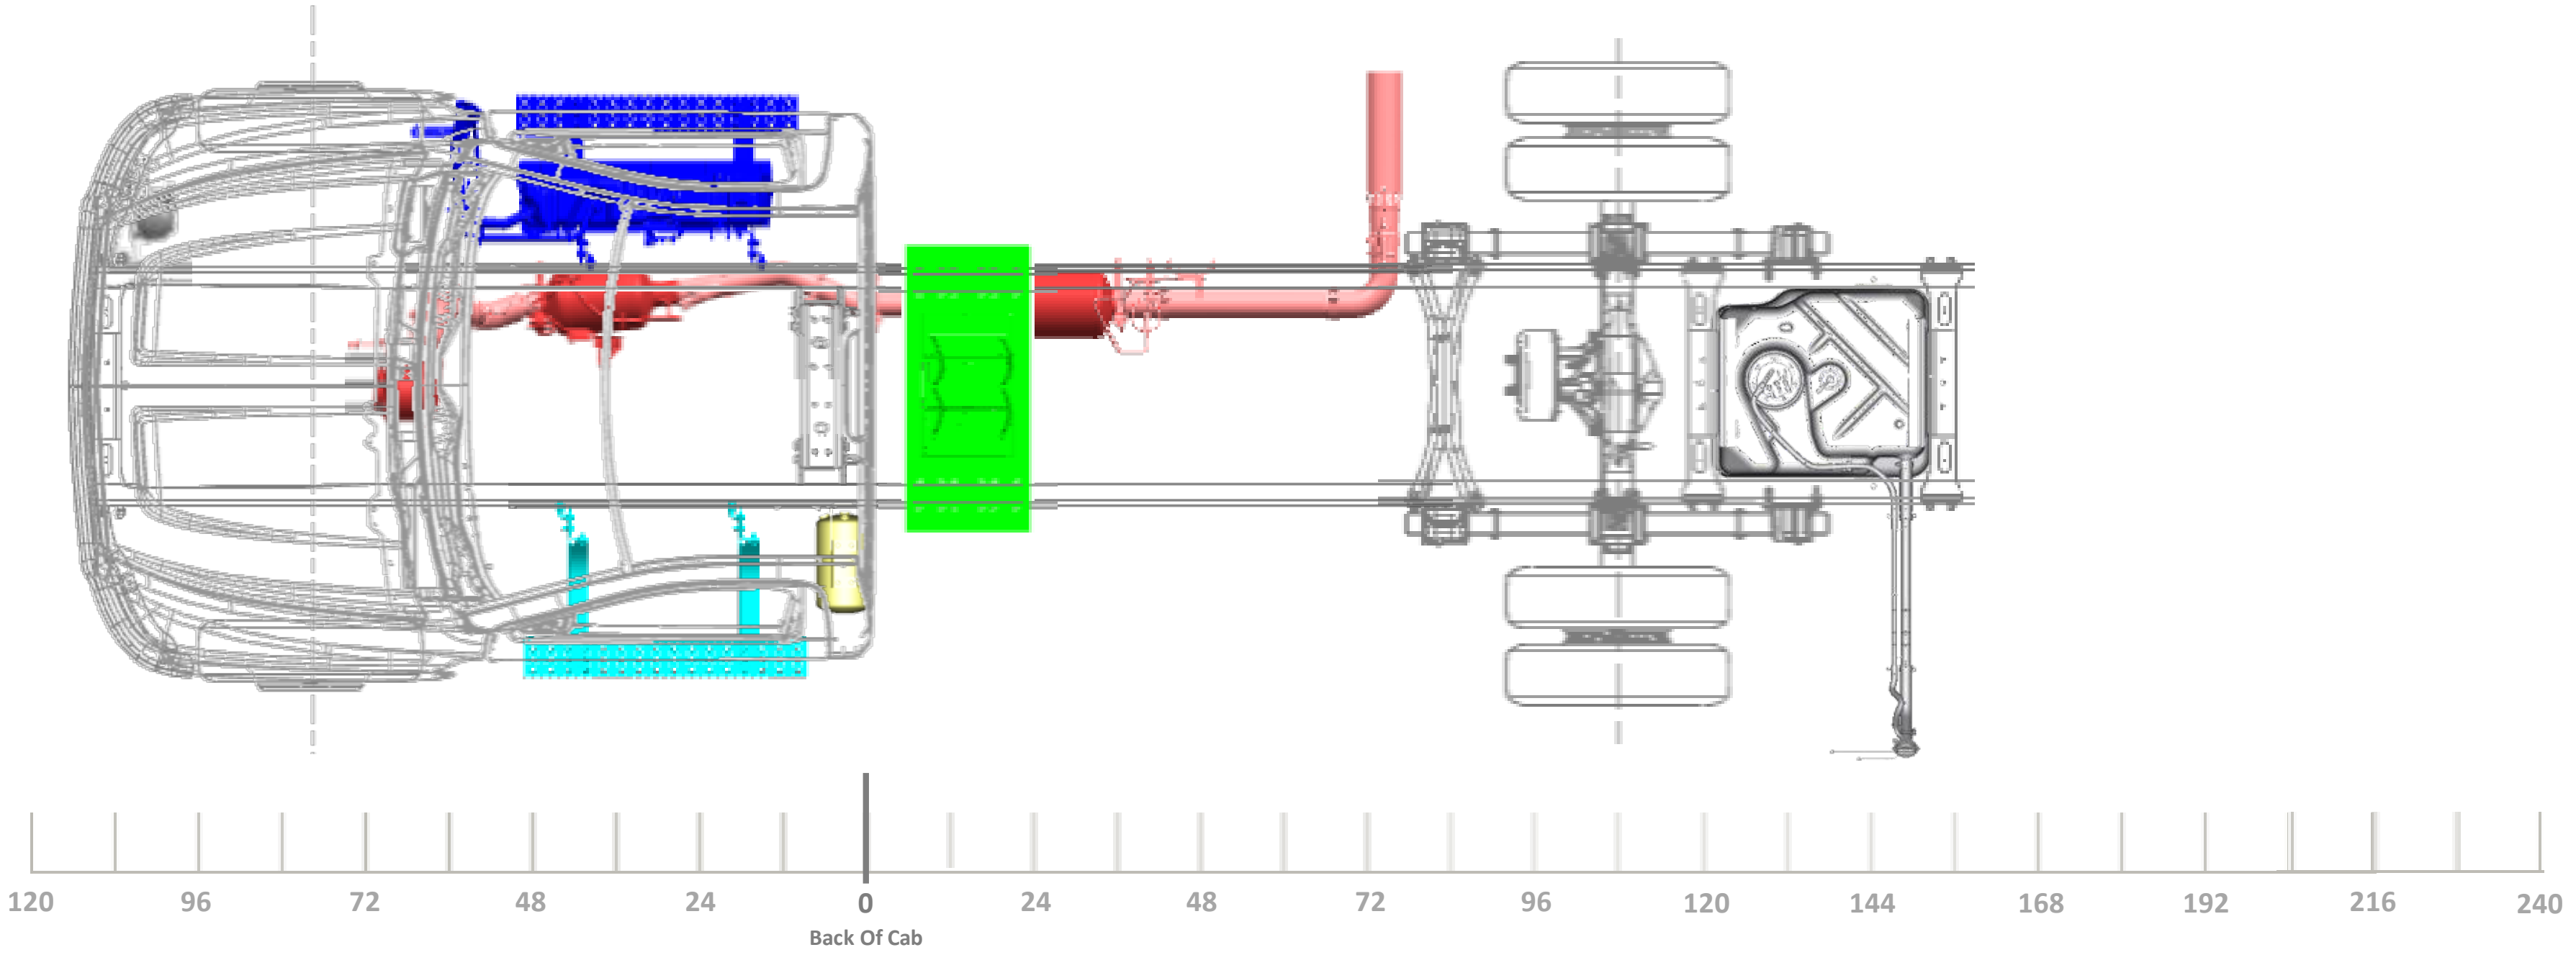

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

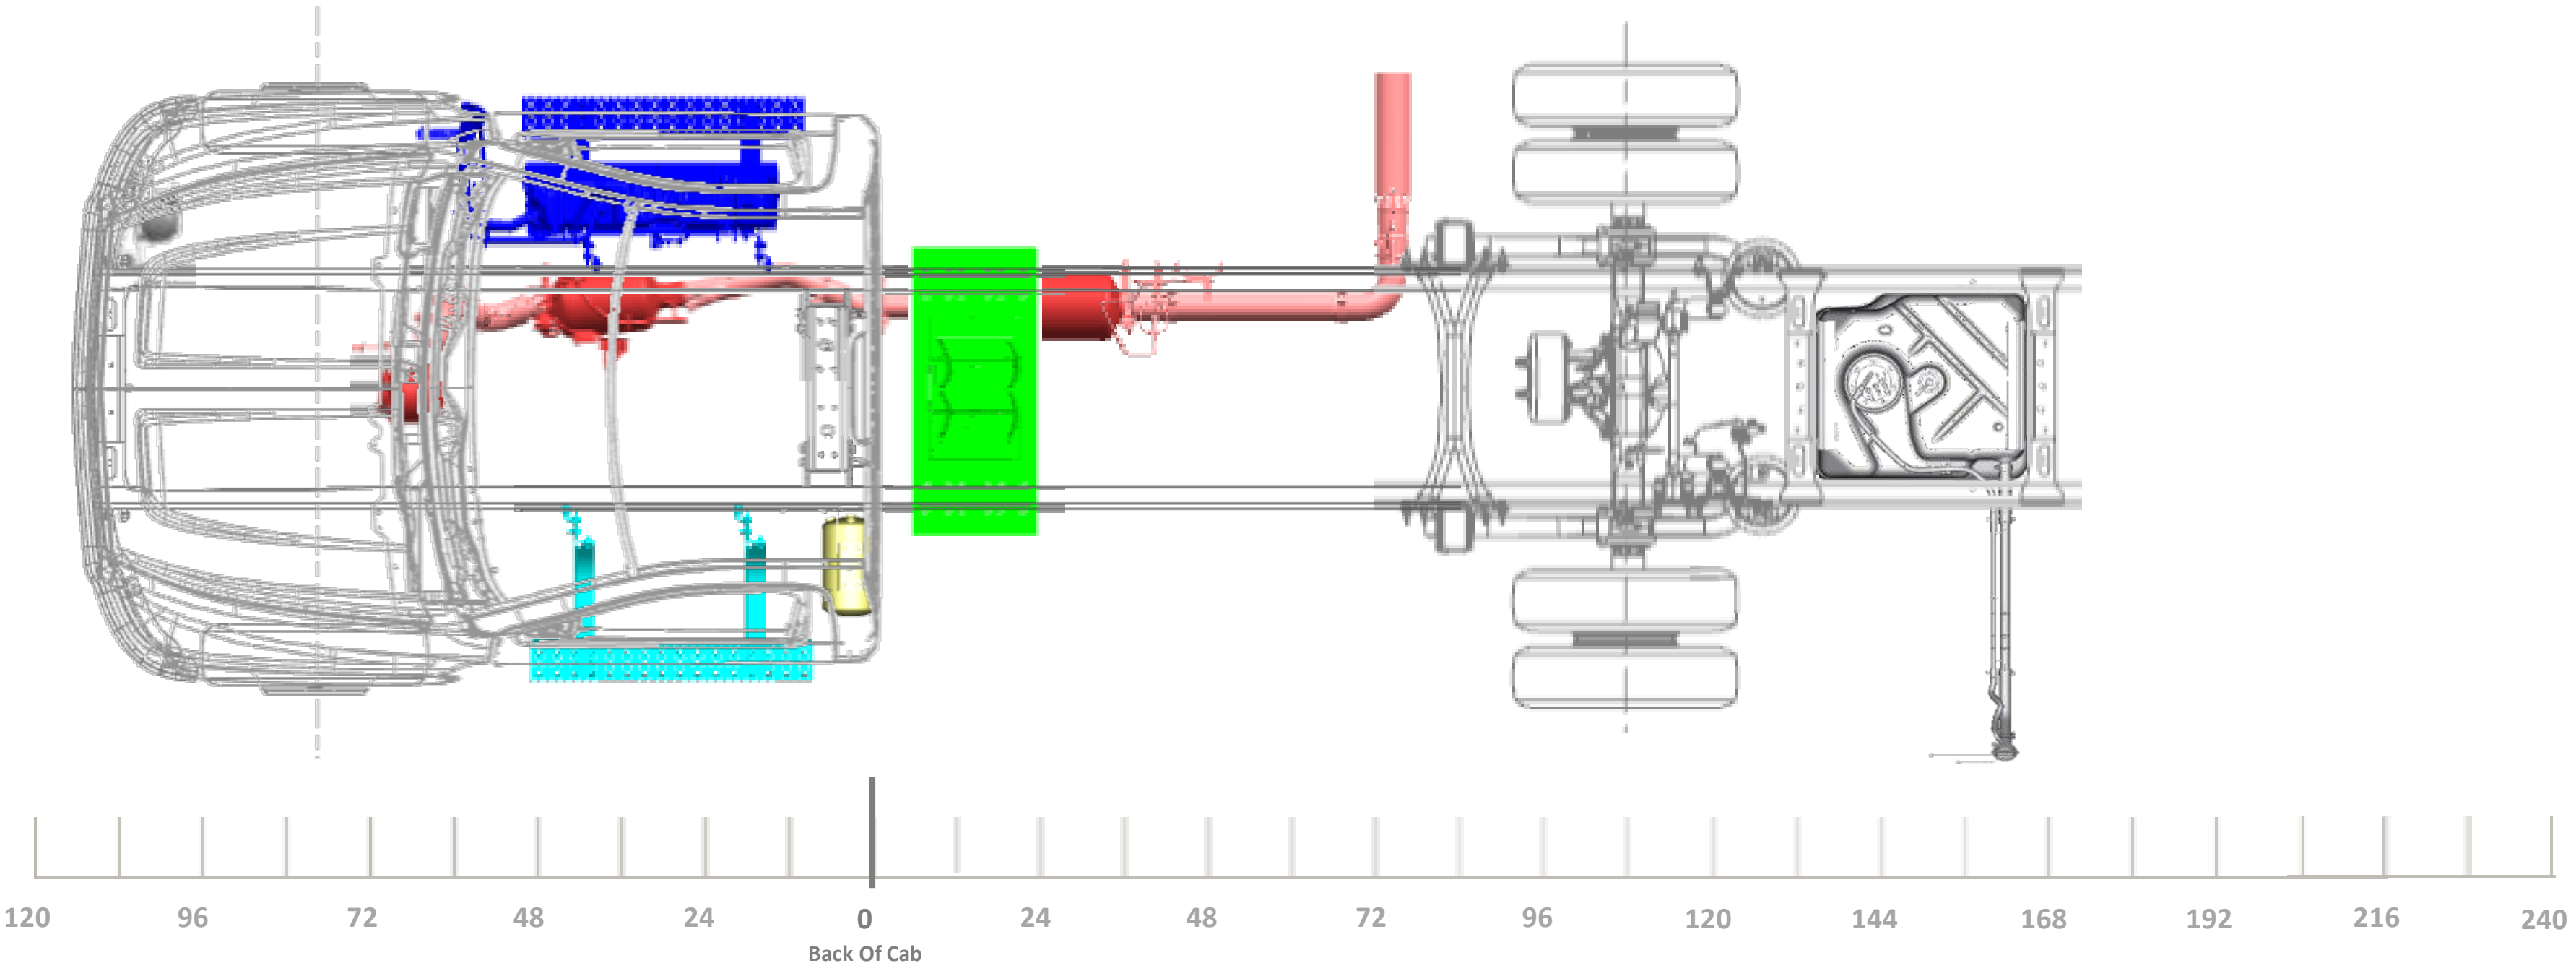

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

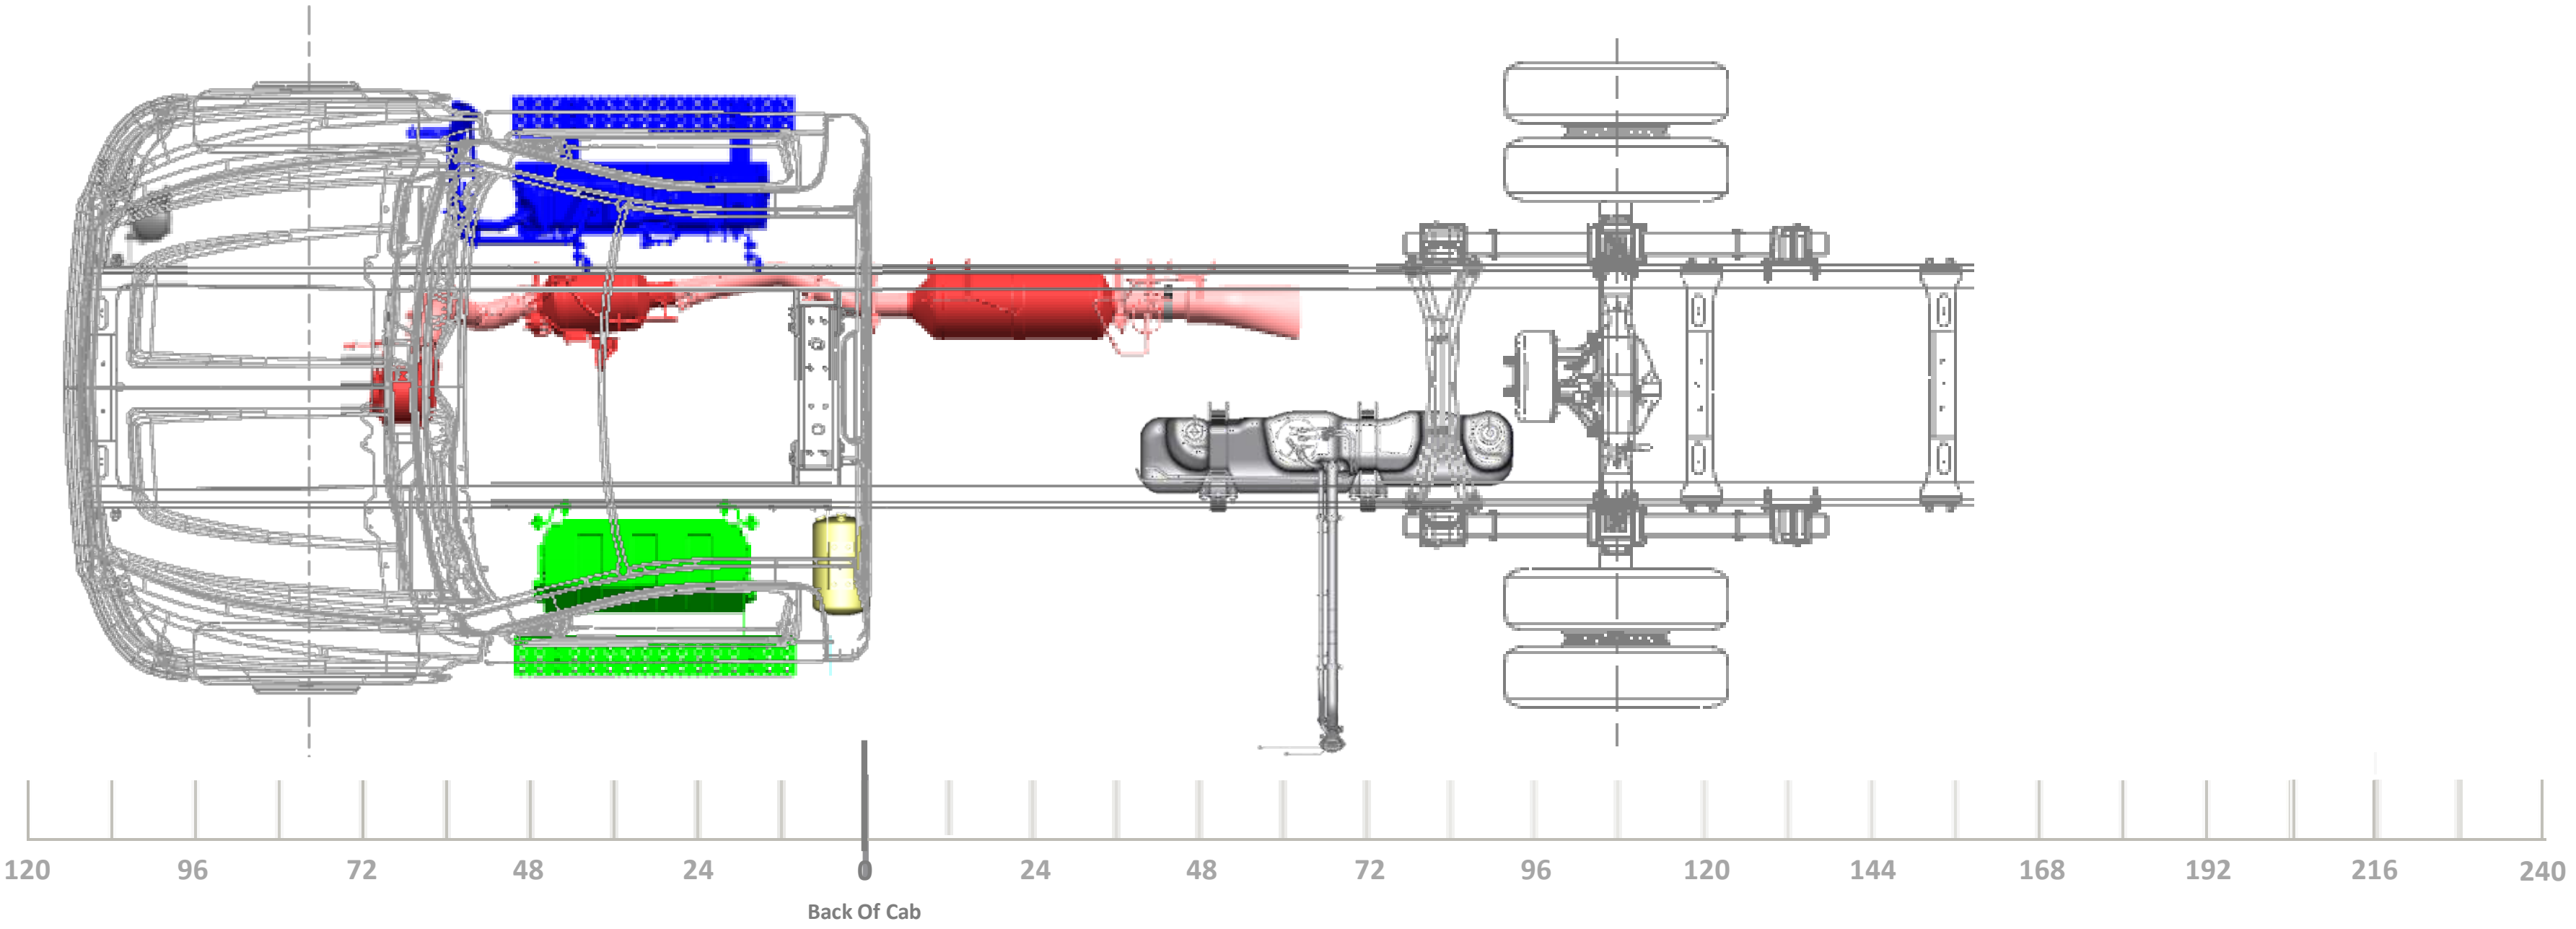

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

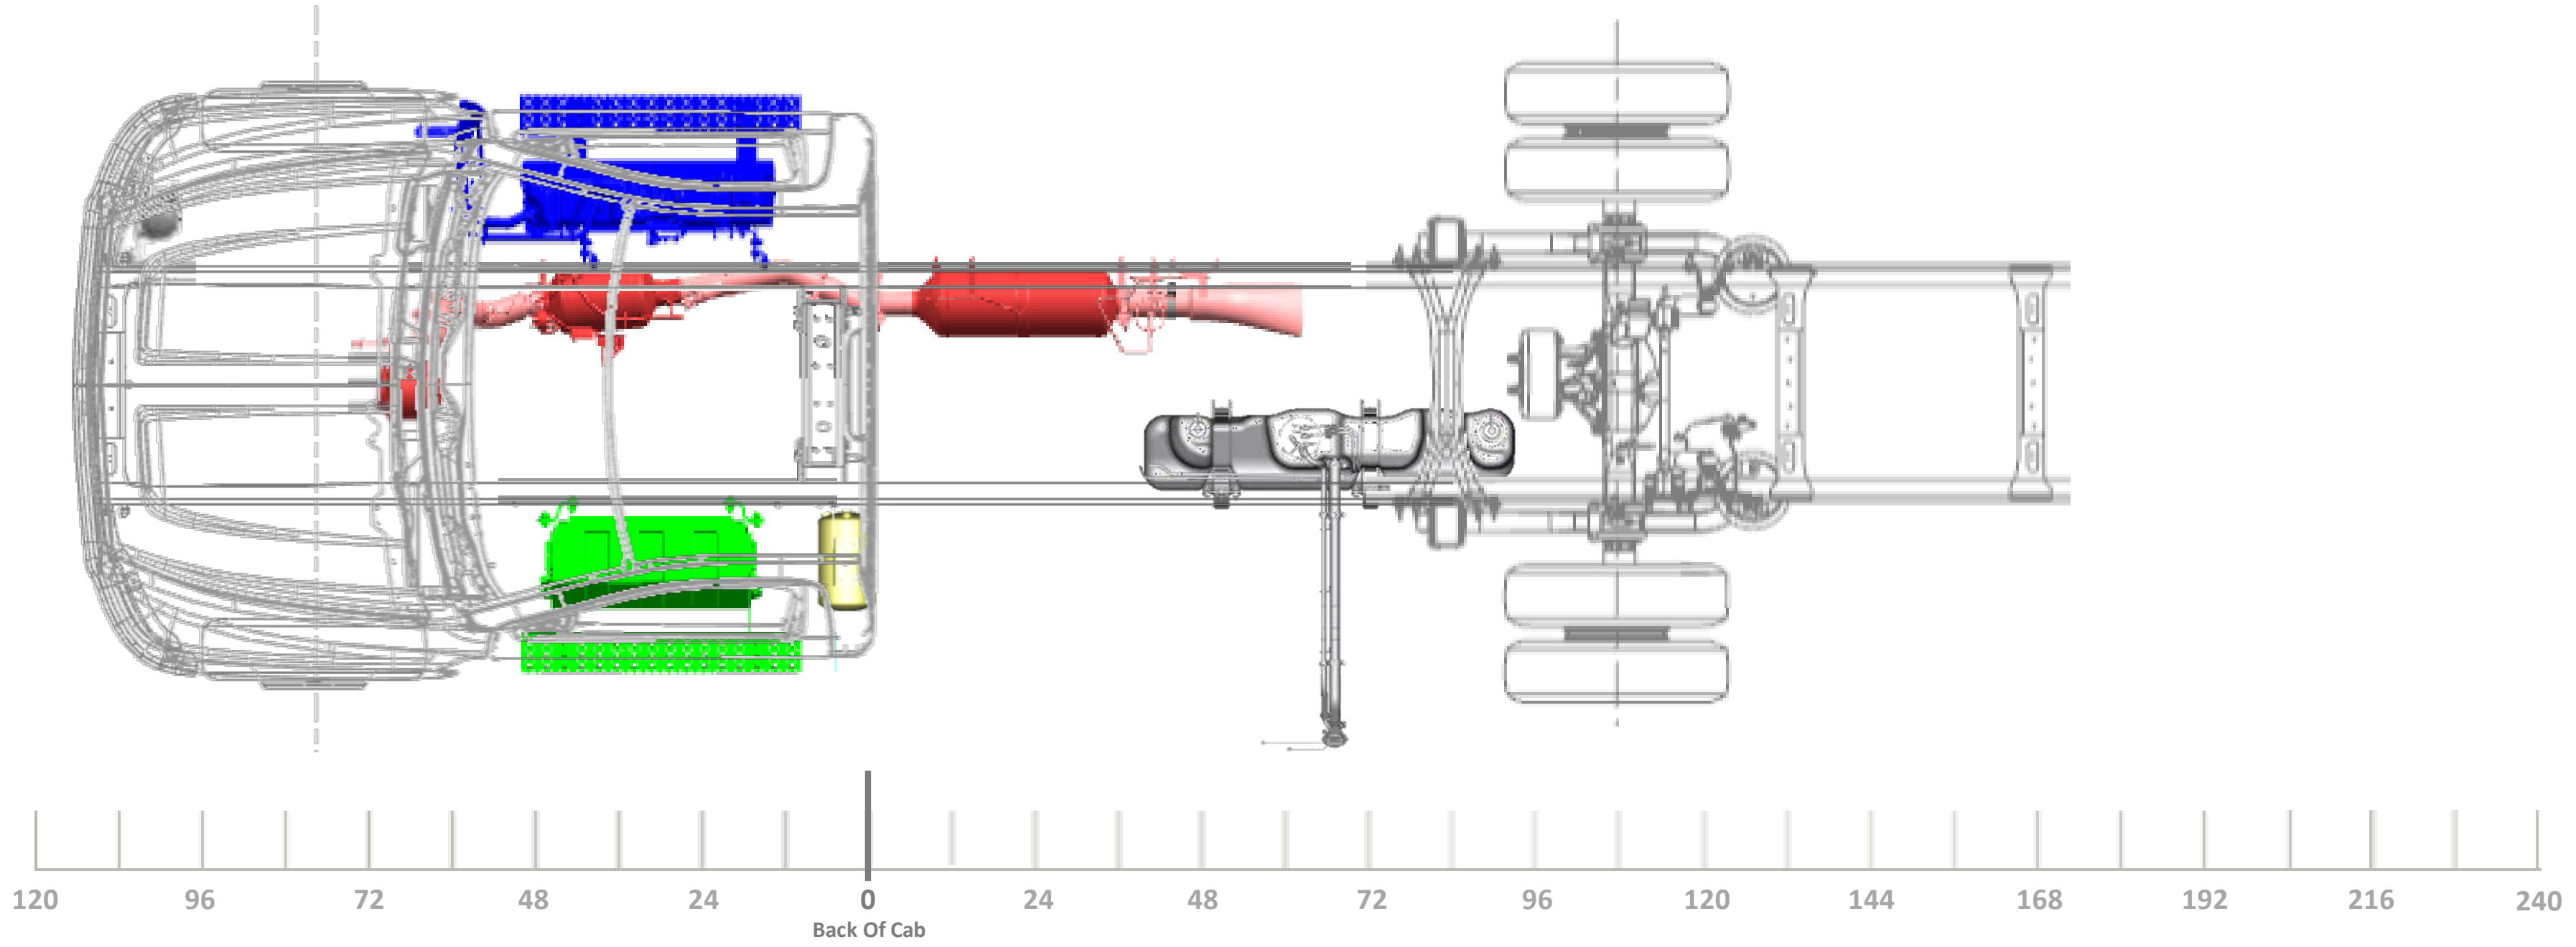

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

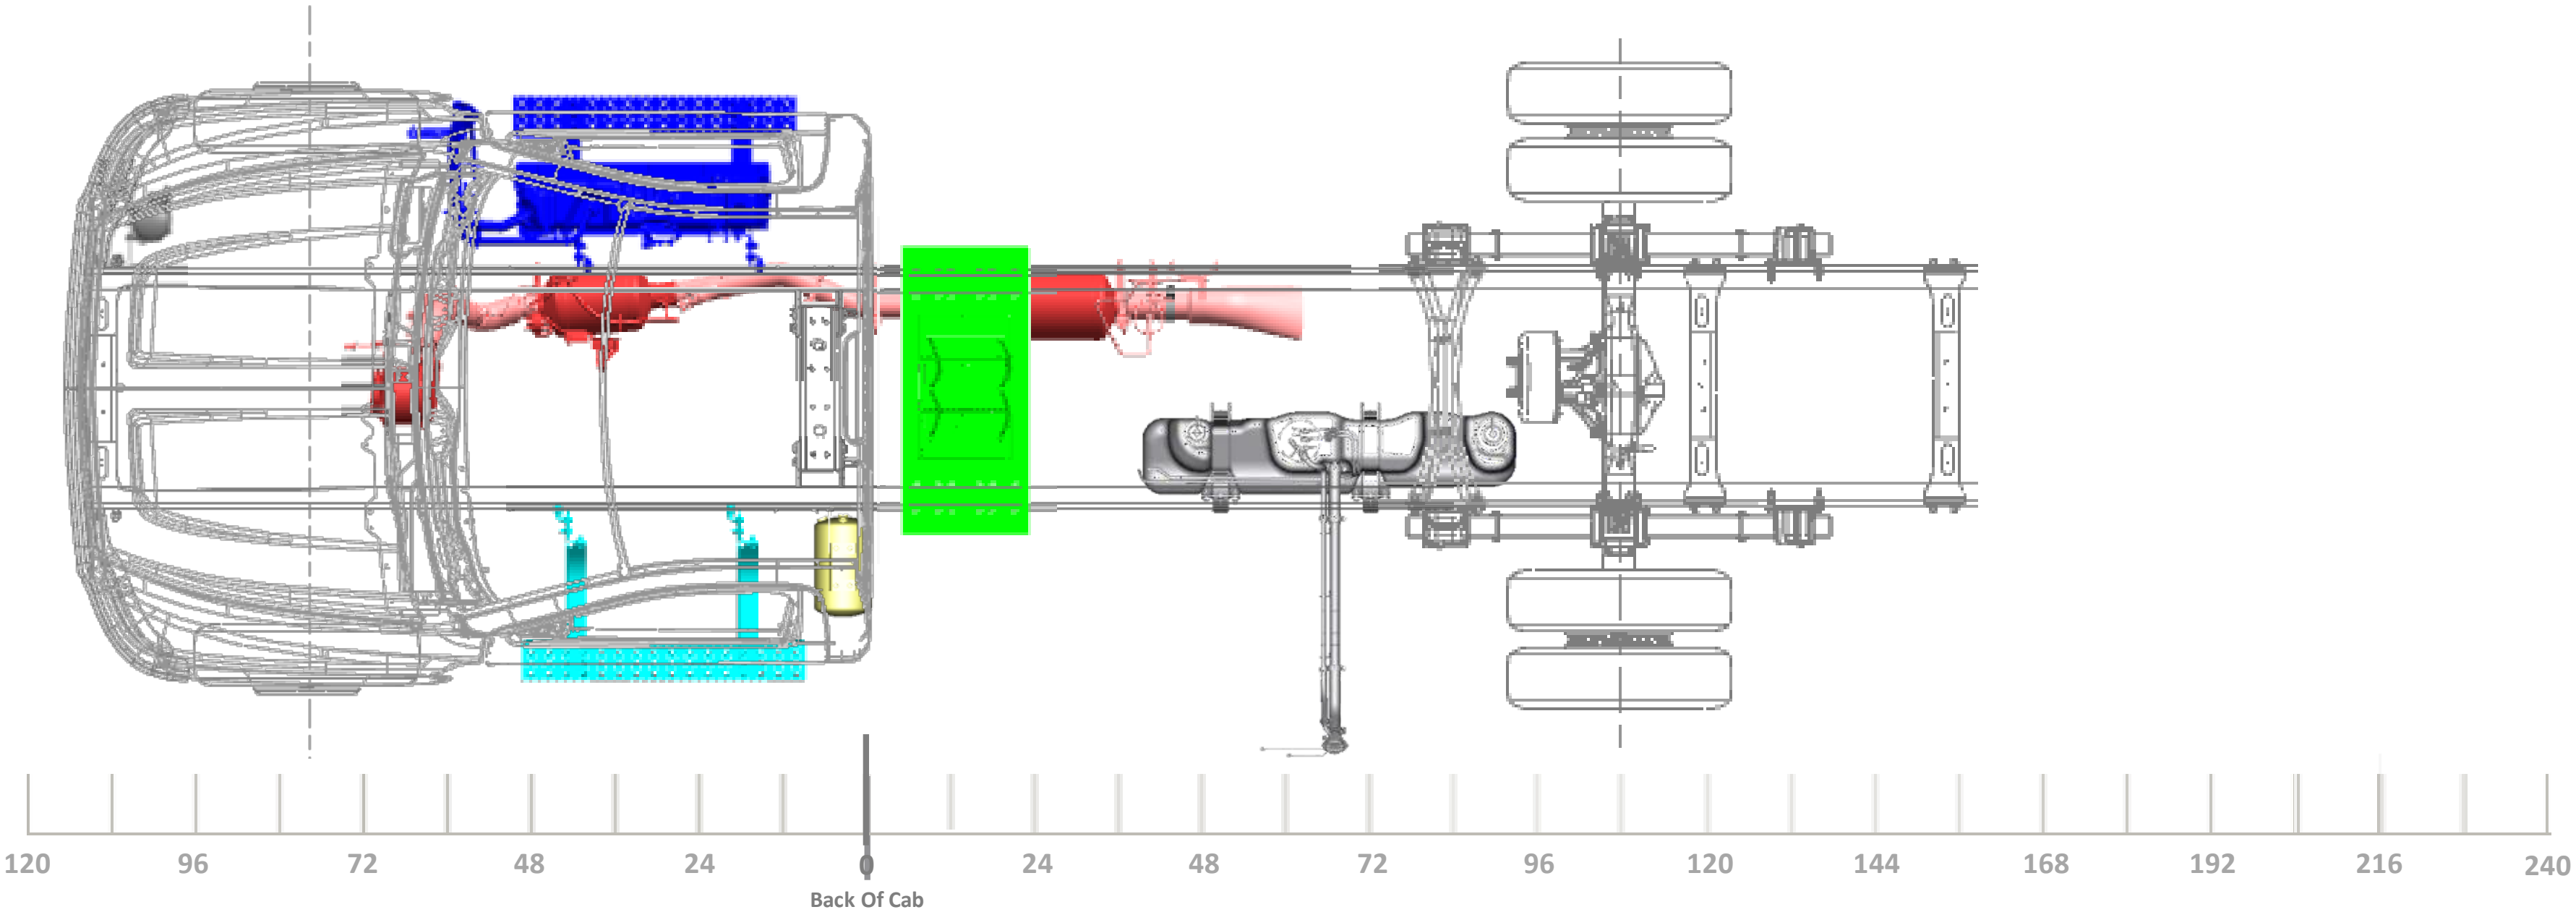

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

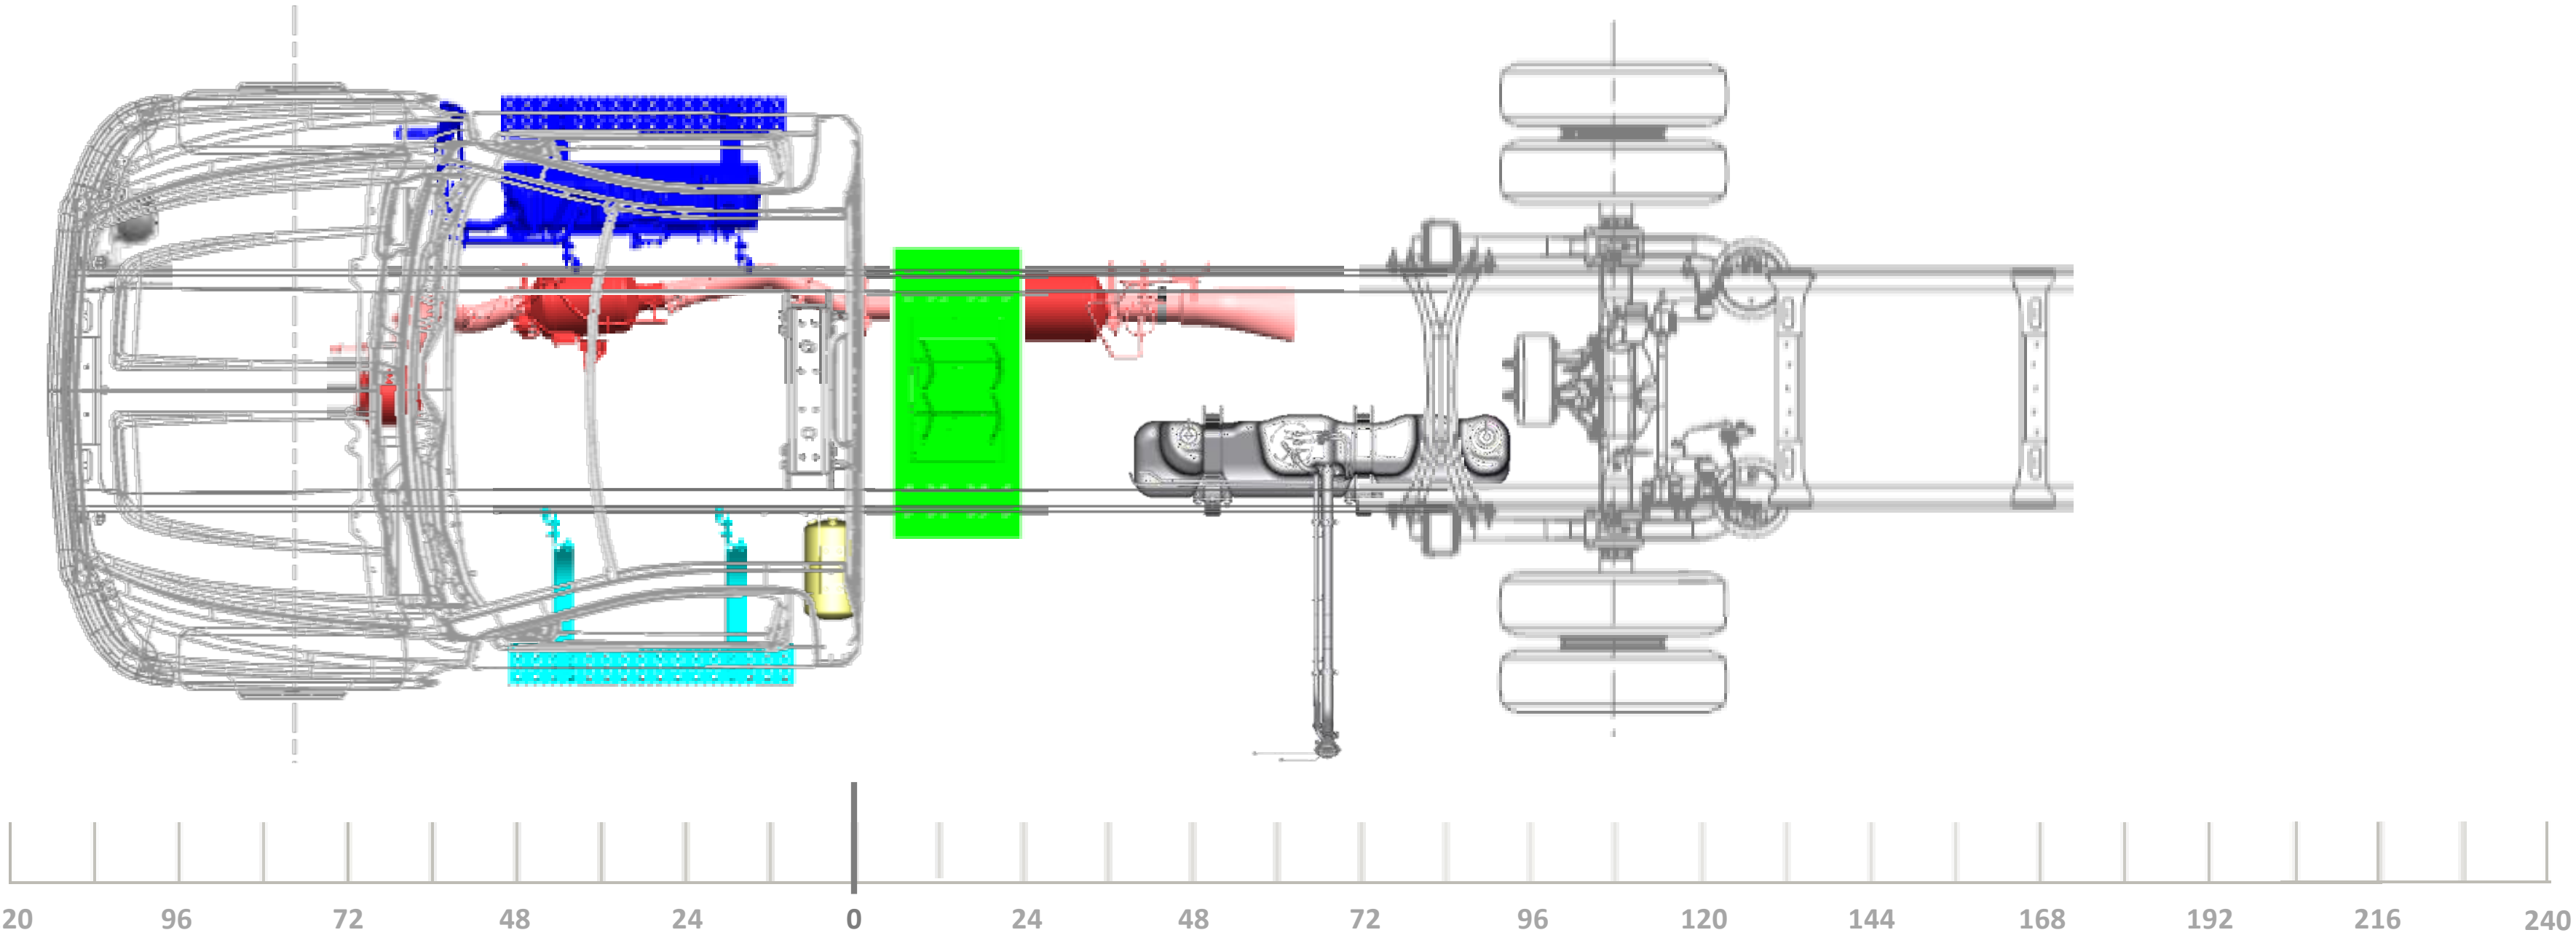

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

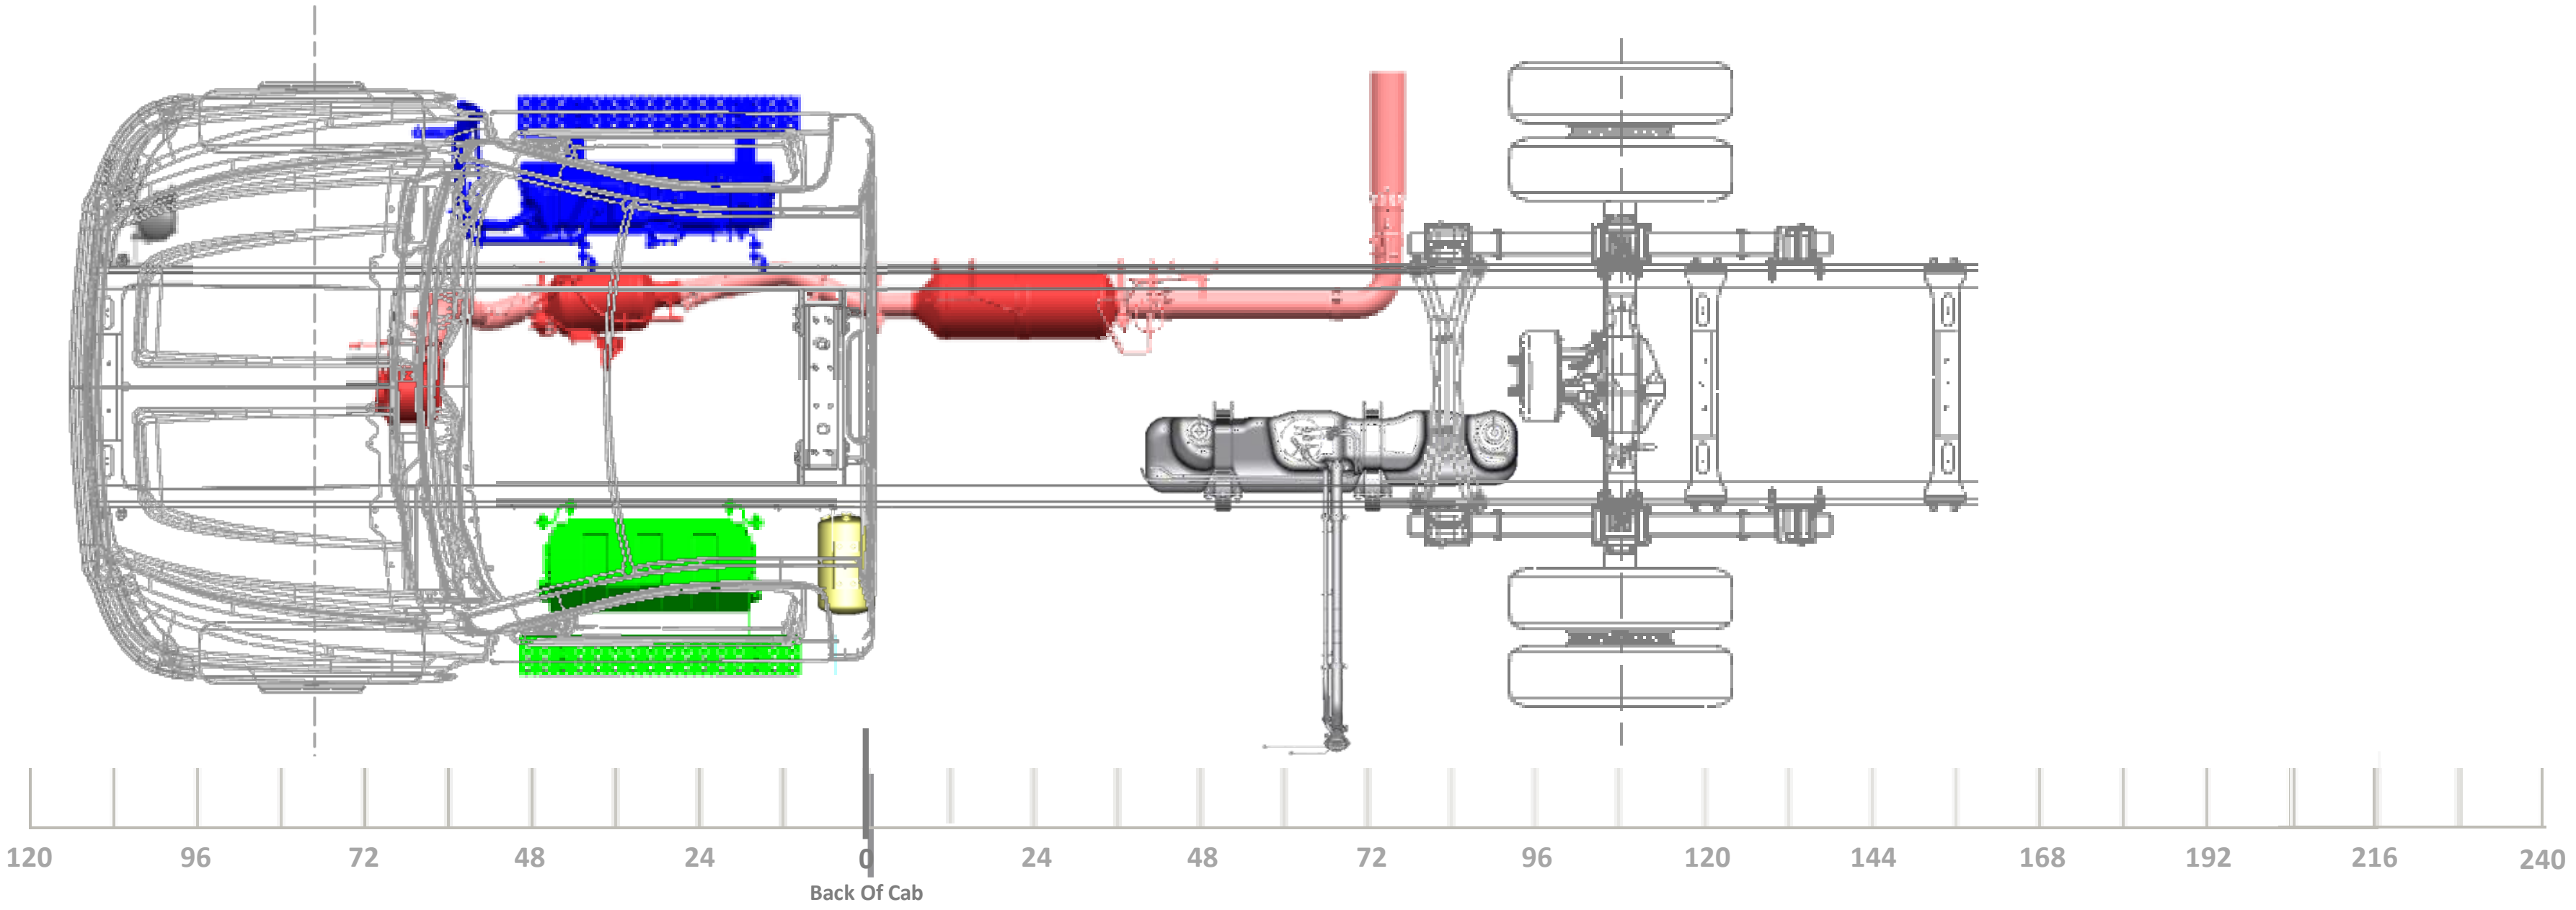

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

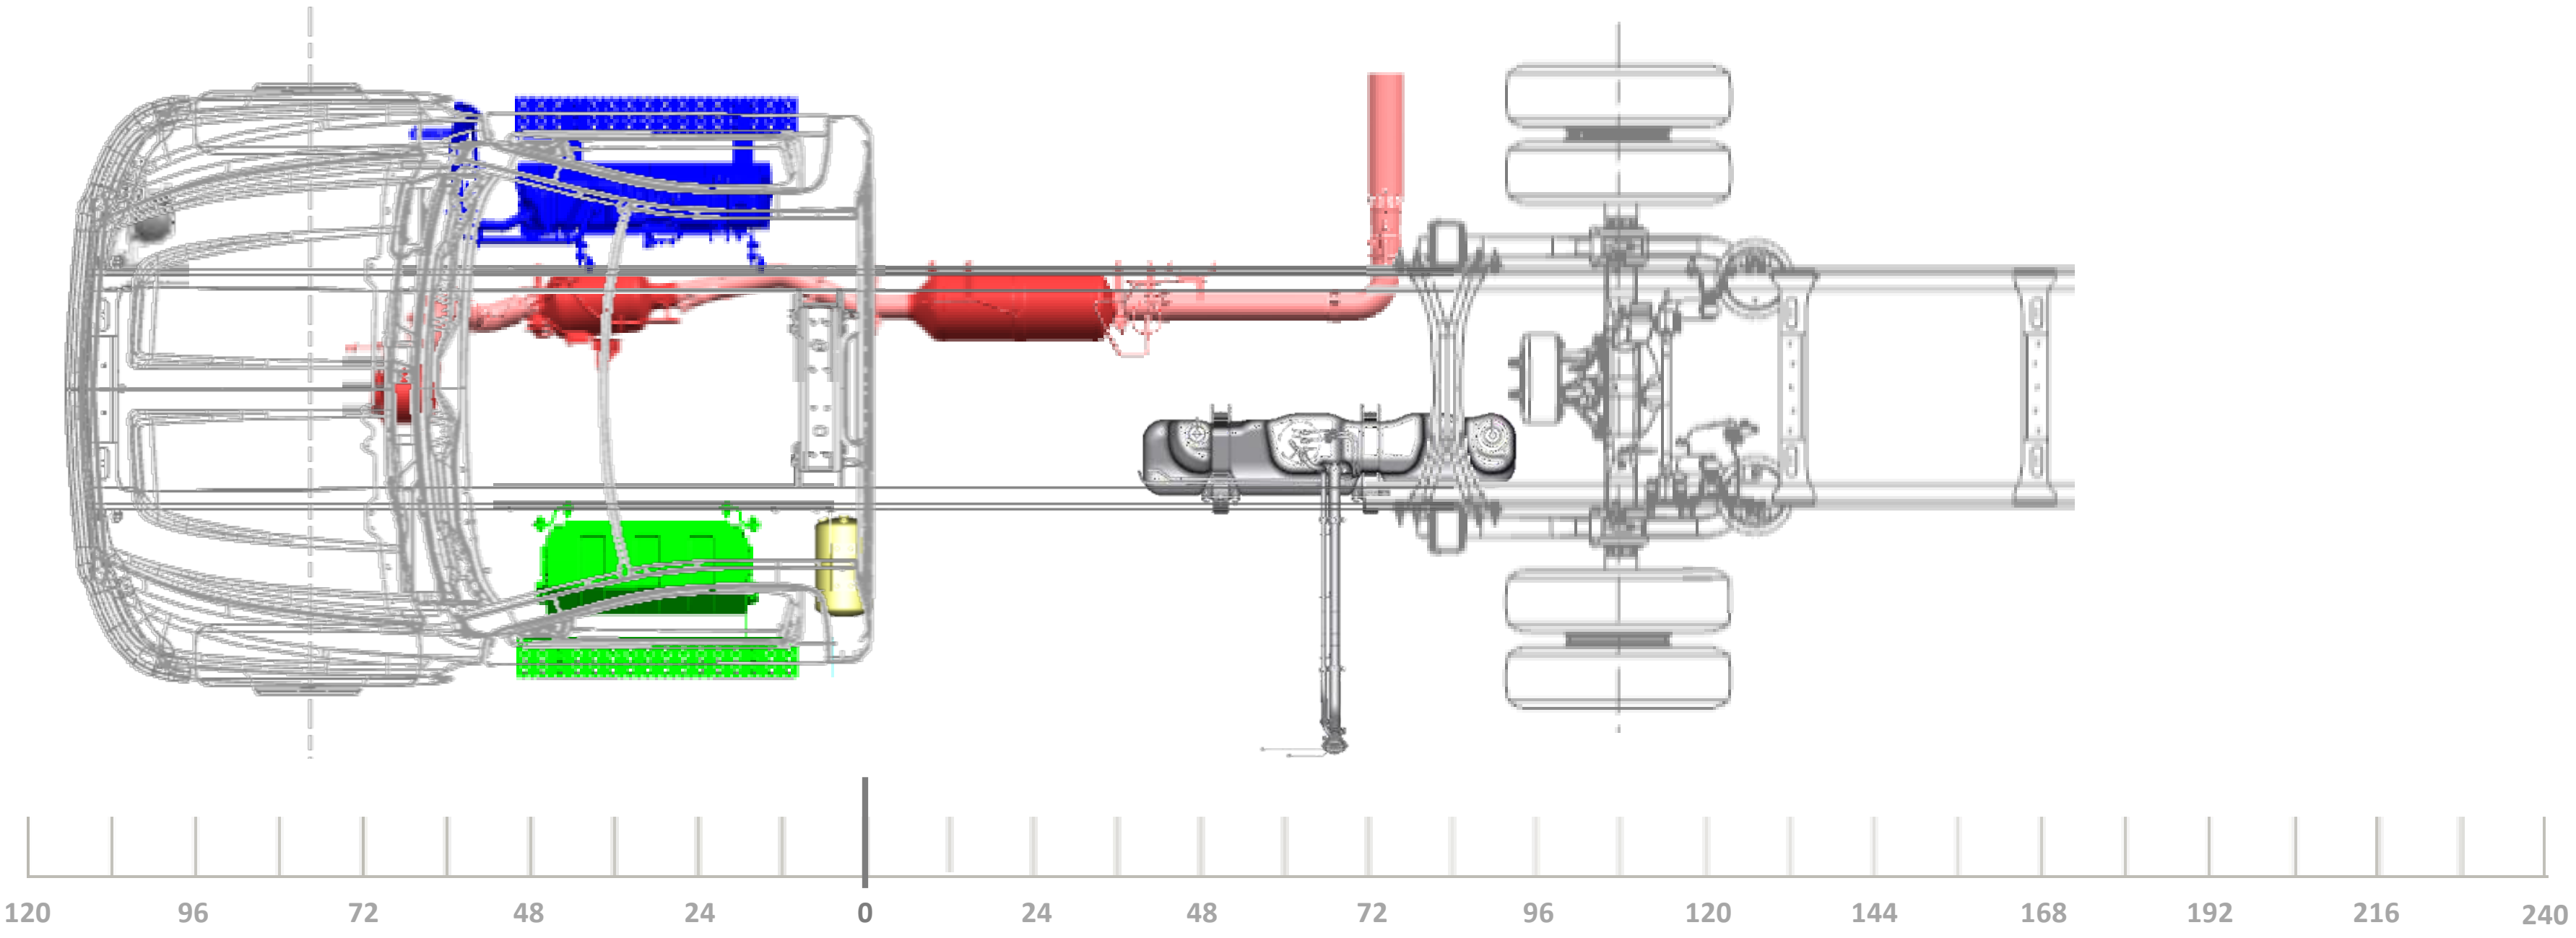

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

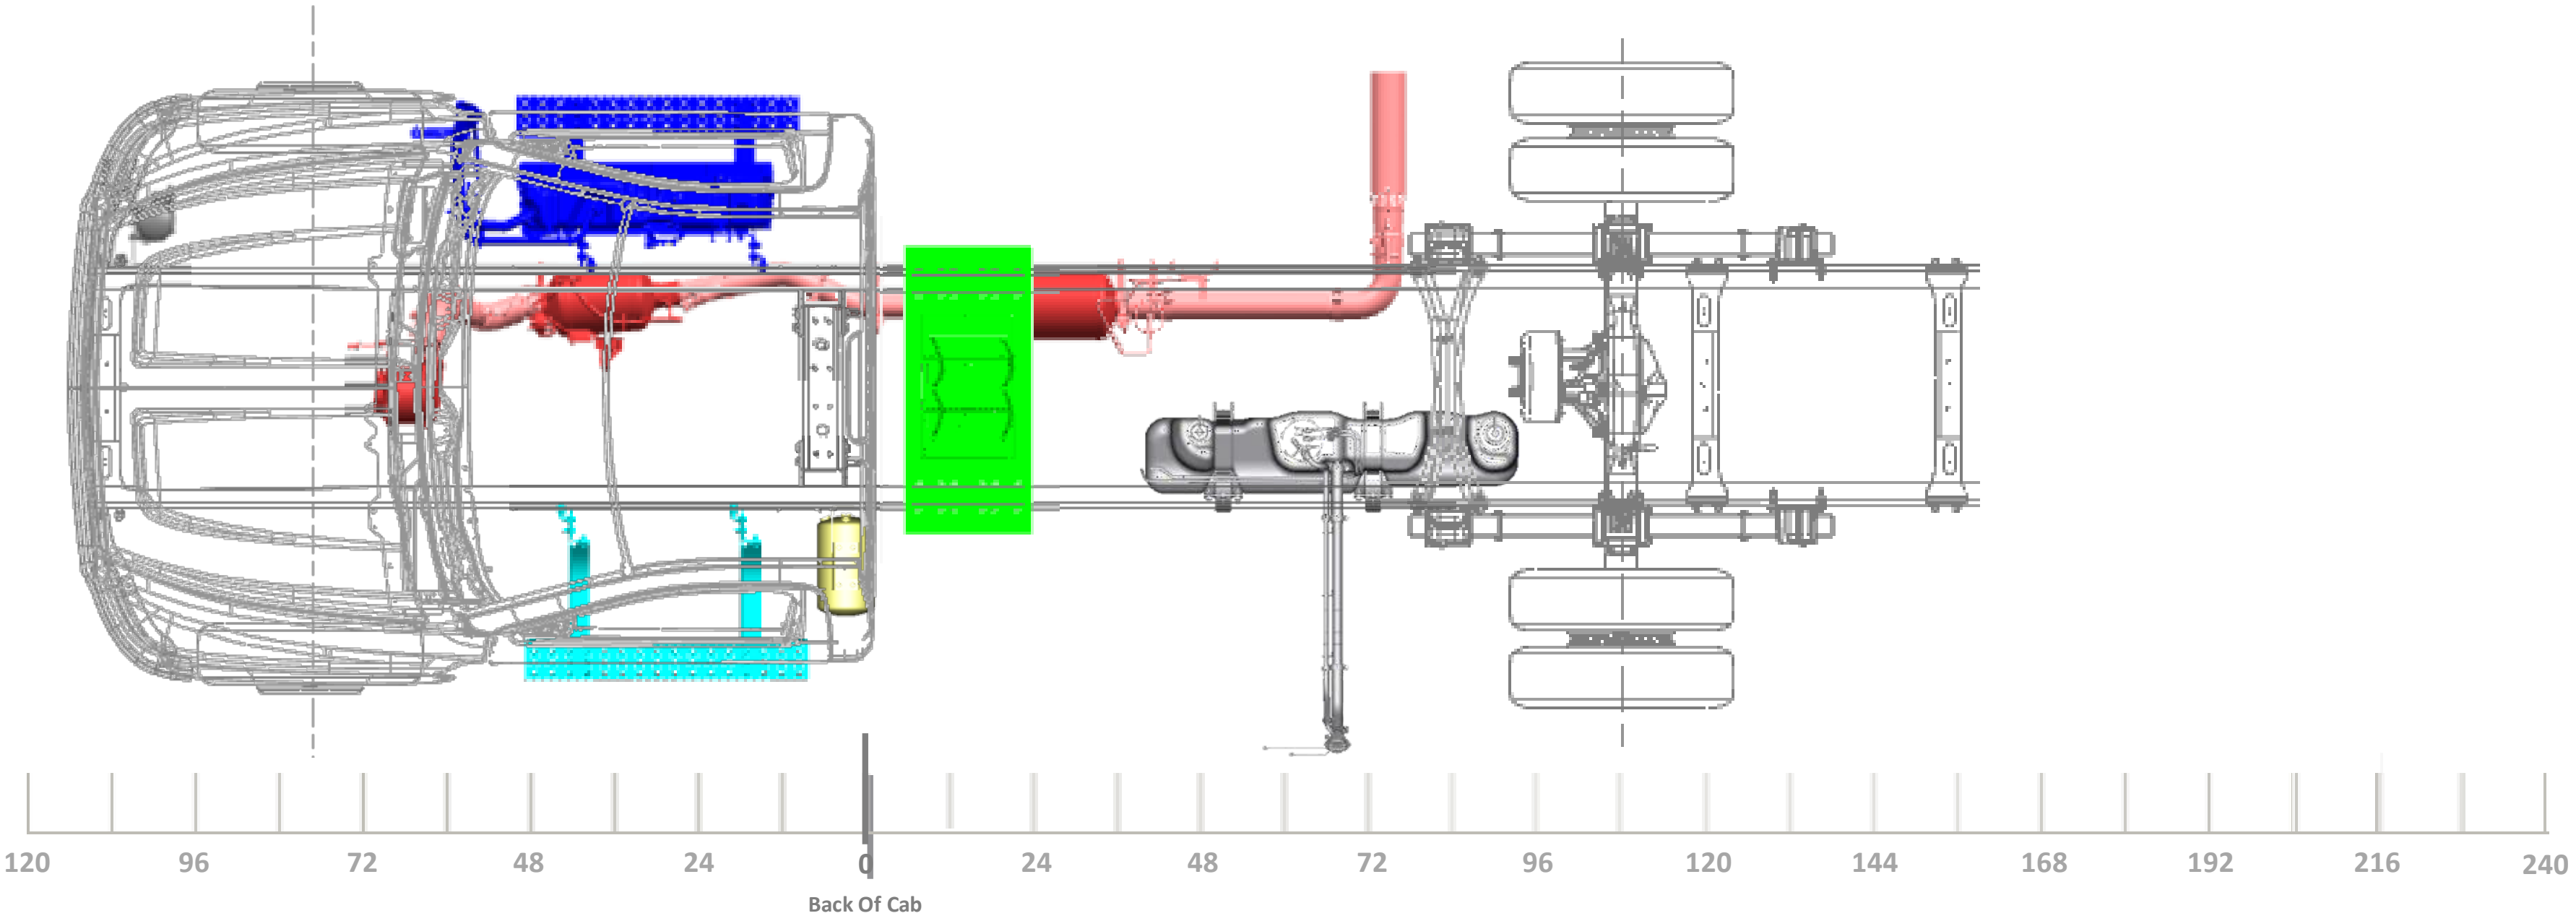

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

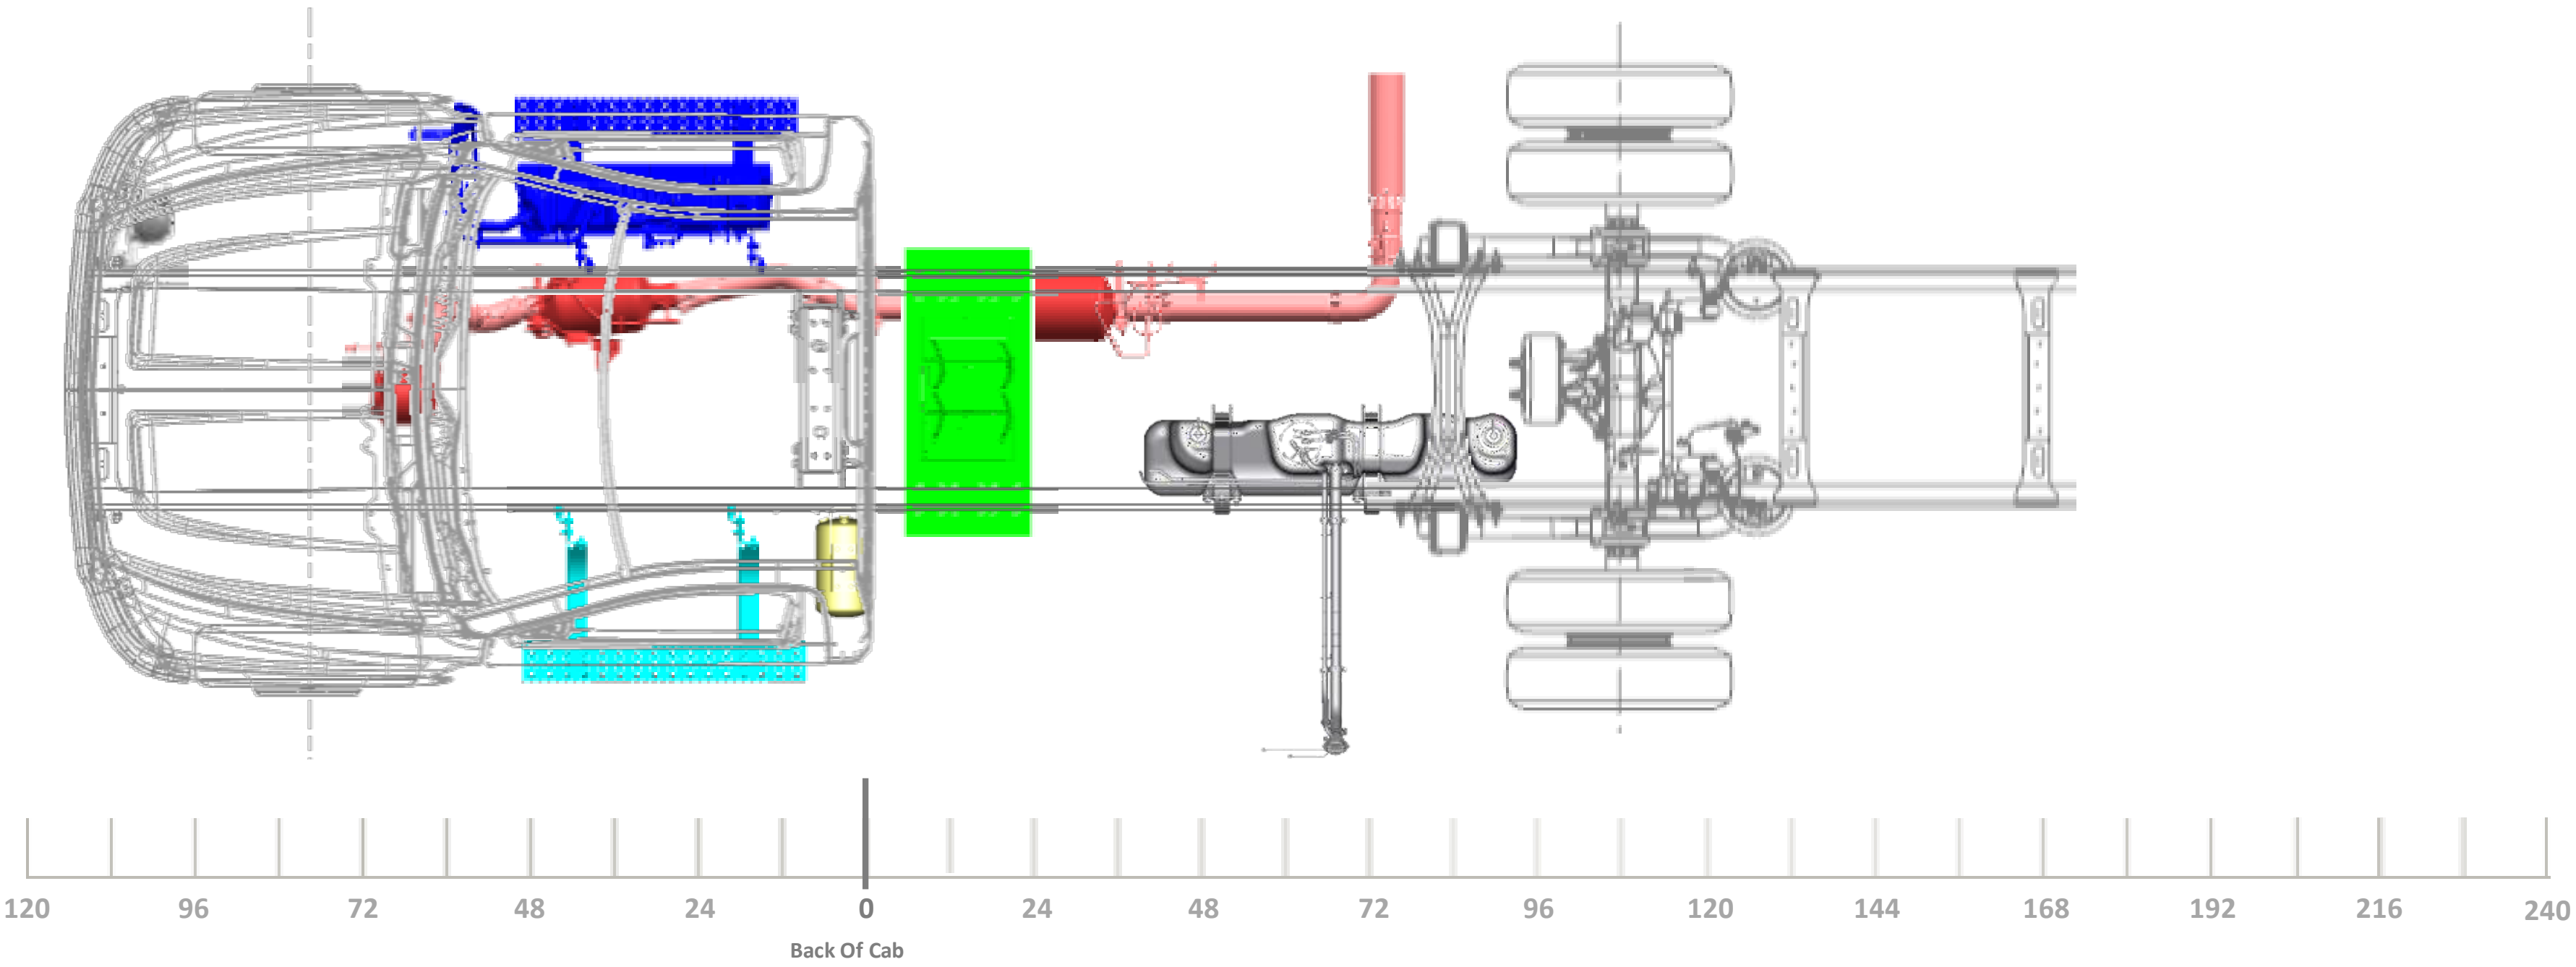

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

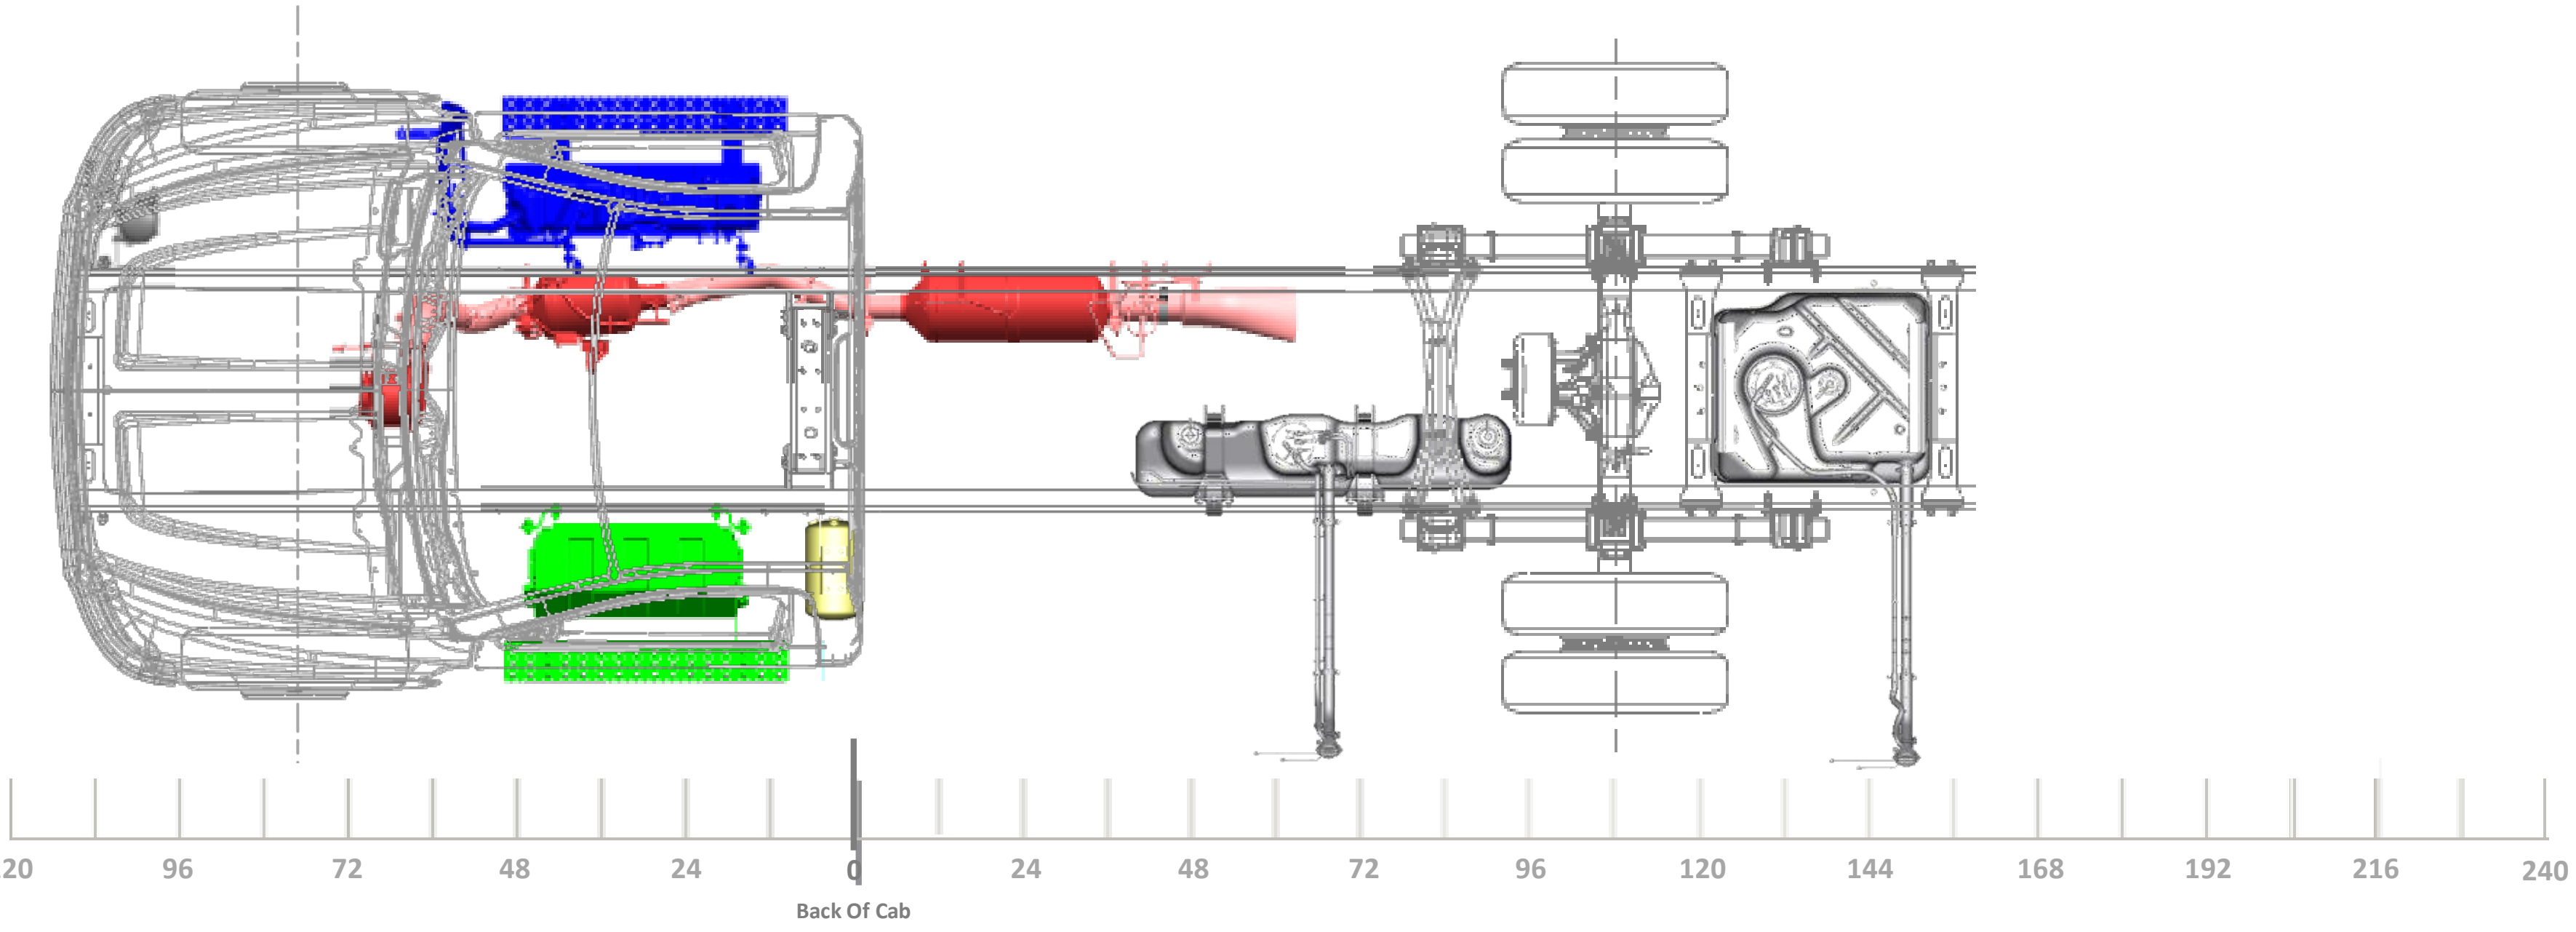

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

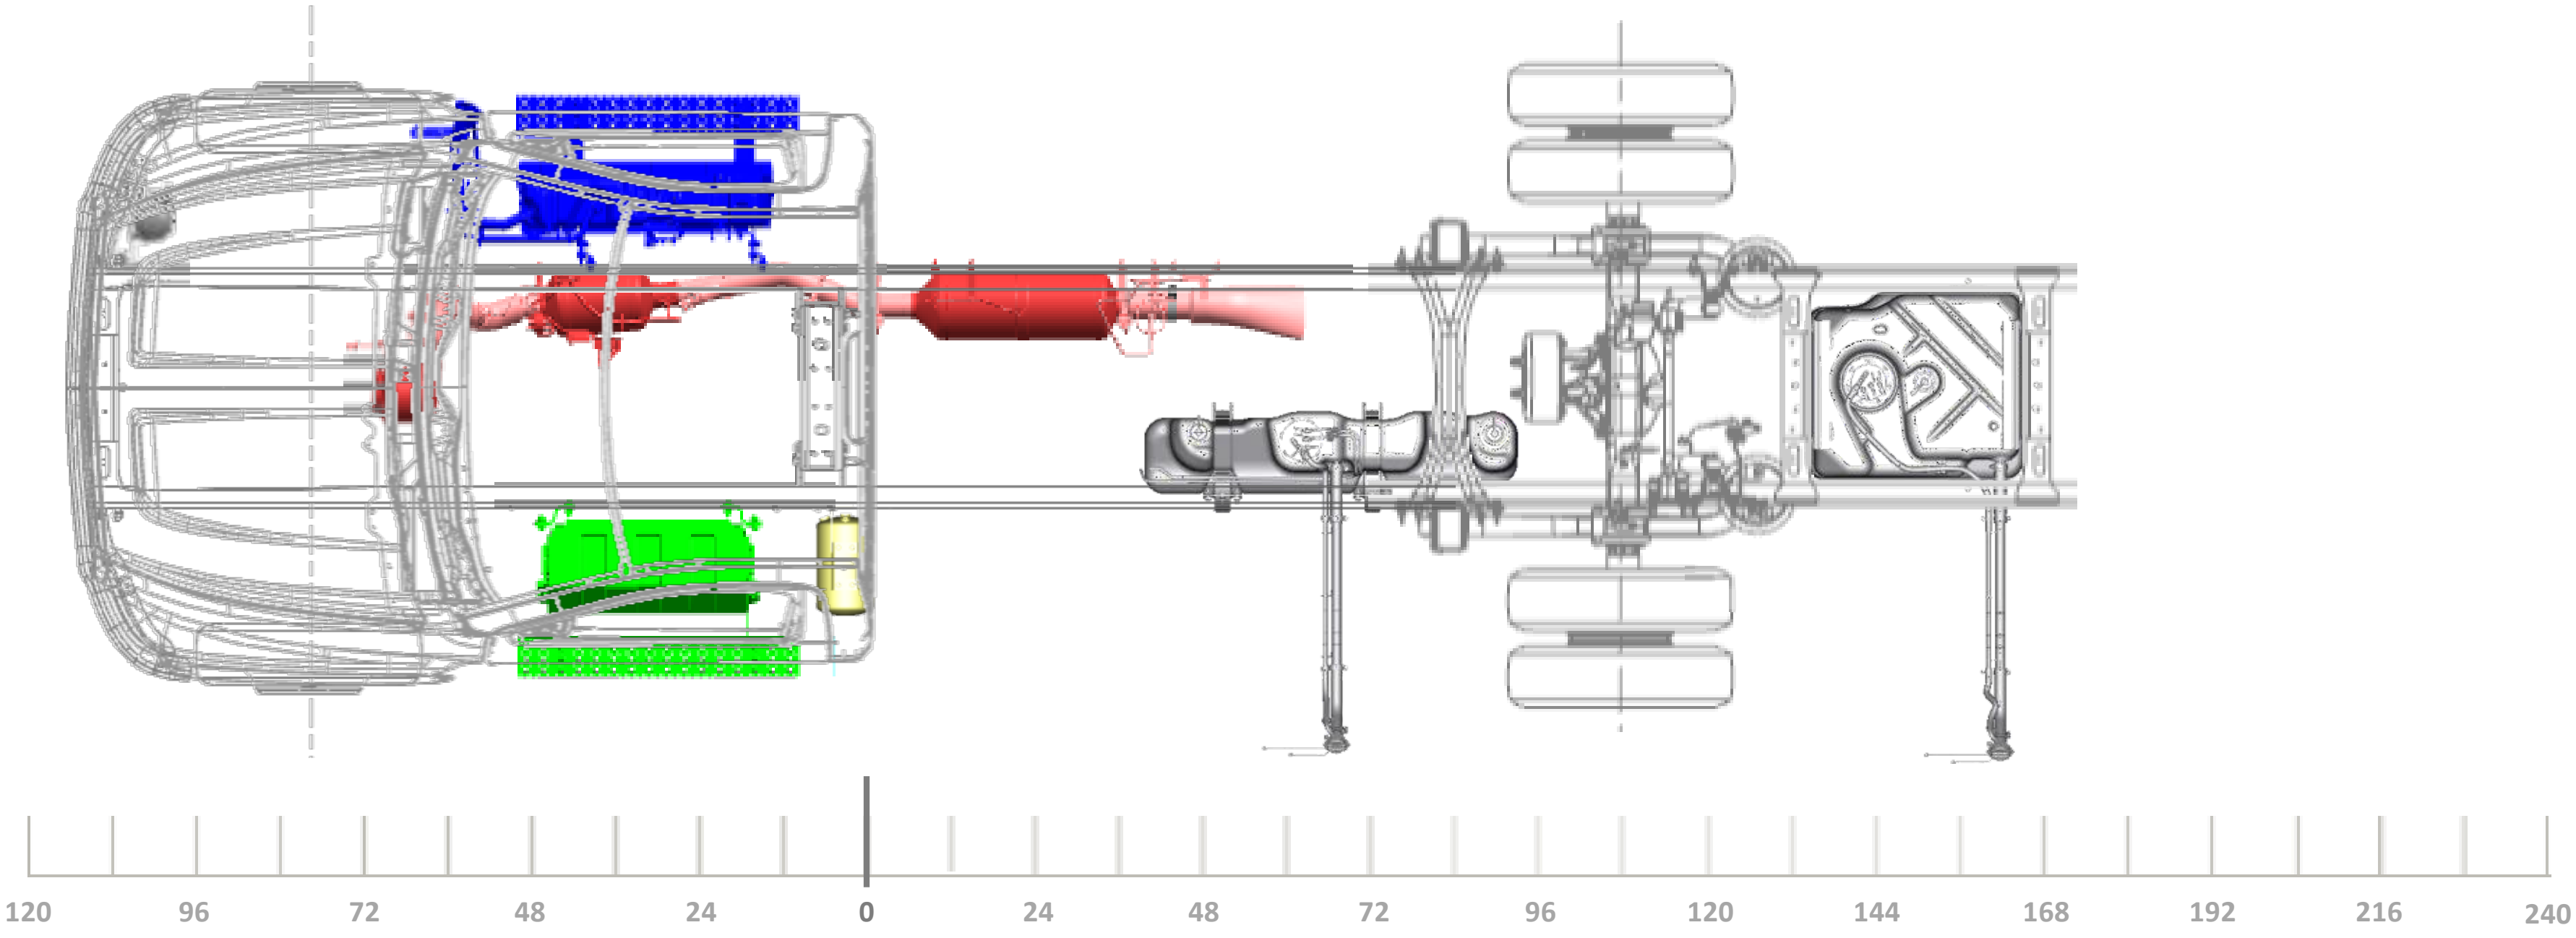

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189" WB (108" CA) 49", 63", OR 75" AF

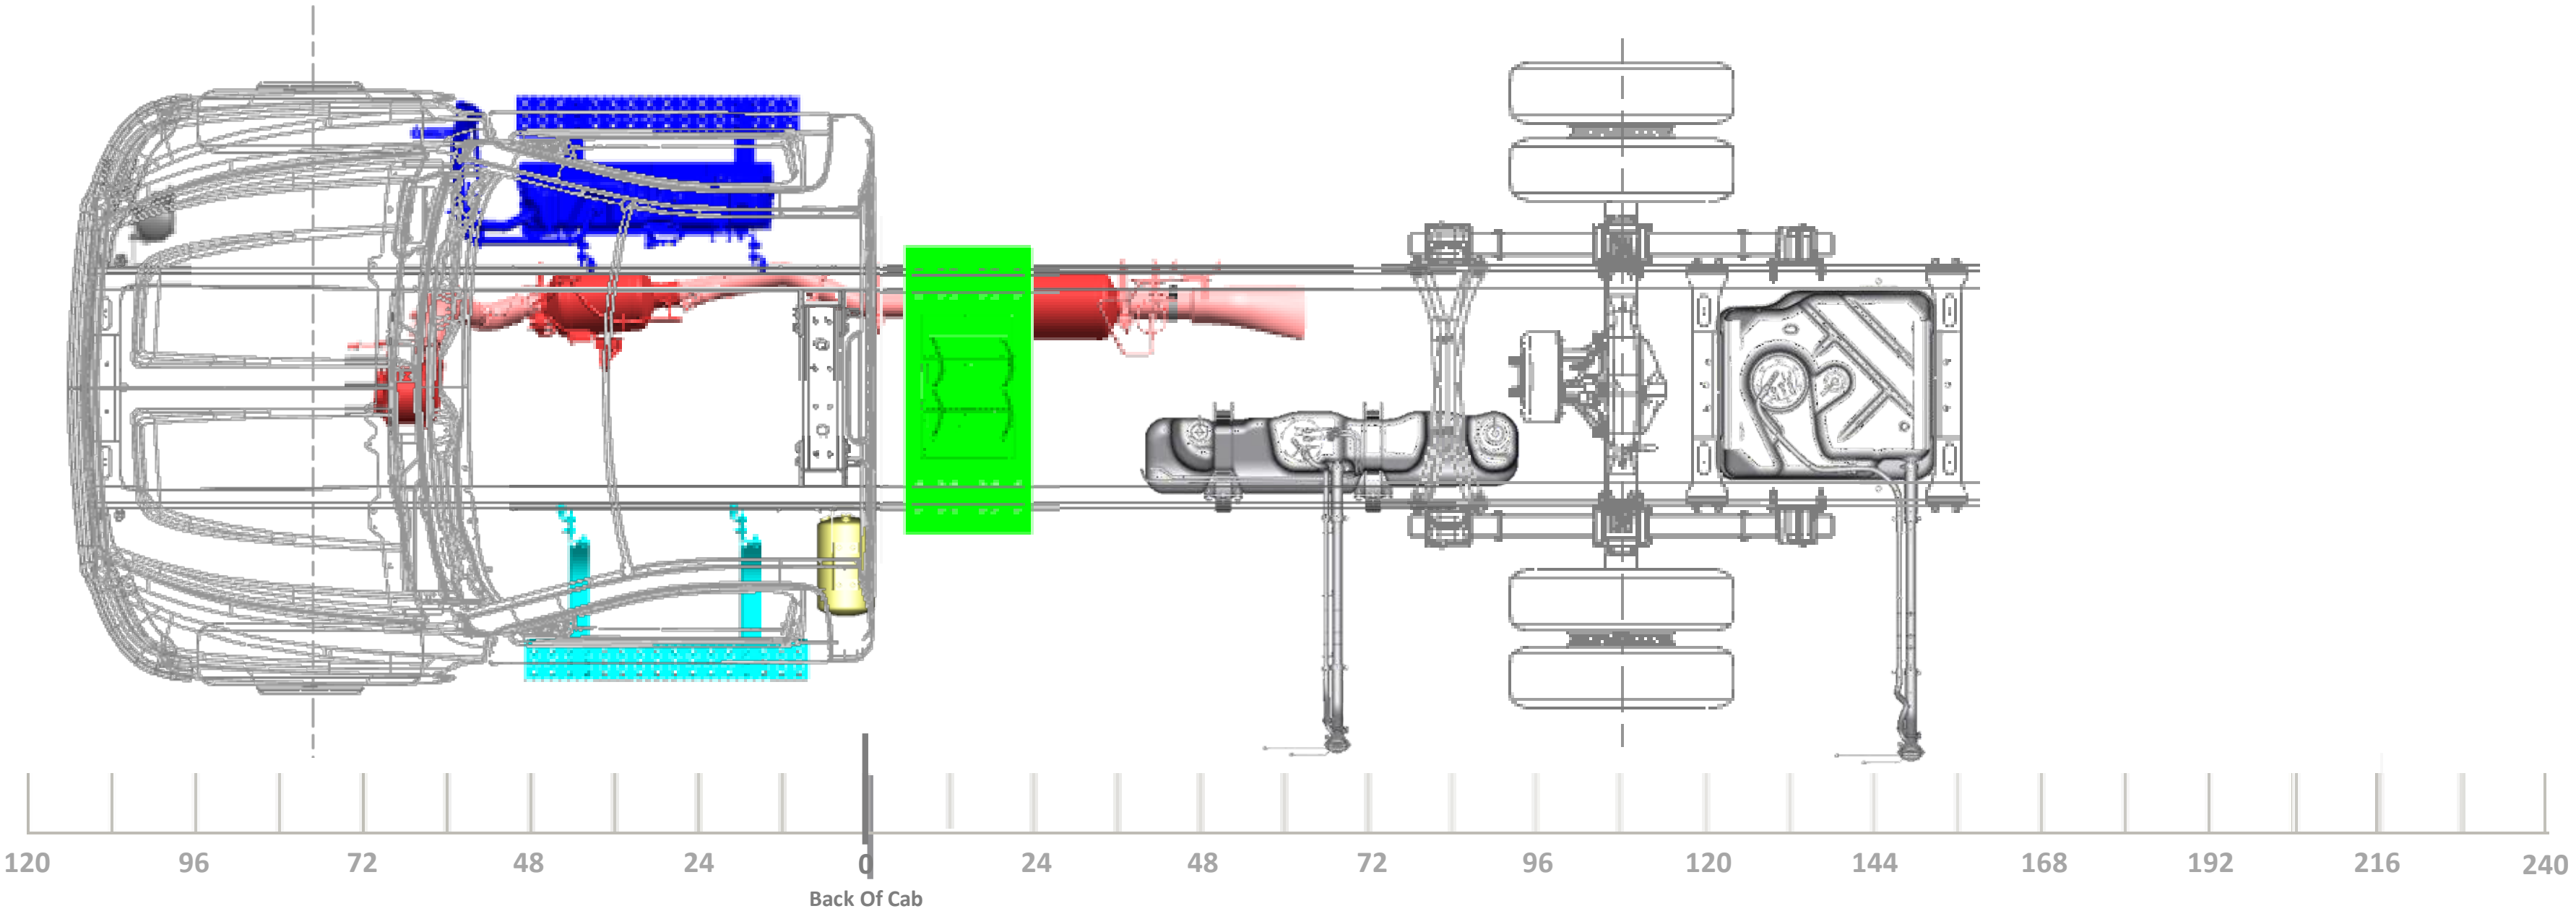

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189" WB (108" CA) 63" OR 75" AF

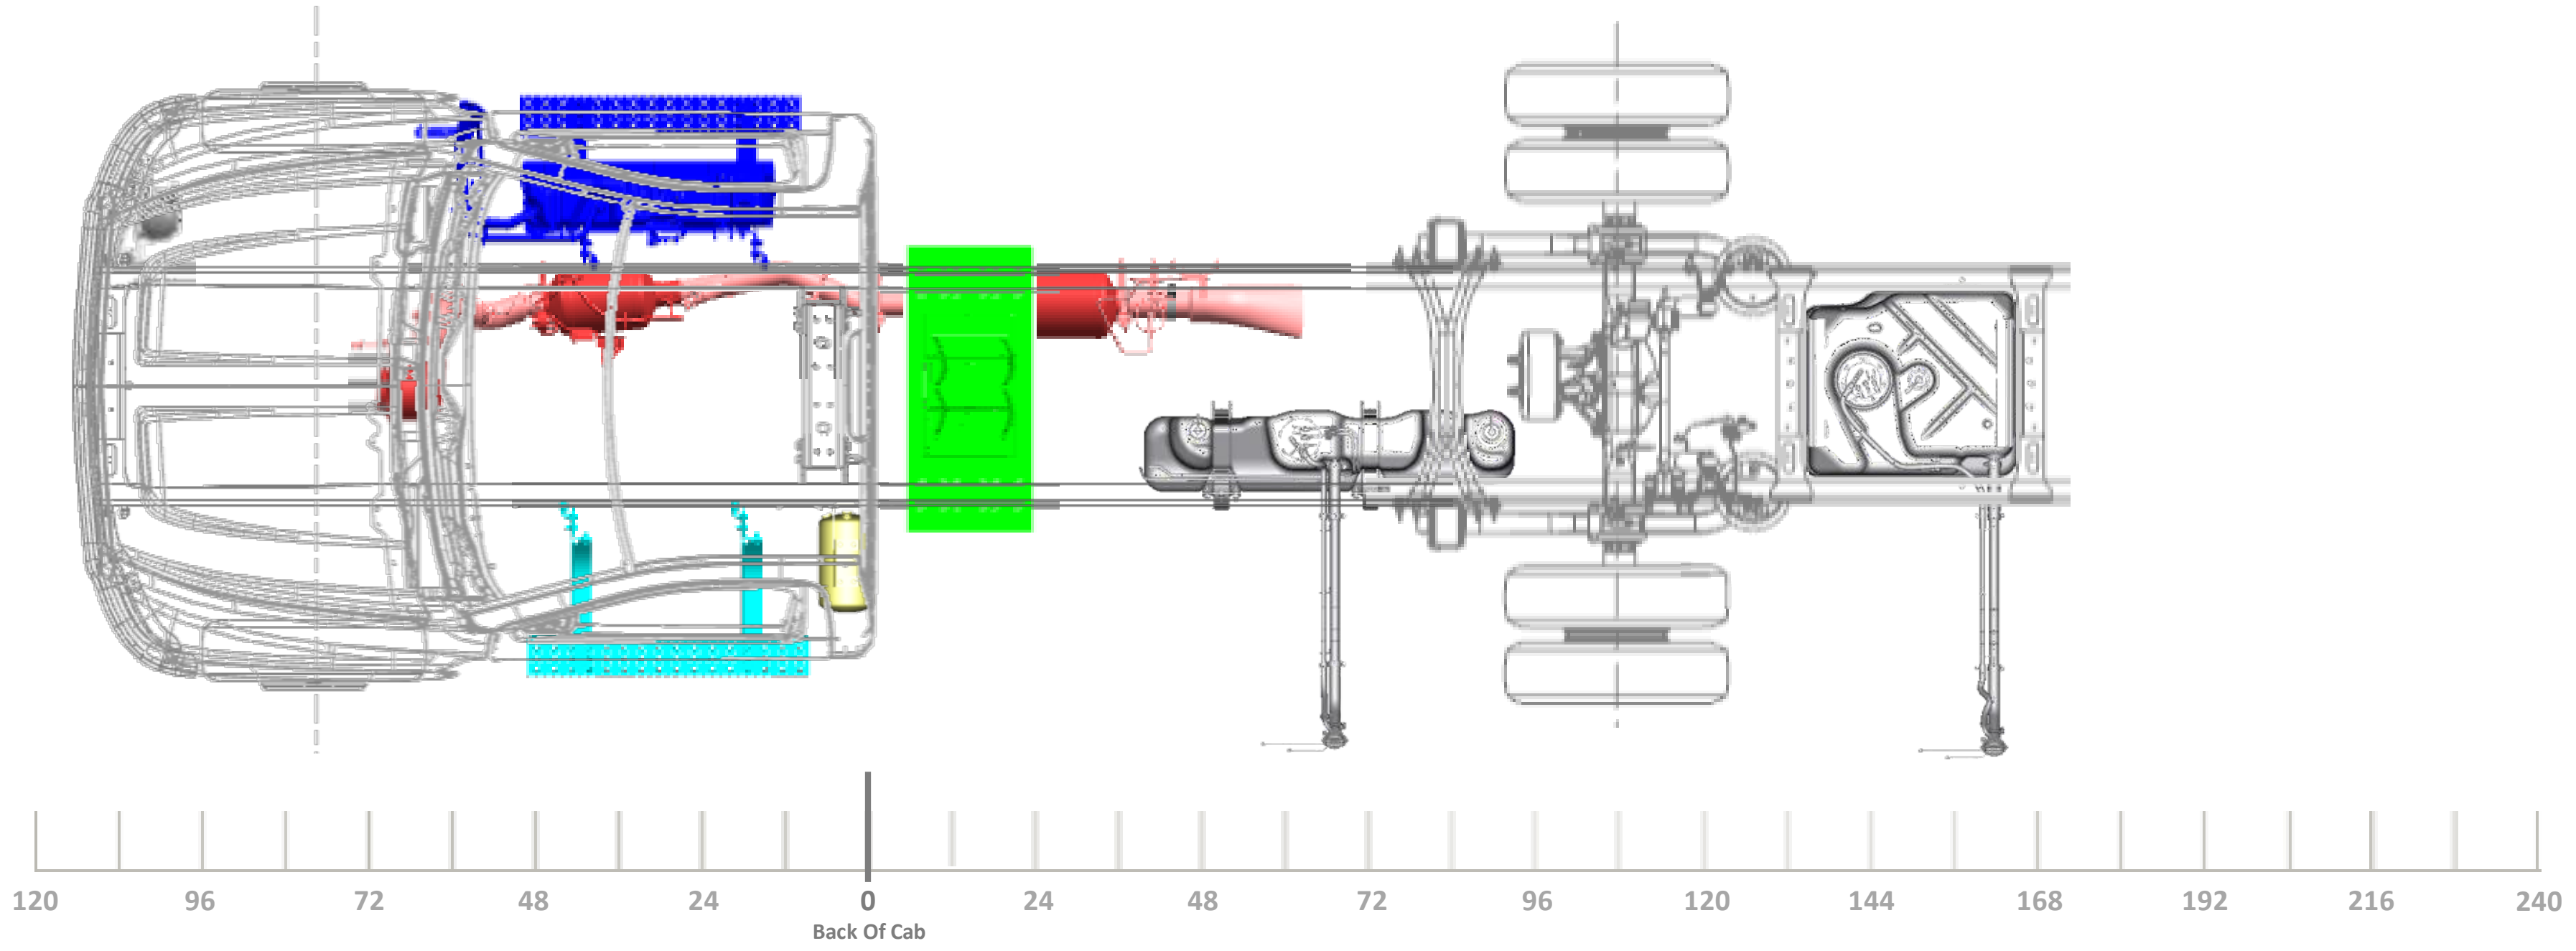

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

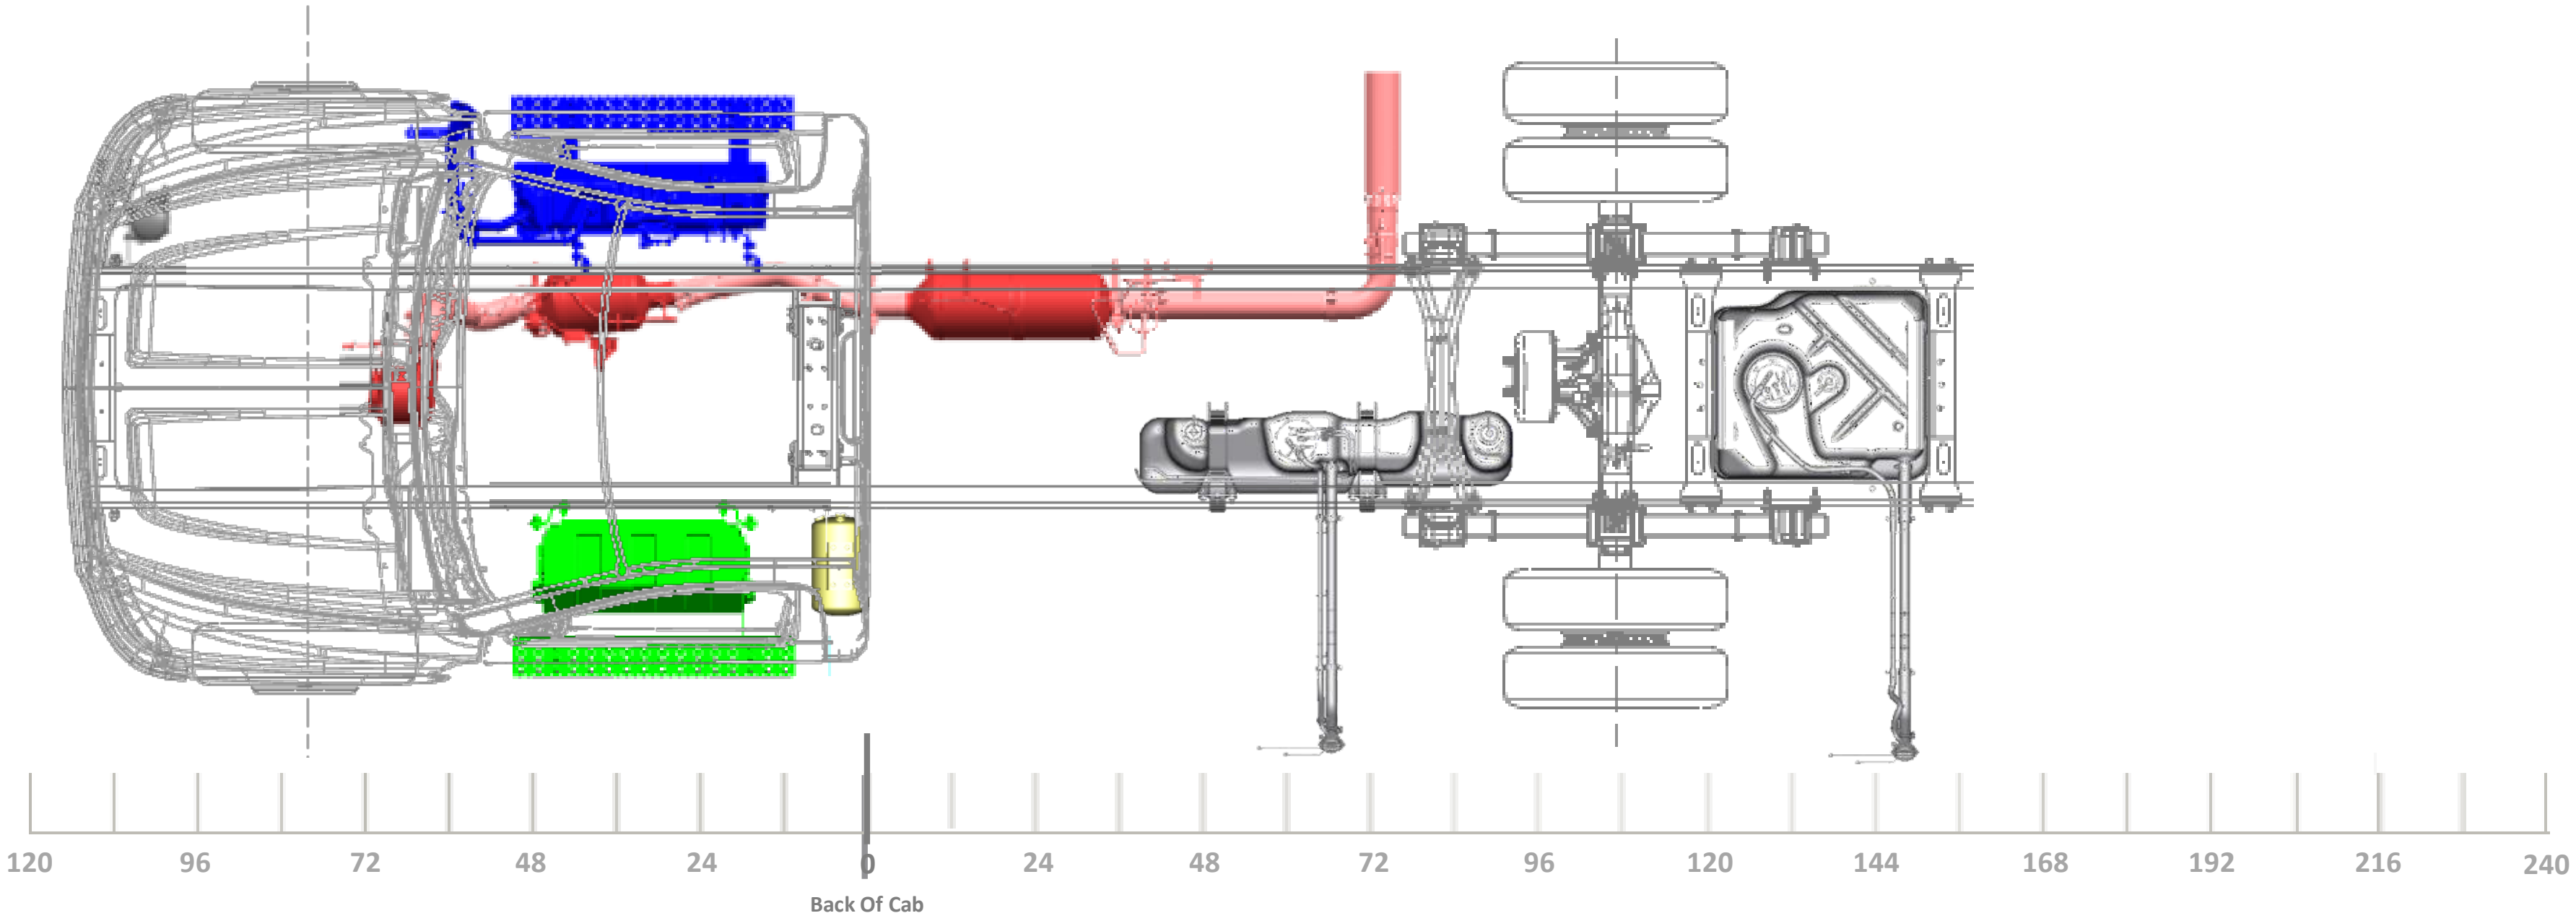

2020 Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189" WB (108" CA) 63" OR 75" AF

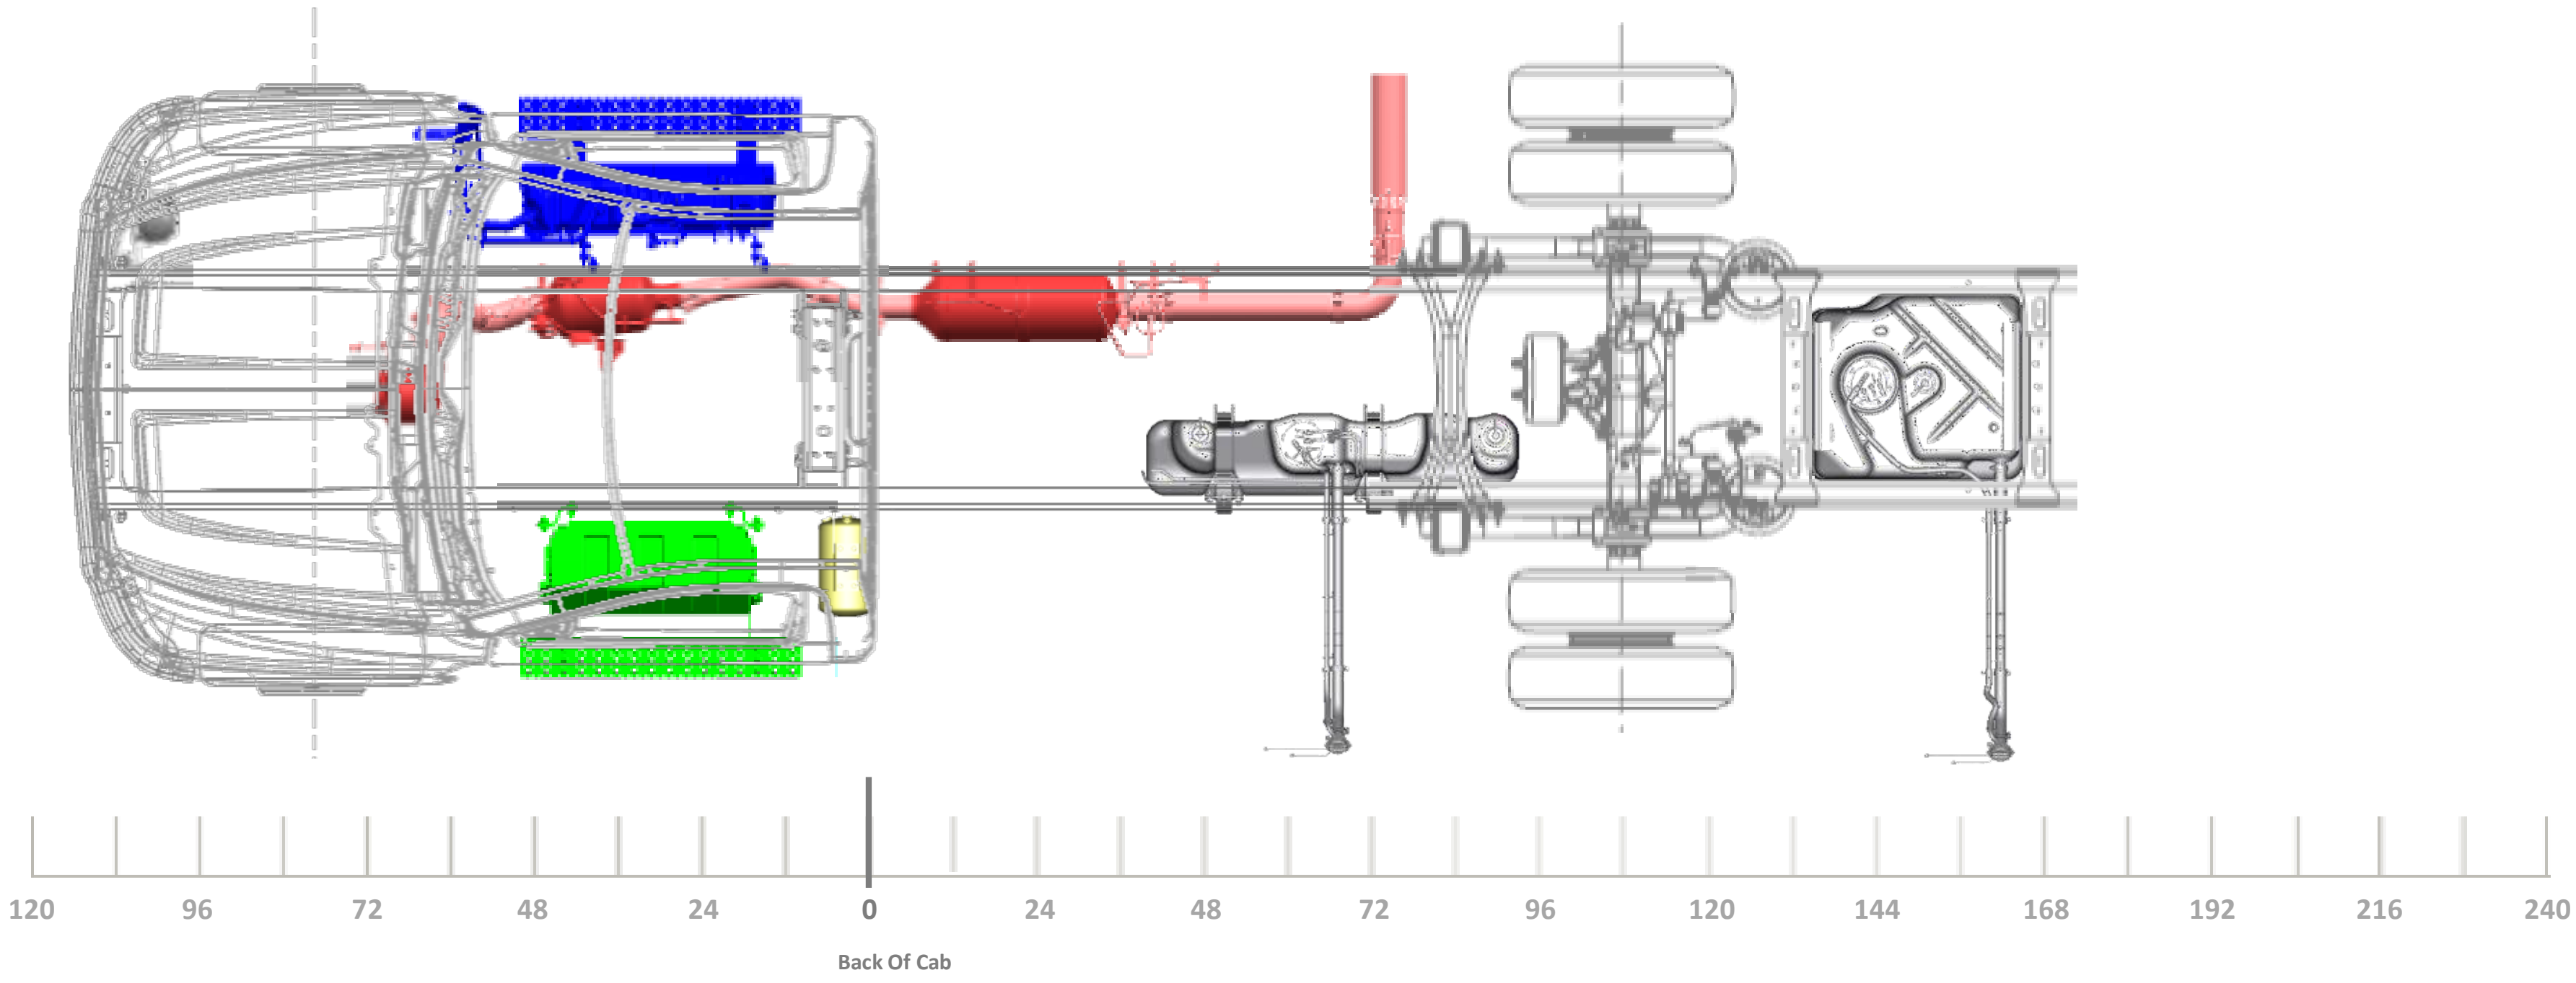

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 49”, 63”, OR 75” AF

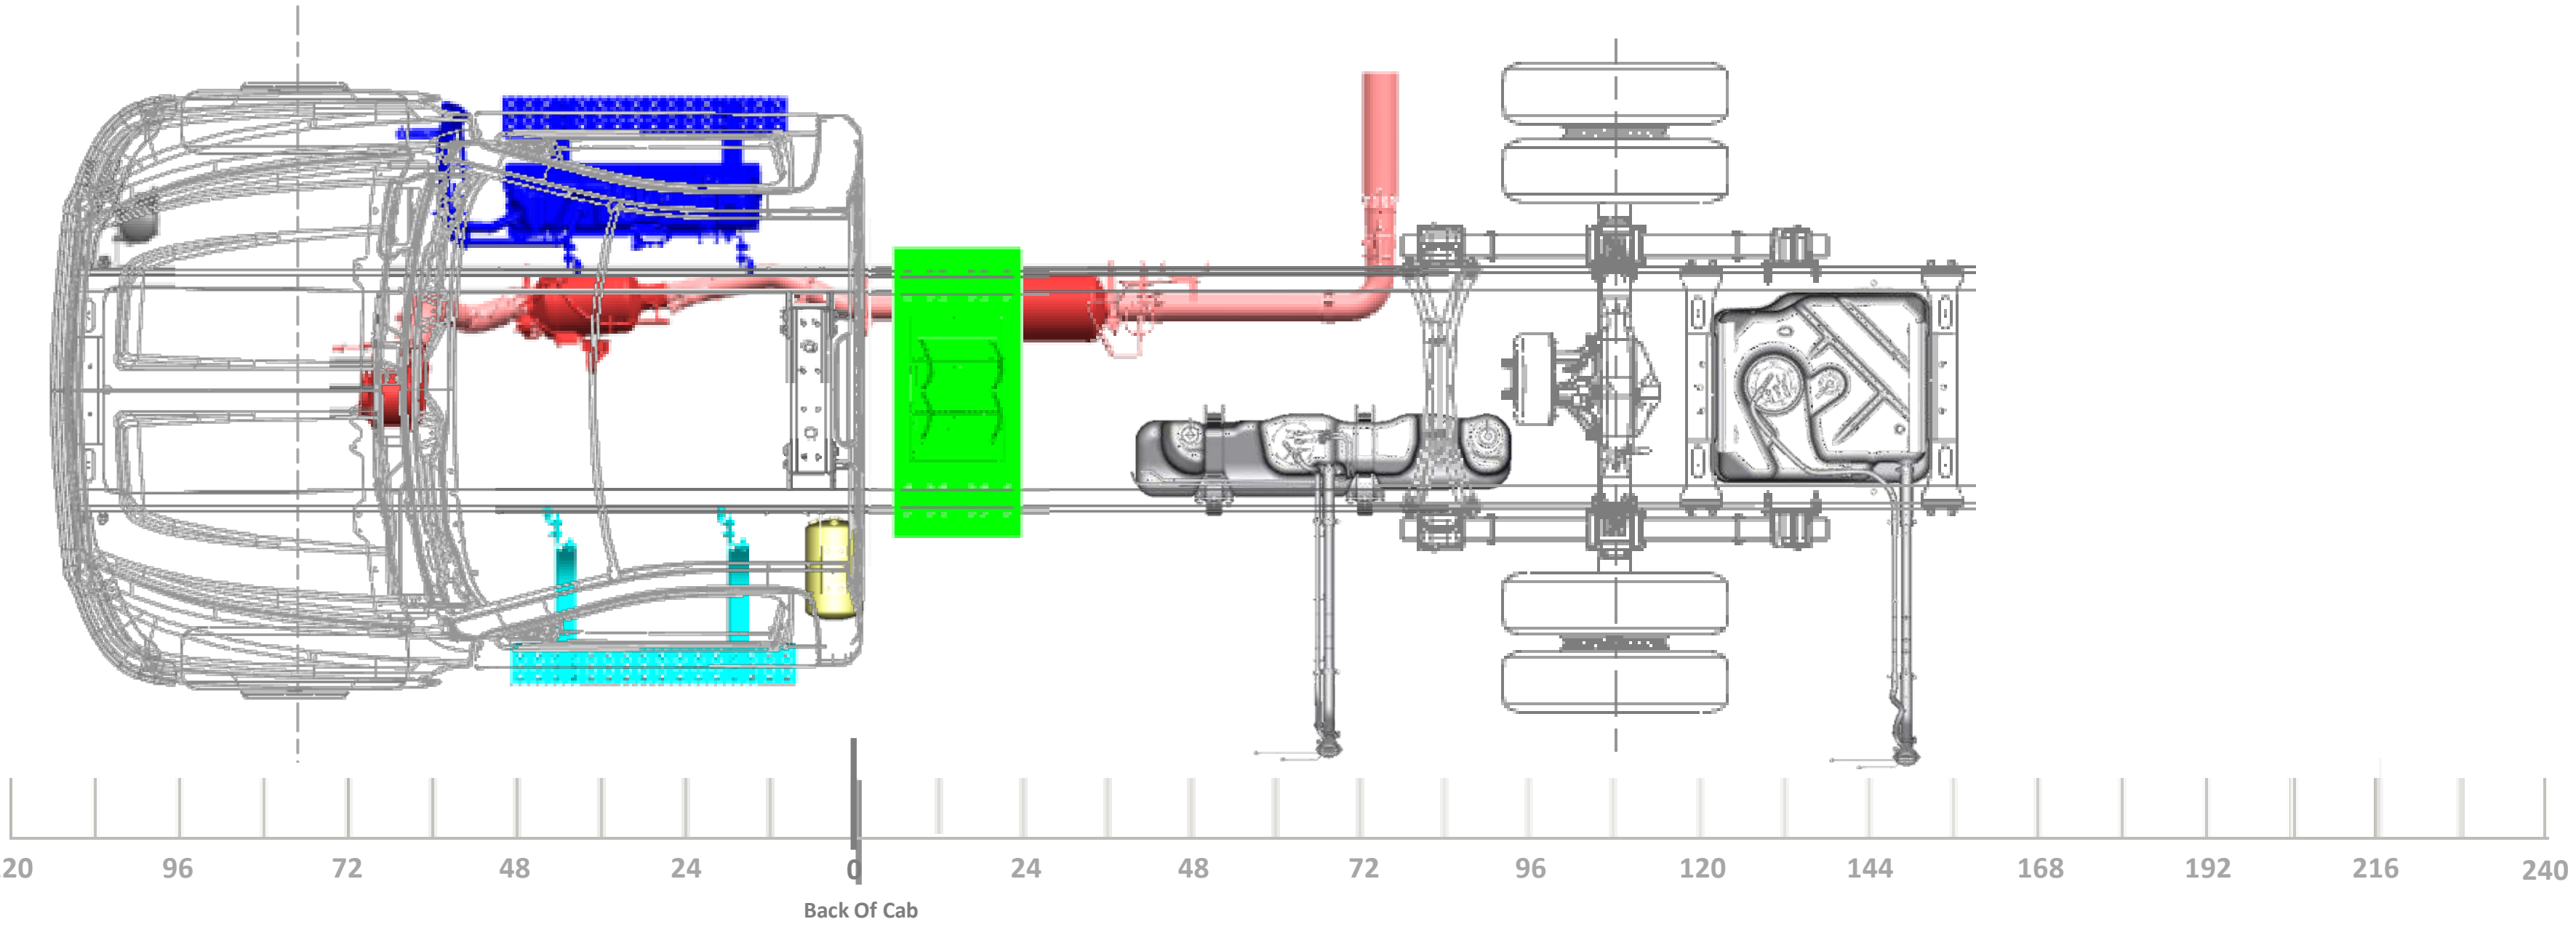

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
189” WB (108” CA) 63” OR 75” AF

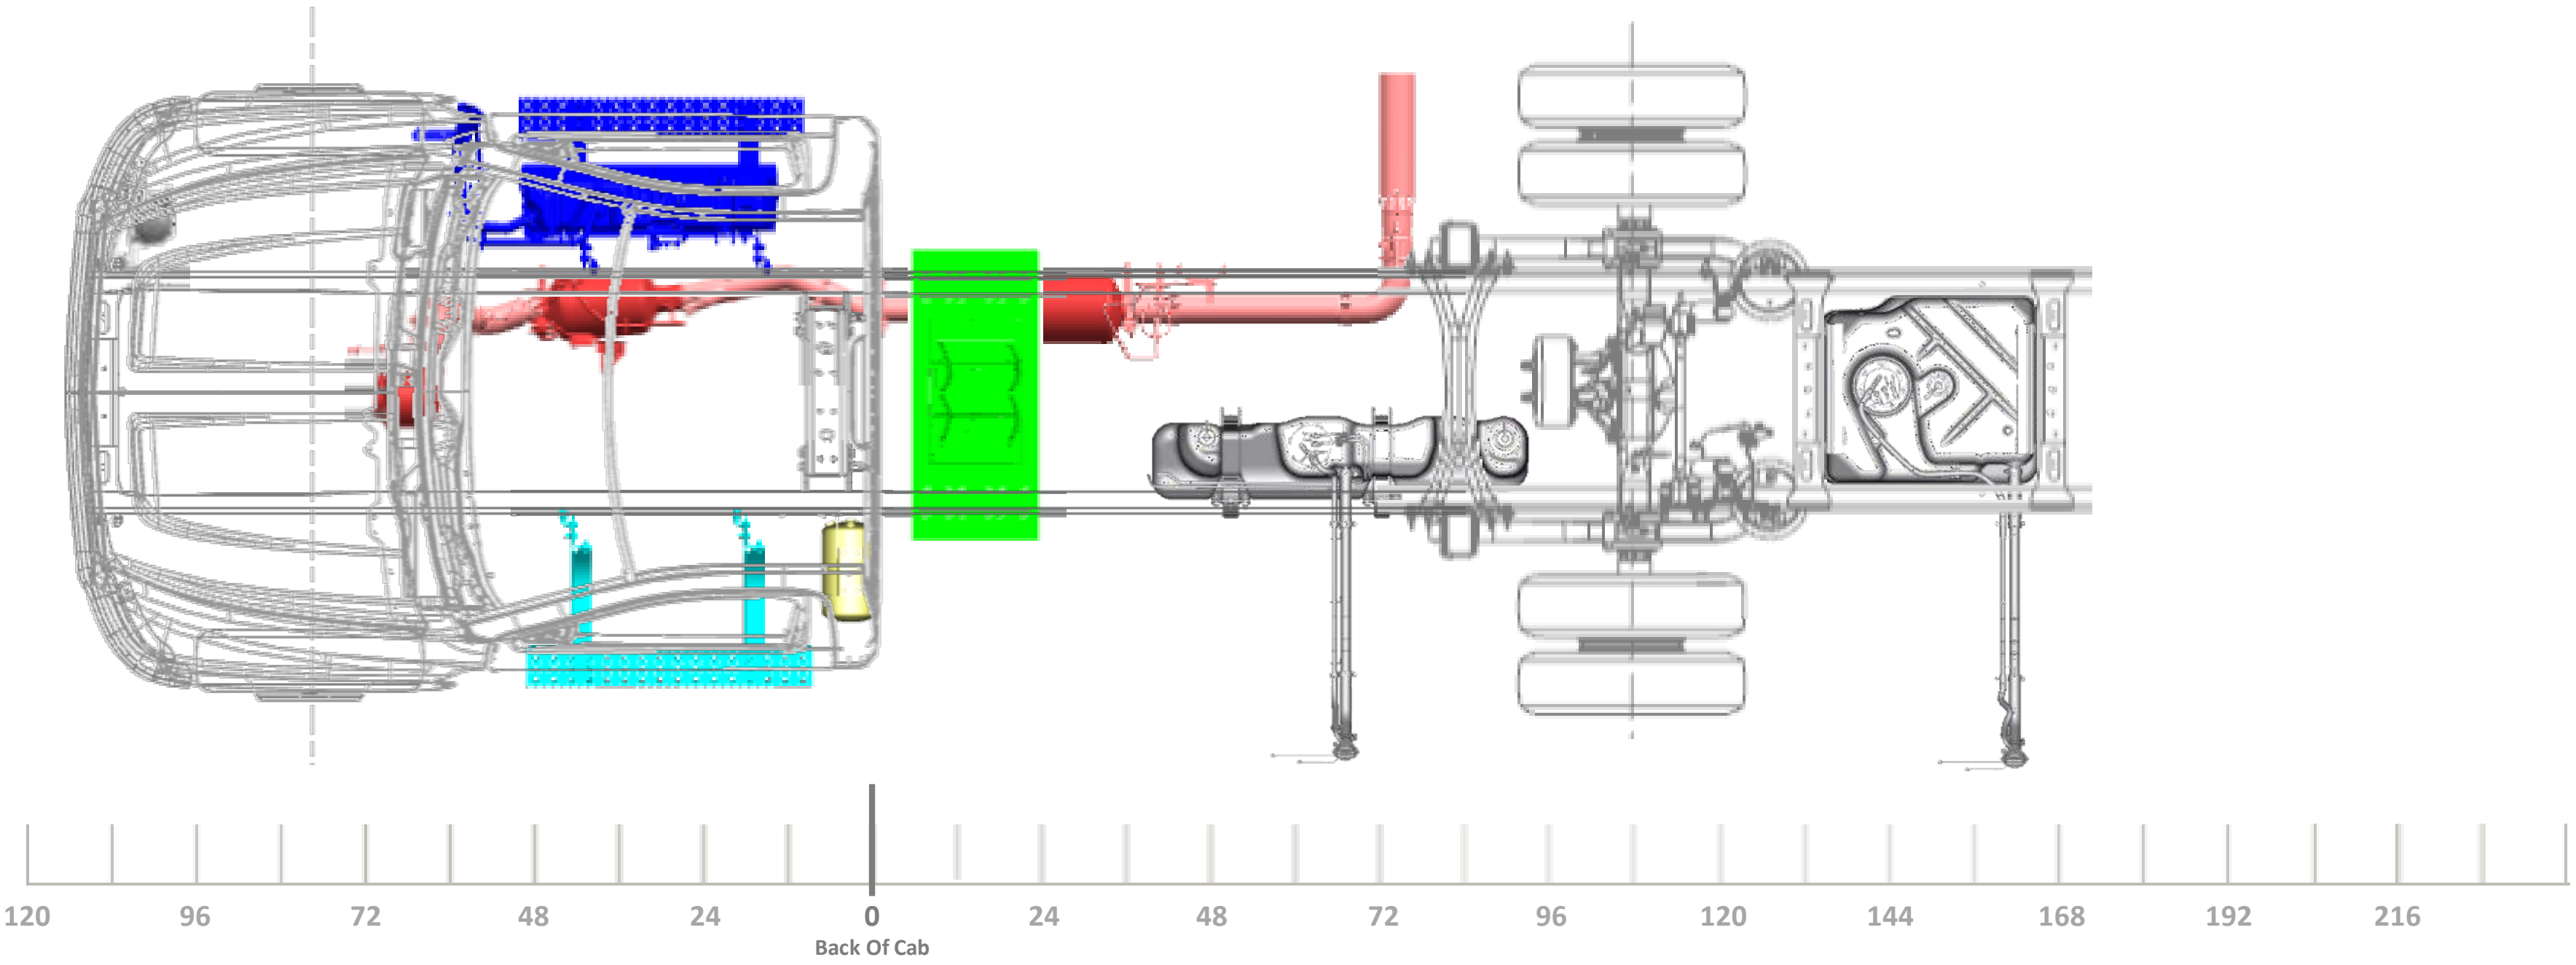

Regular Cab – 201” WB

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

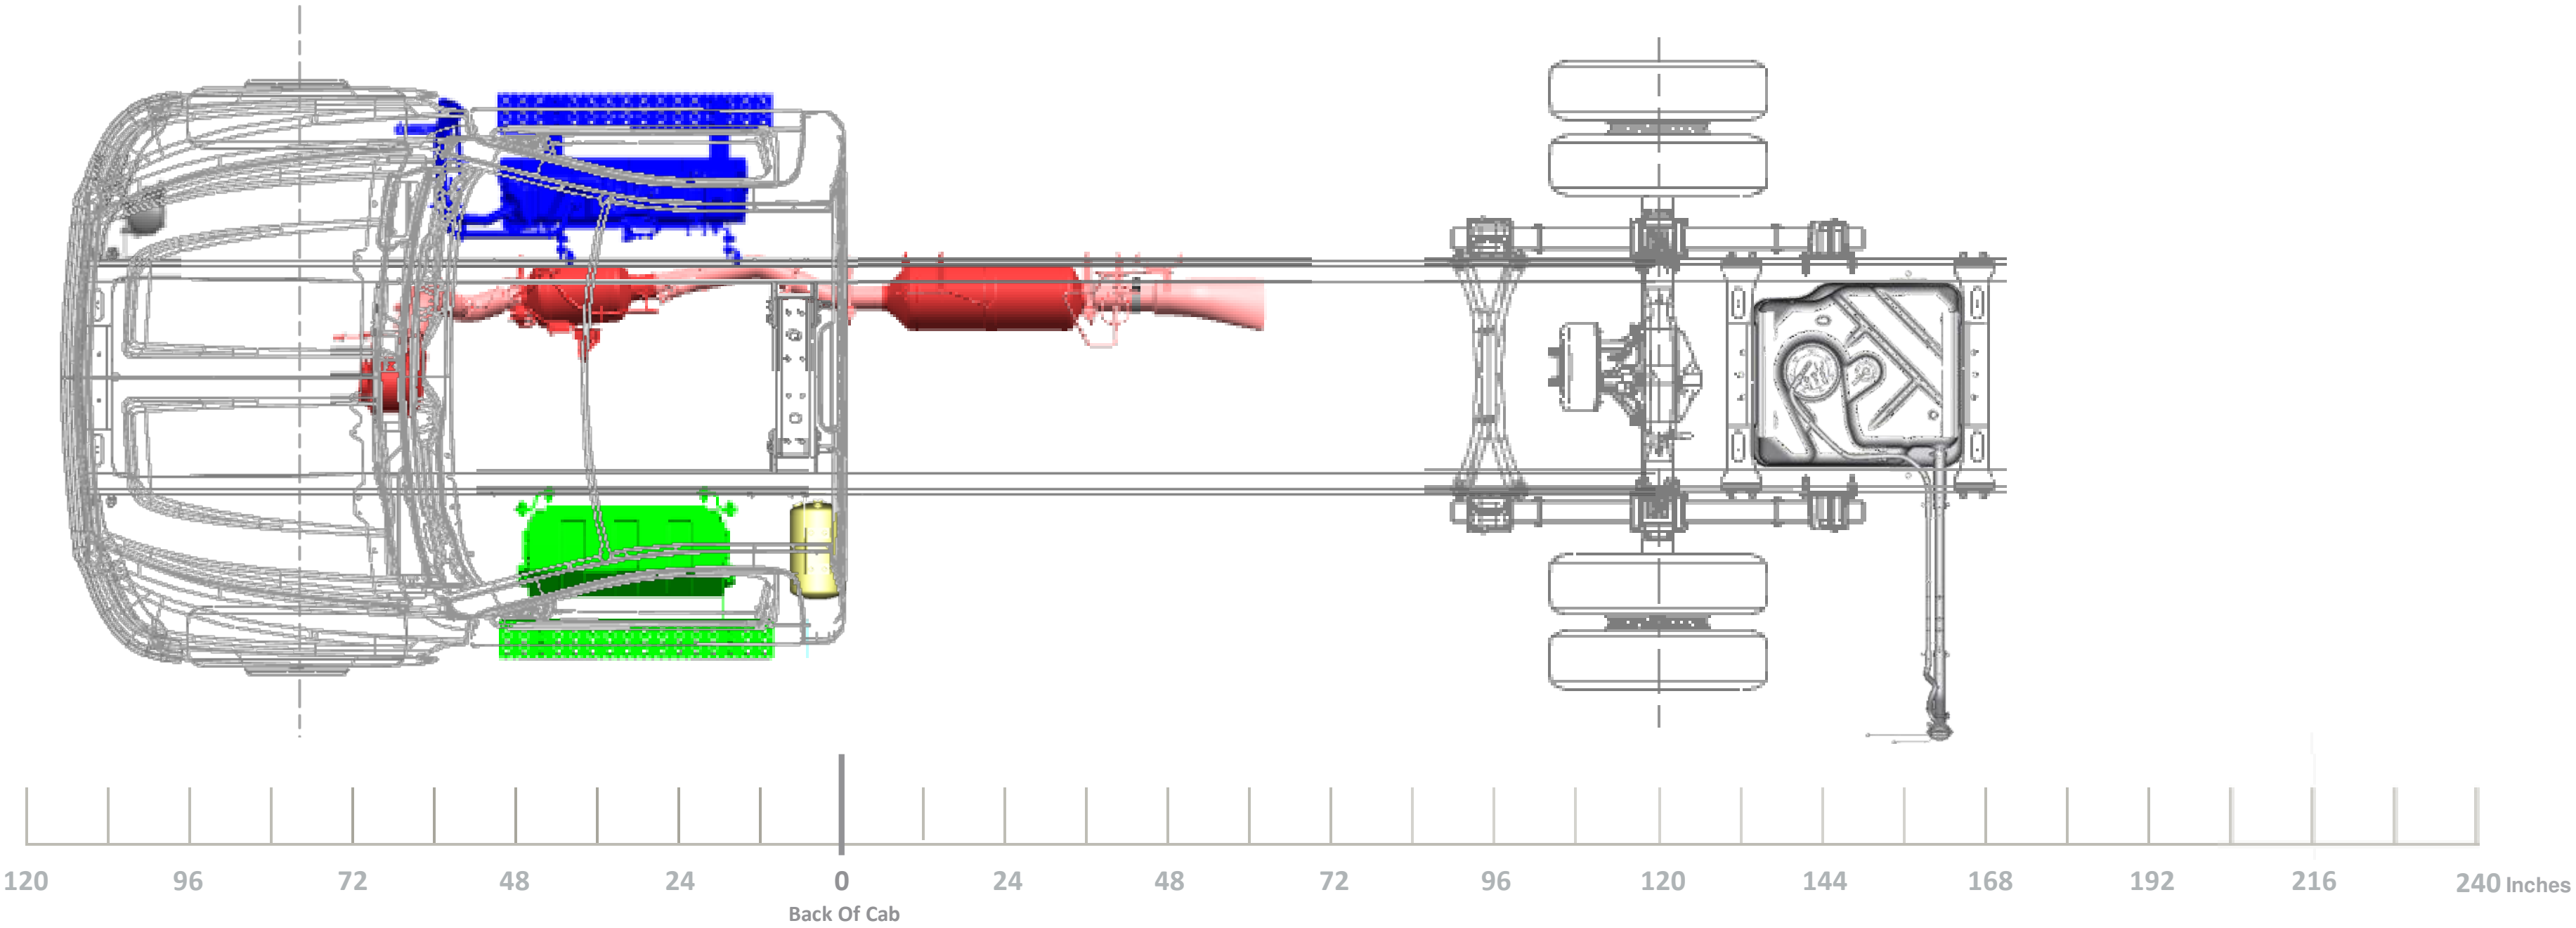
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

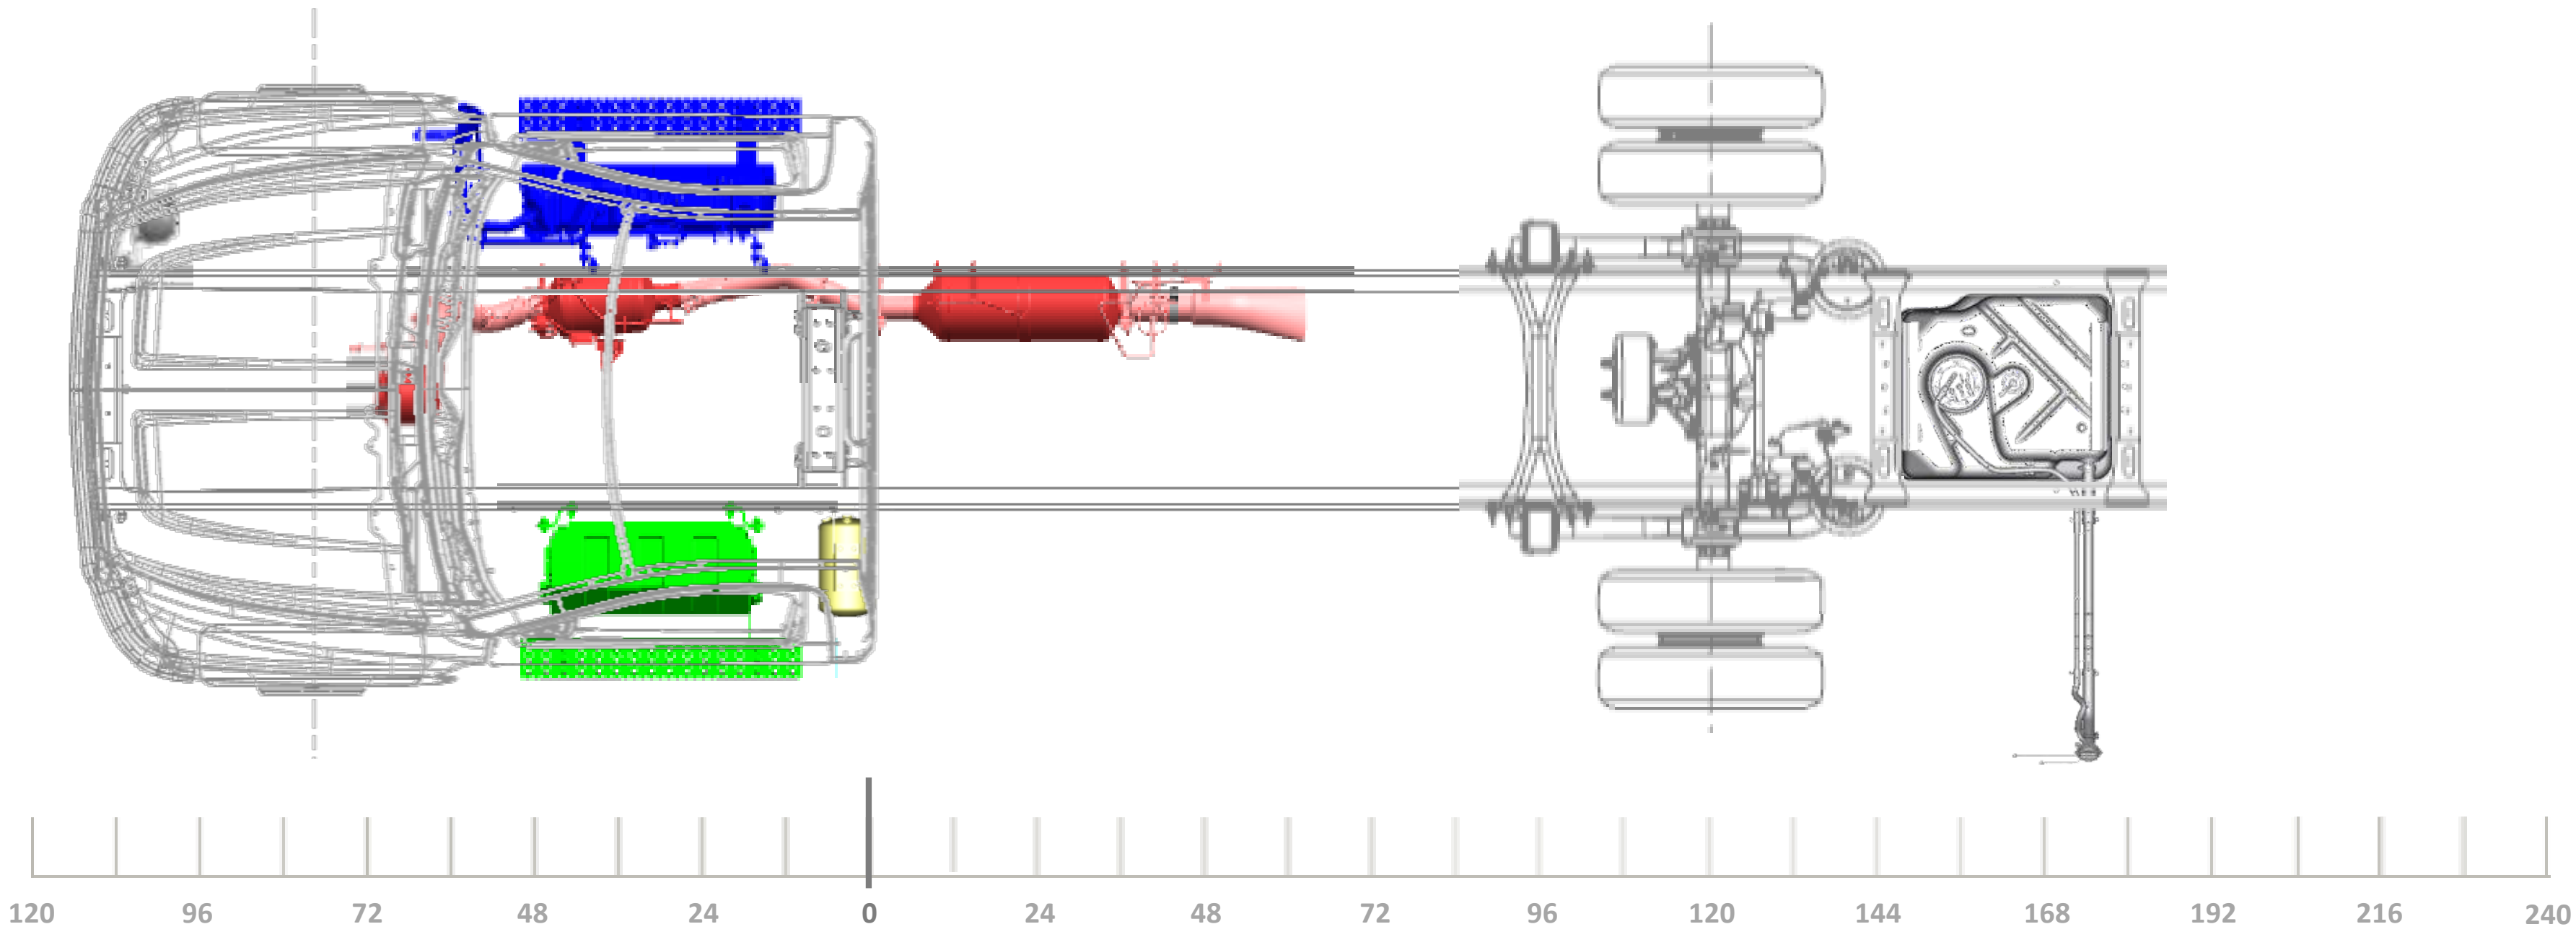

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

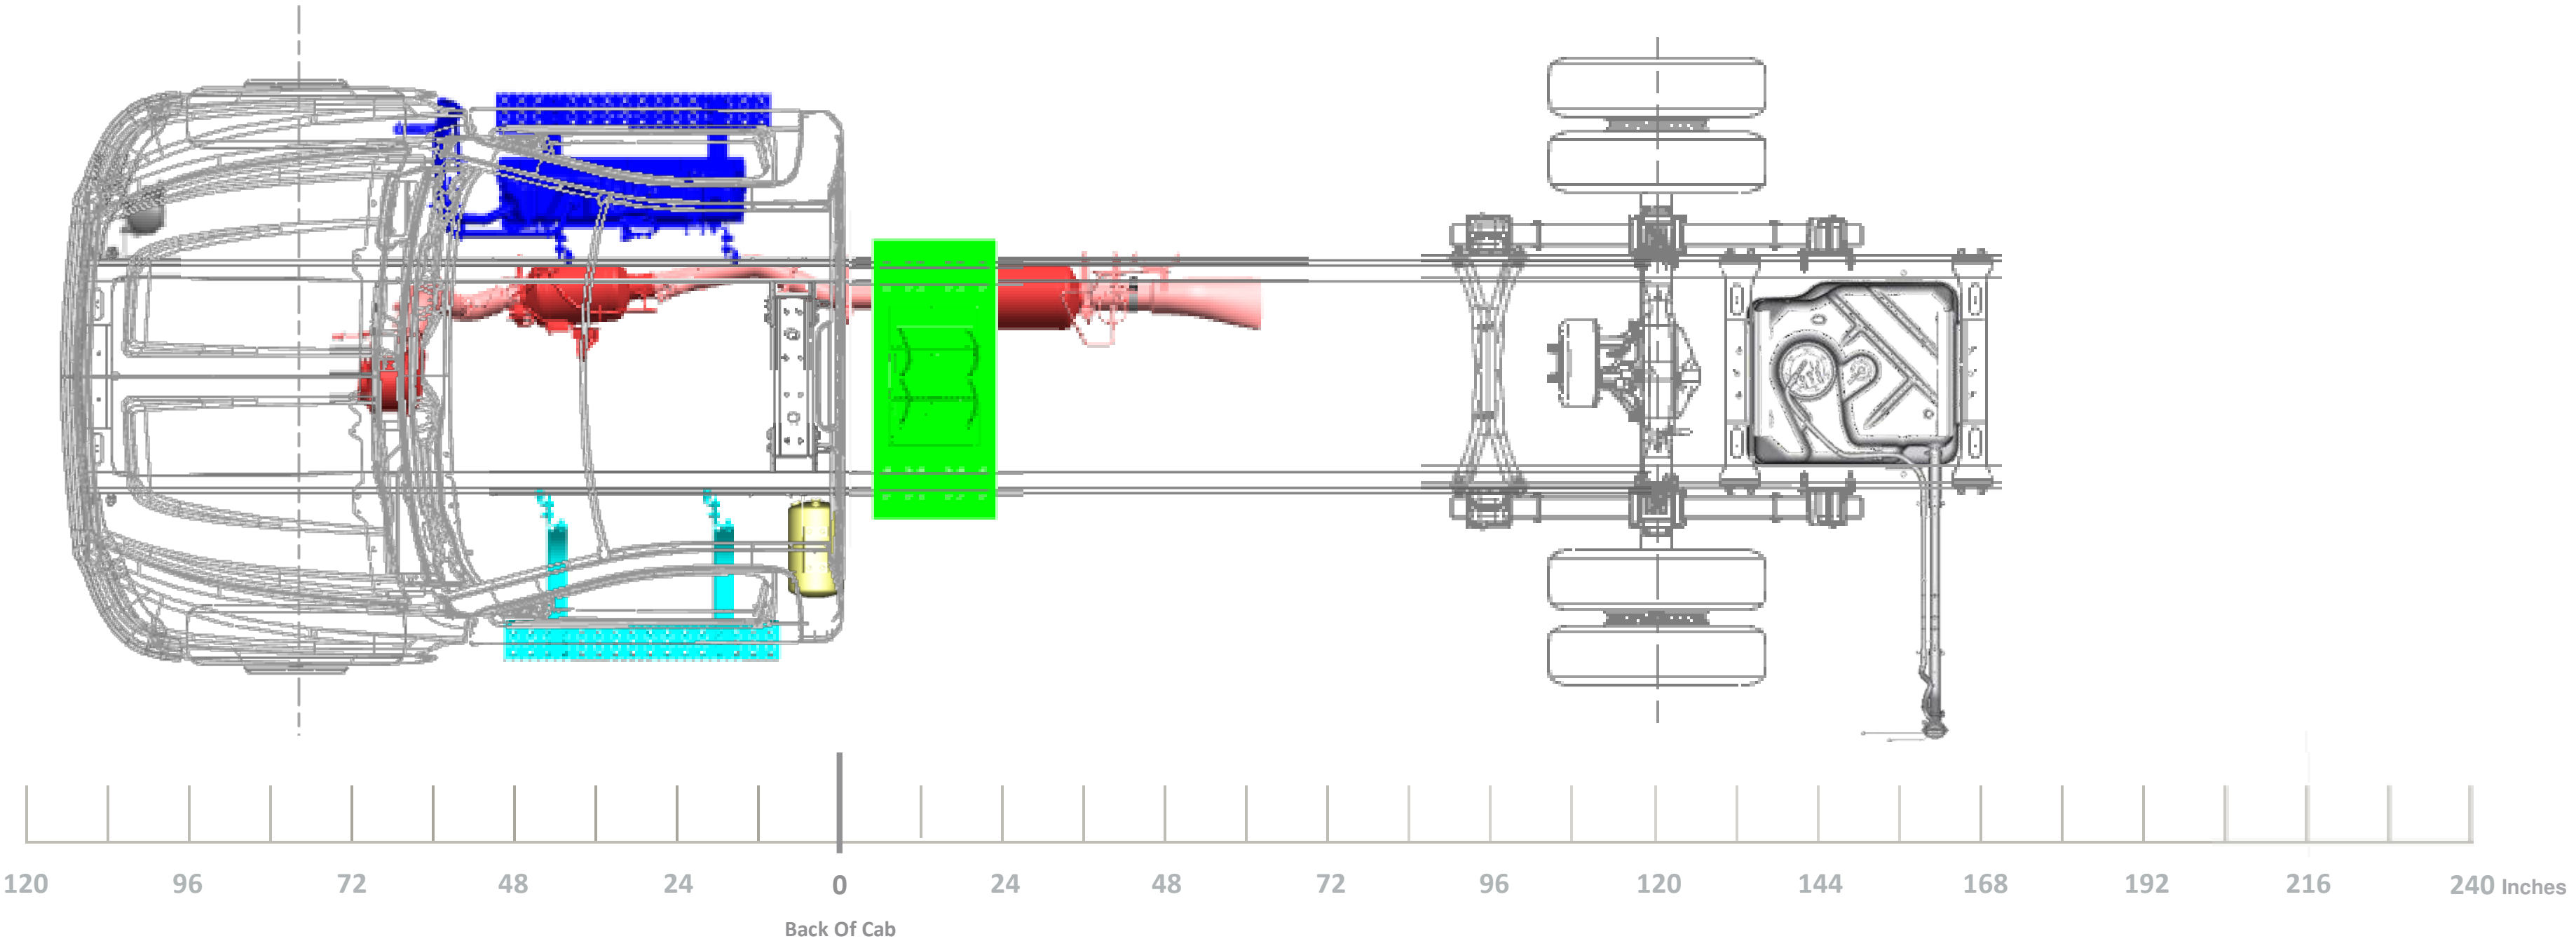
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

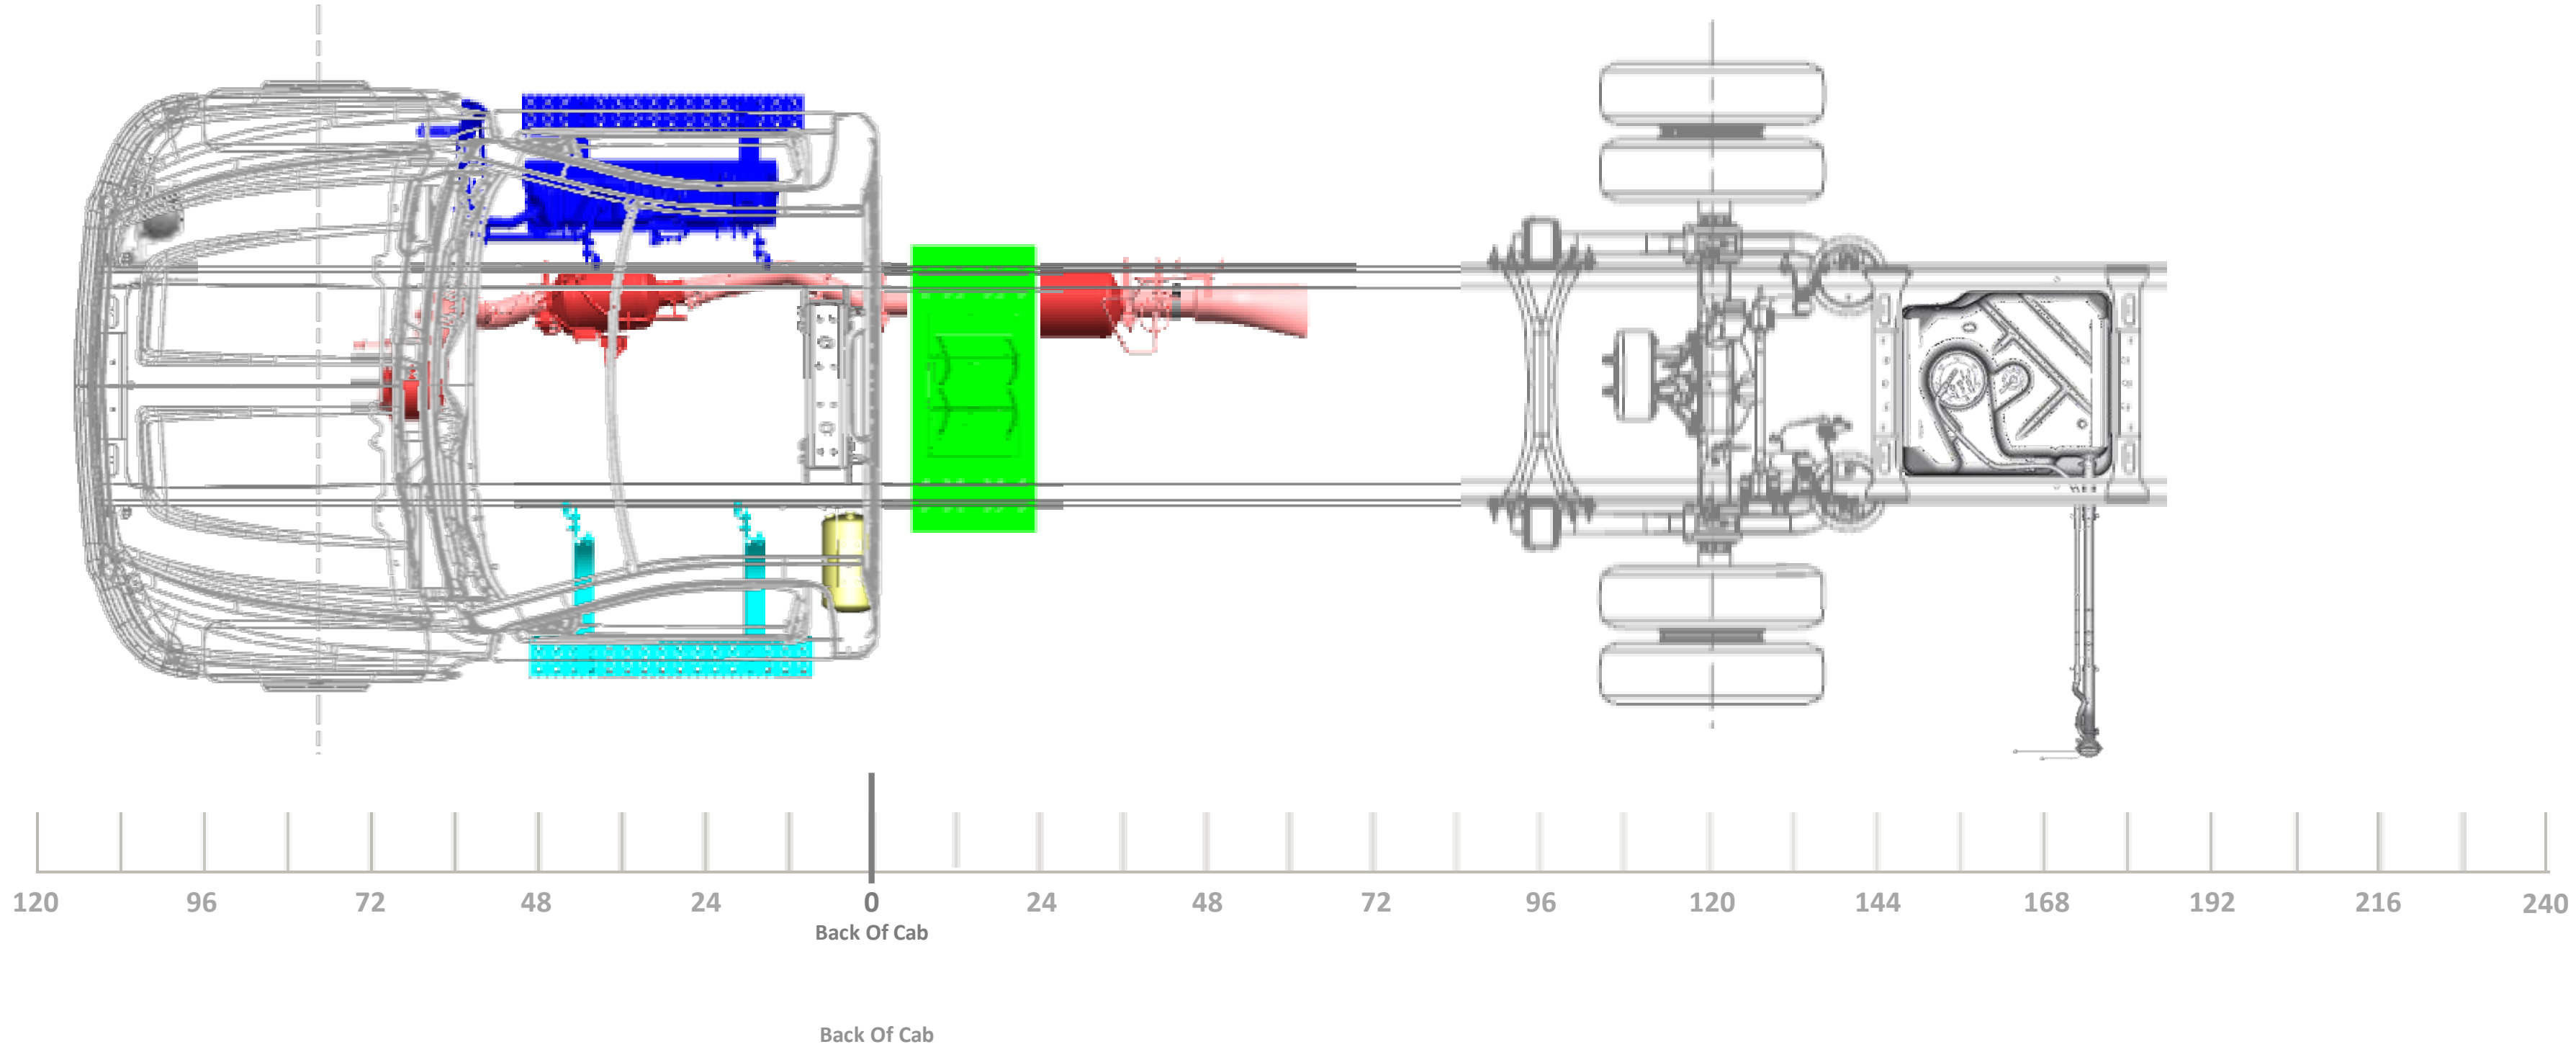
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240
Back Of Cab

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

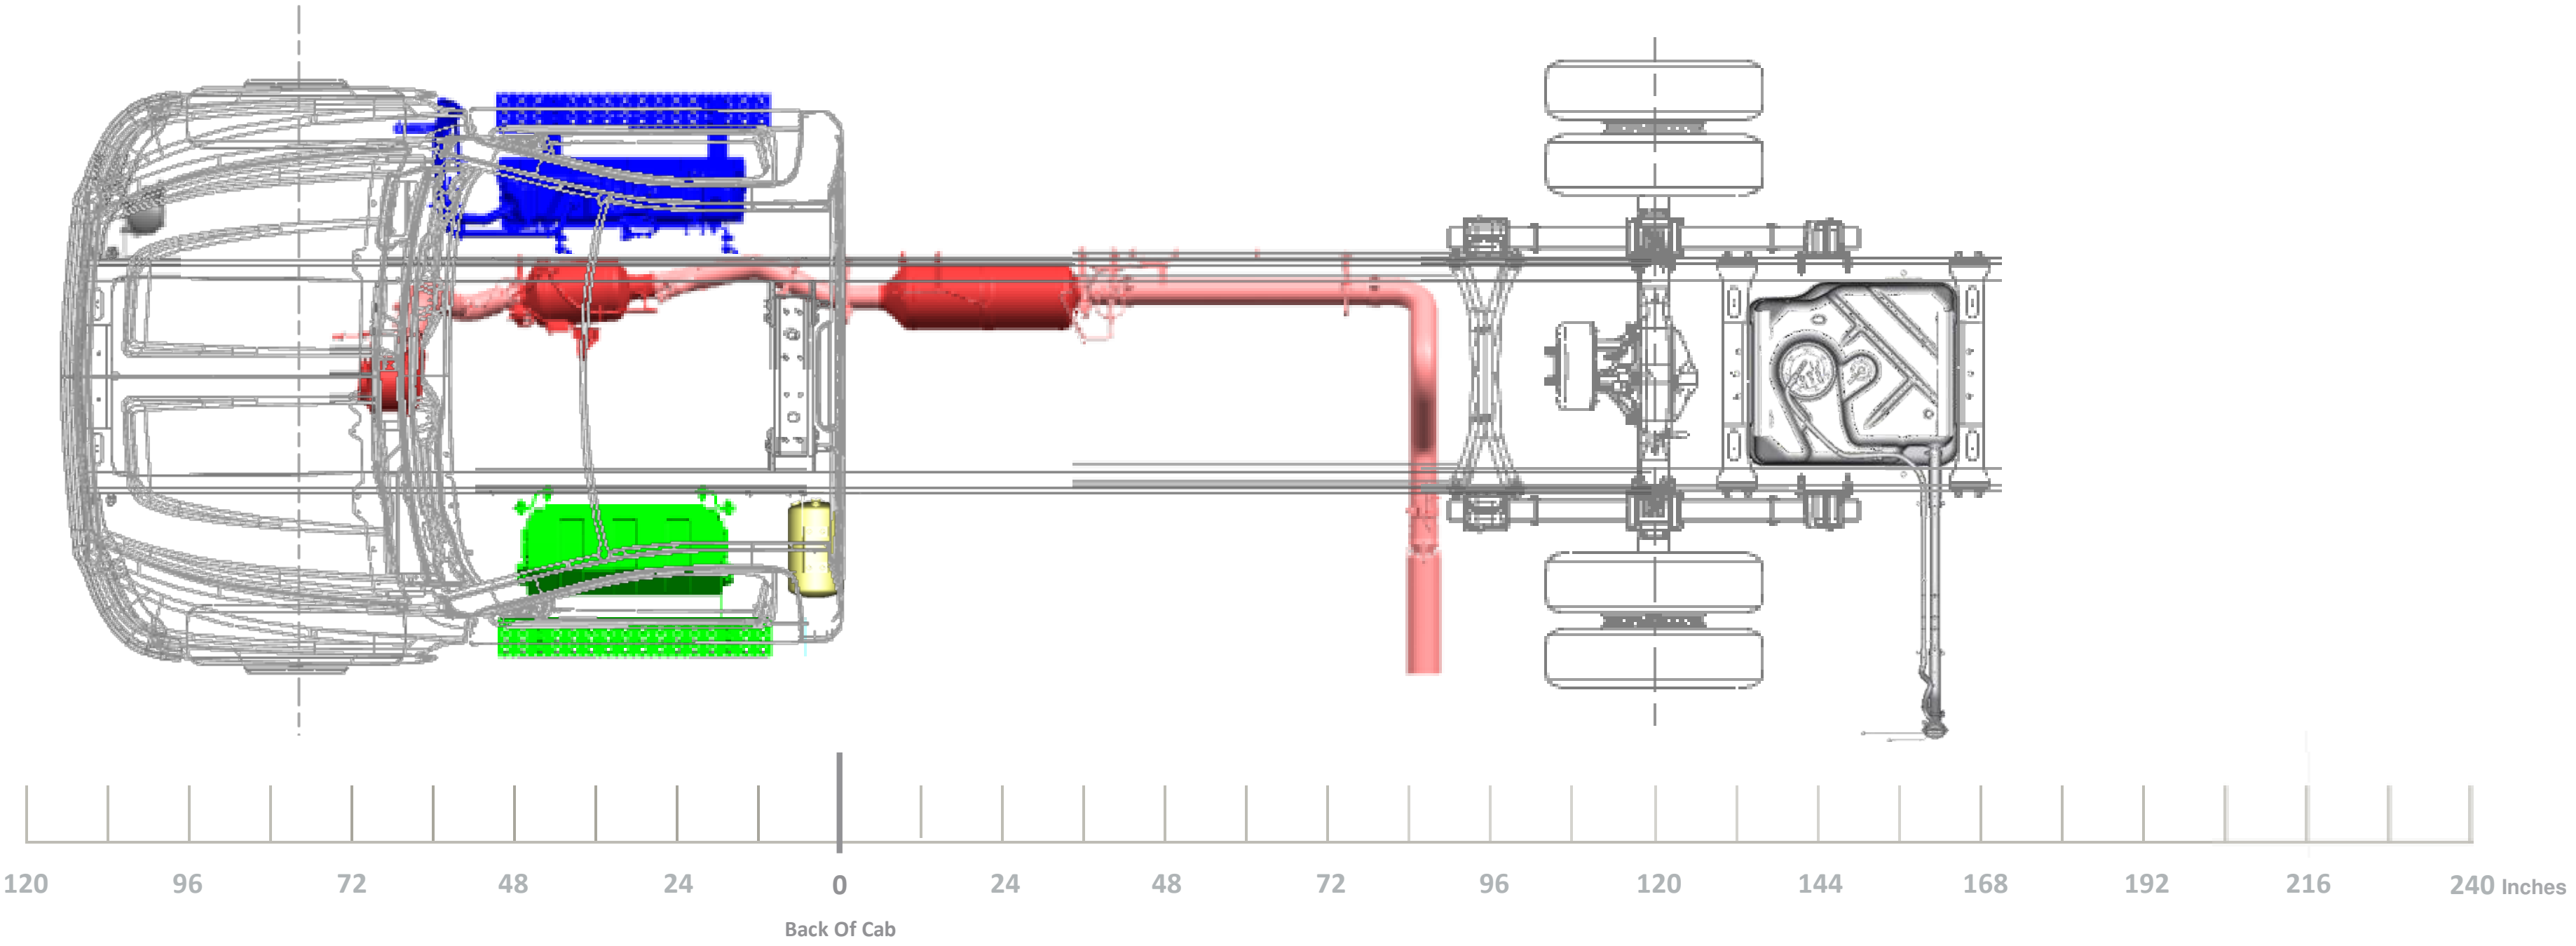
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240 Inches
Back Of Cab

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

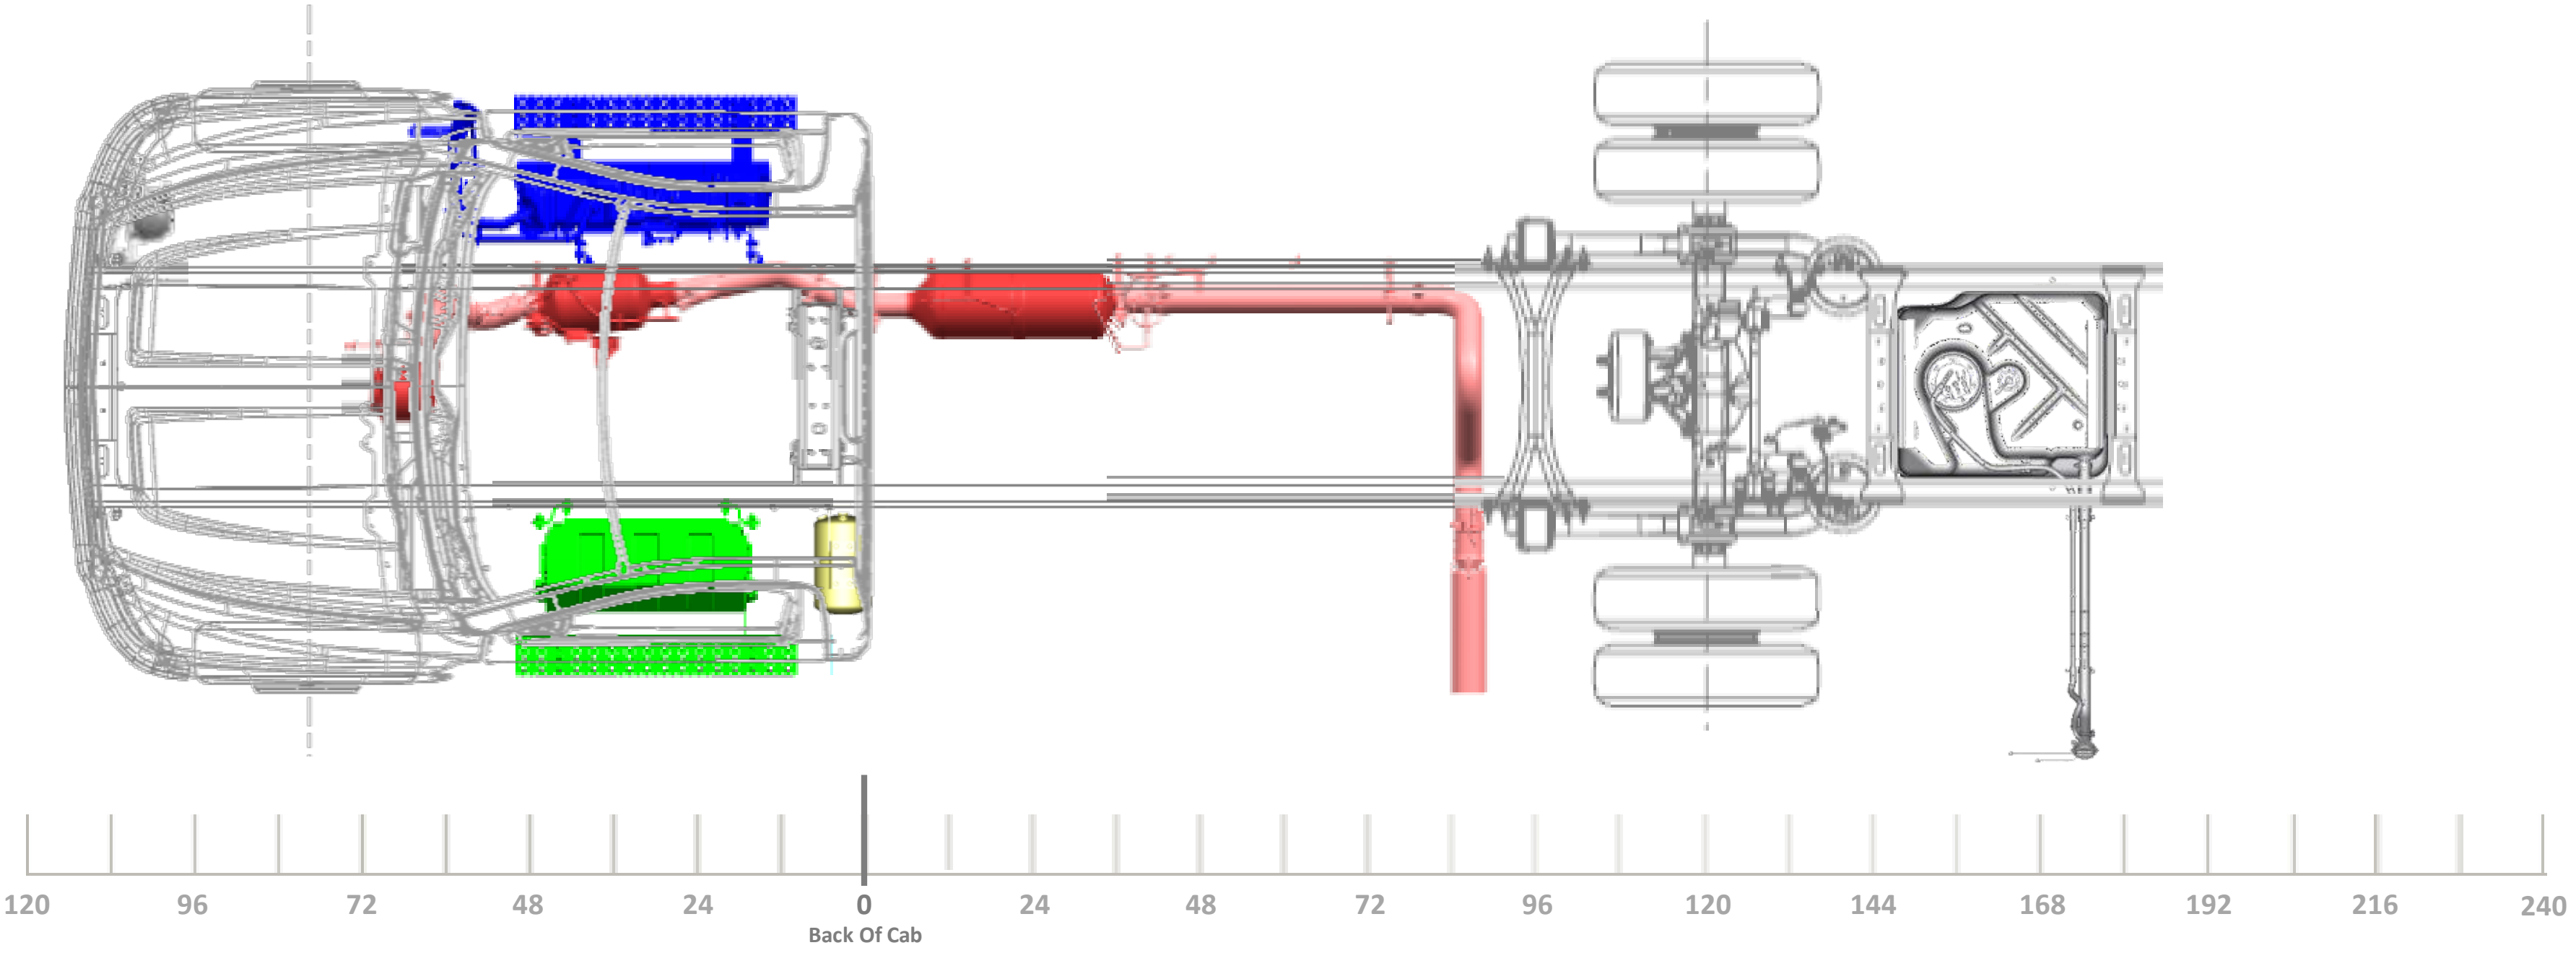

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

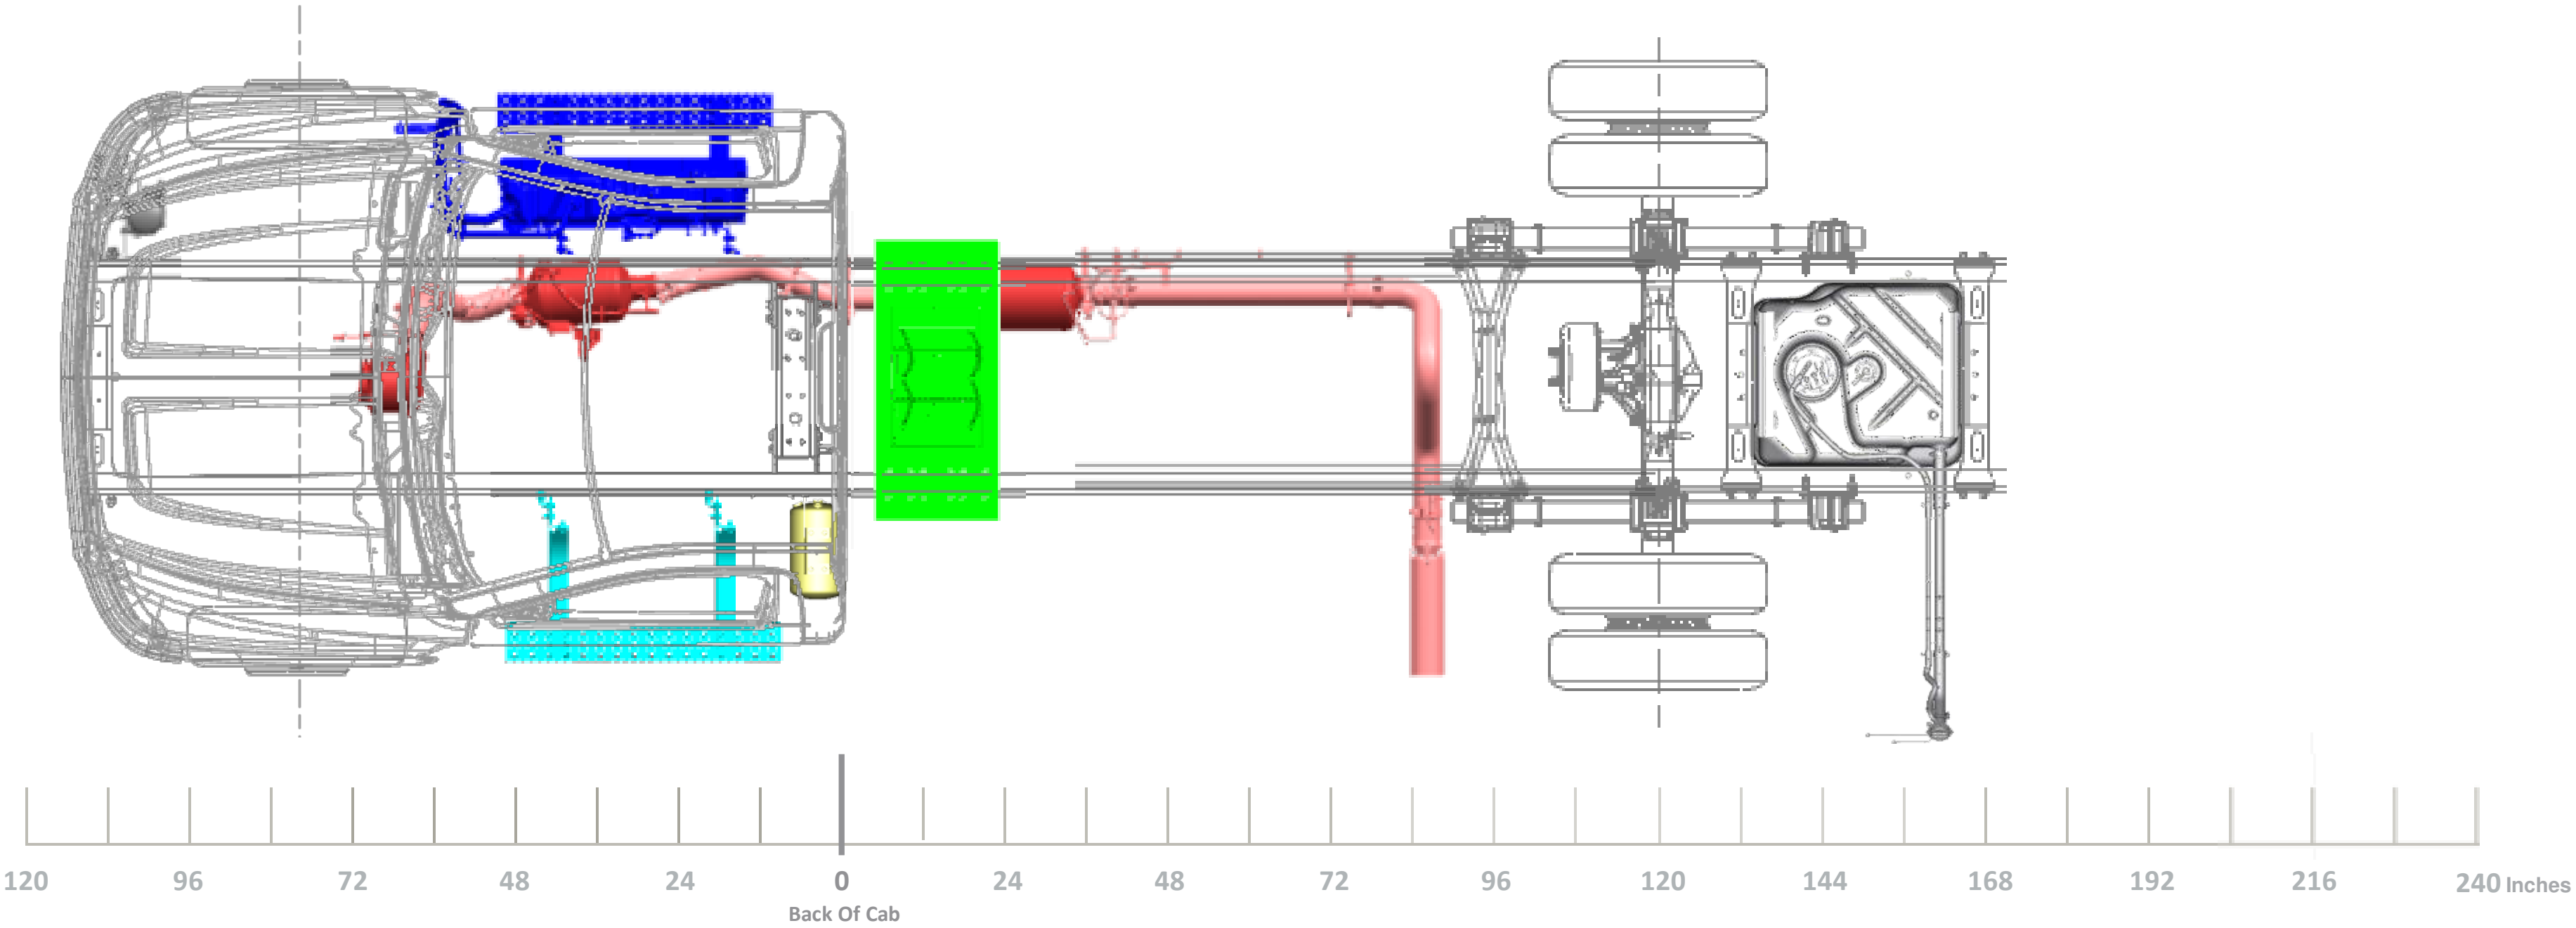
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

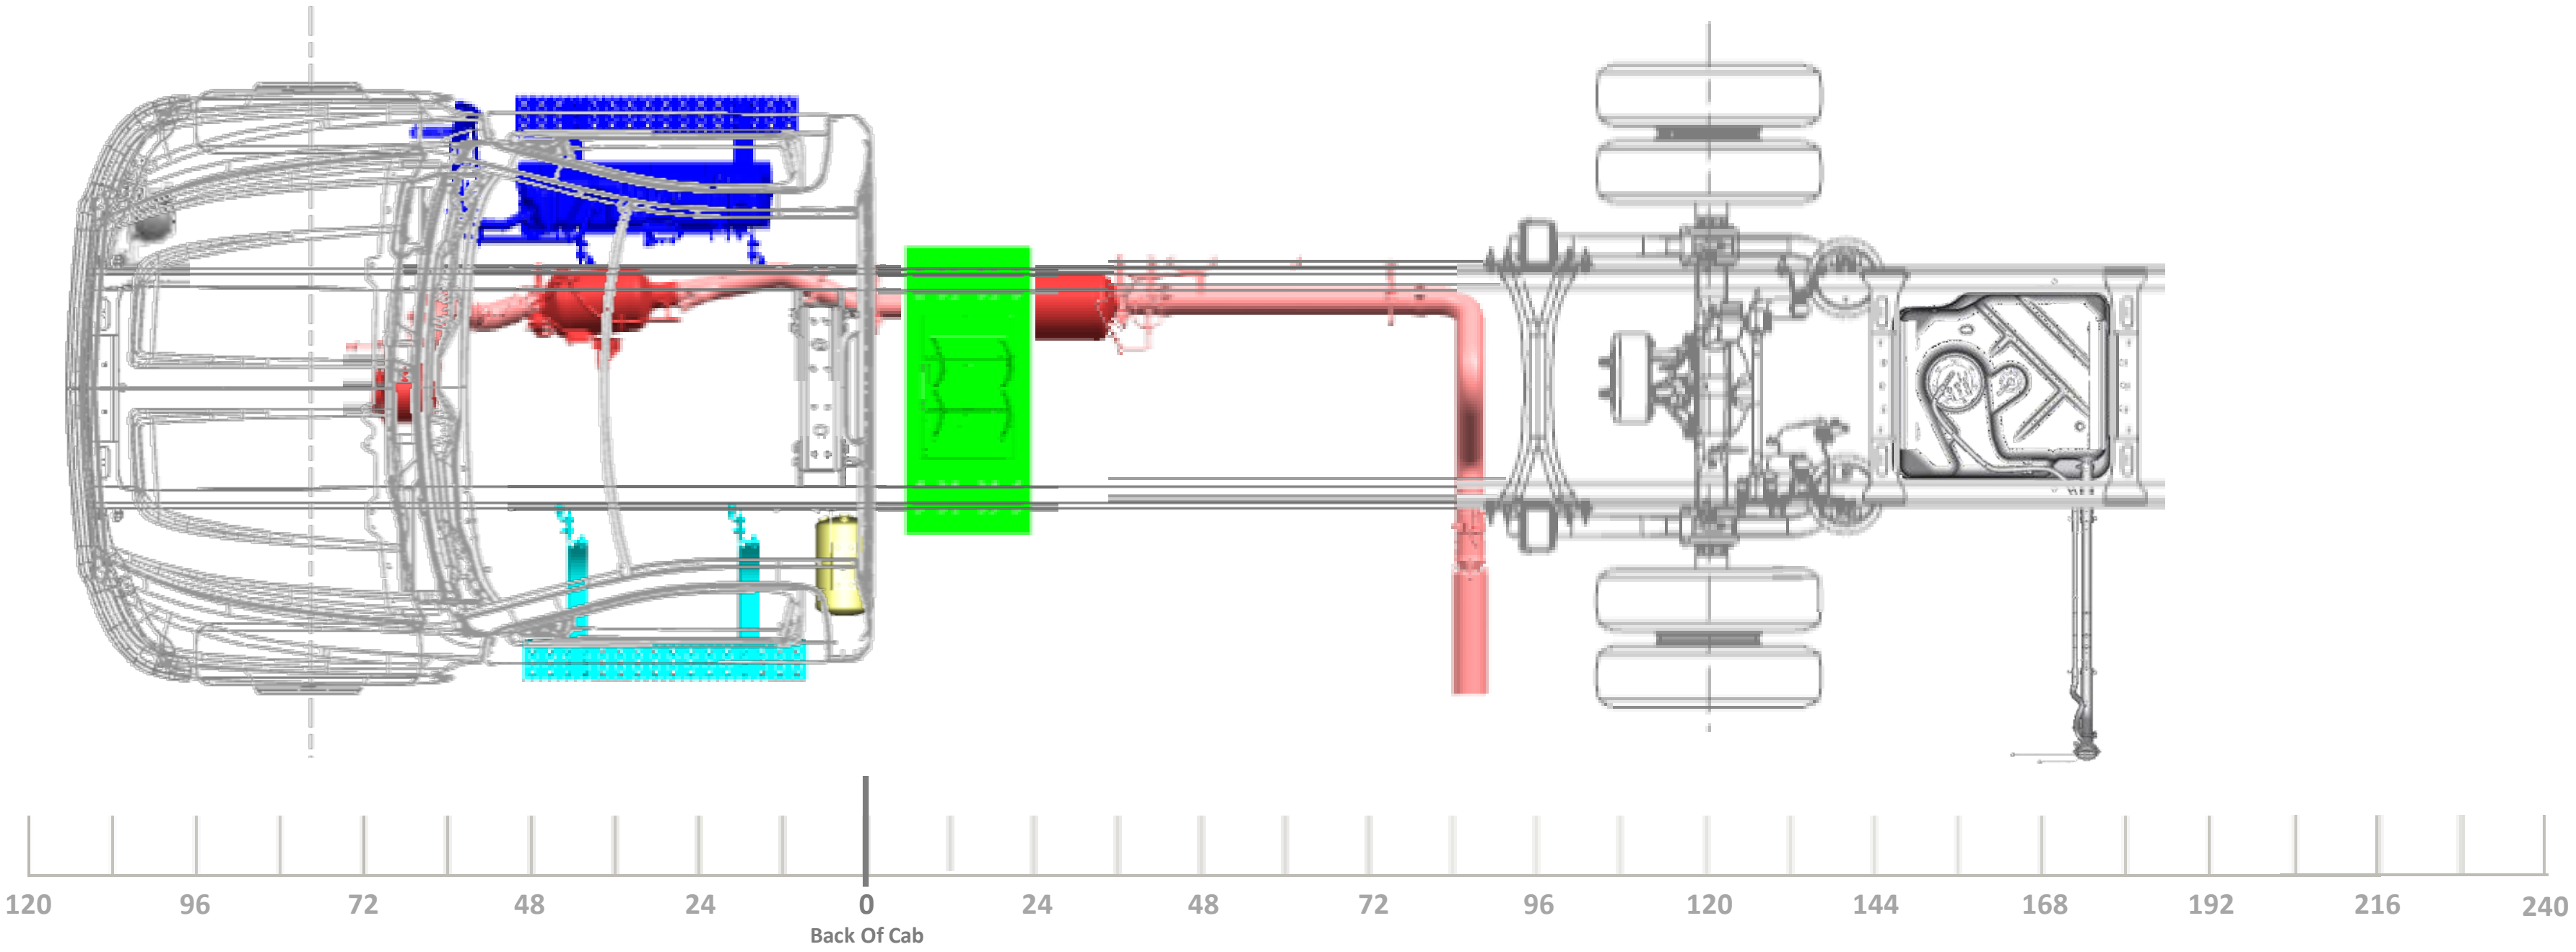

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

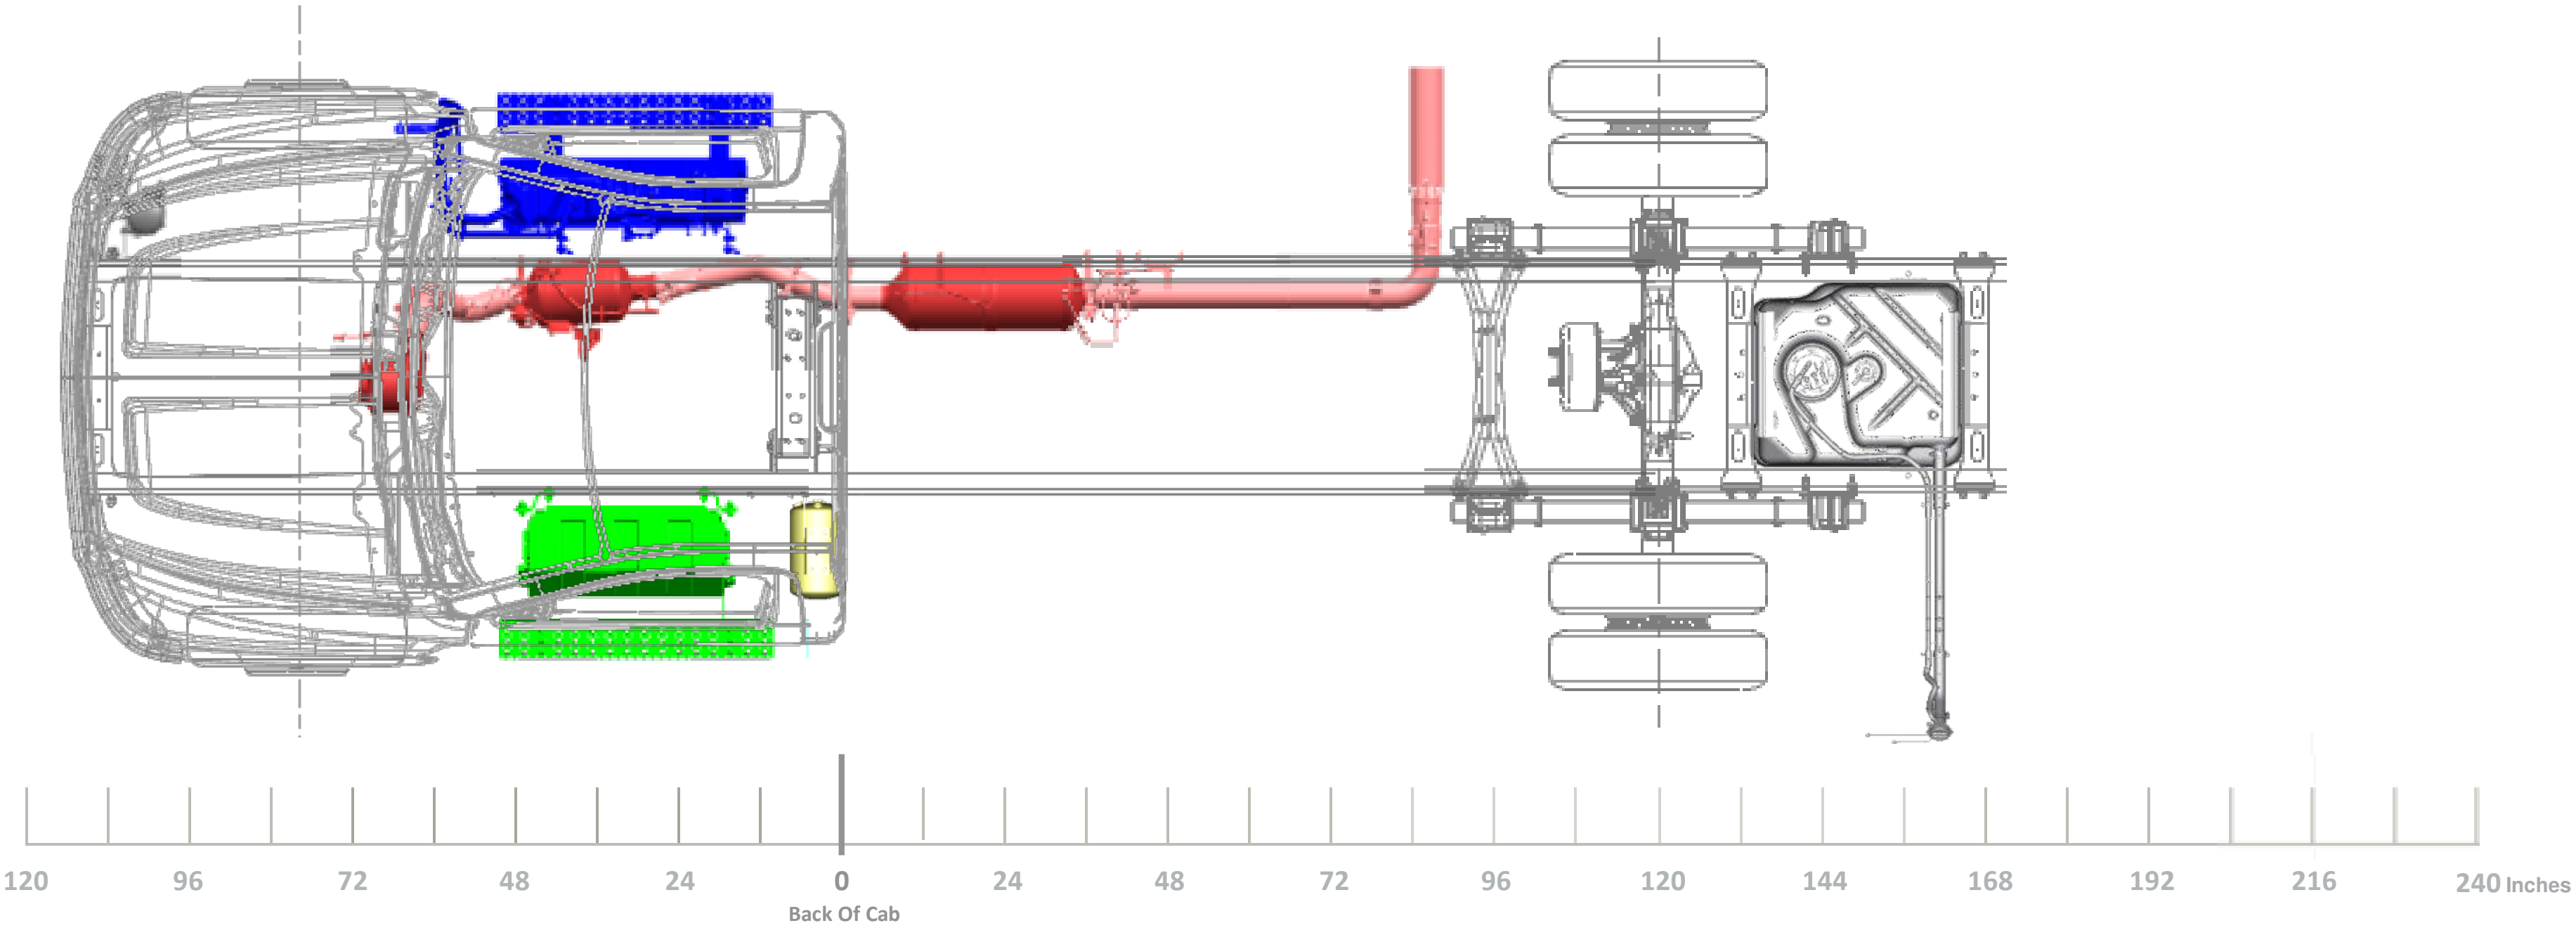
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

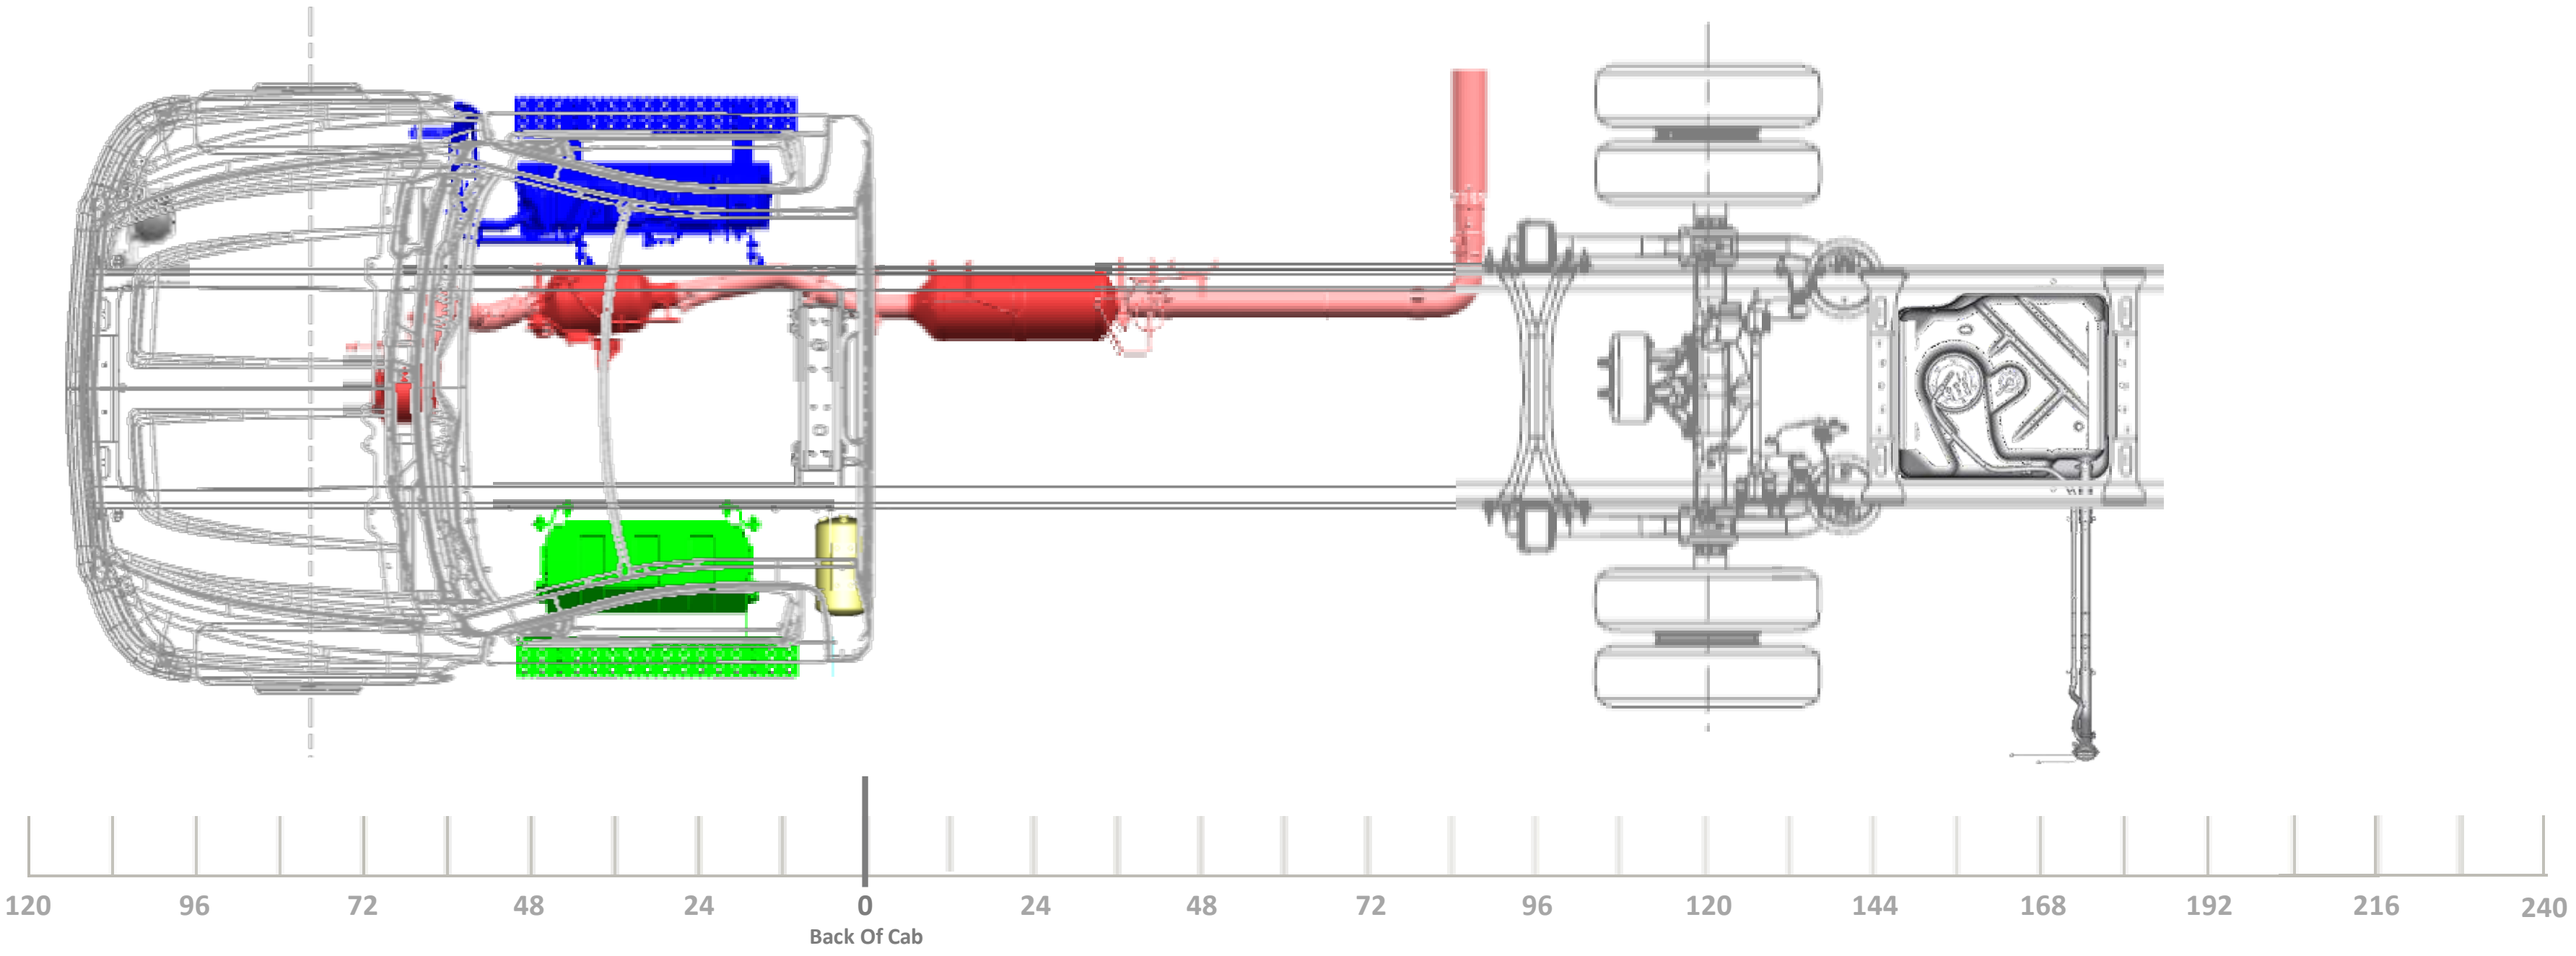

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

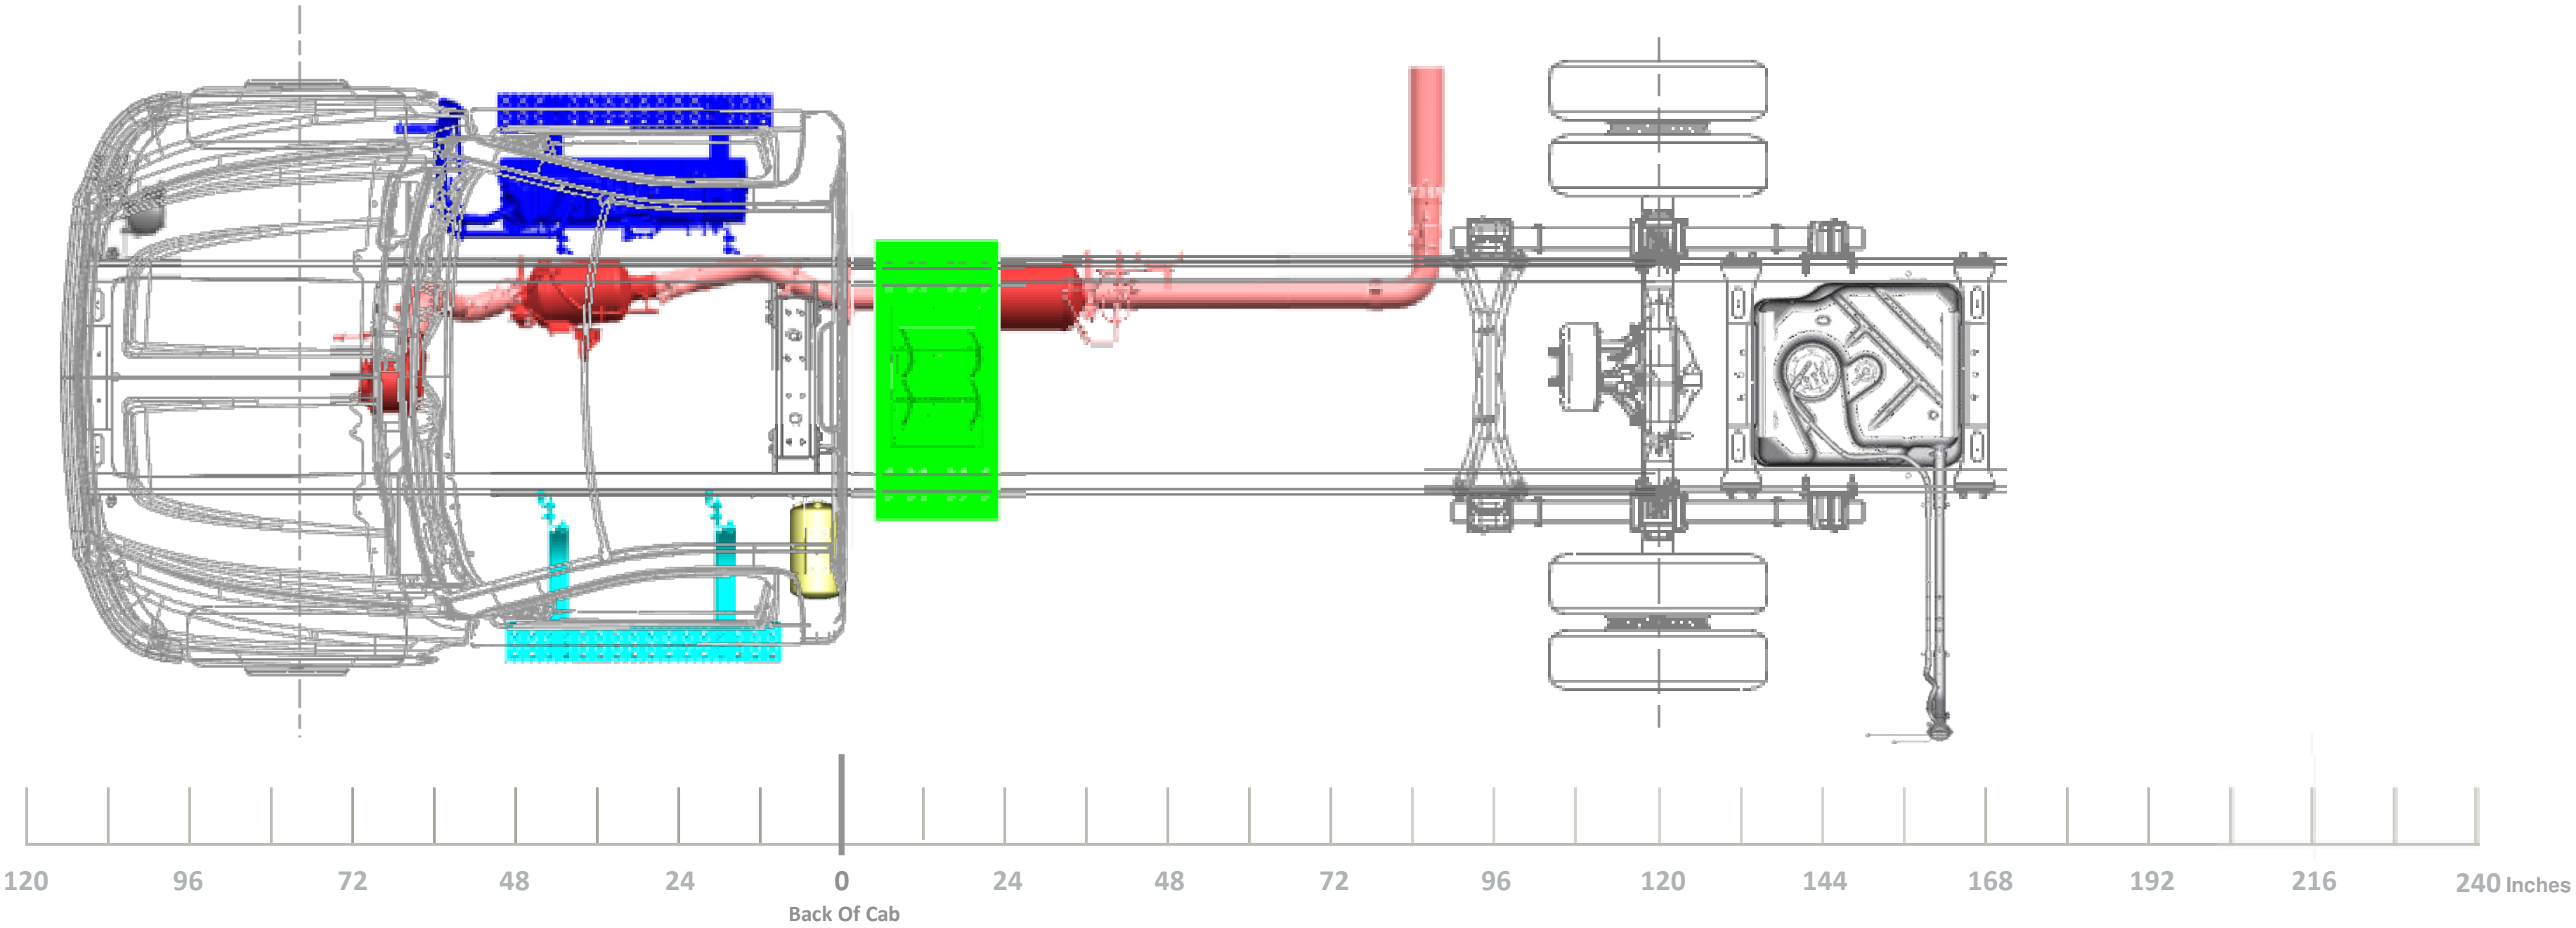
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201" WB (120" CA) 63" OR 75" AF

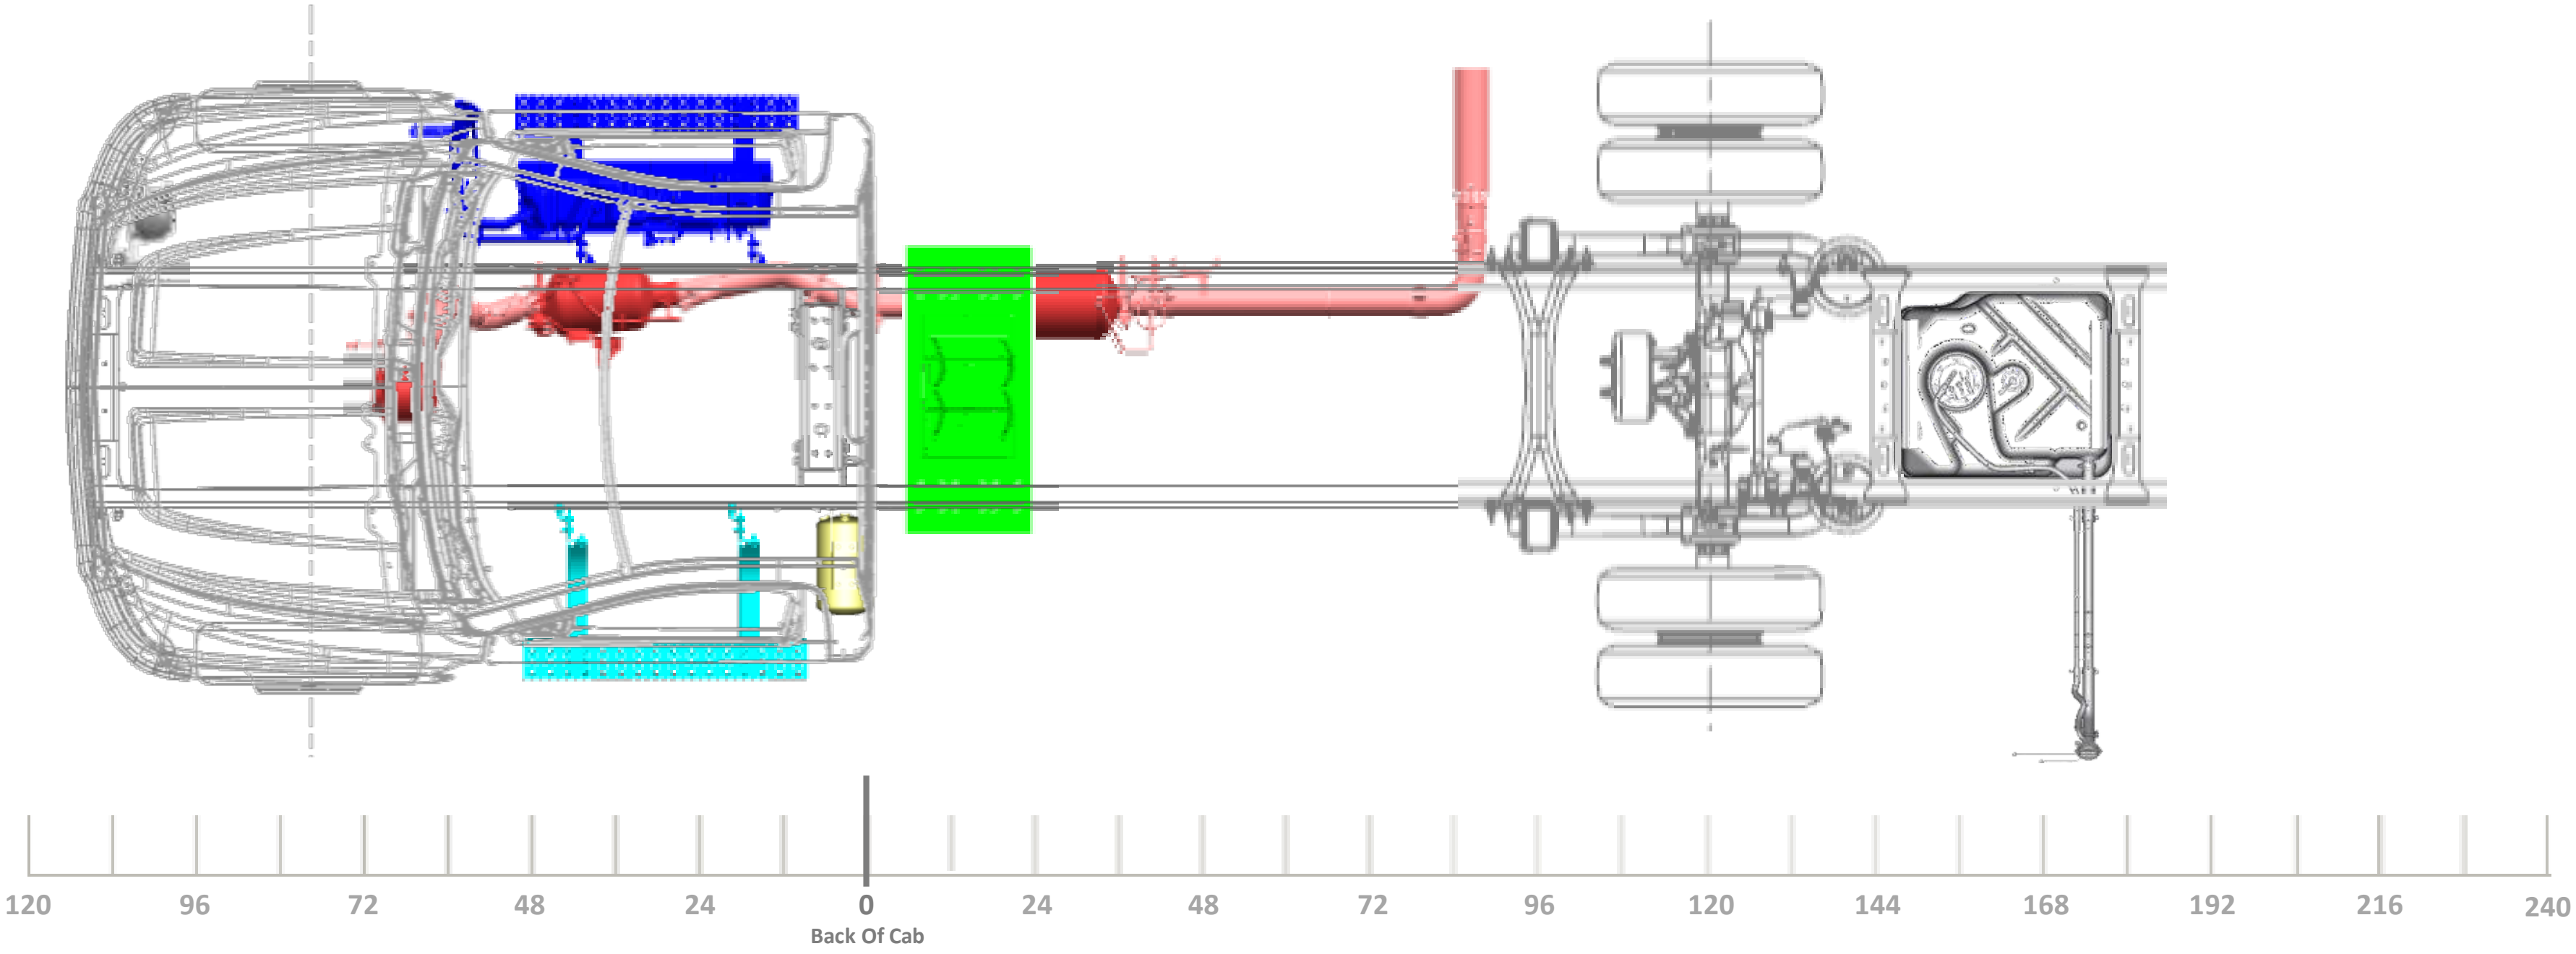

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

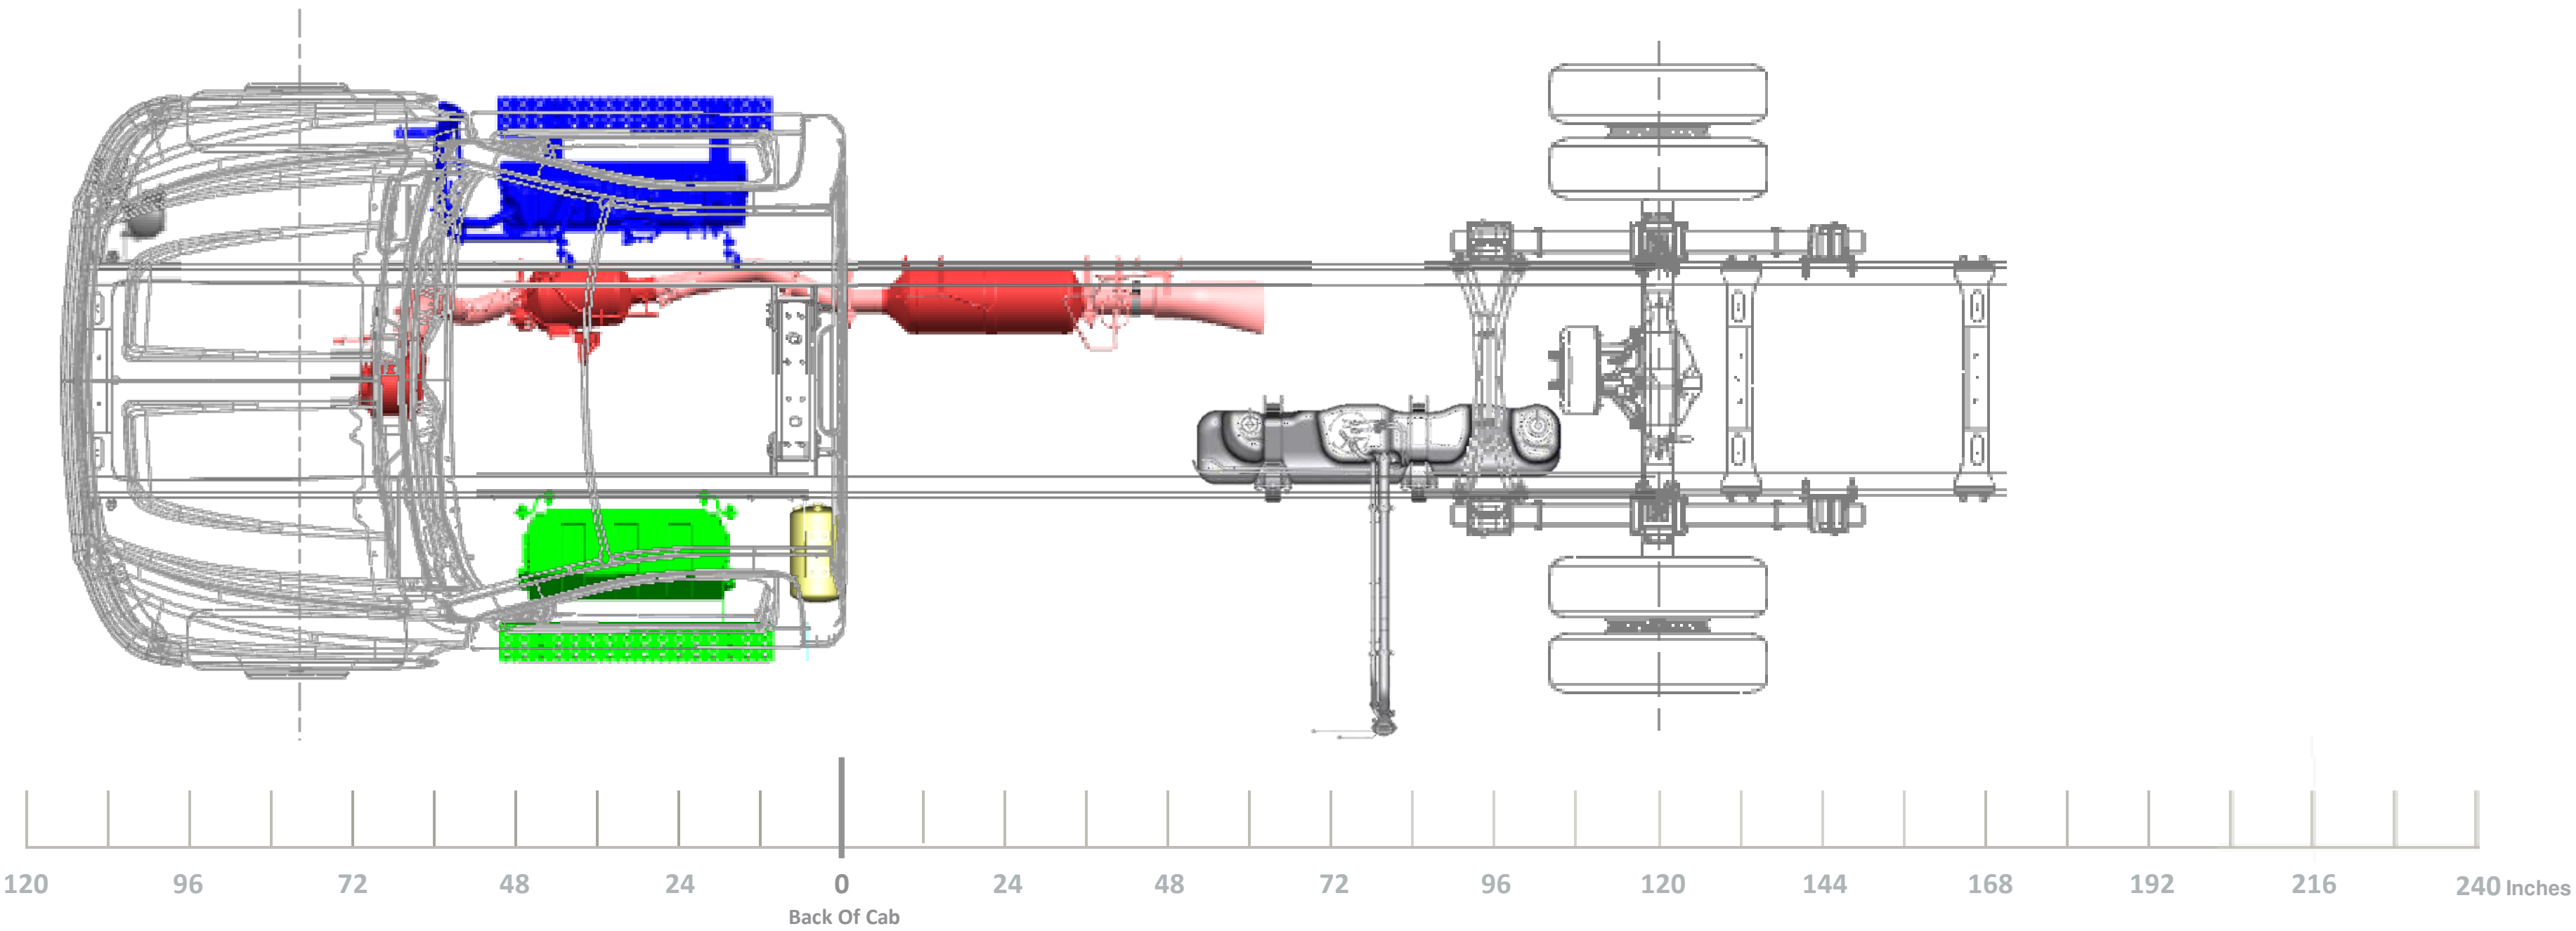
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

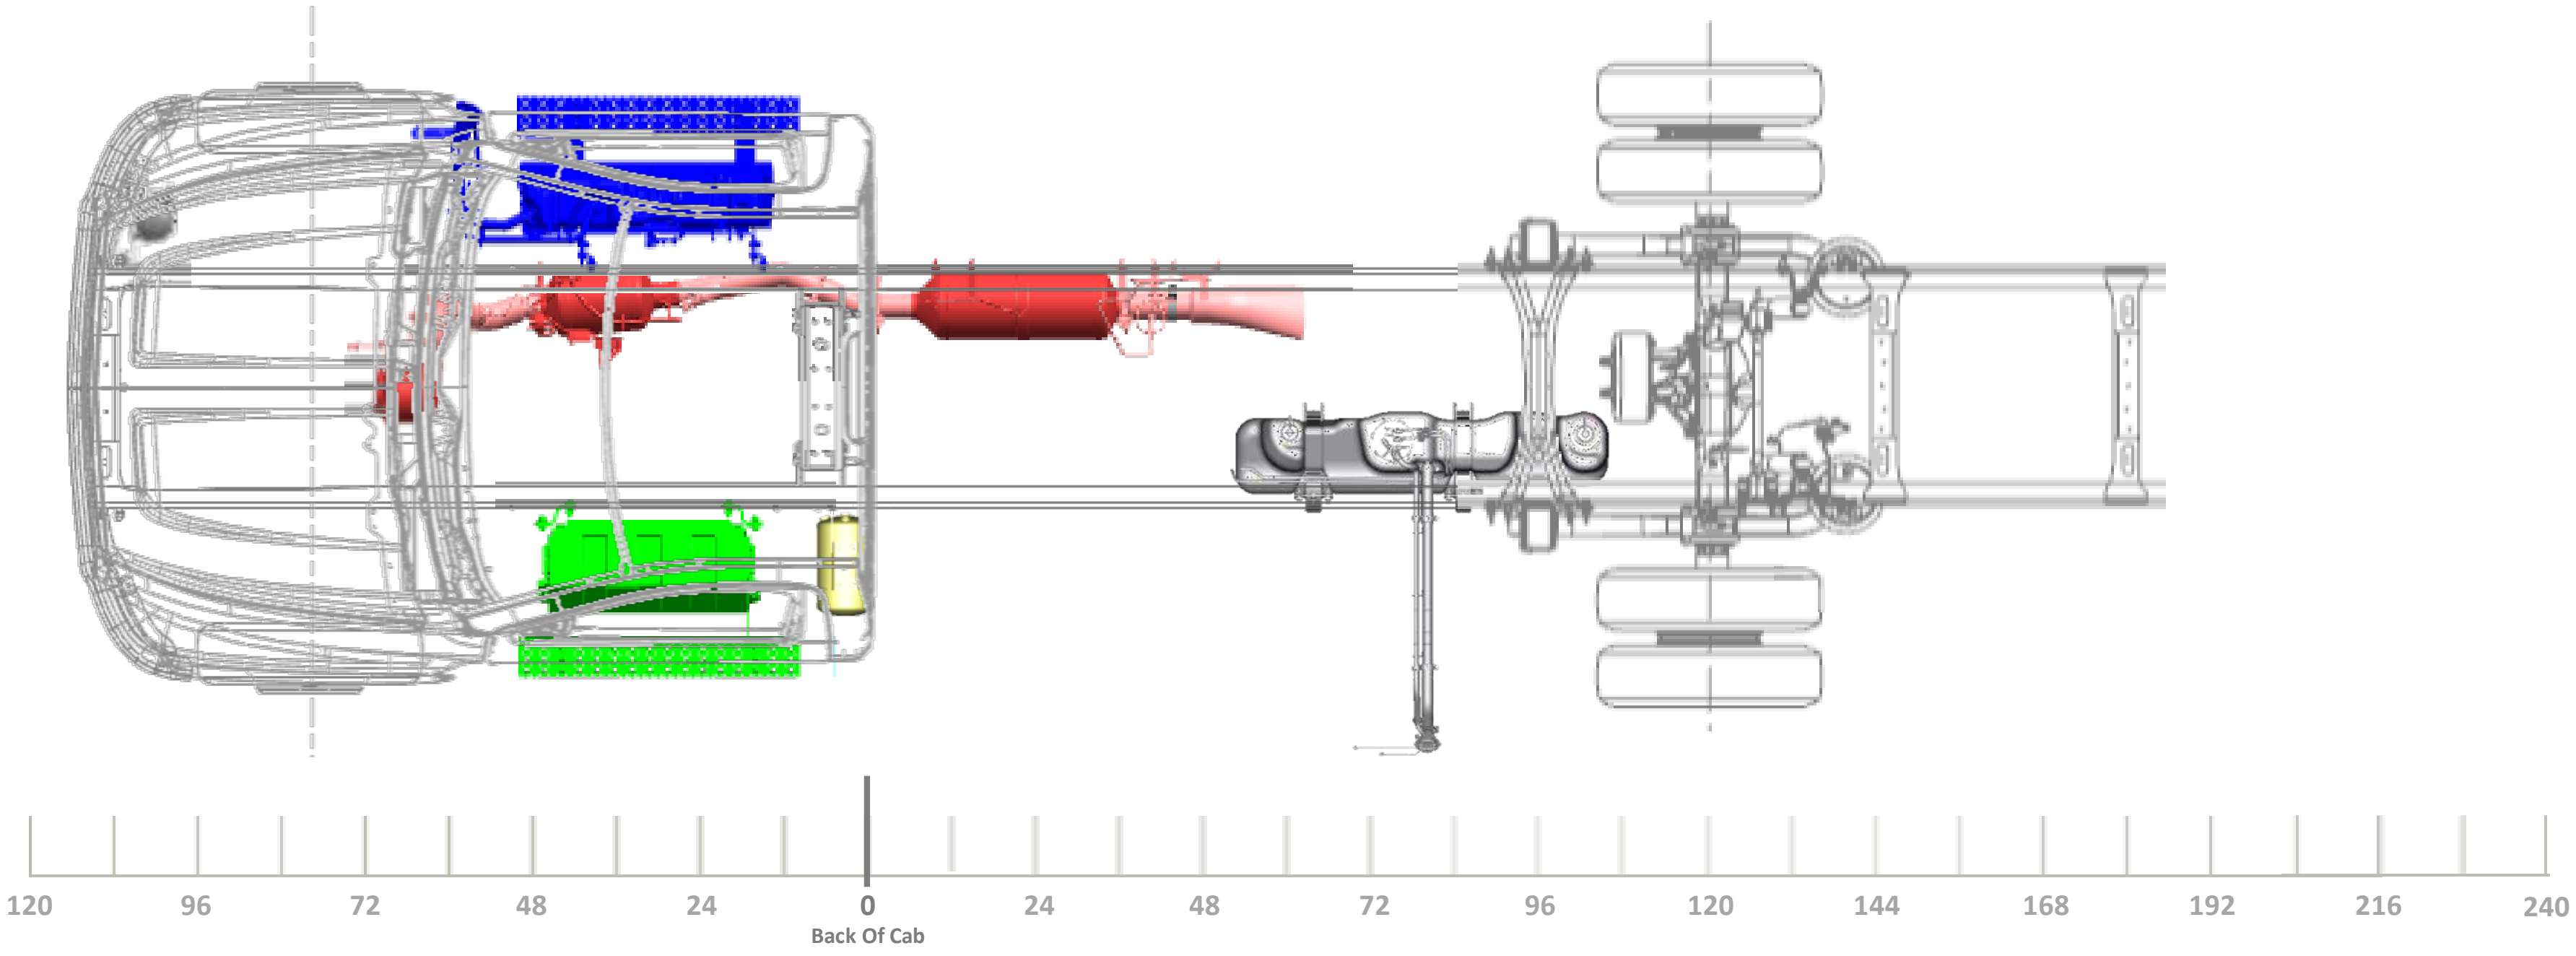

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

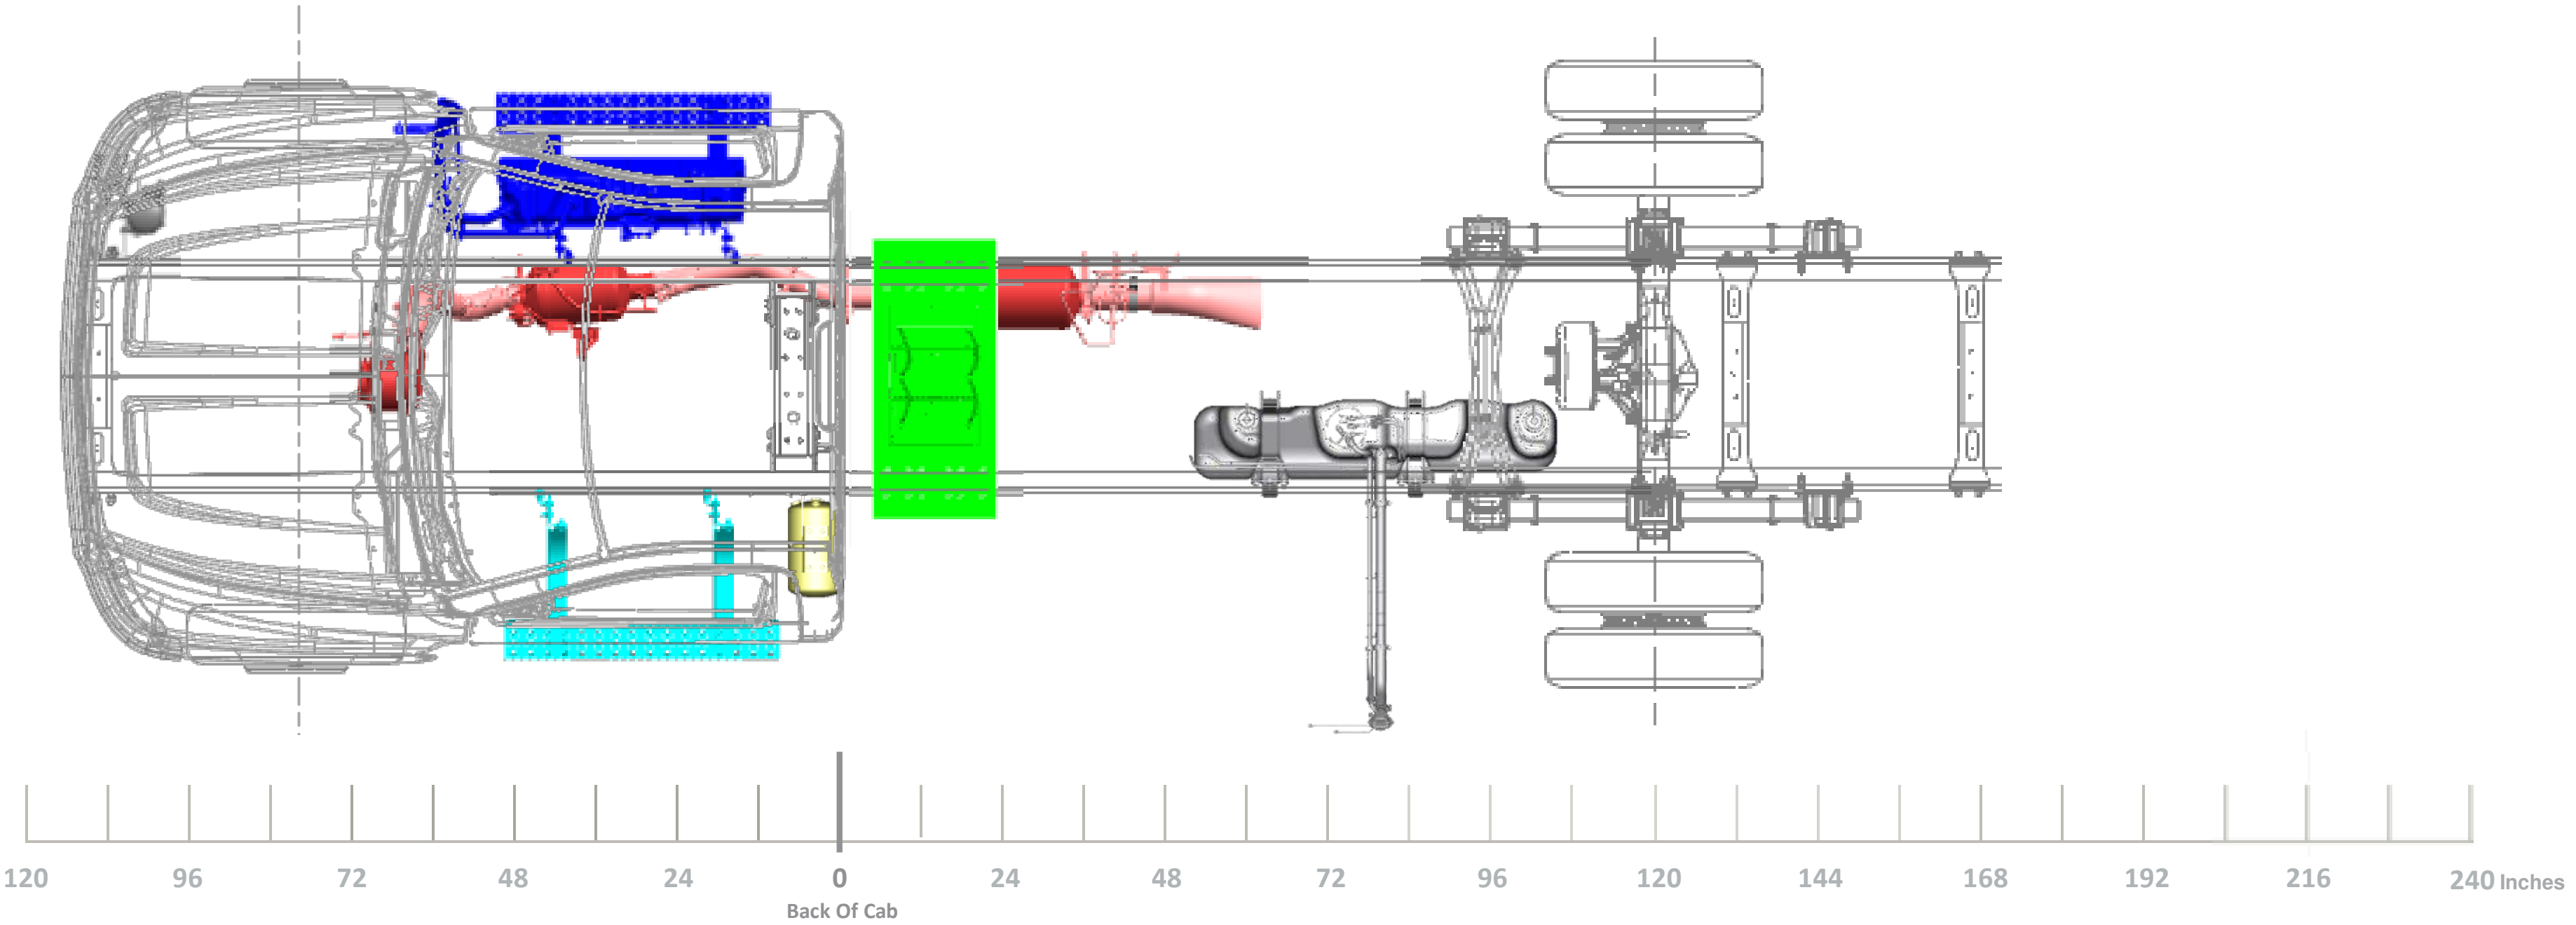
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

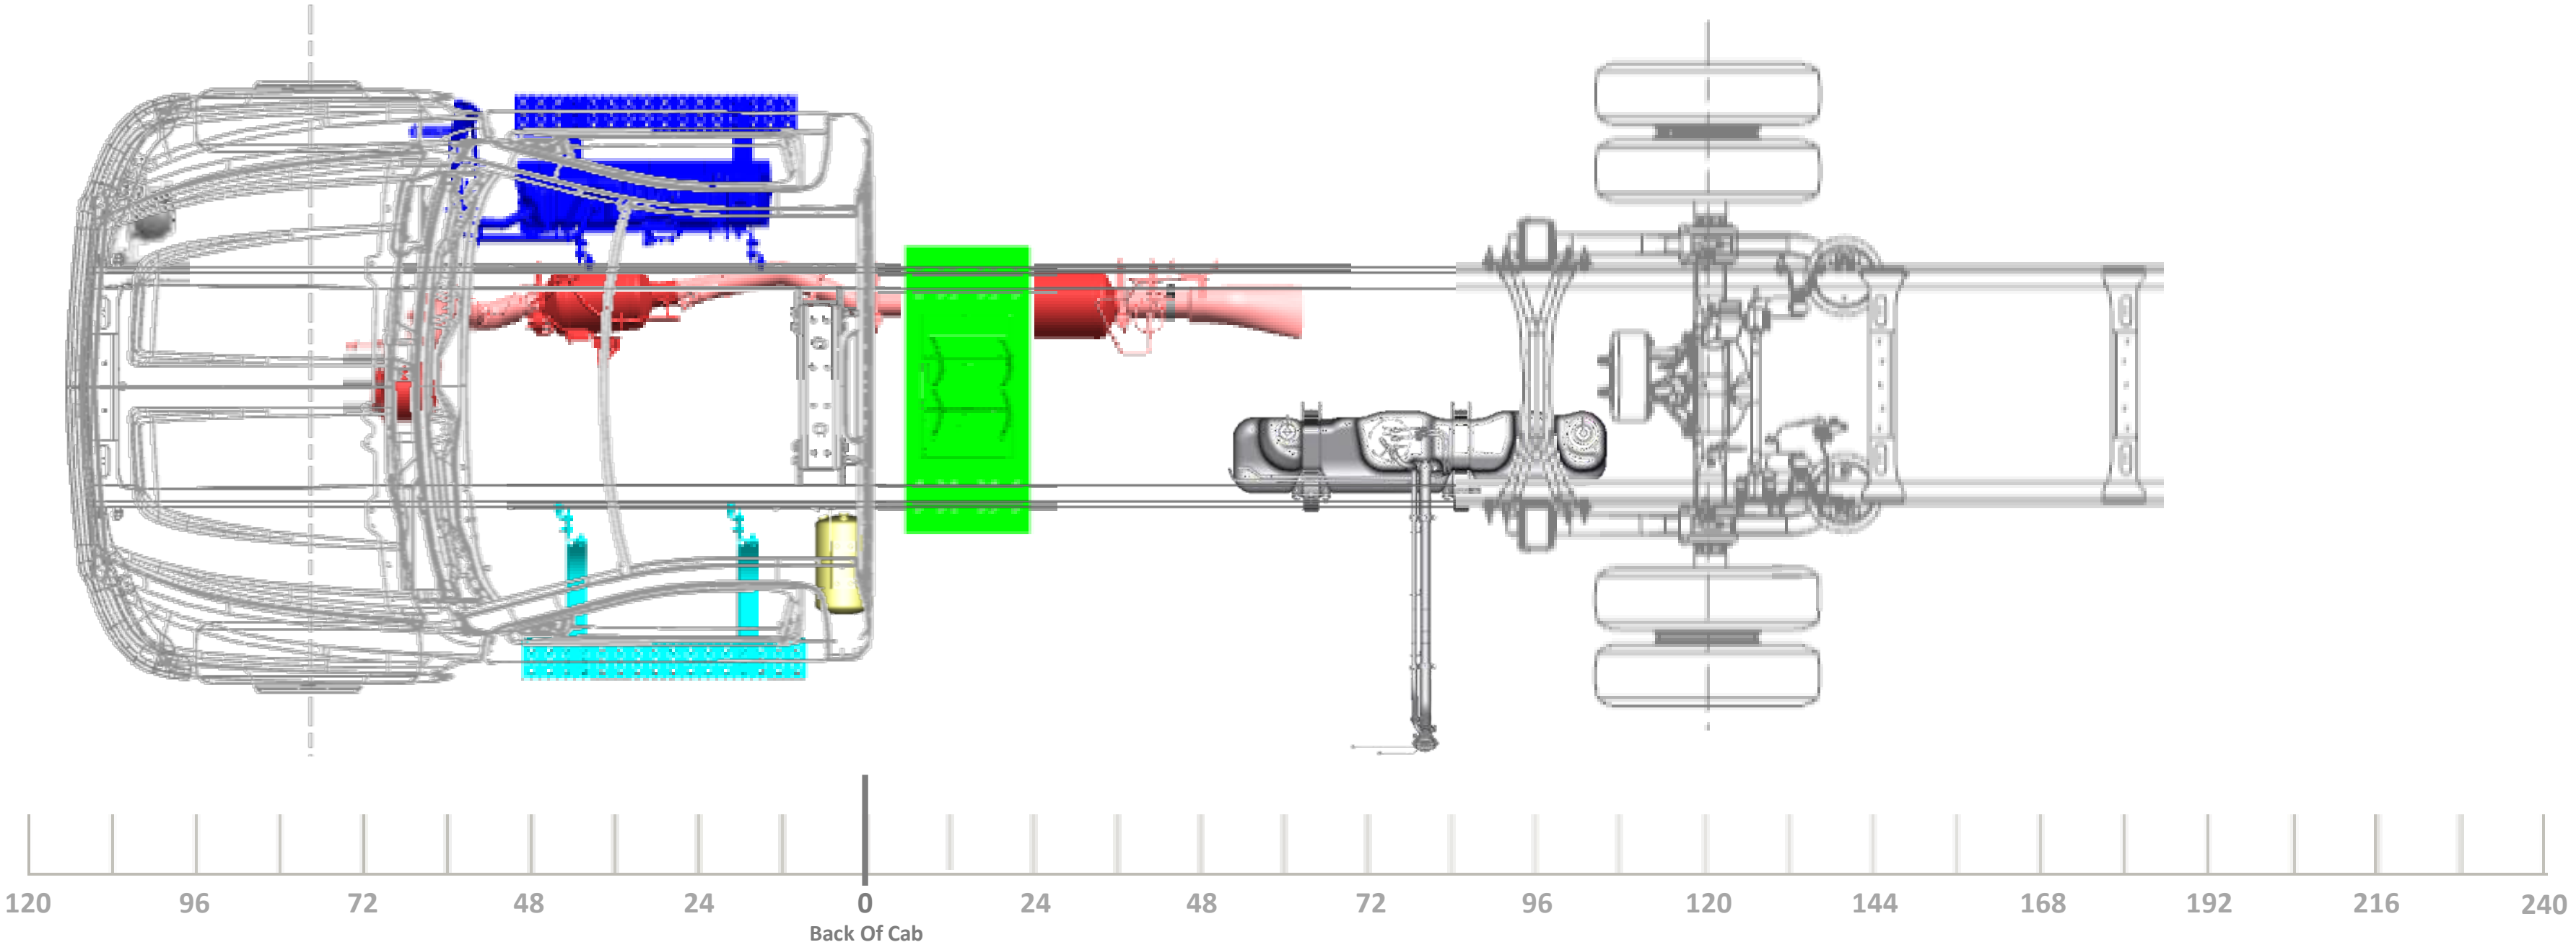

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

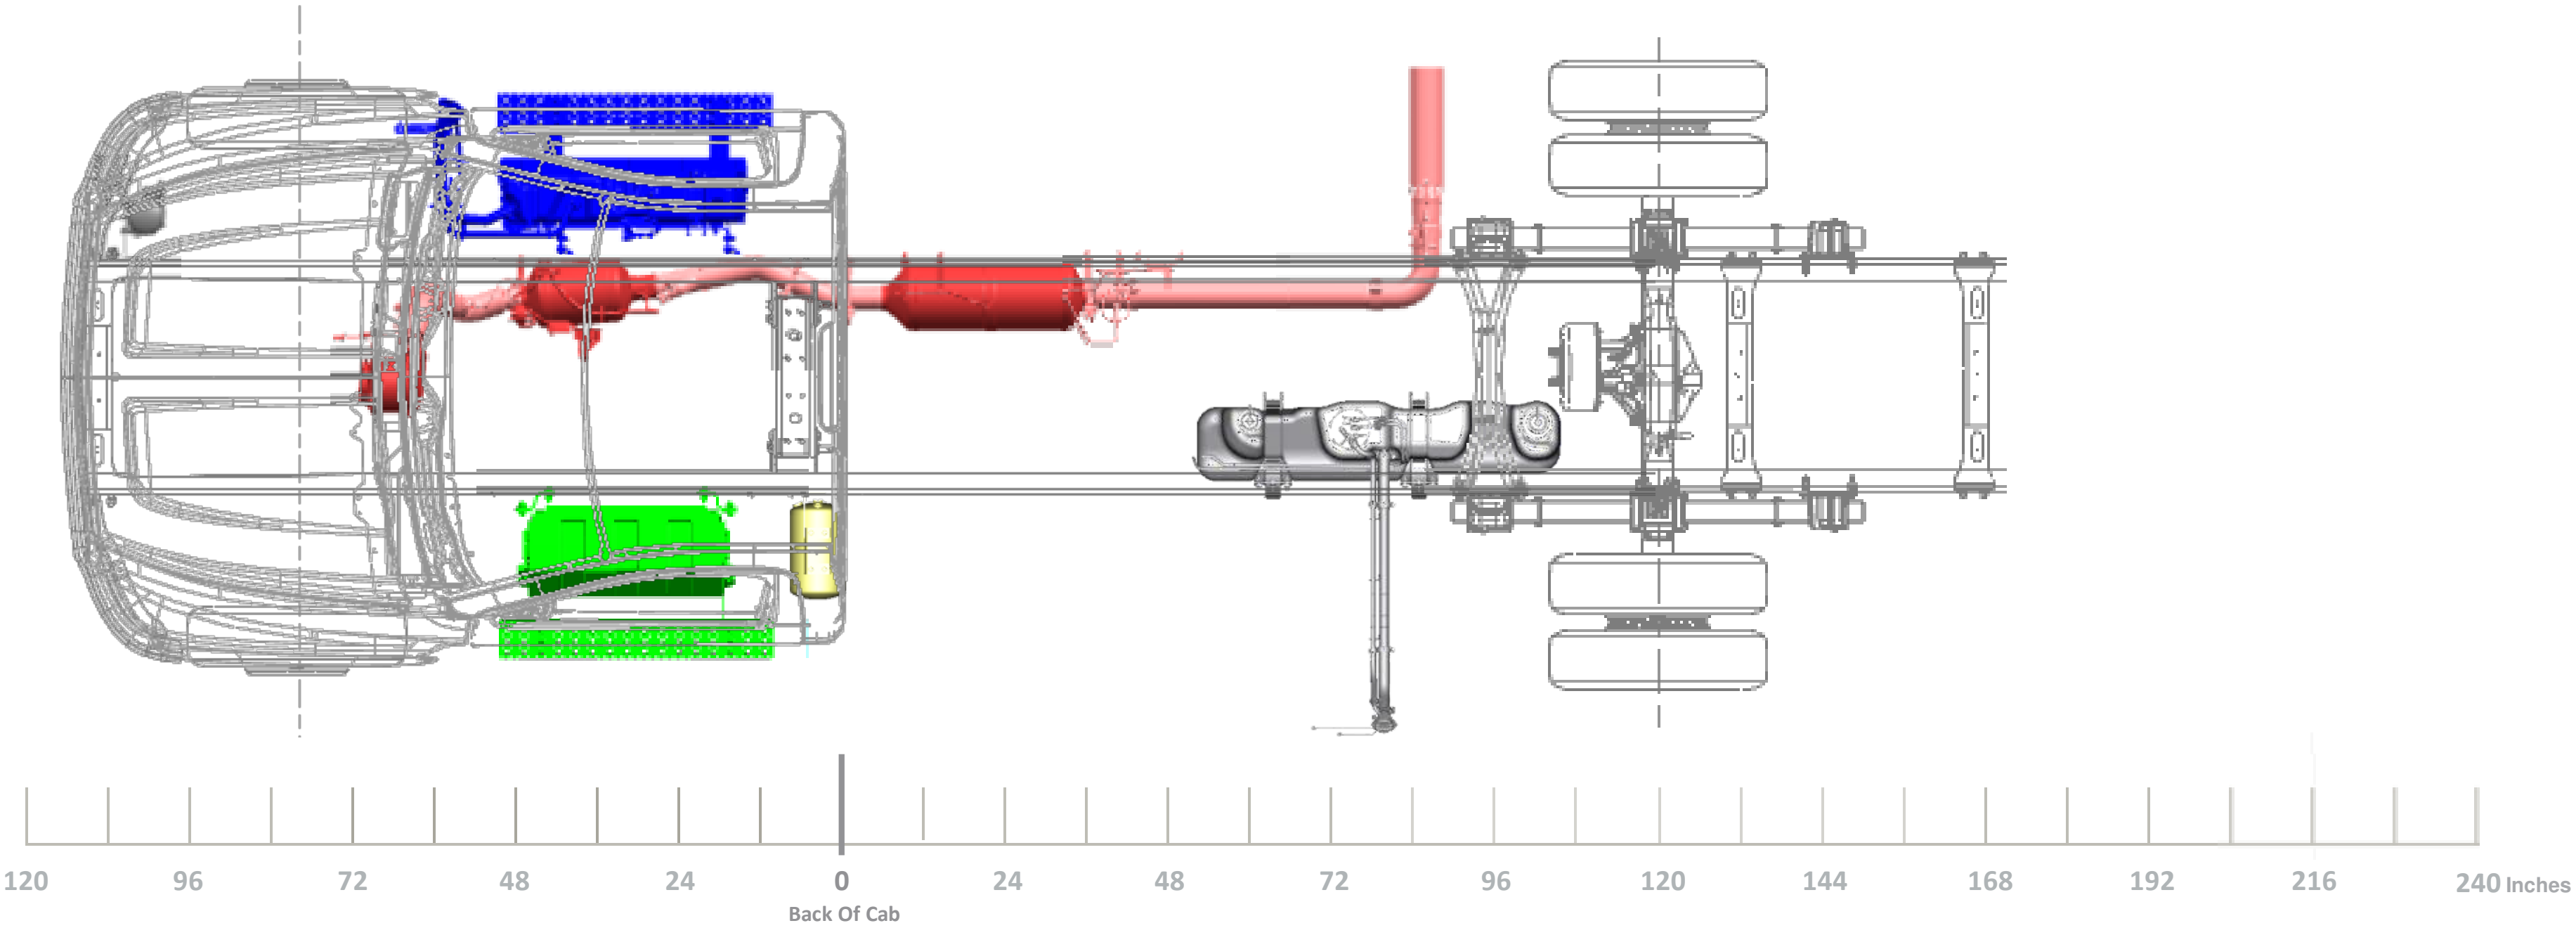
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201" WB (120" CA) 63" OR 75" AF

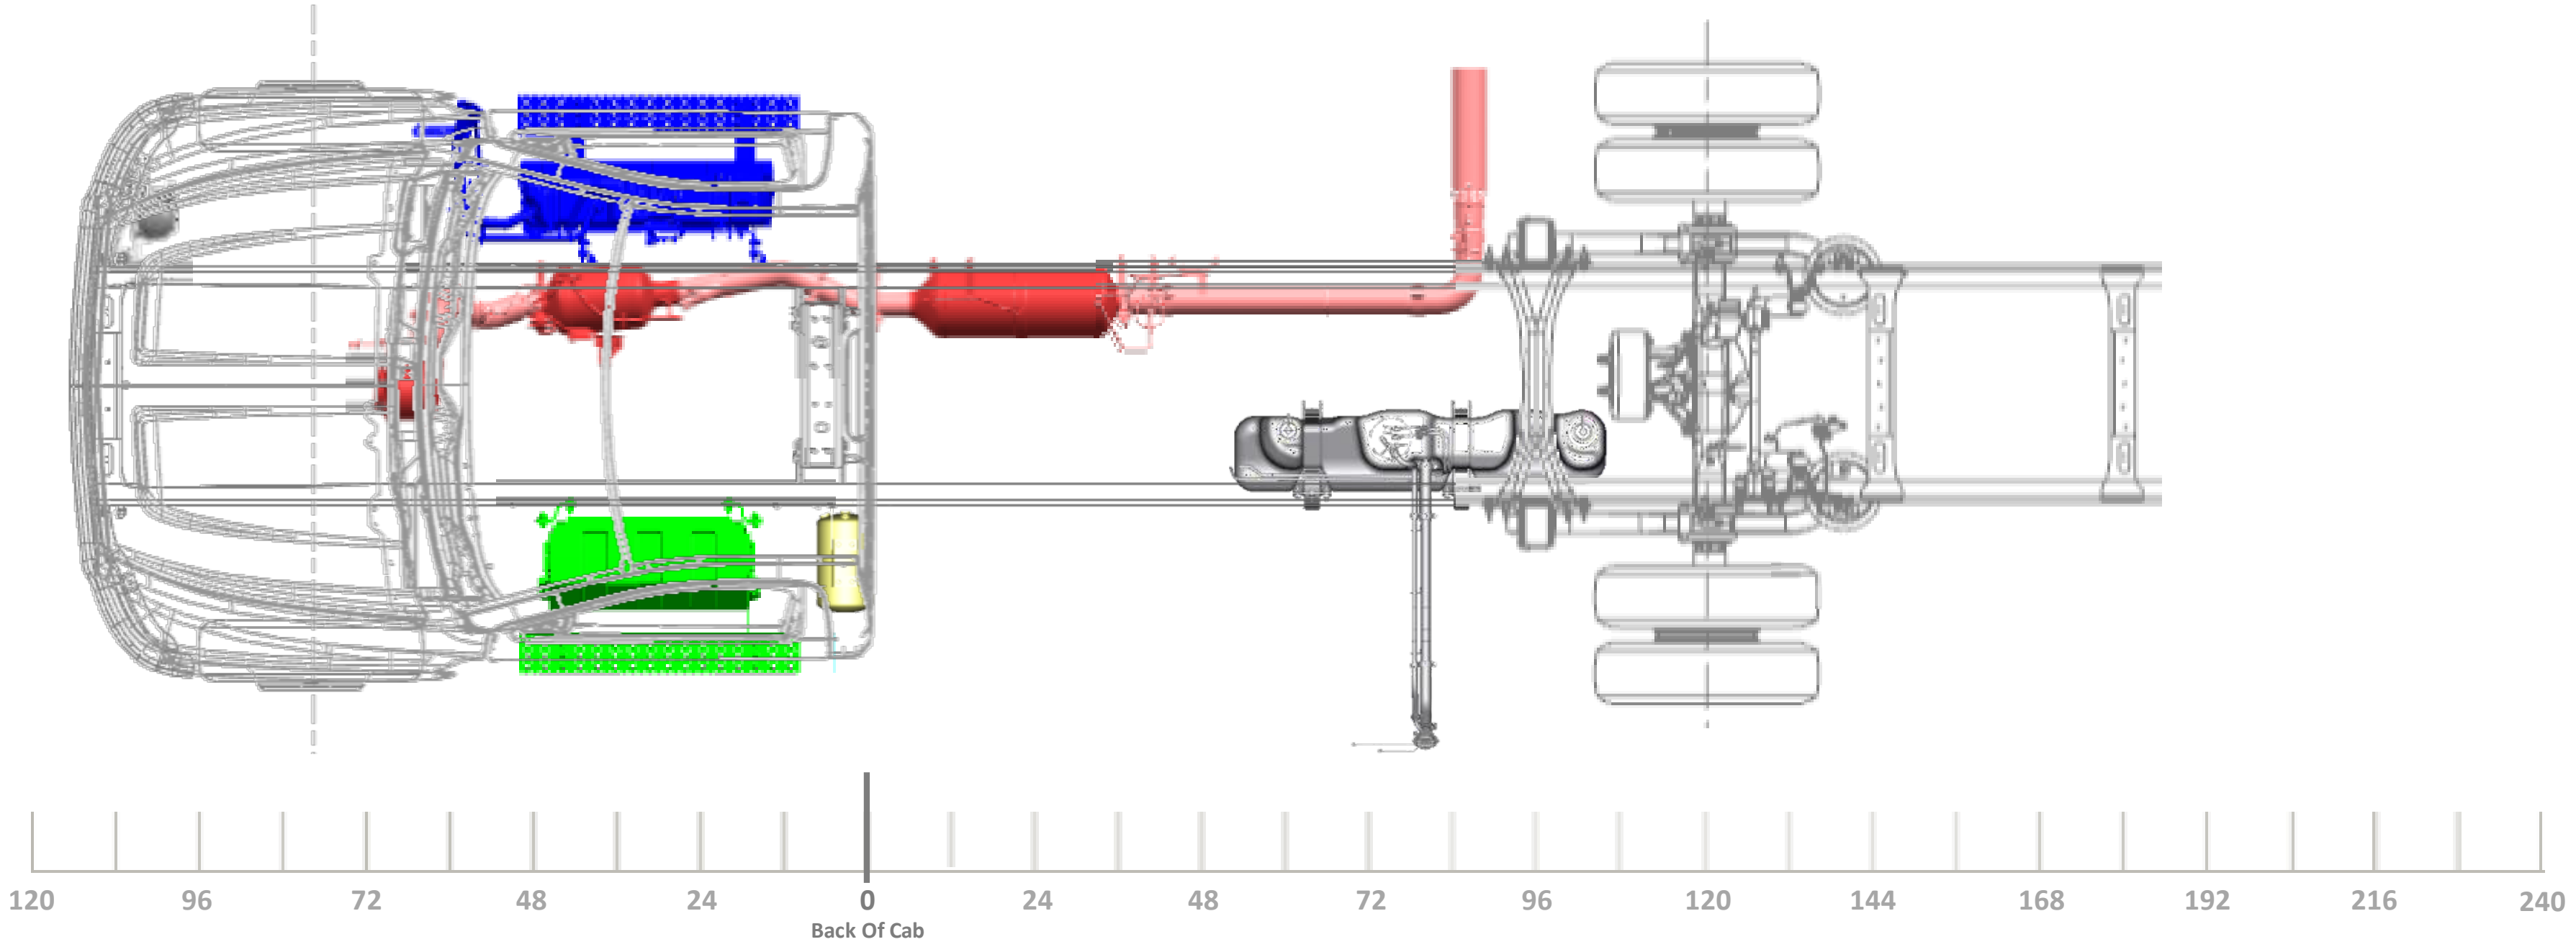

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

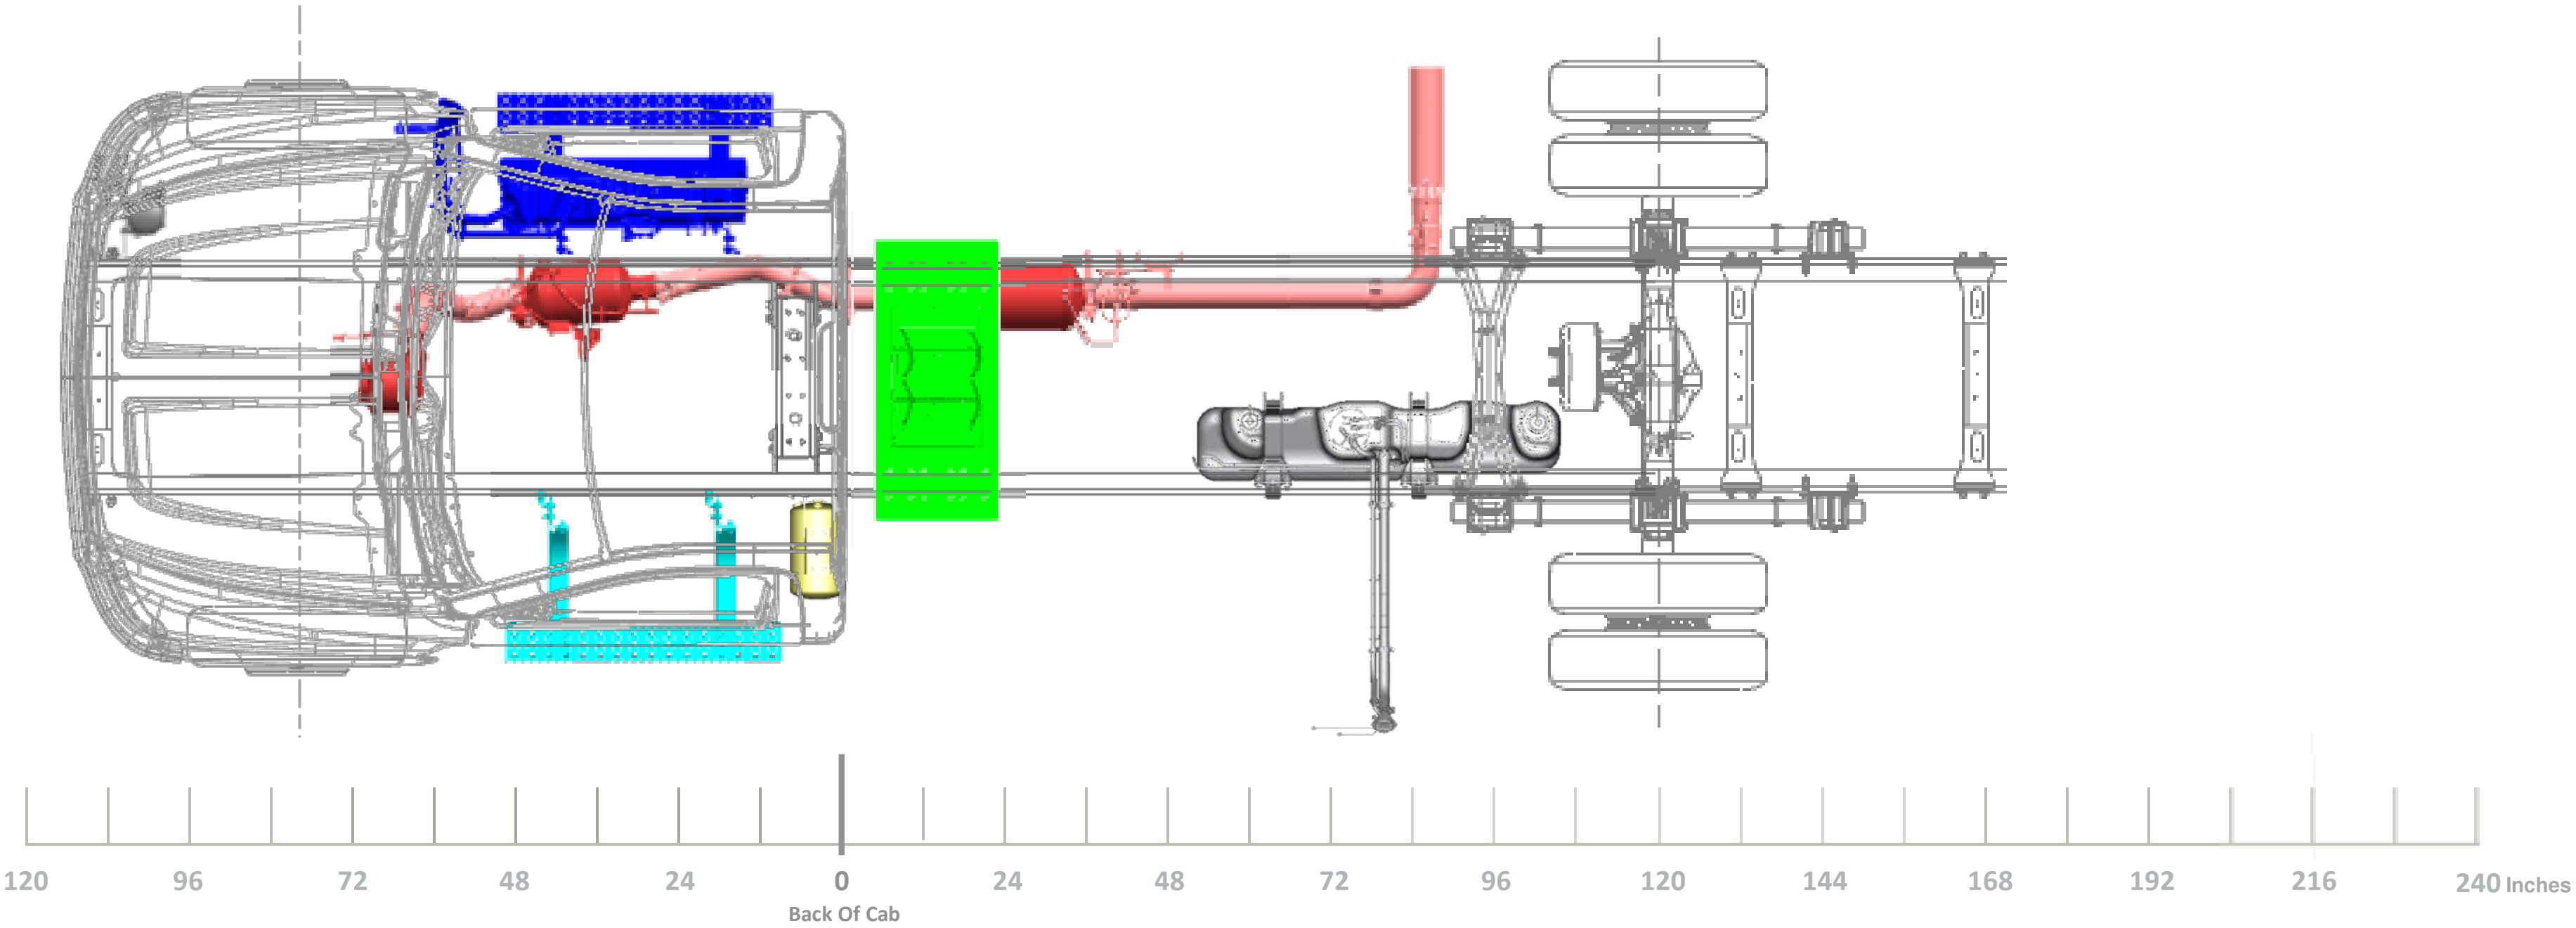
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

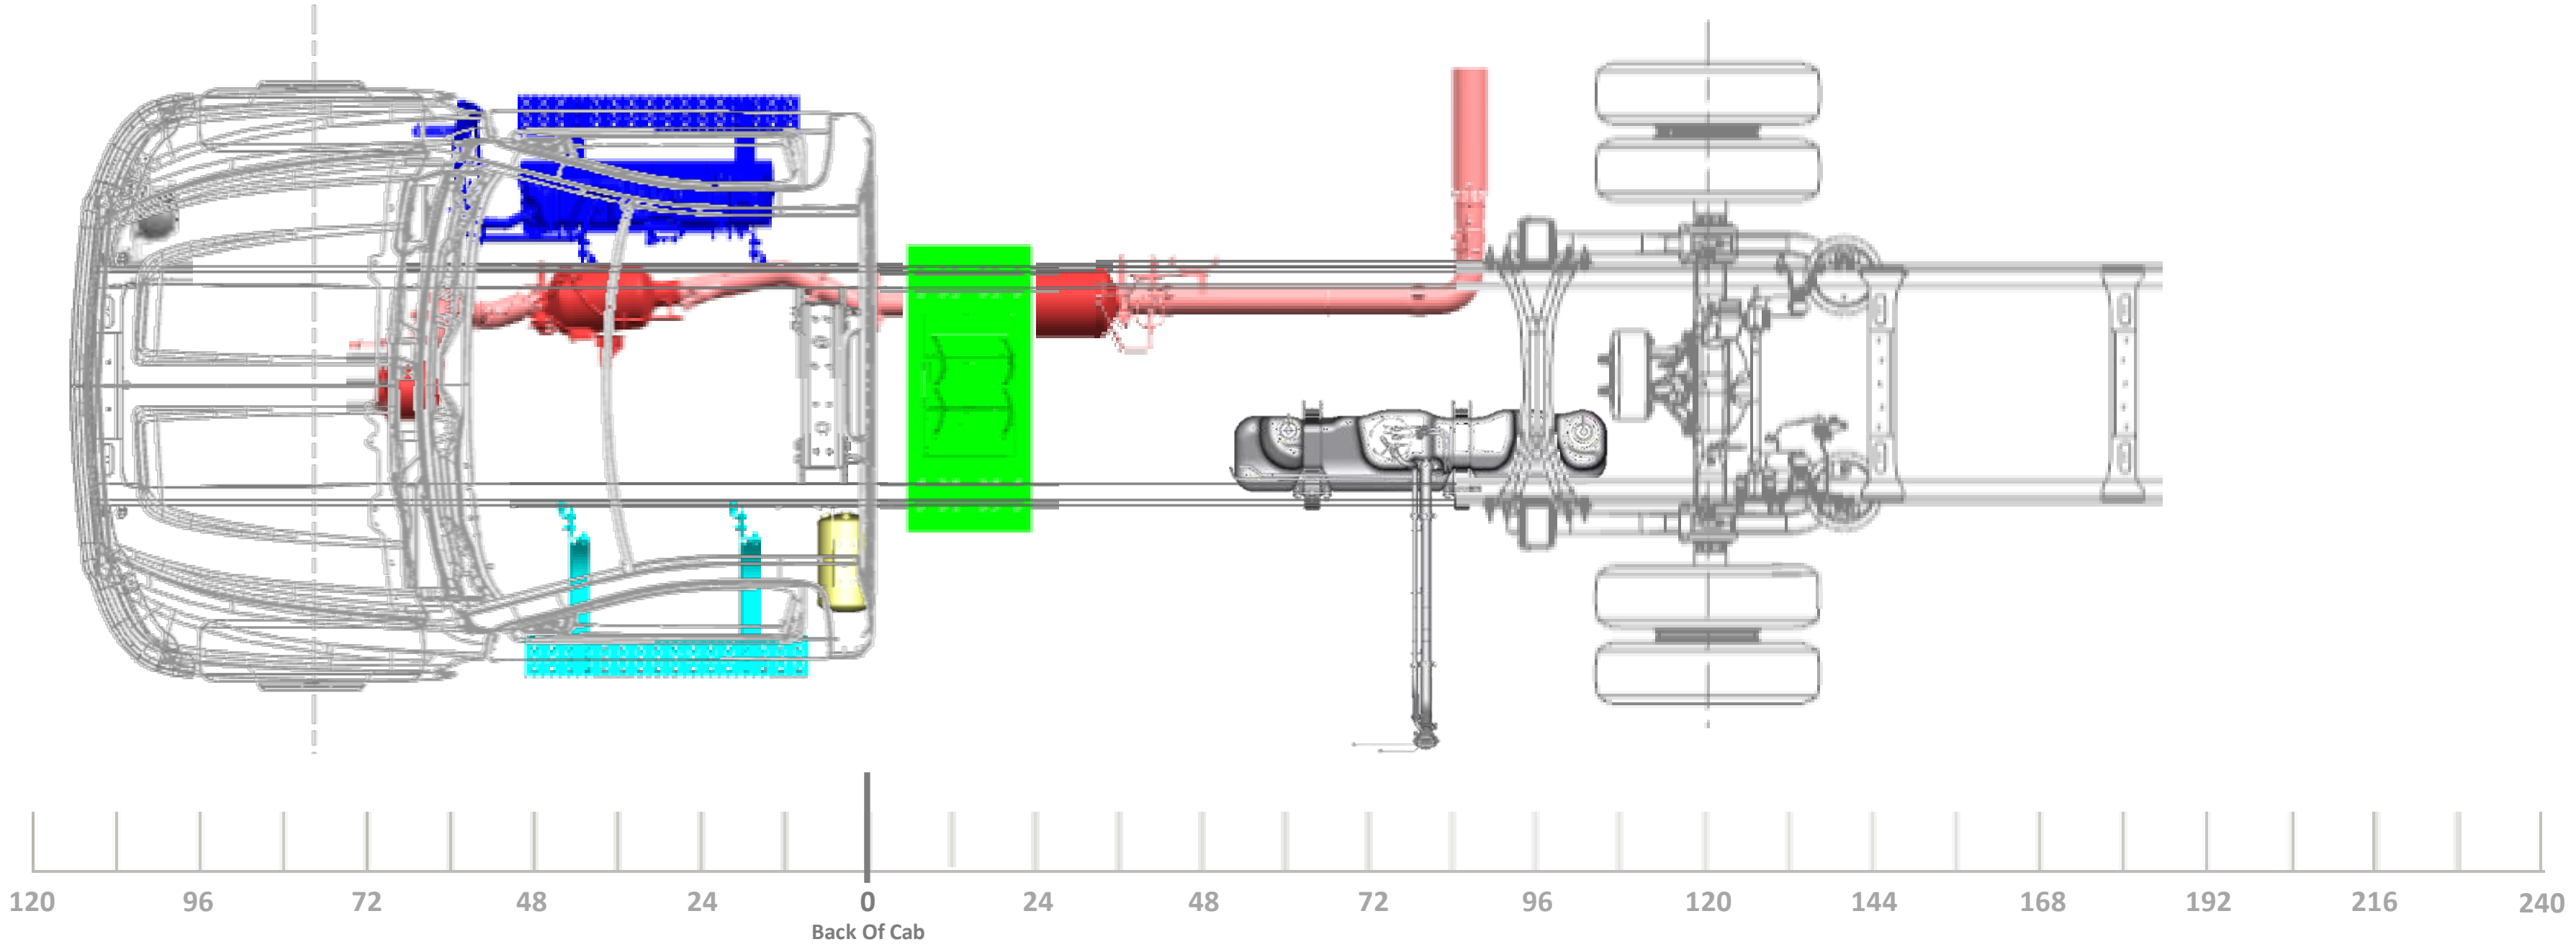

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

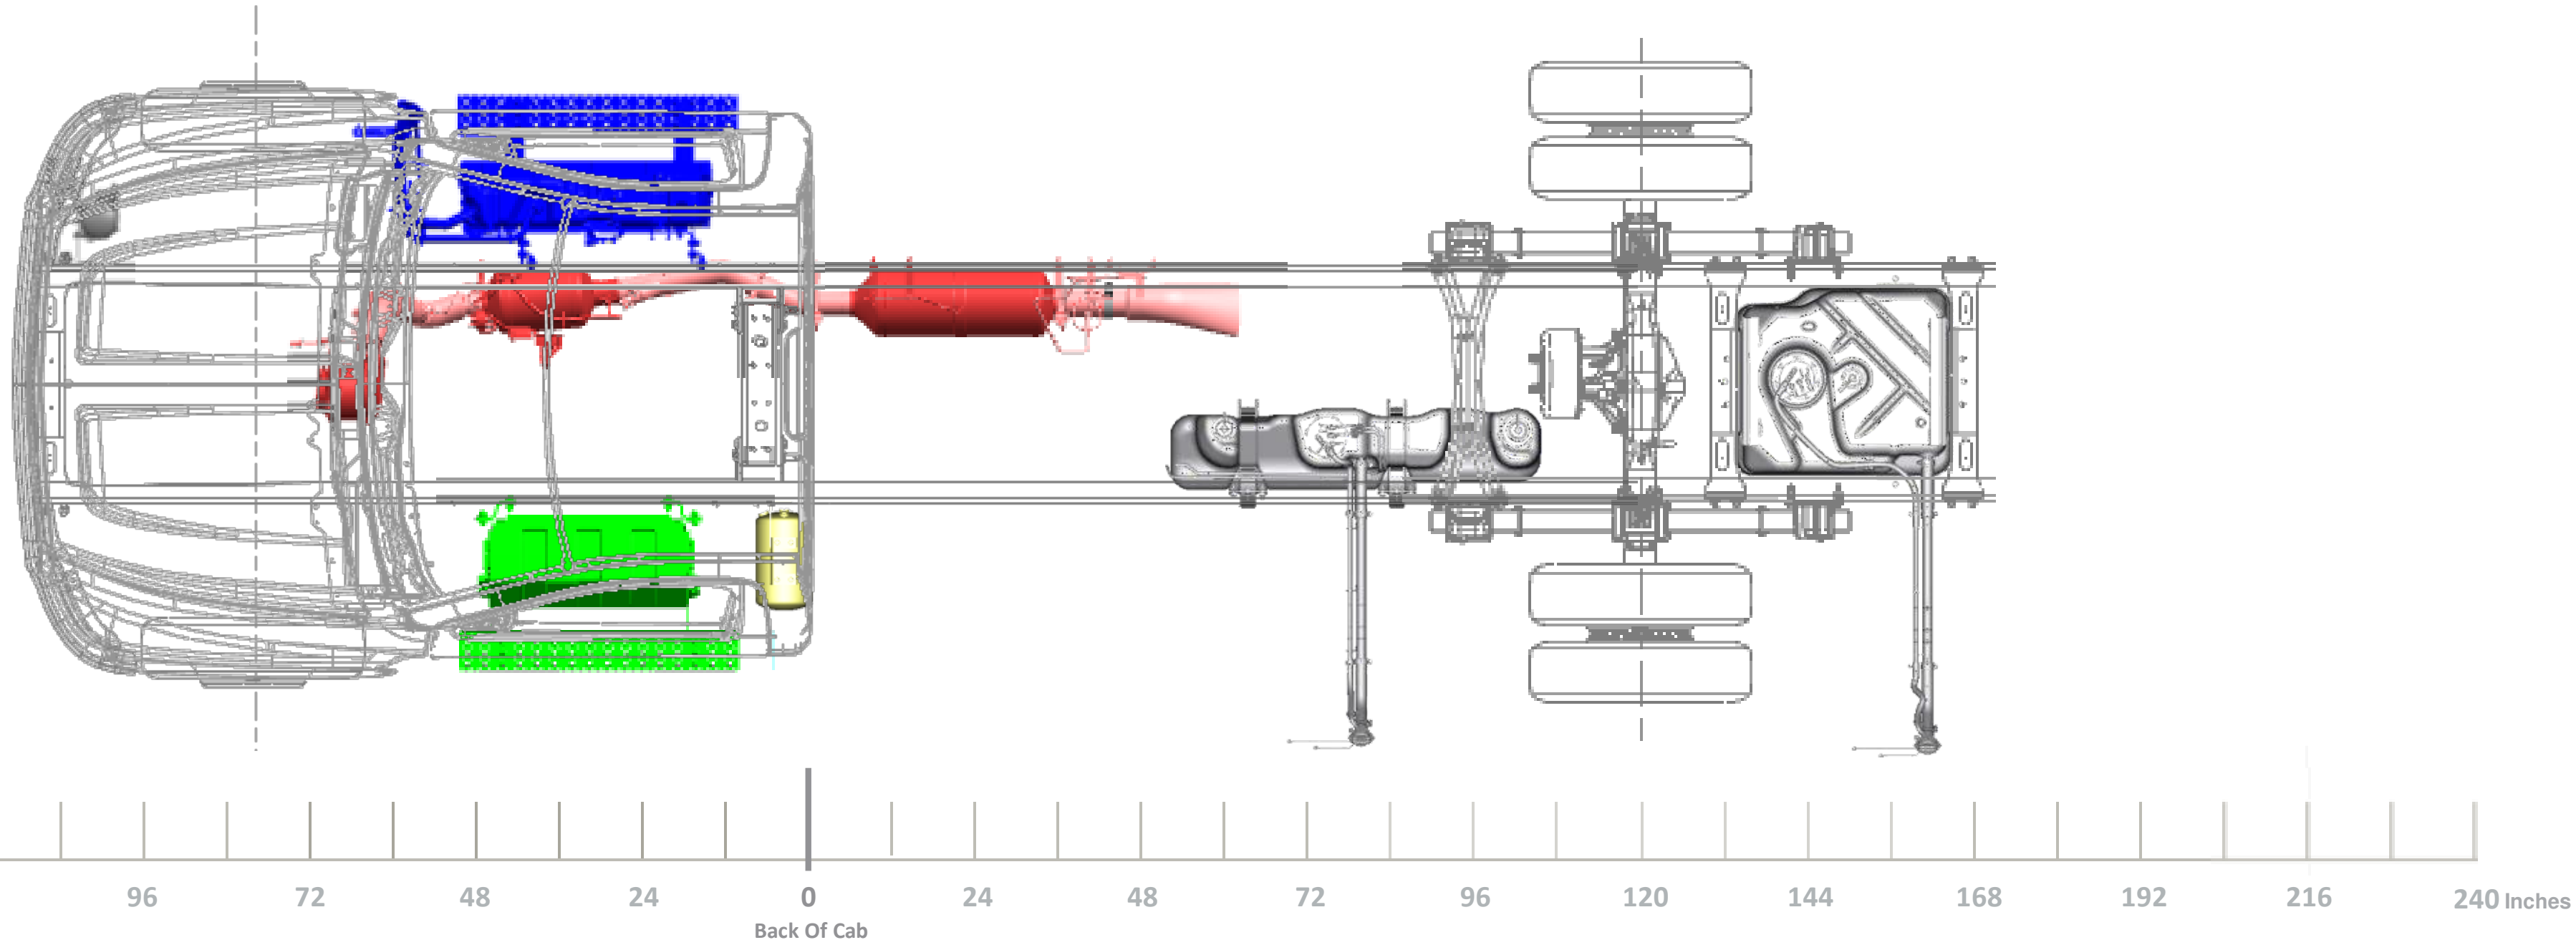
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

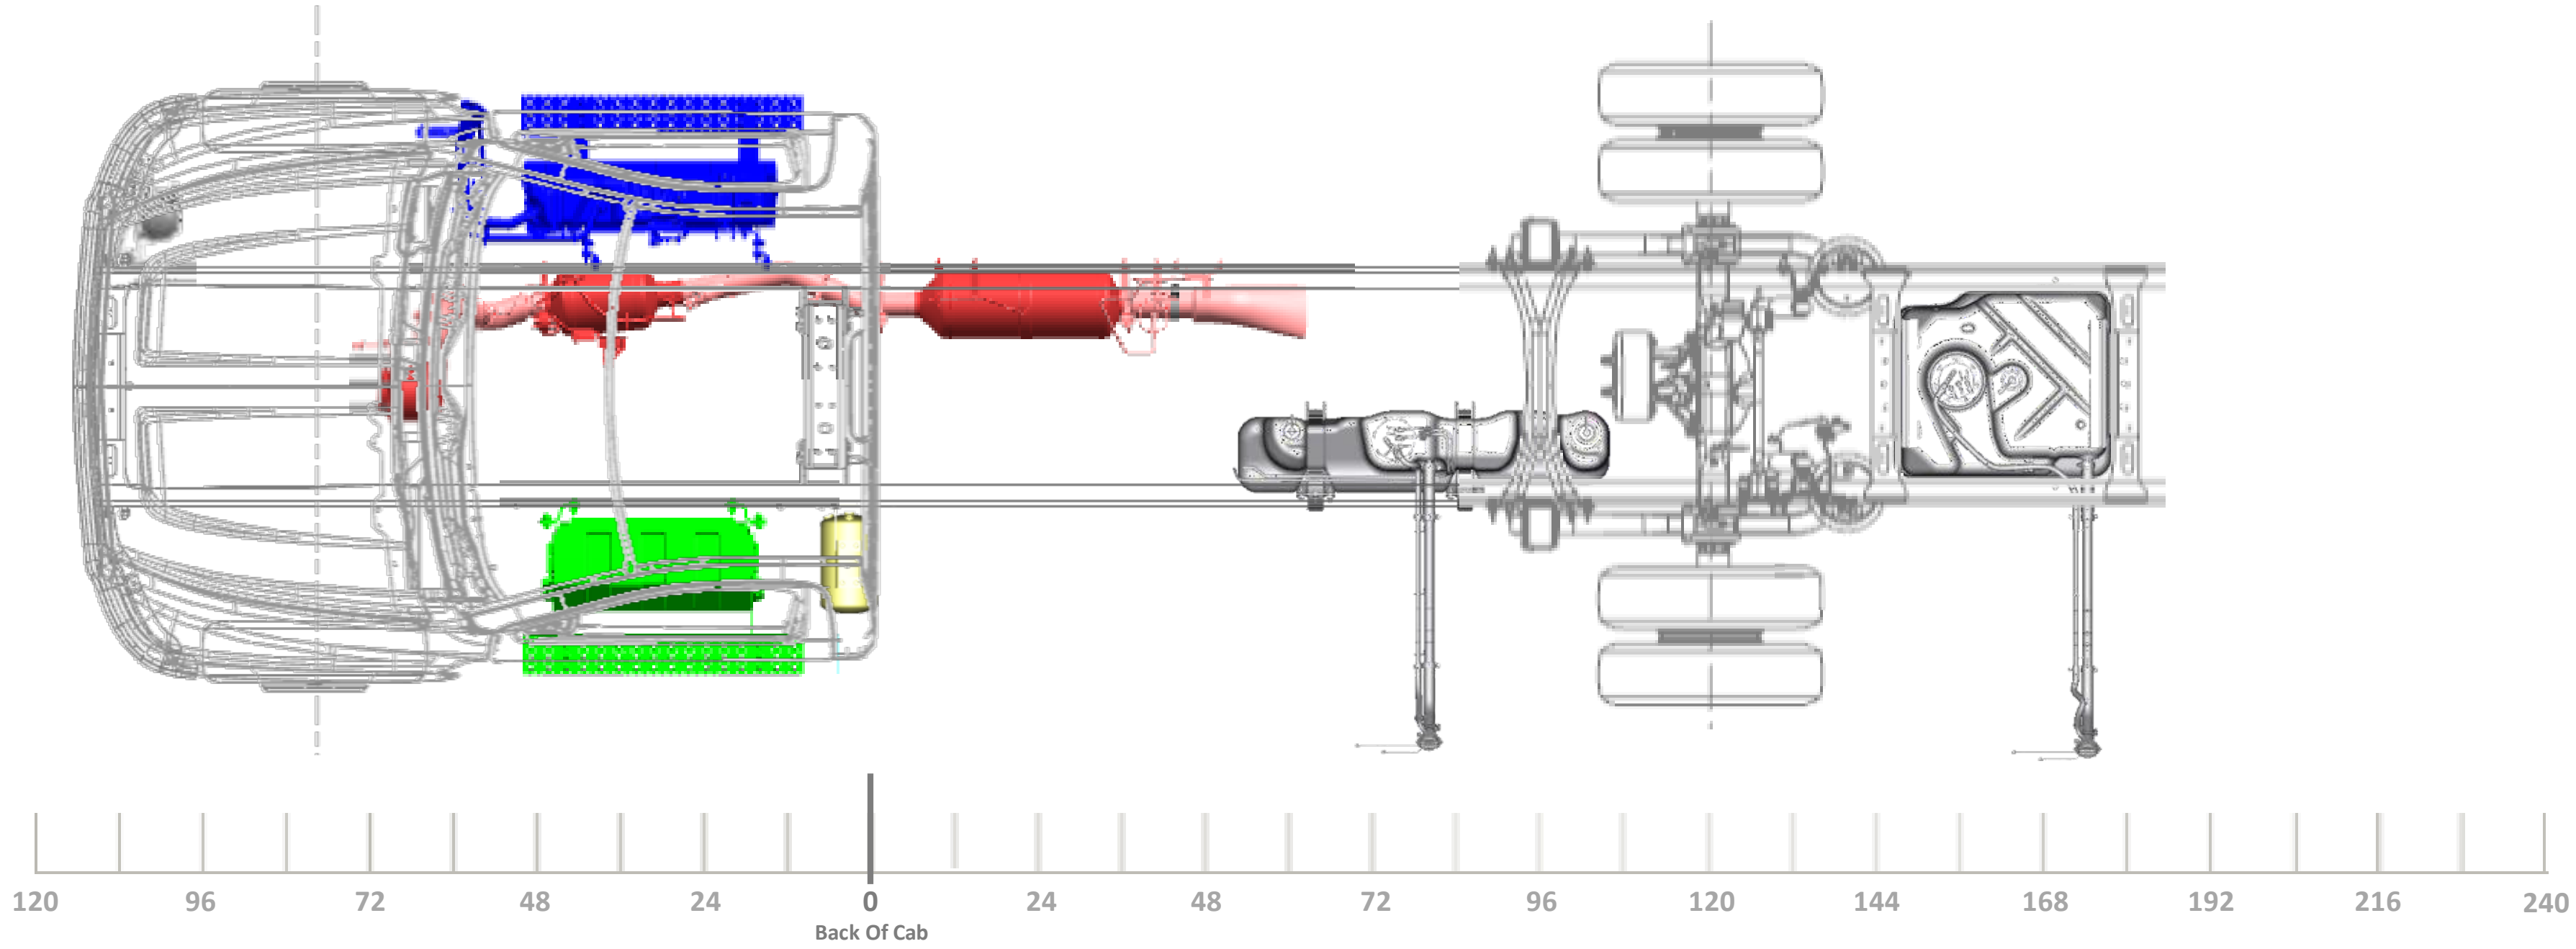

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

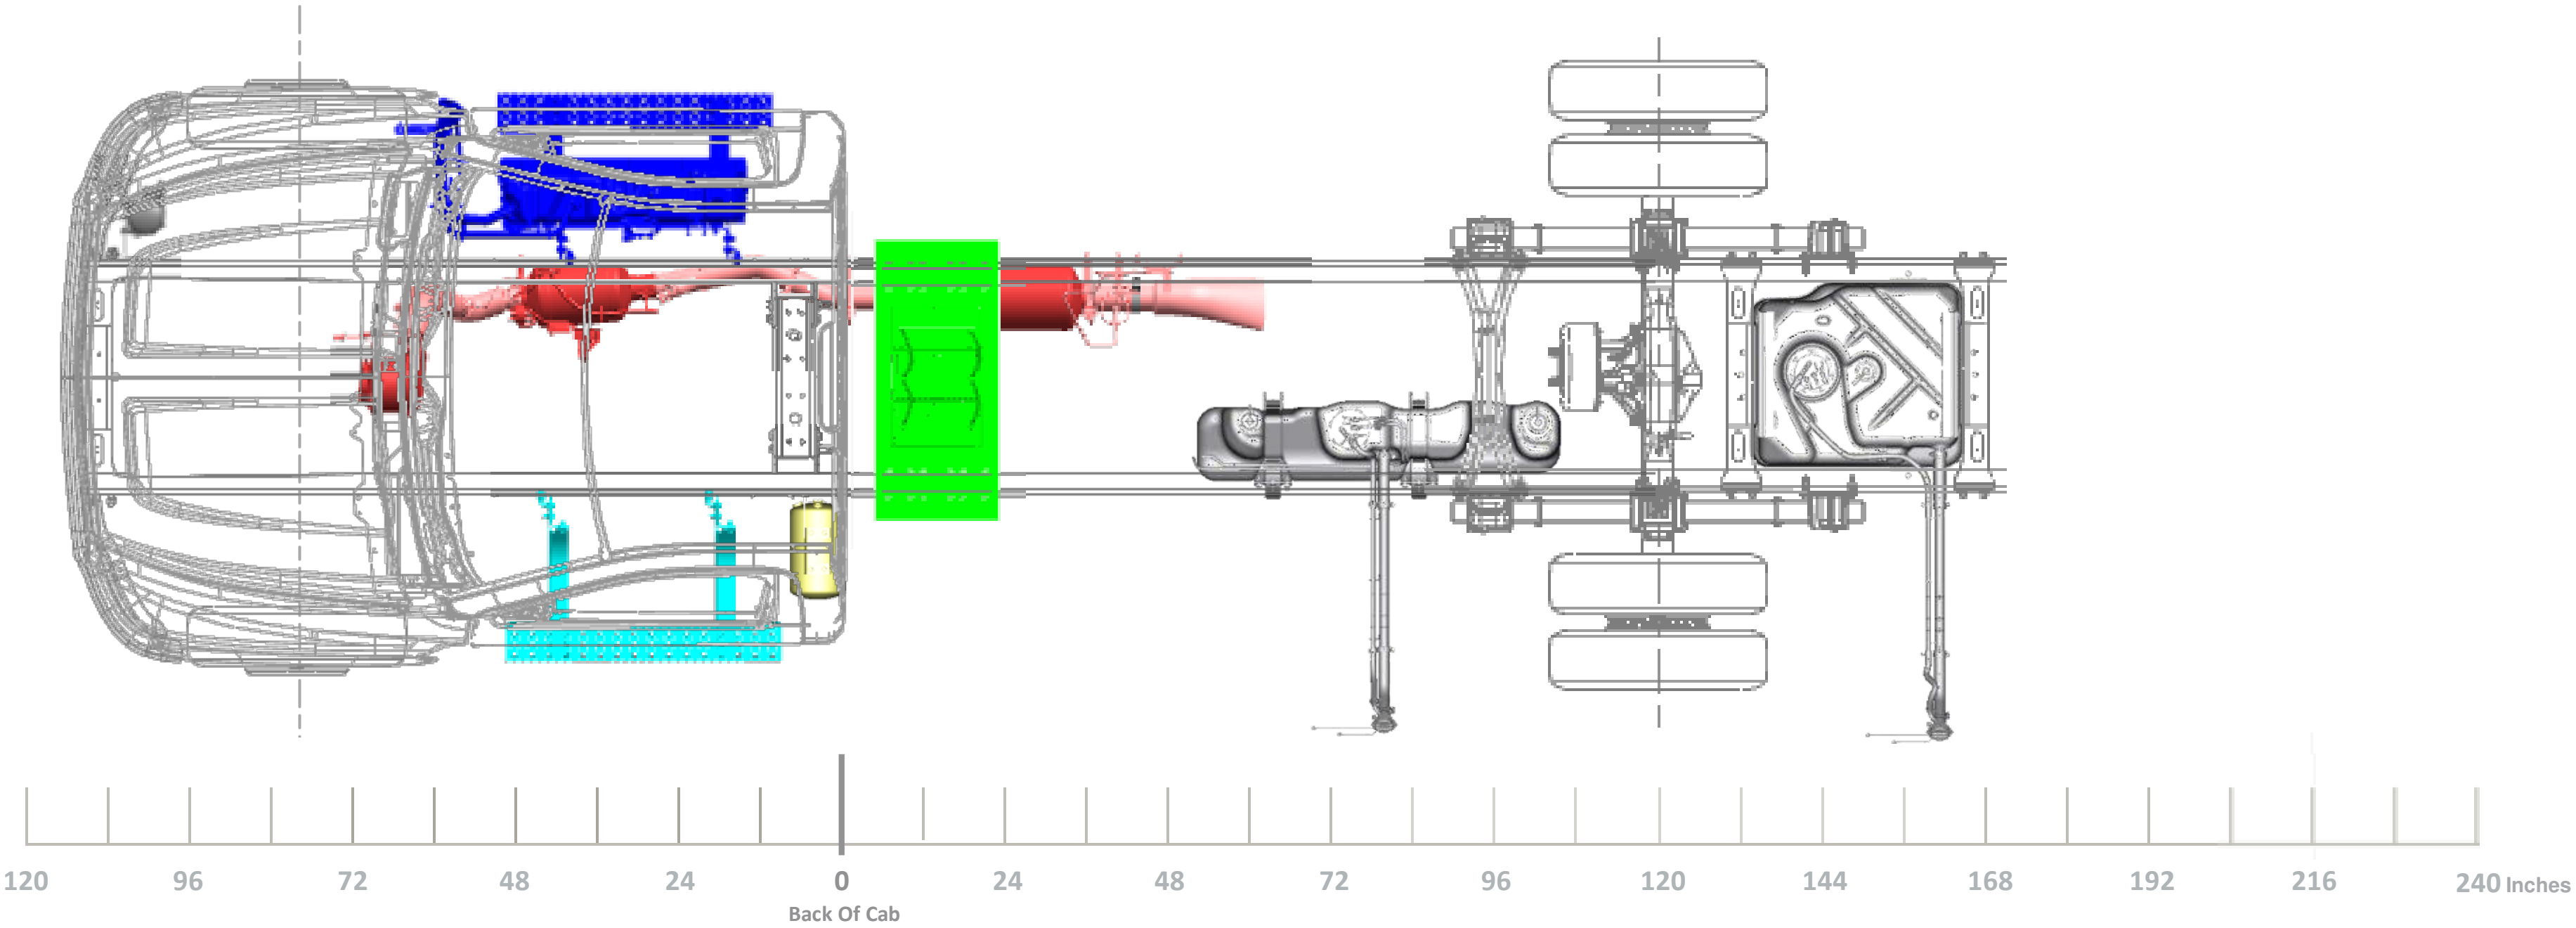
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

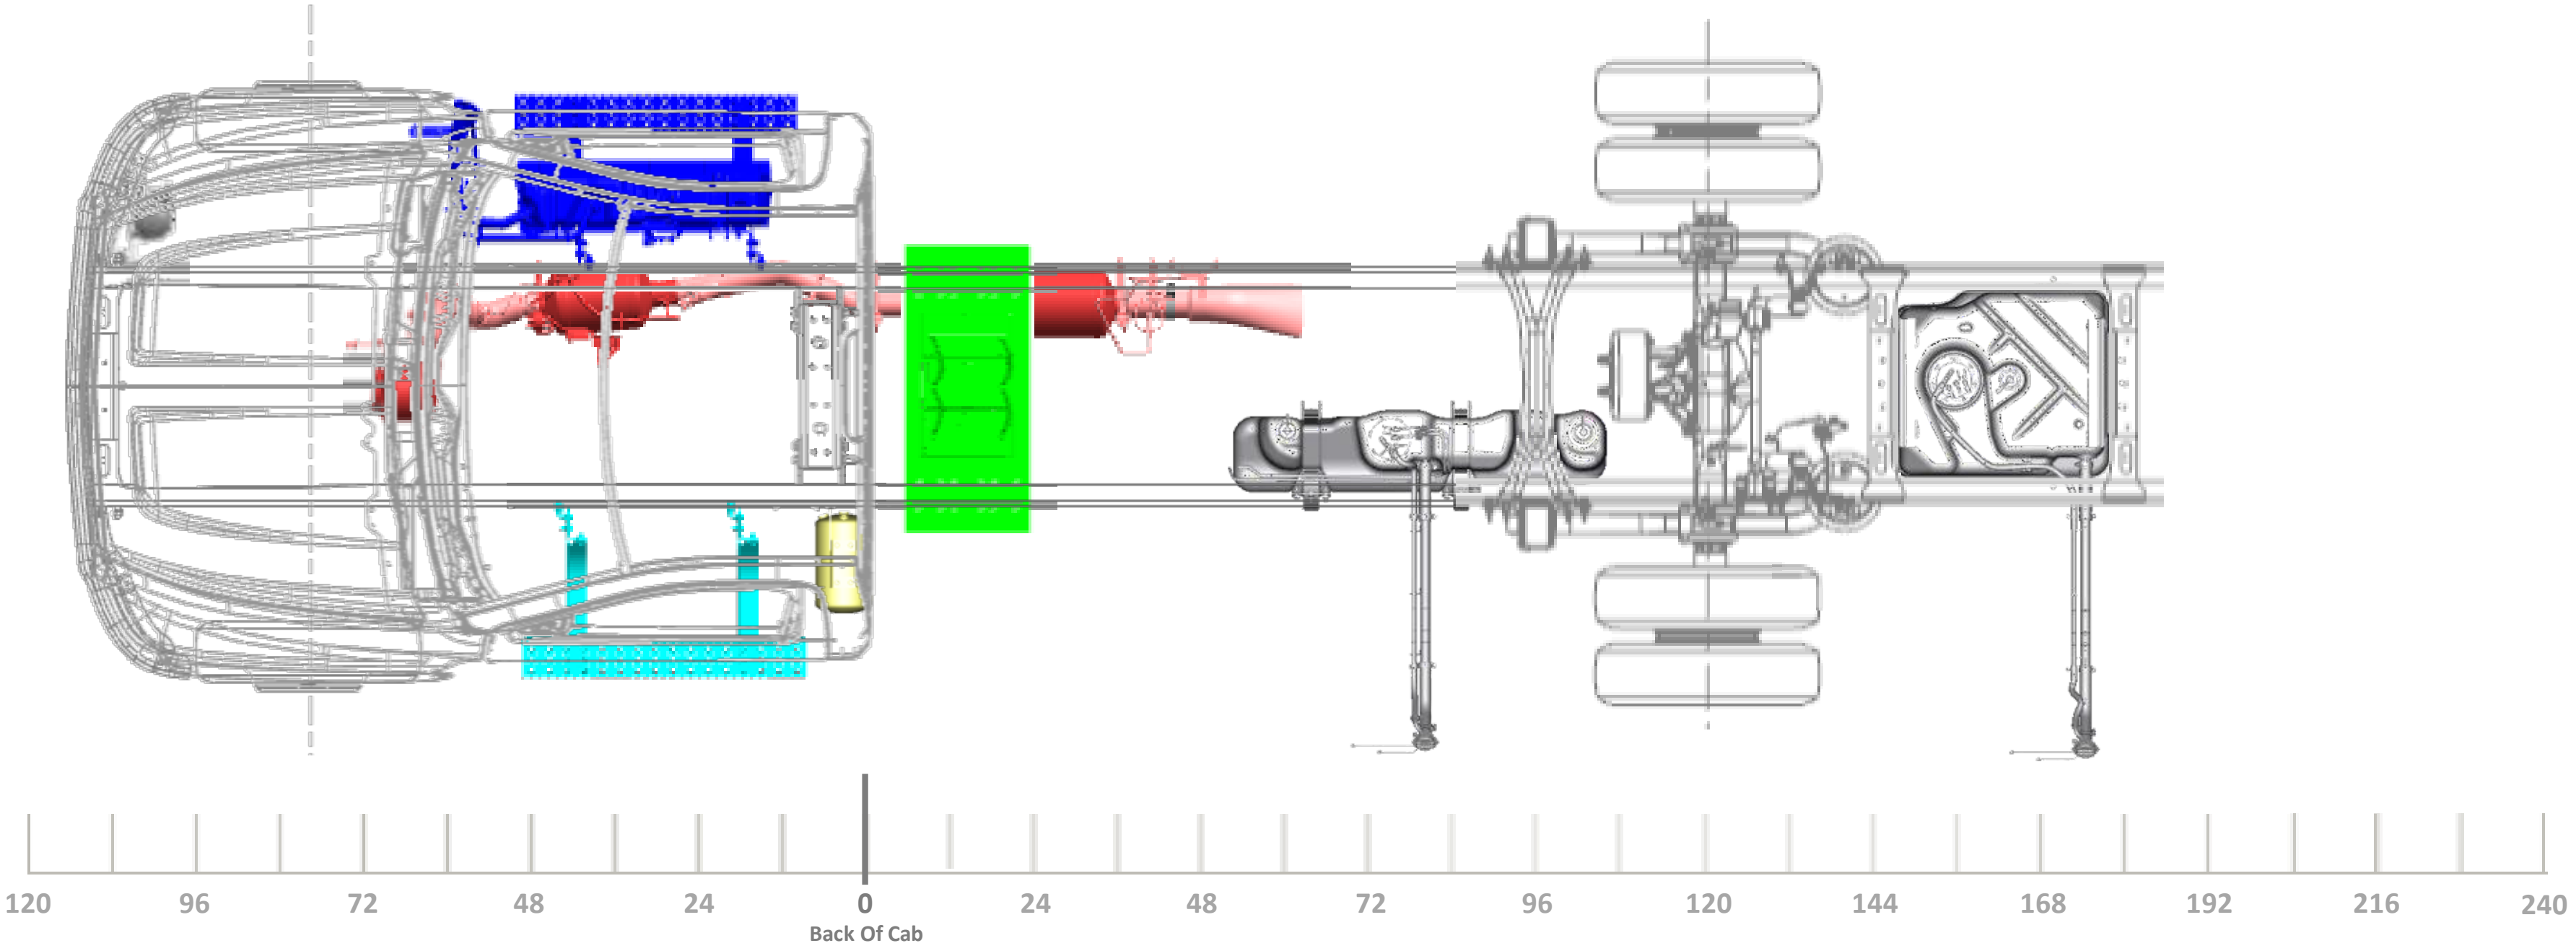

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

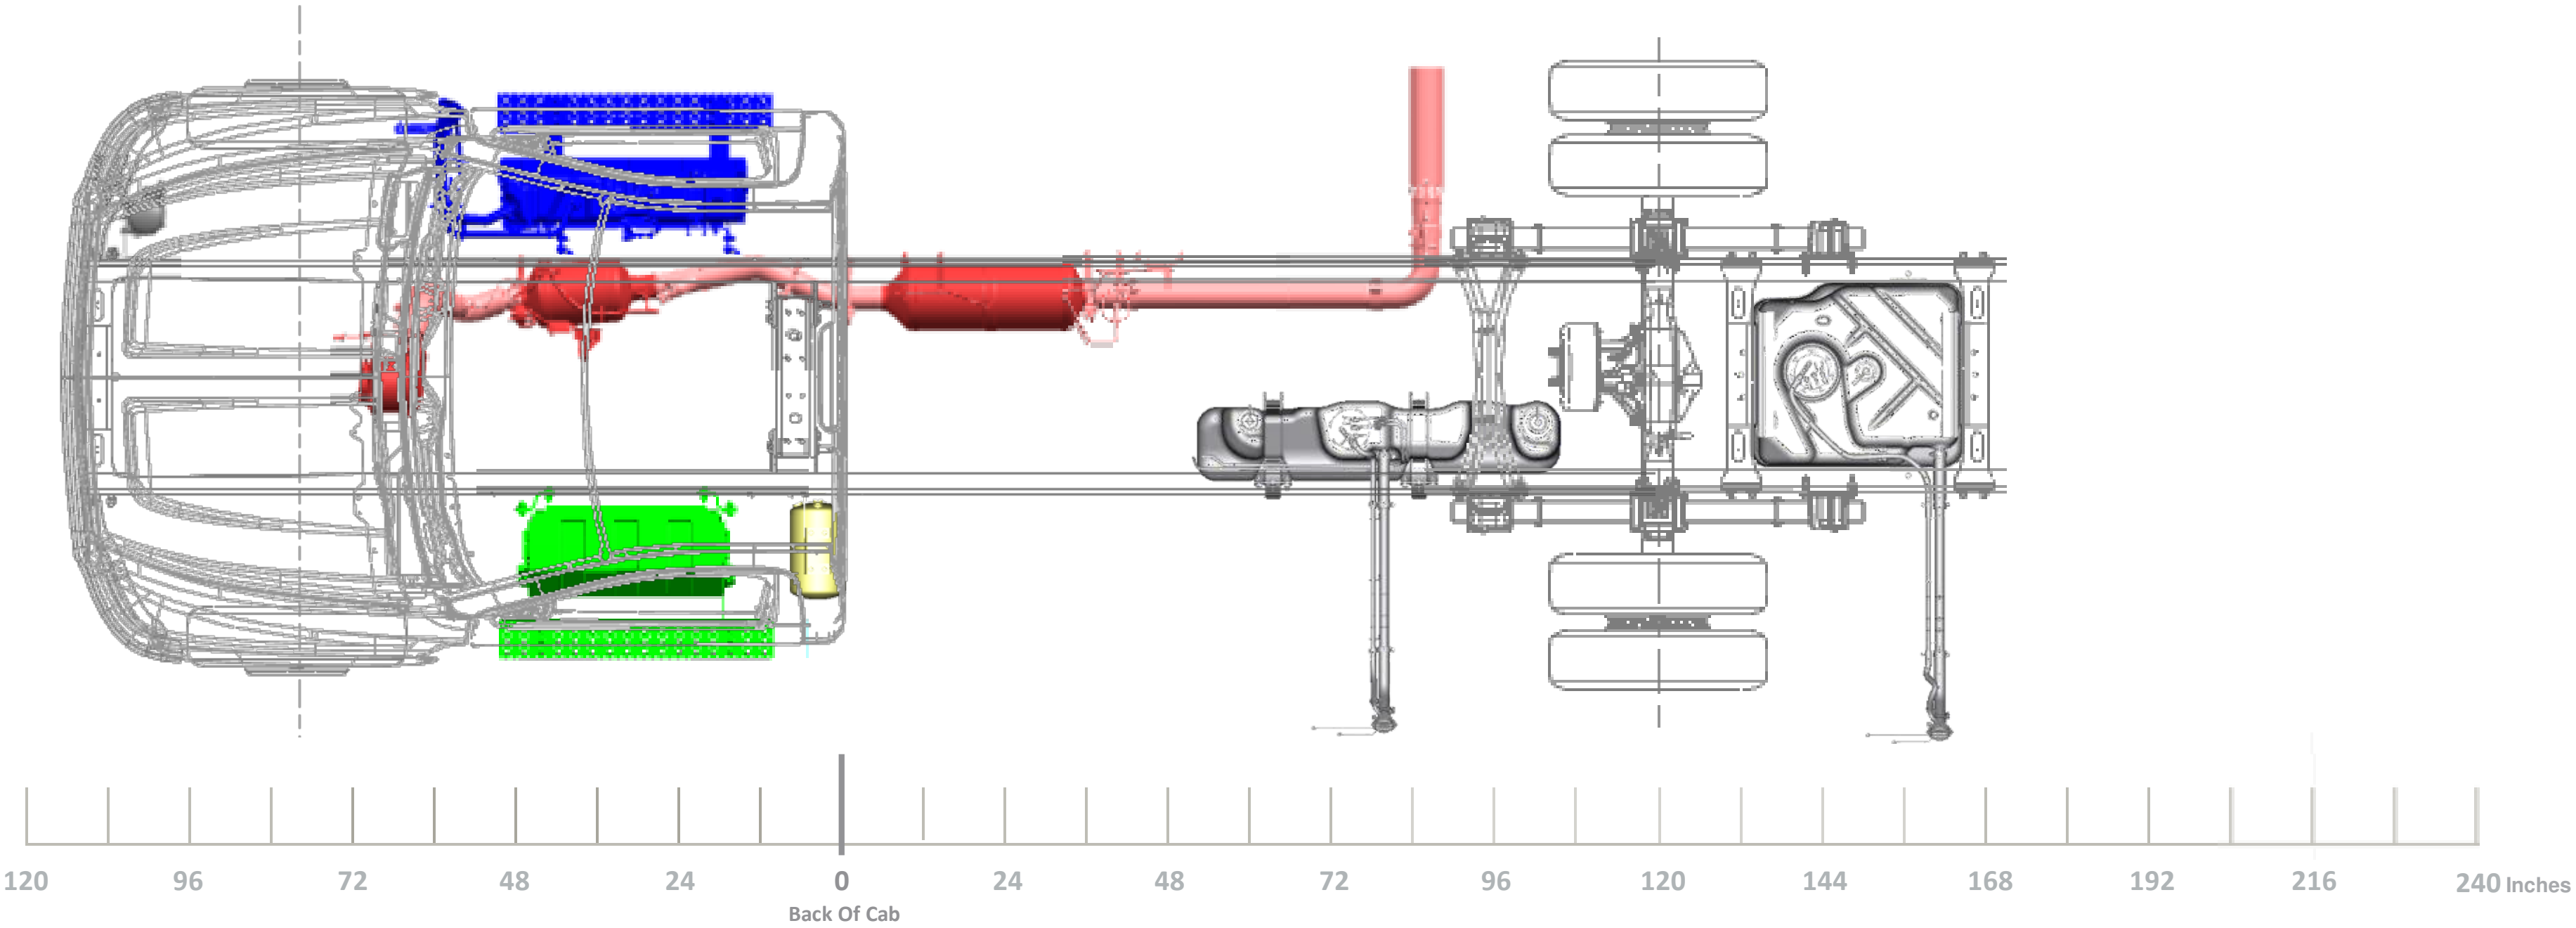
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

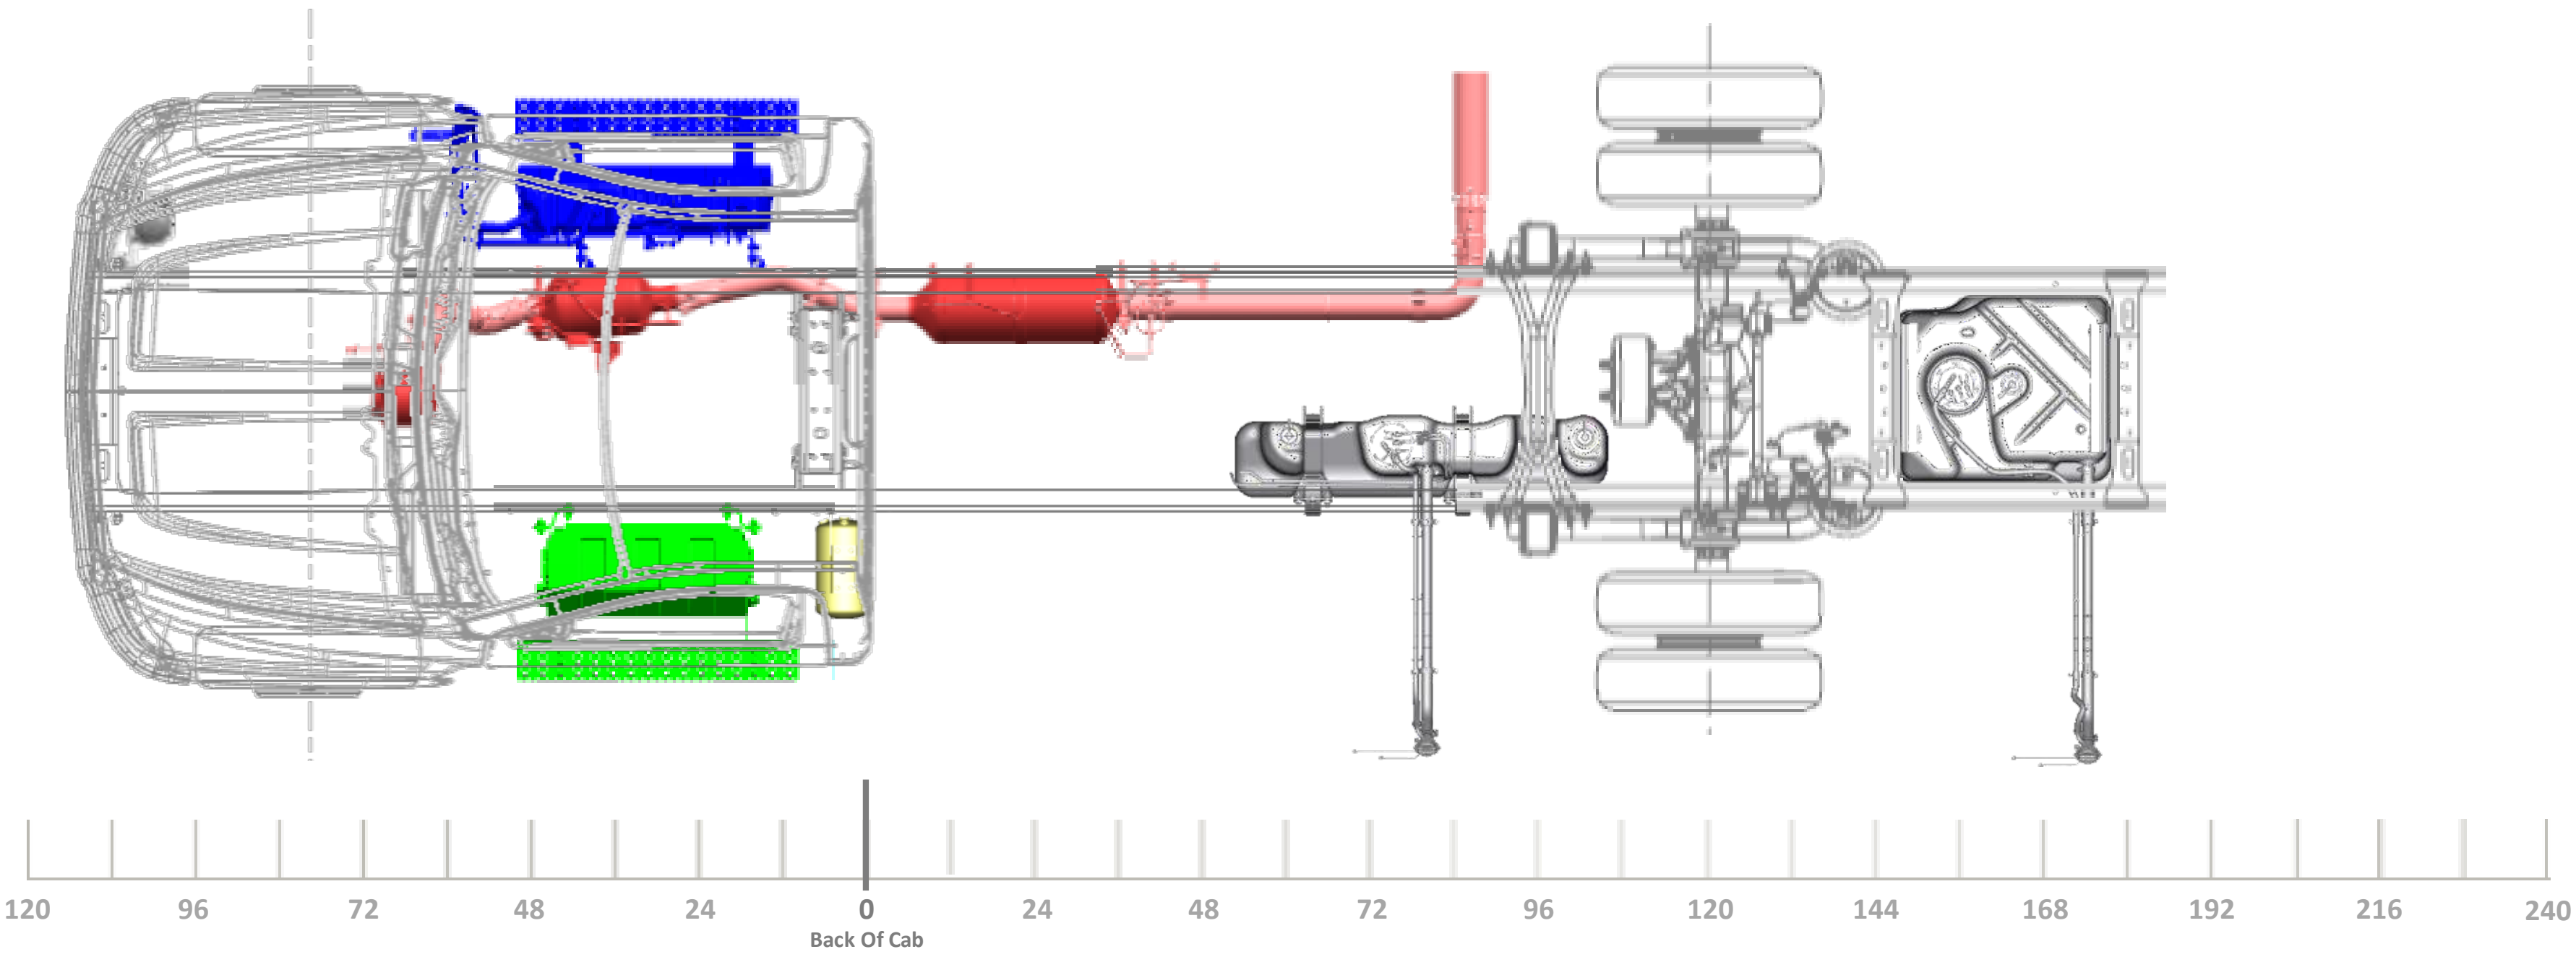

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 49”, 63”, OR 75” AF

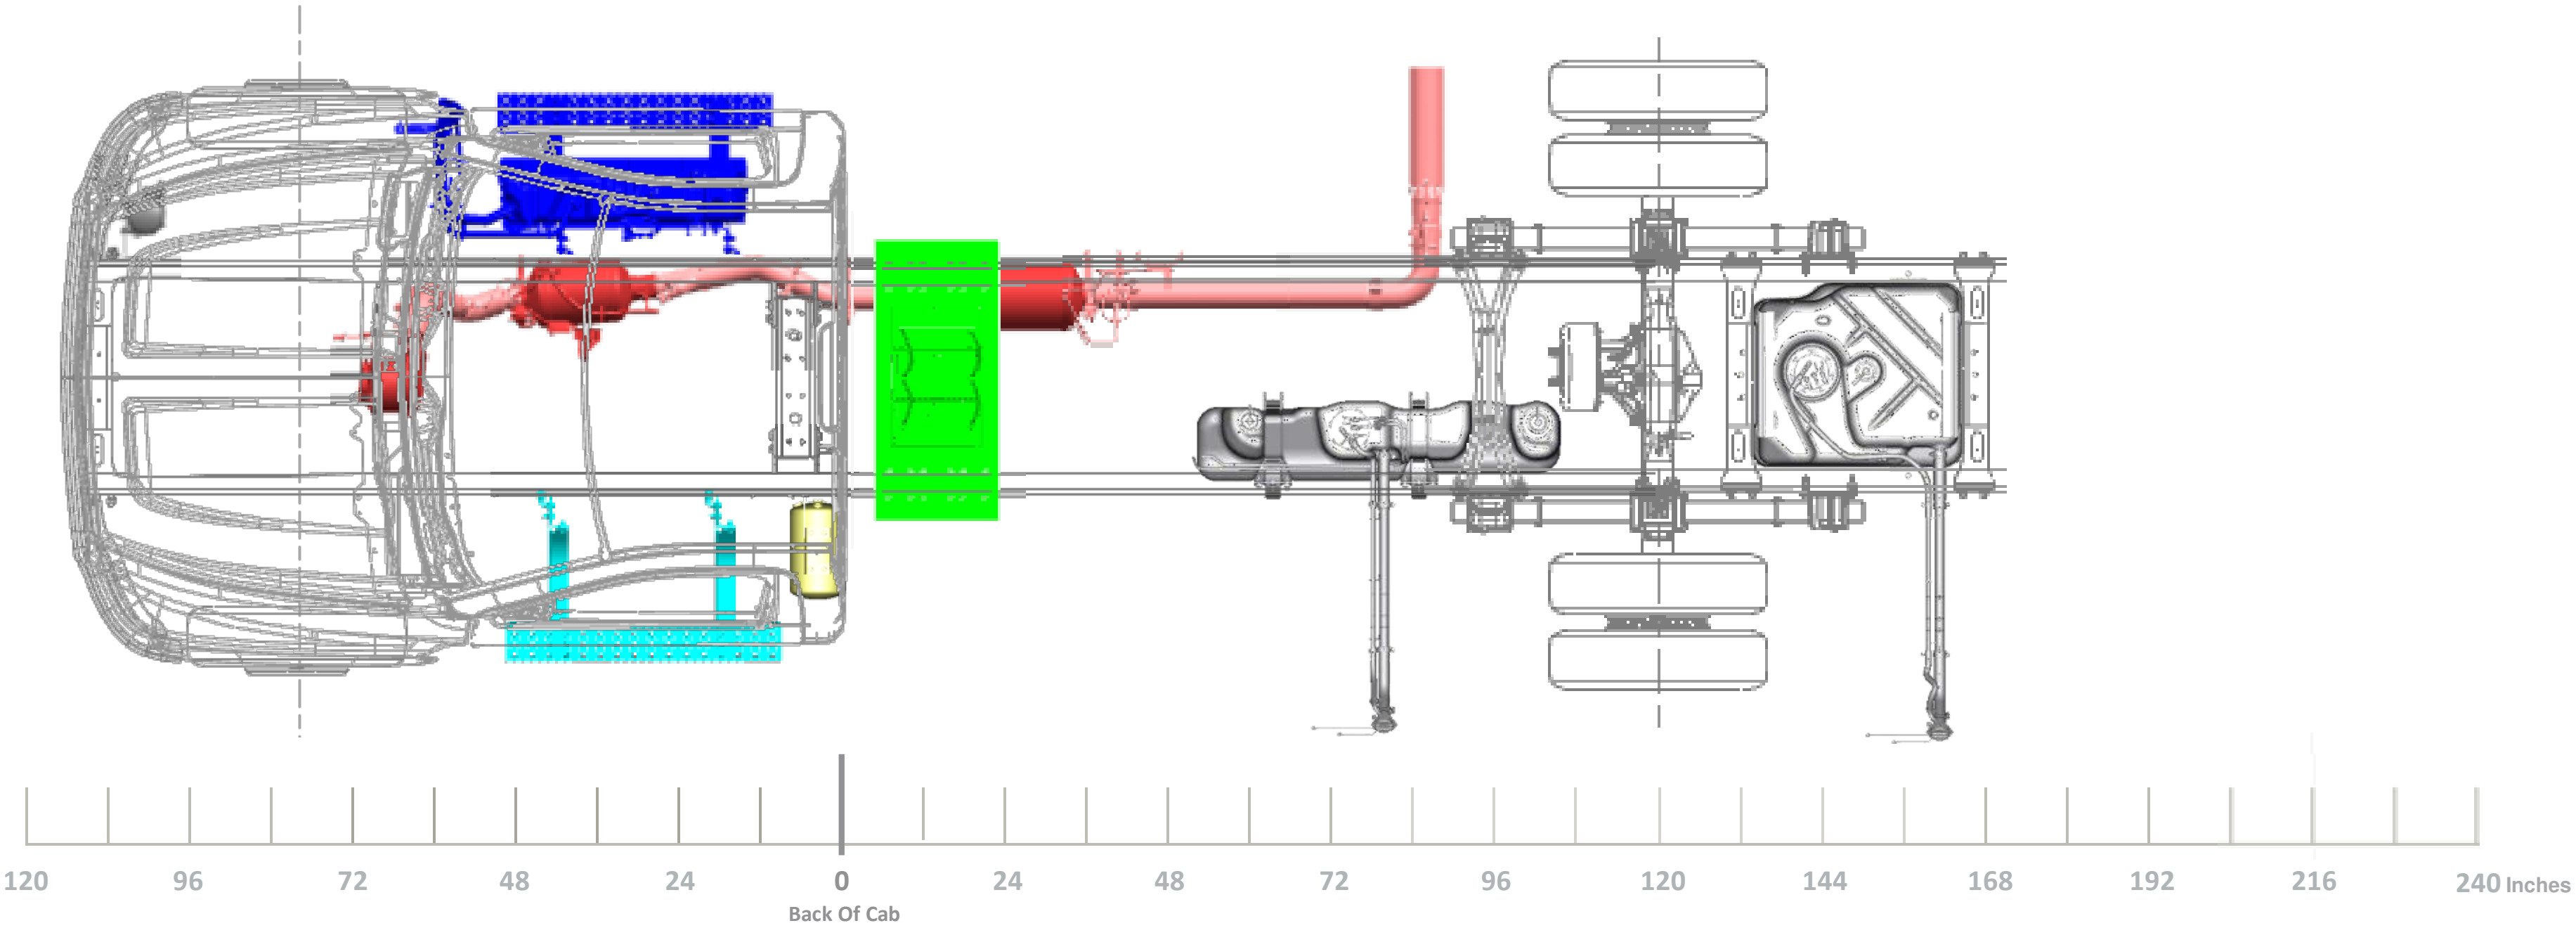
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
201” WB (120” CA) 63” OR 75” AF

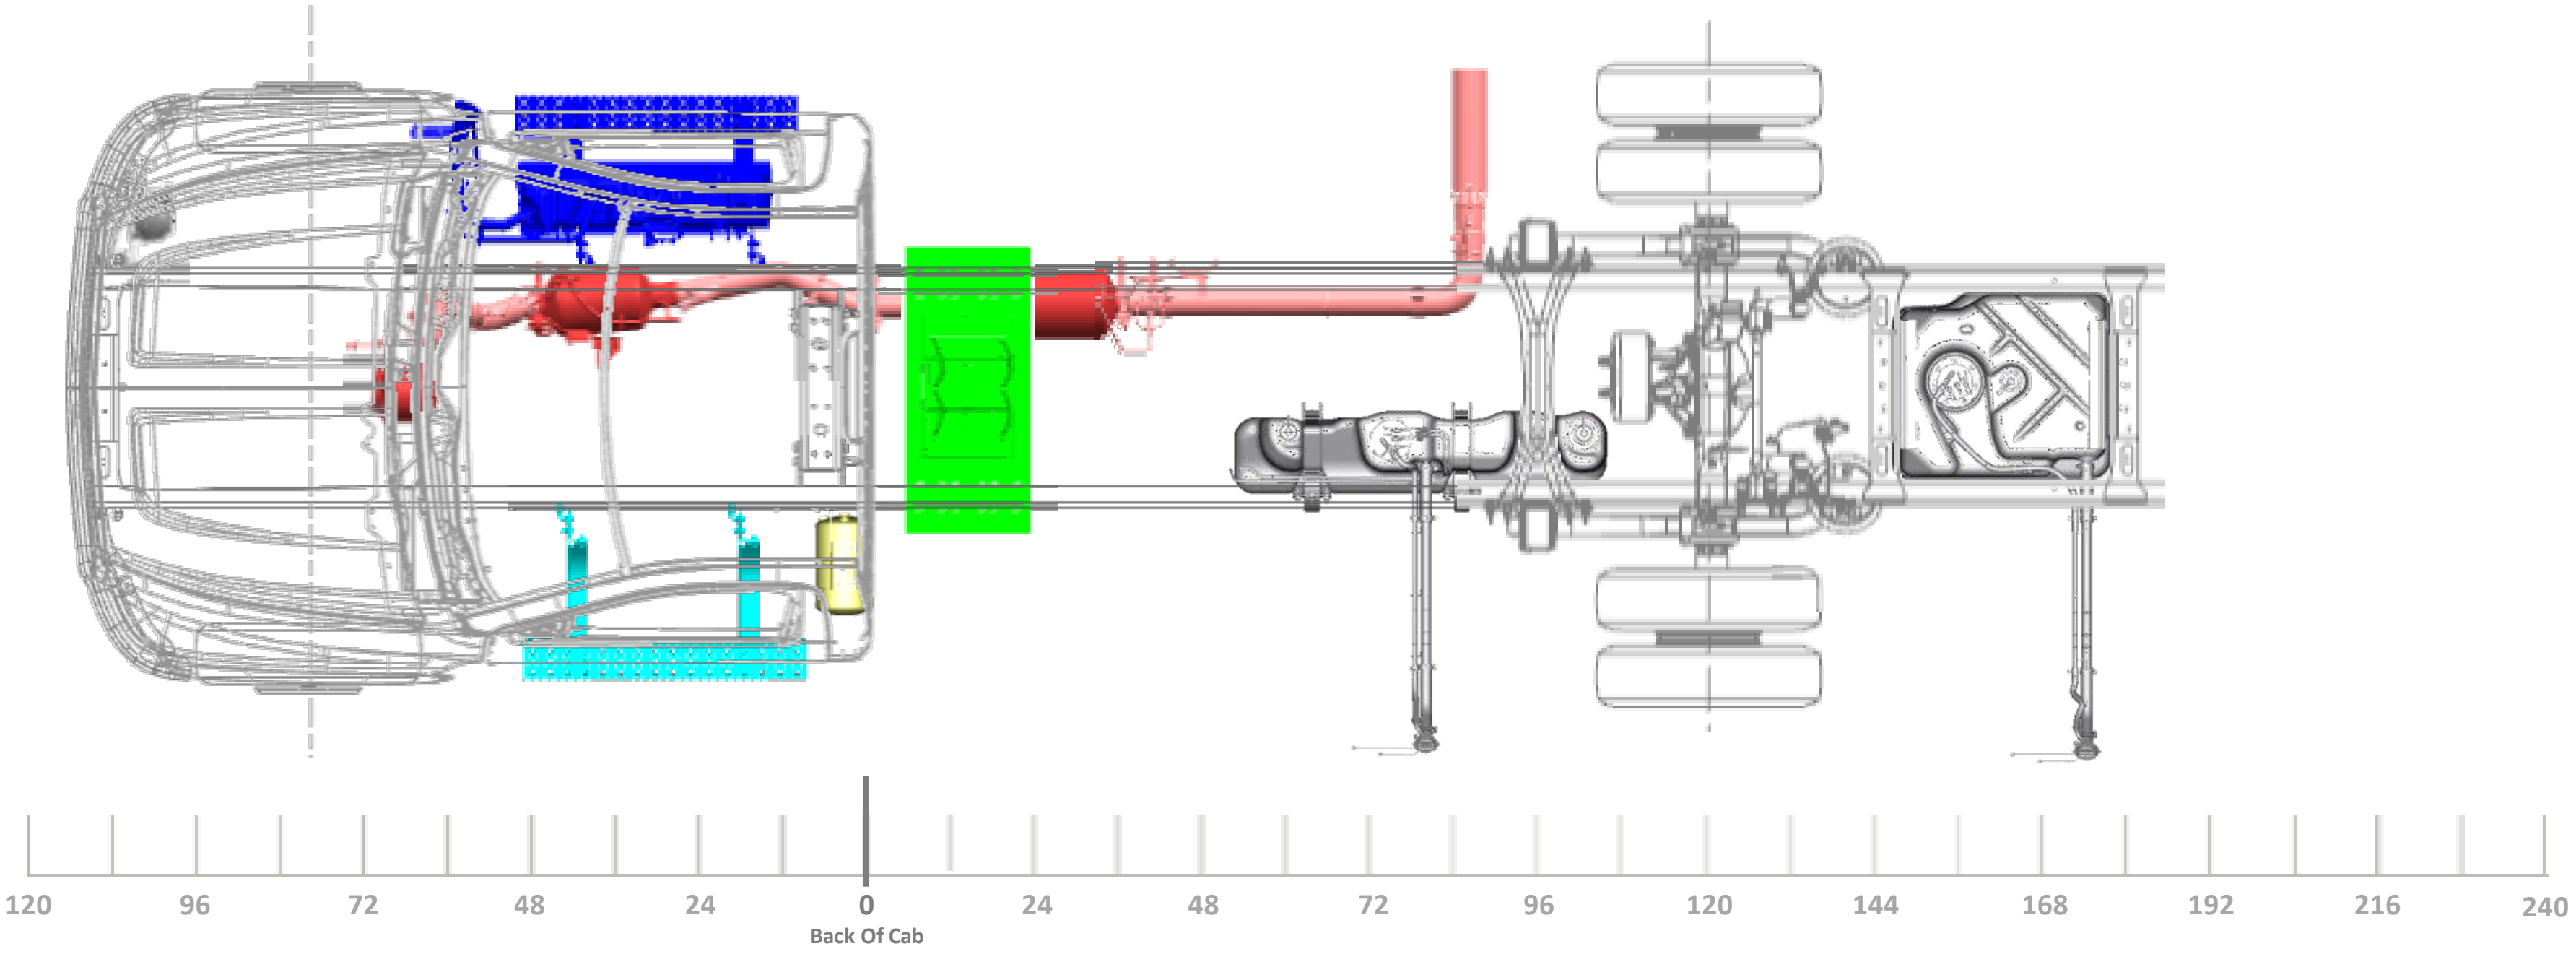

Regular Cab – 219” WB

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

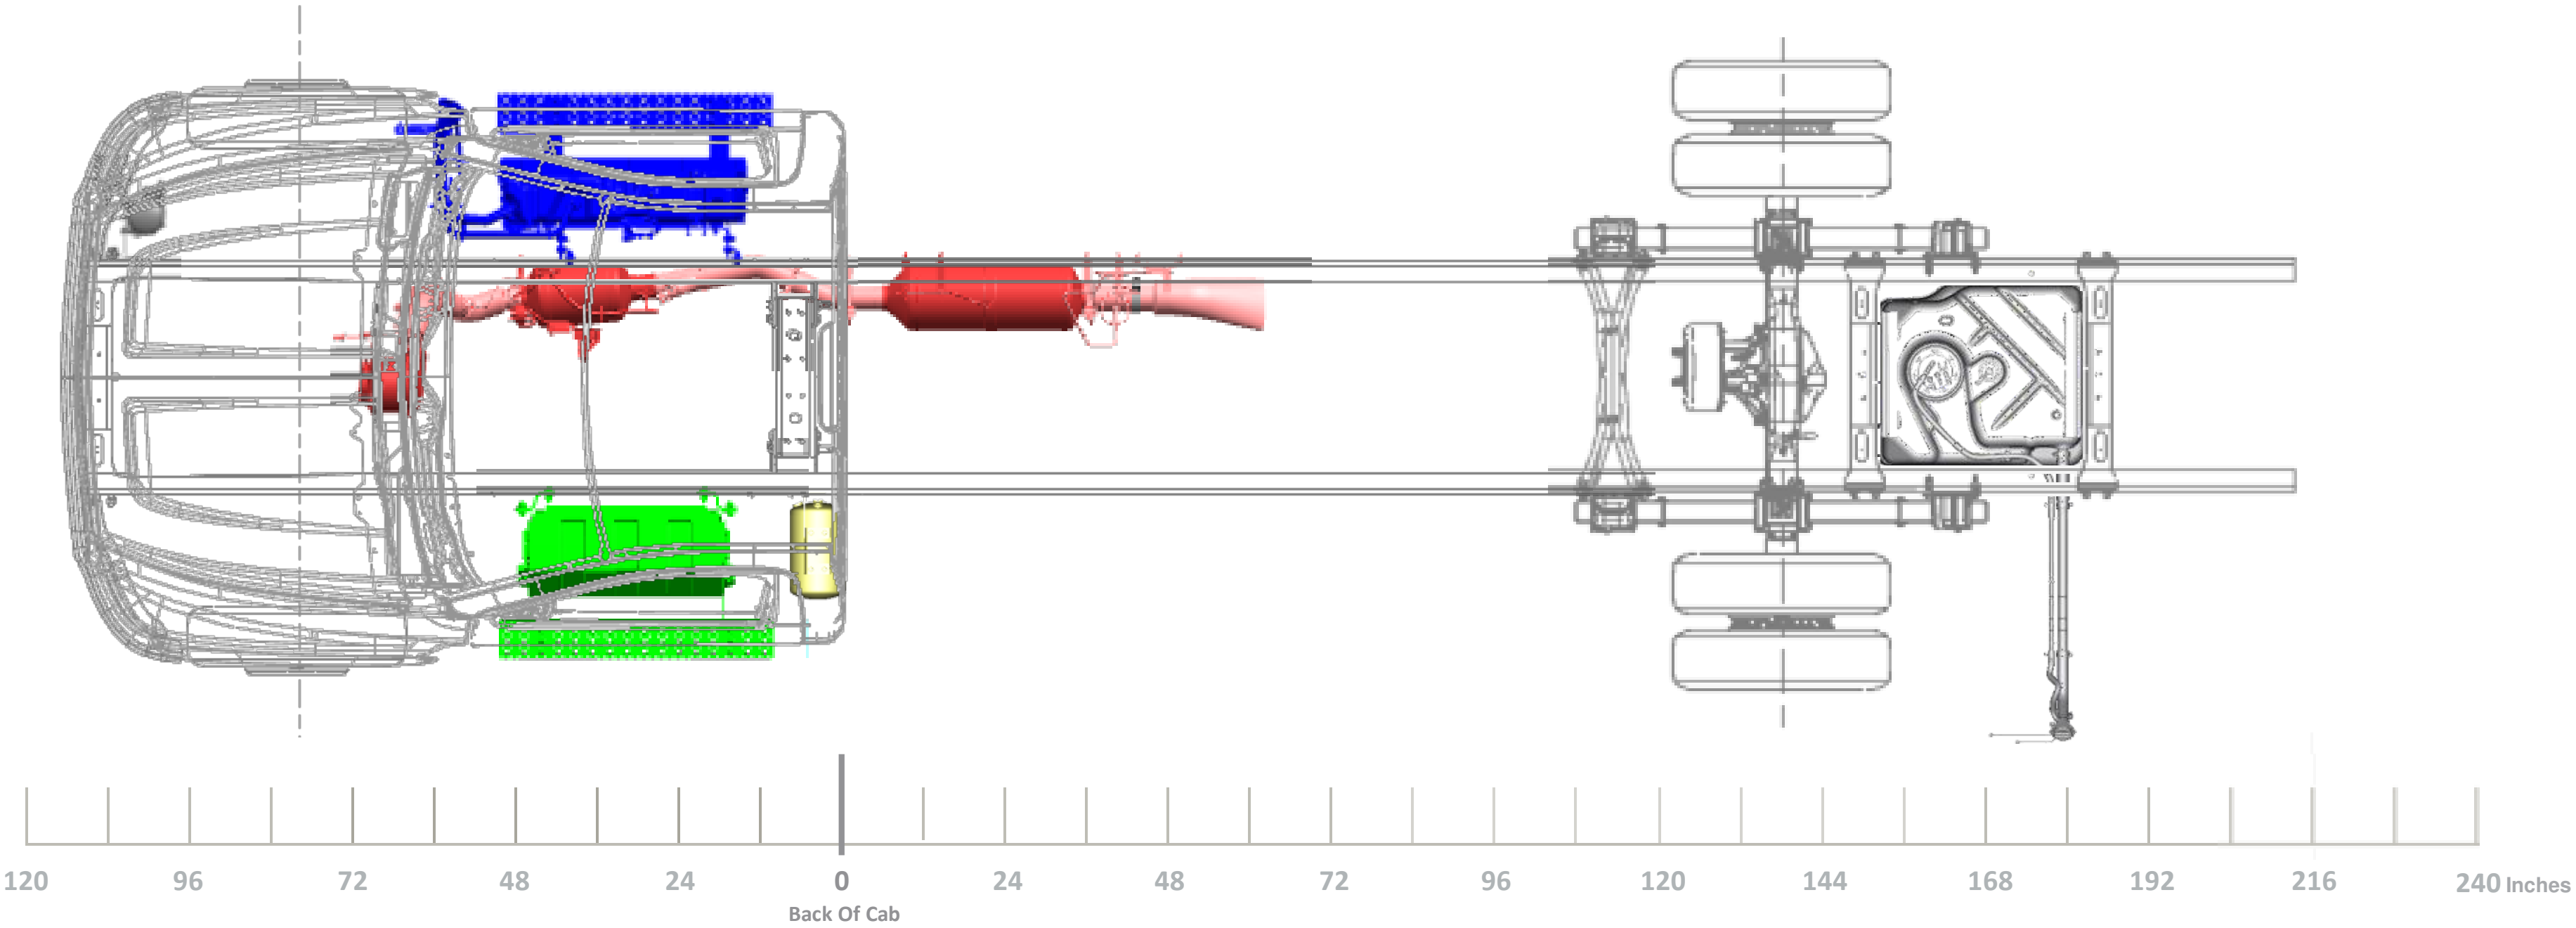
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219" WB (138" CA) 75" AF

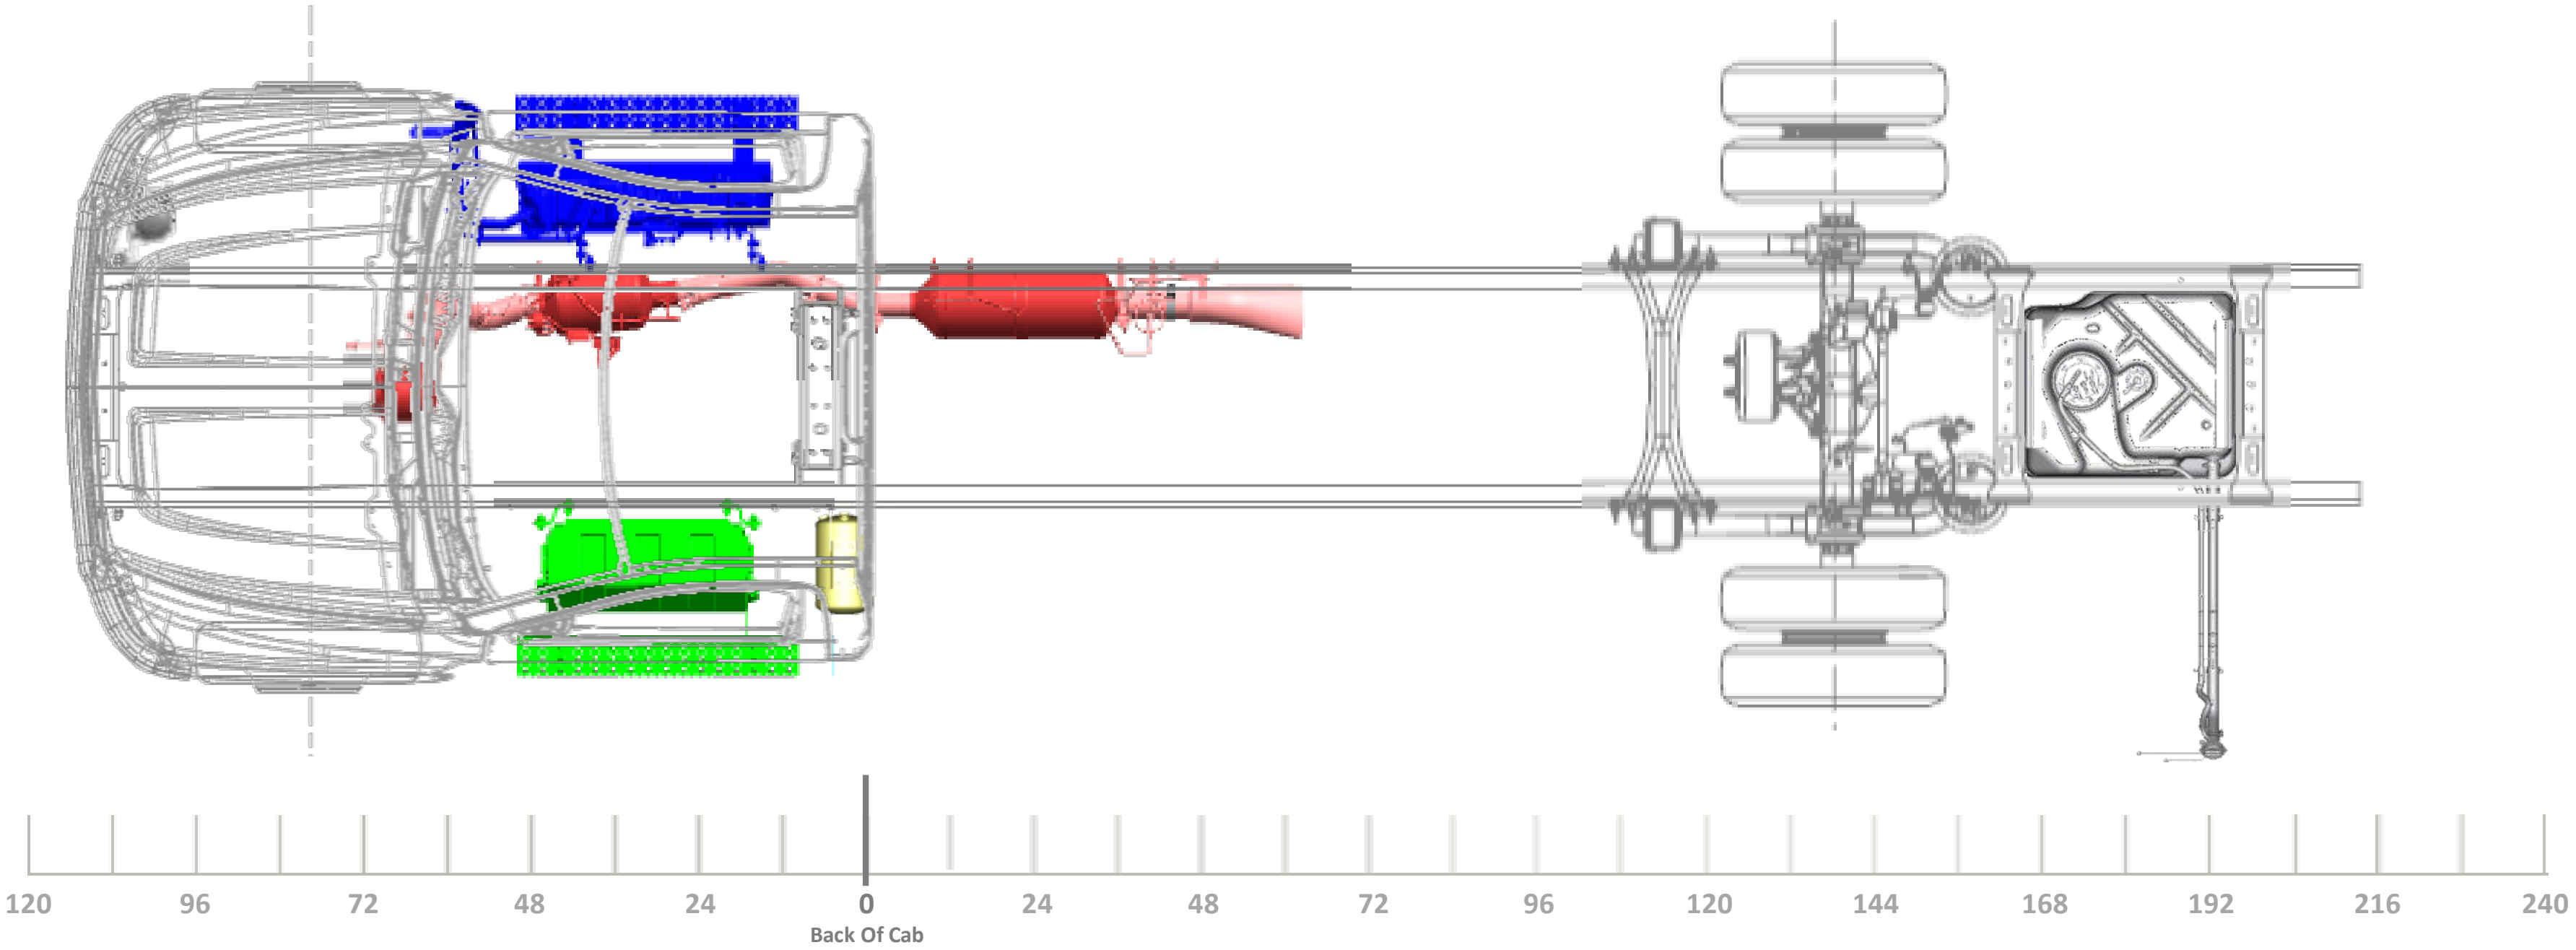

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

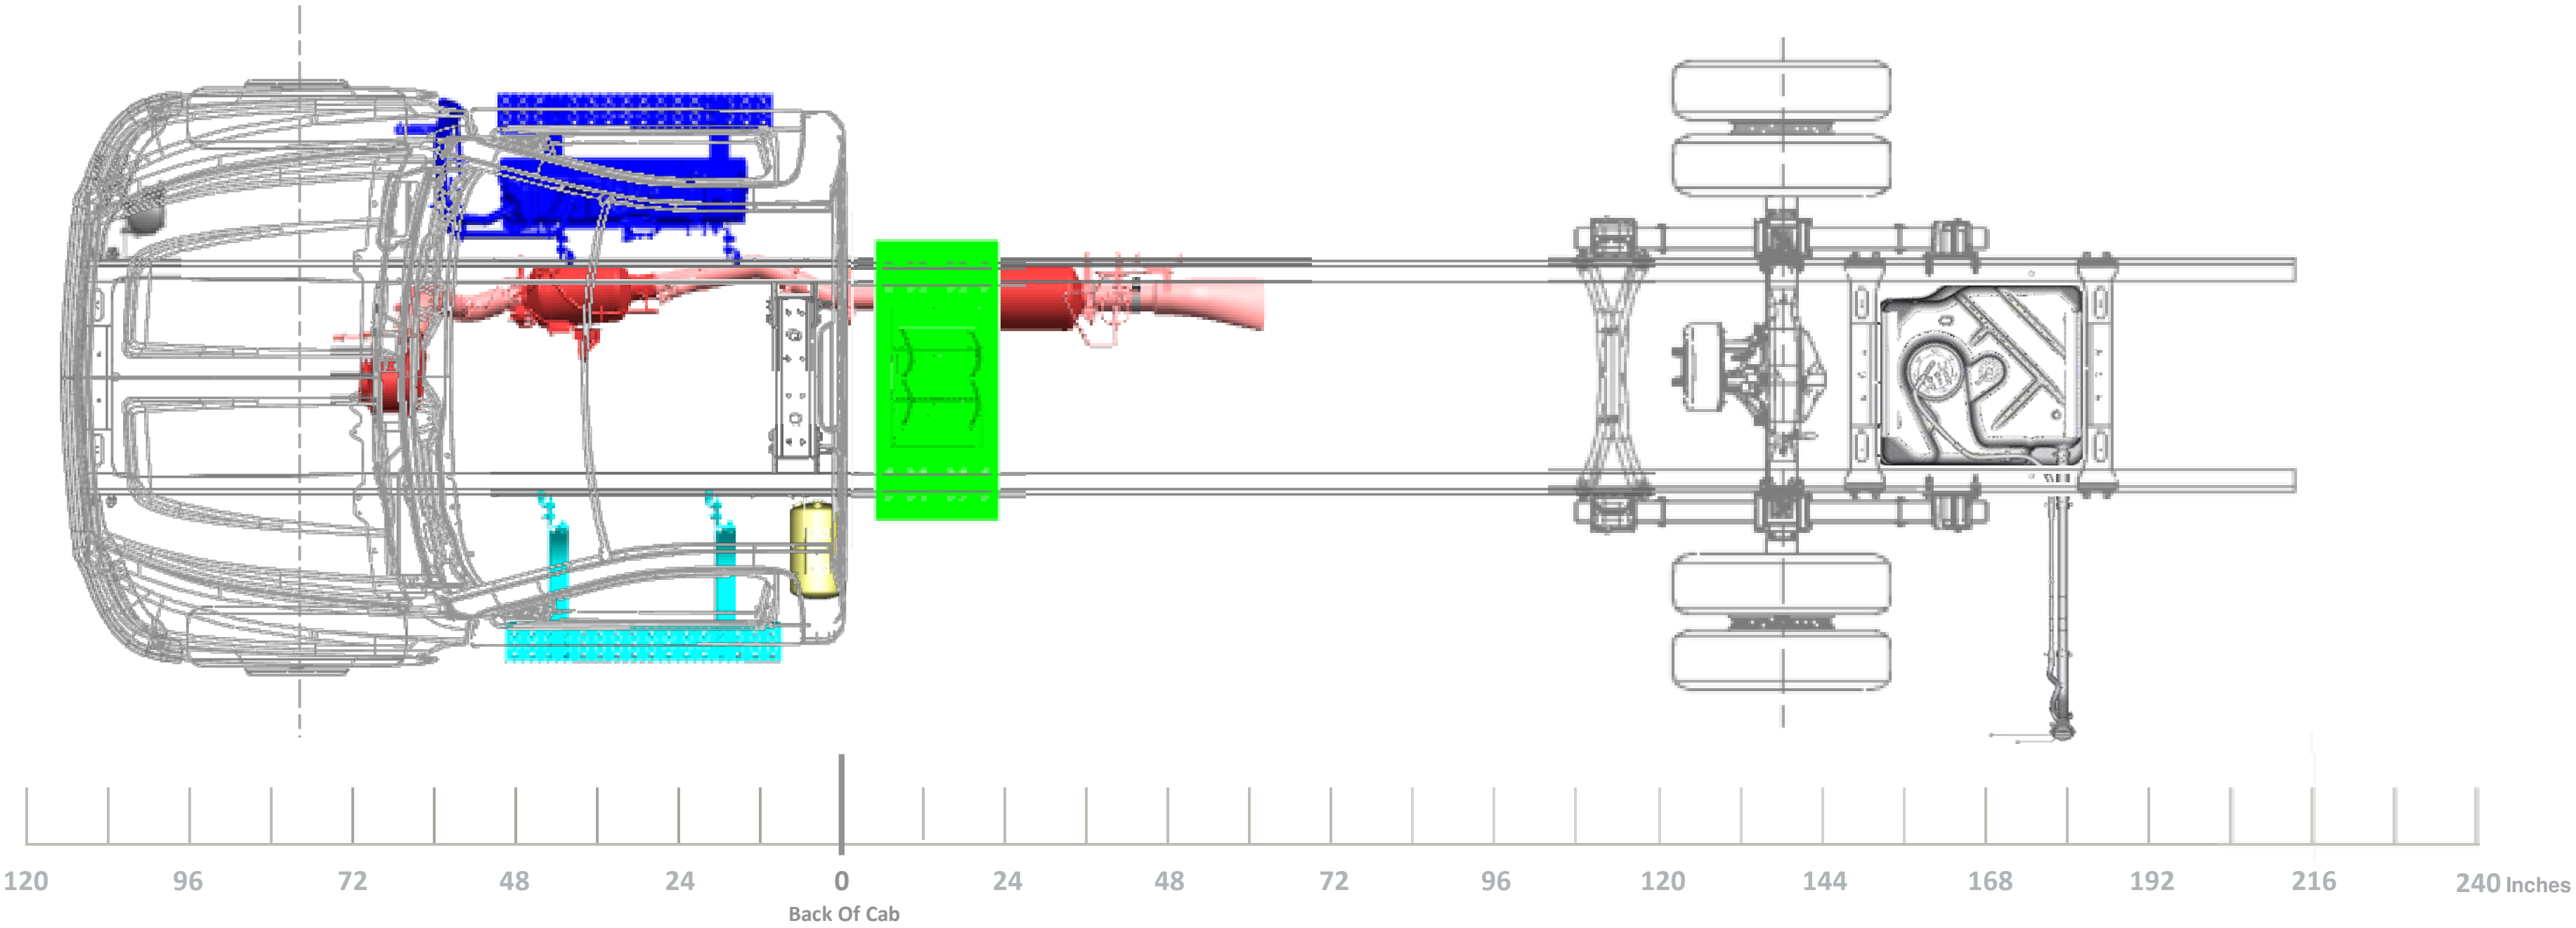
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

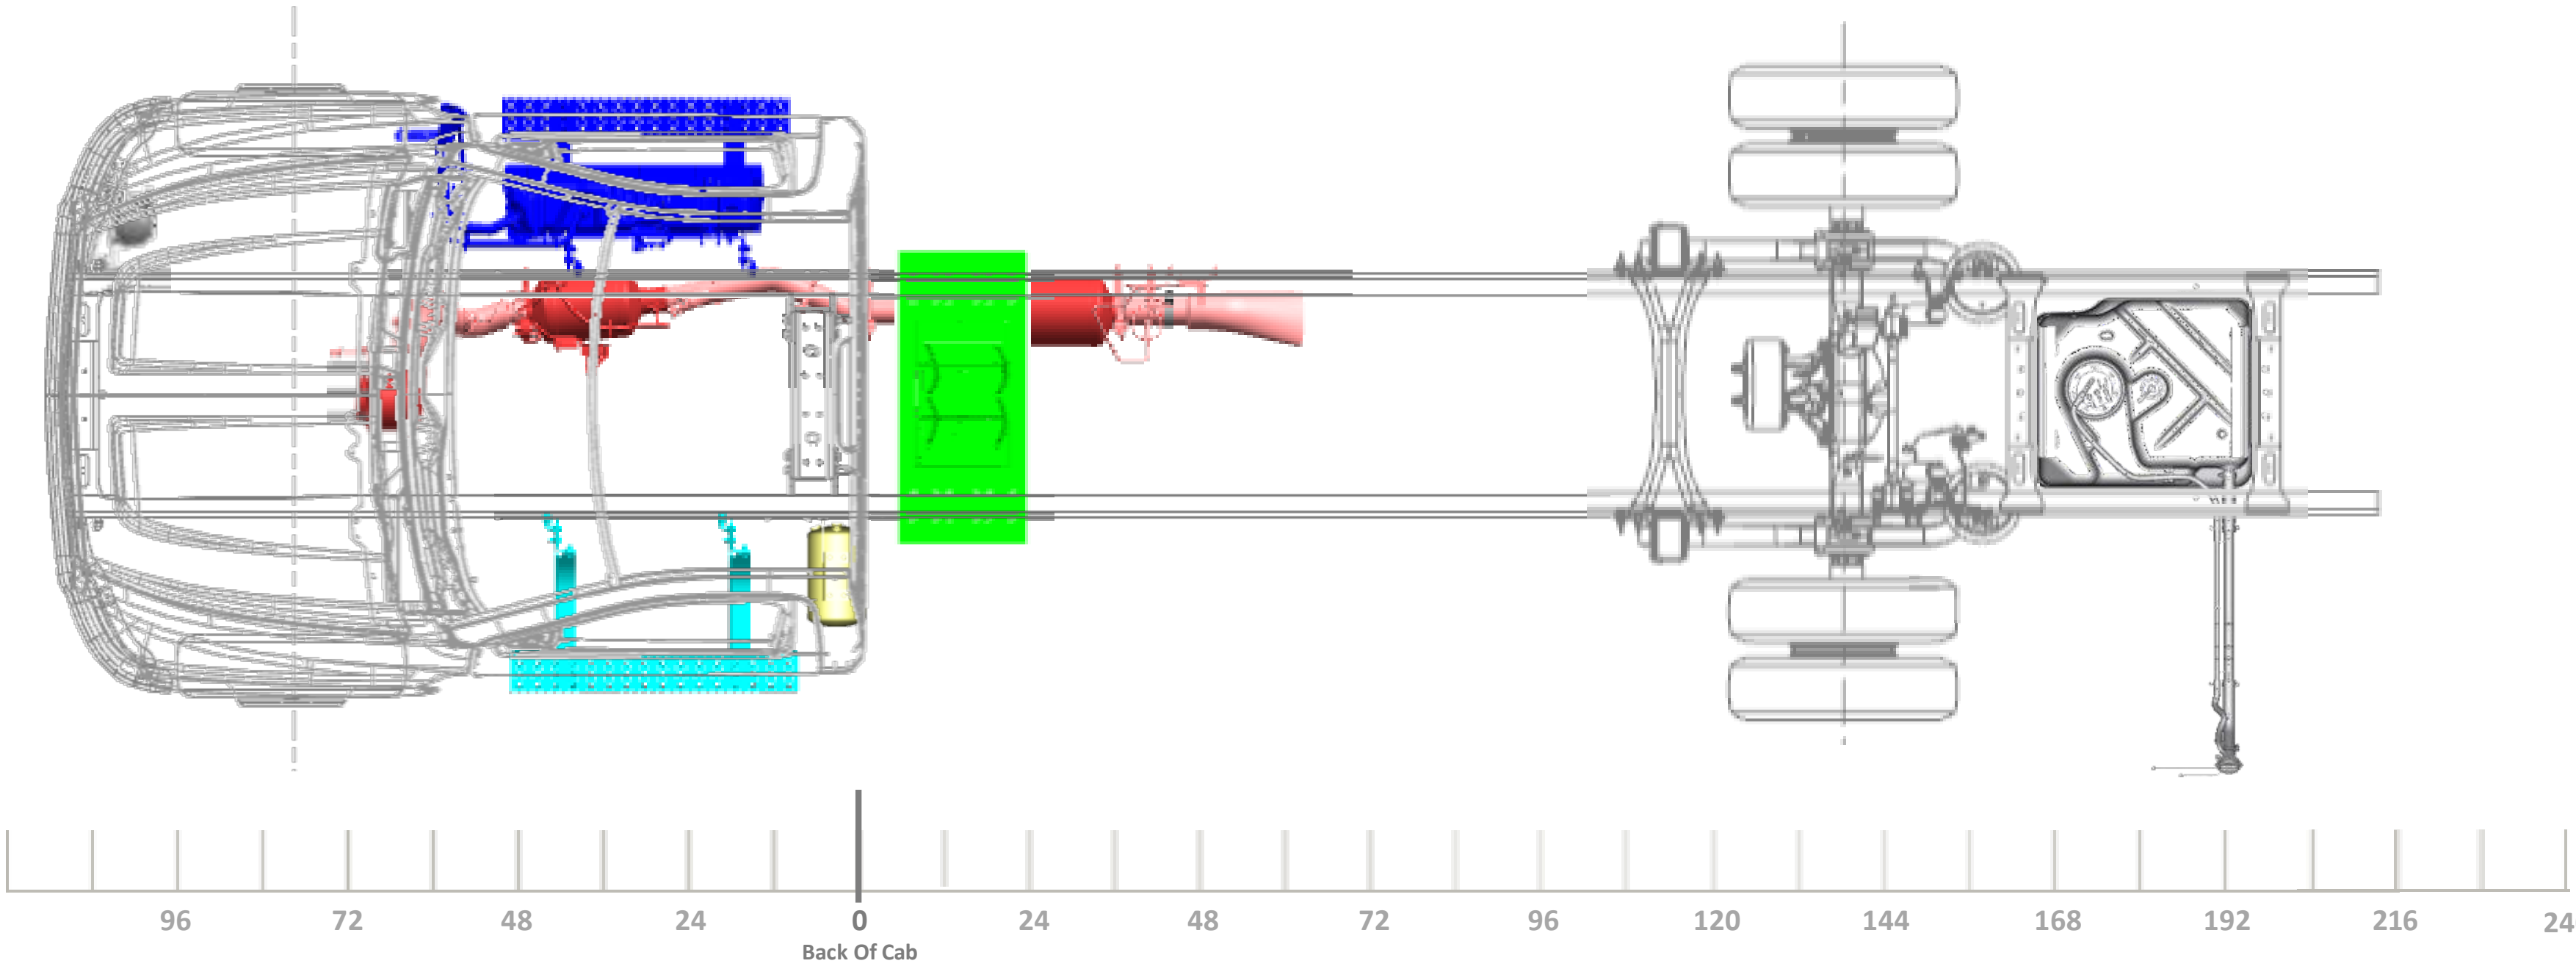

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

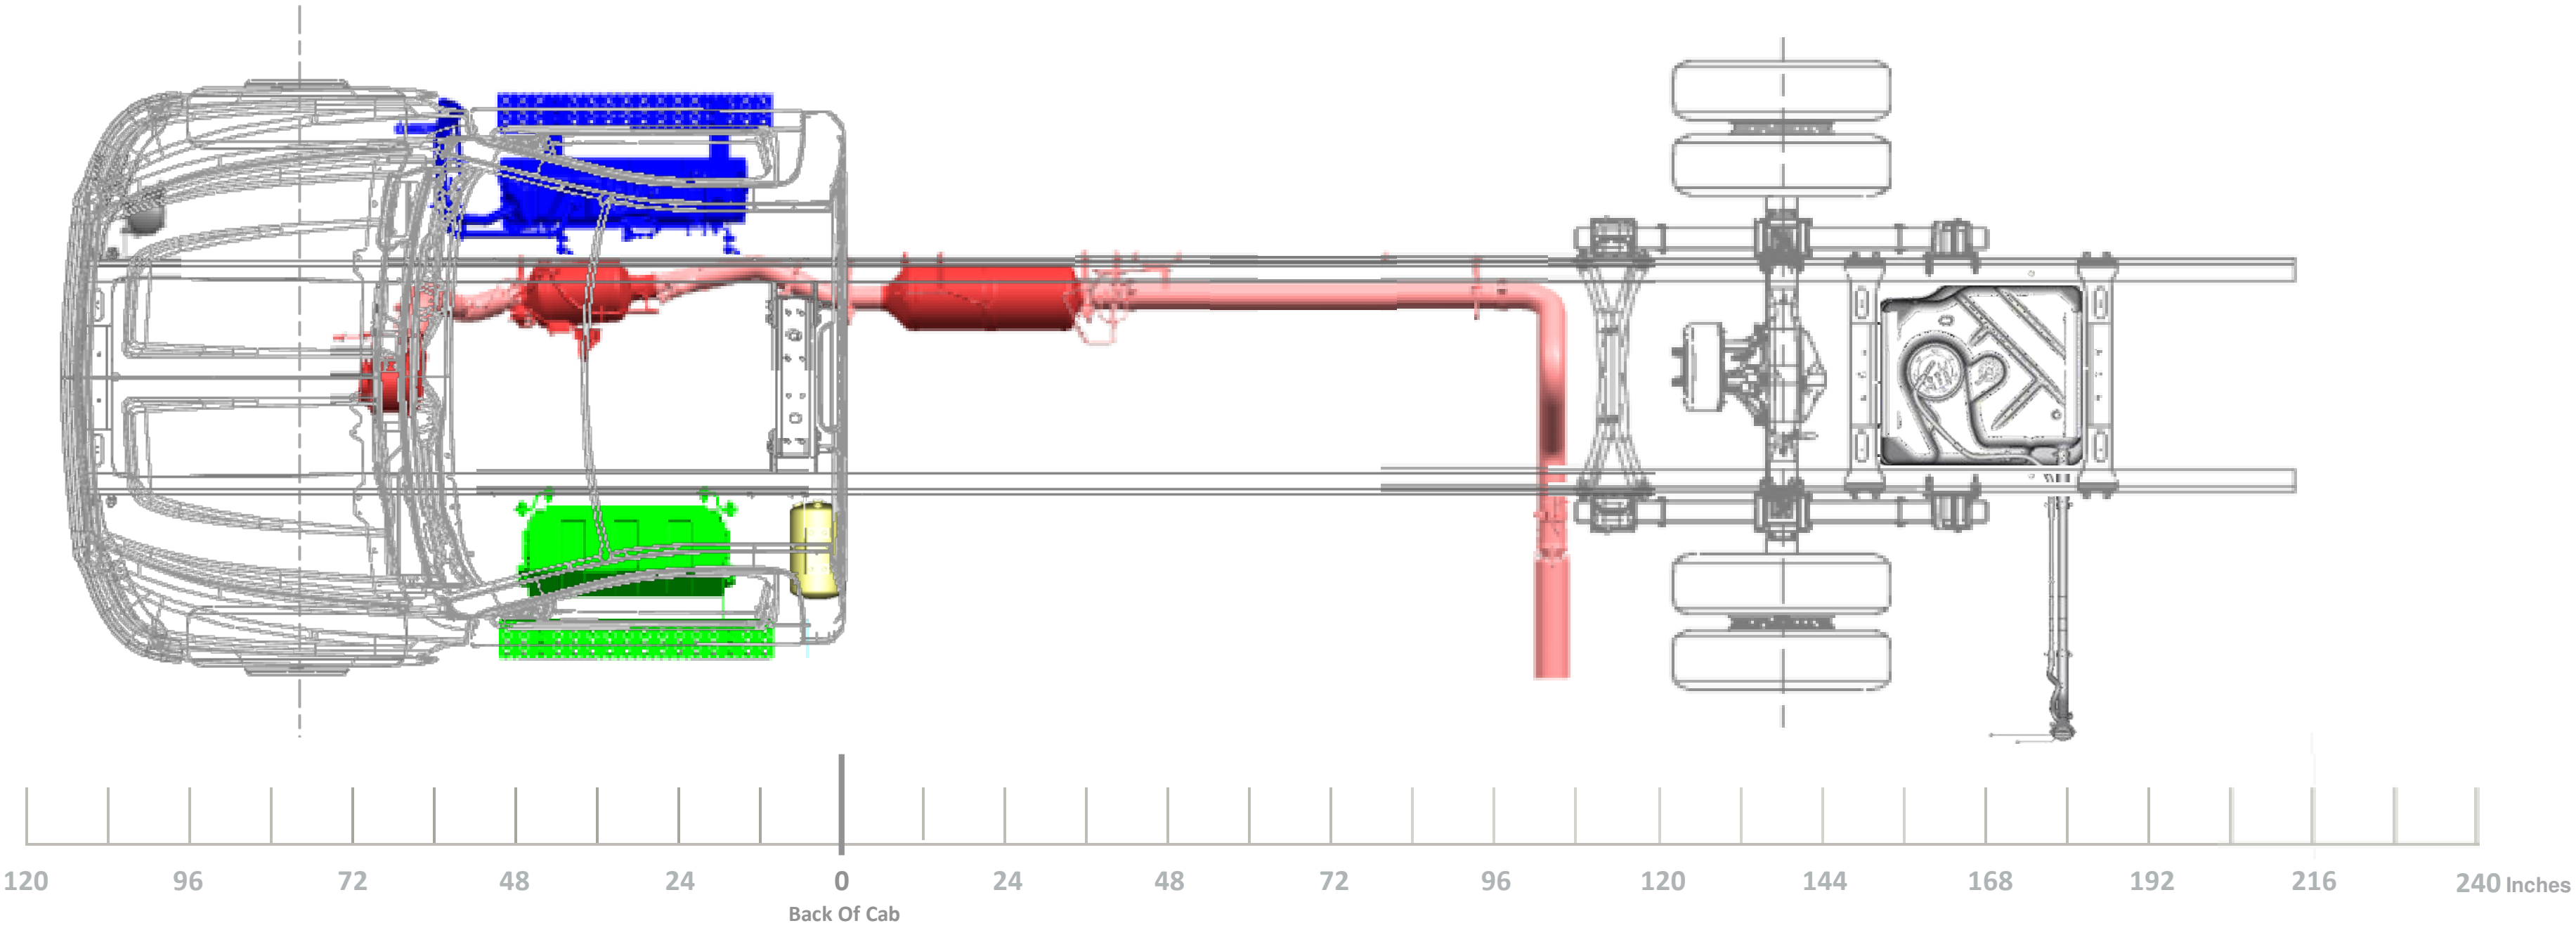
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

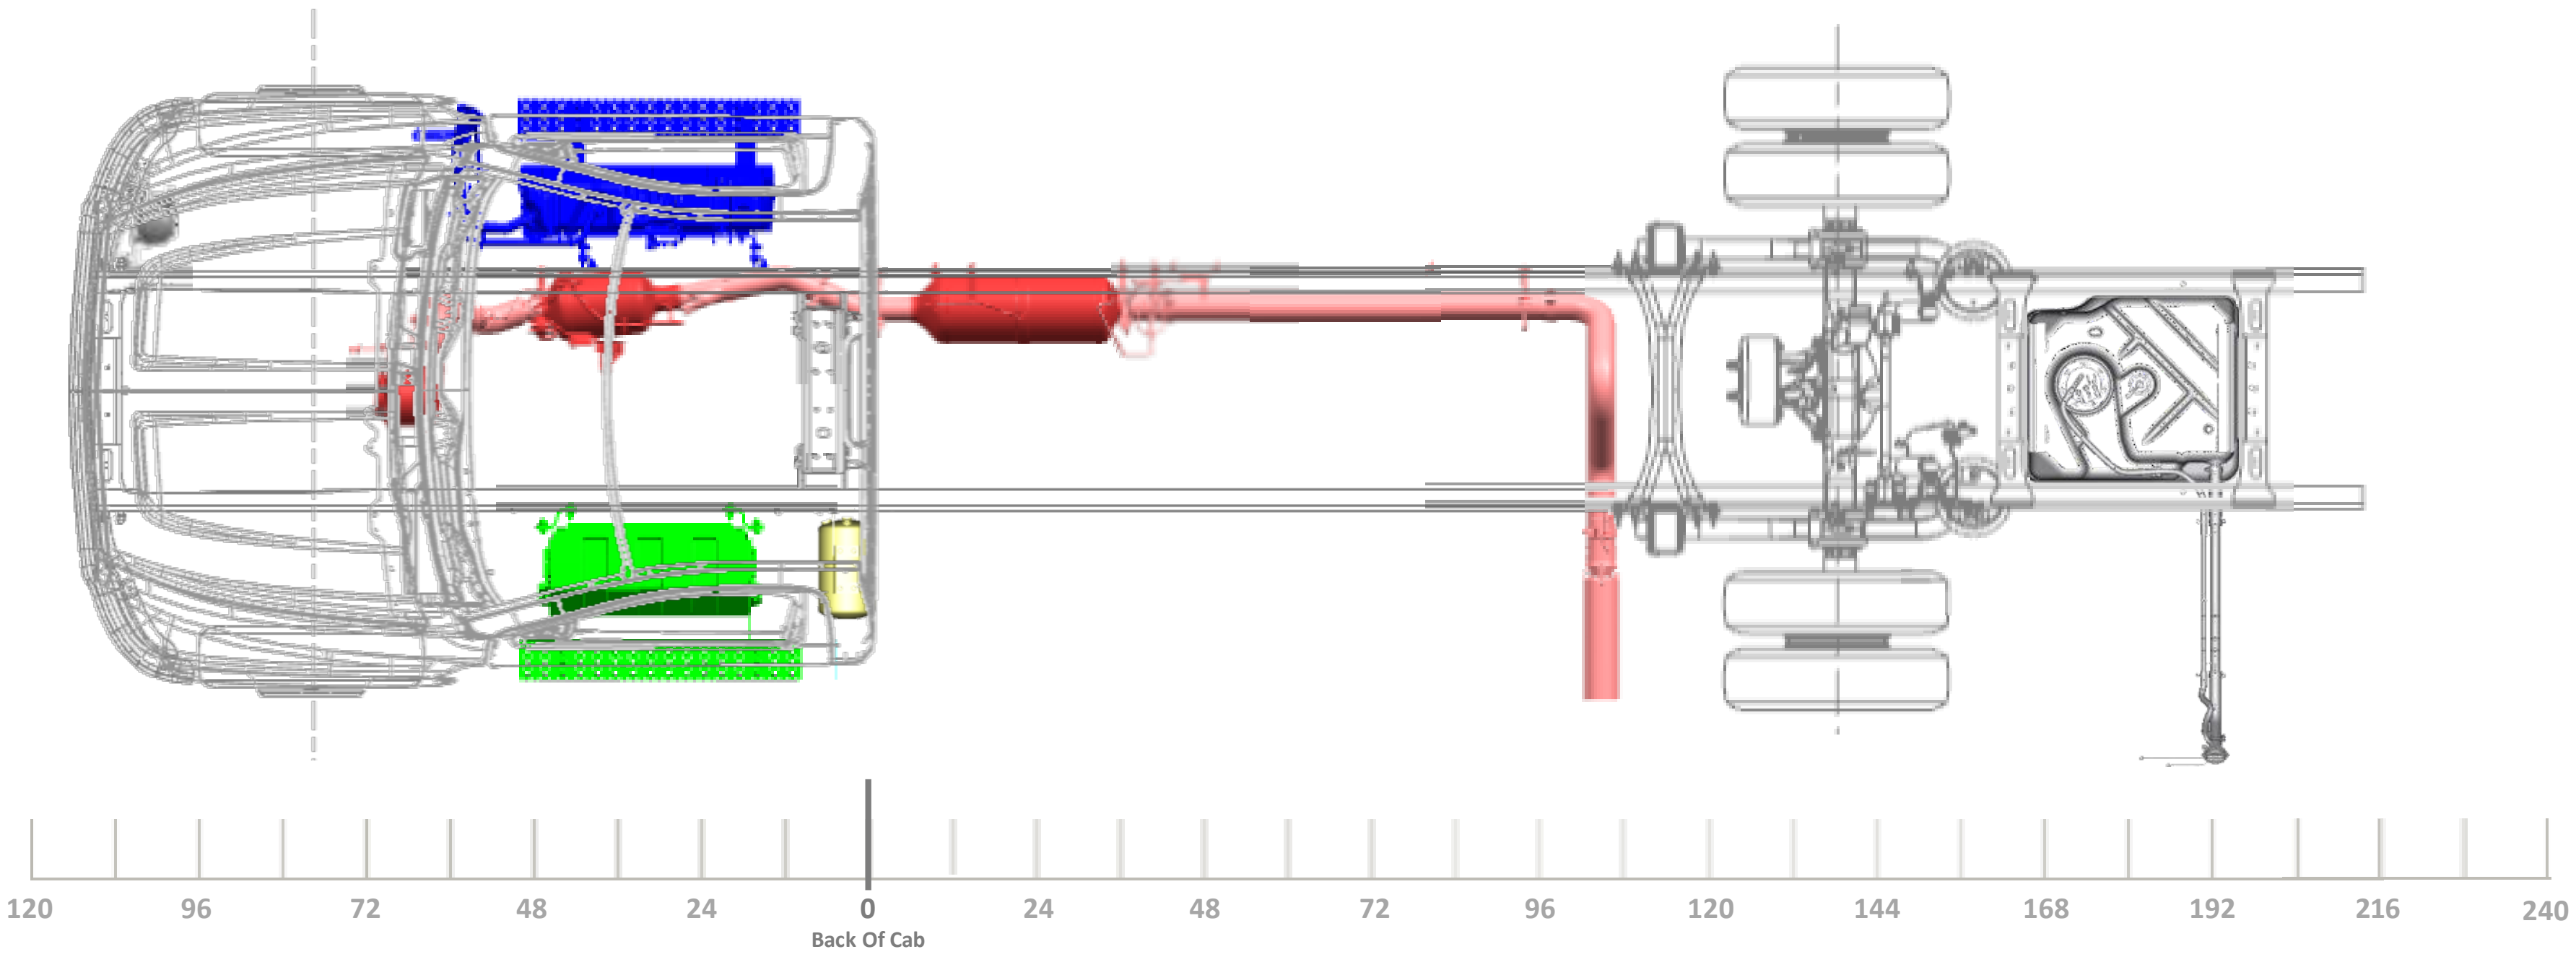

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

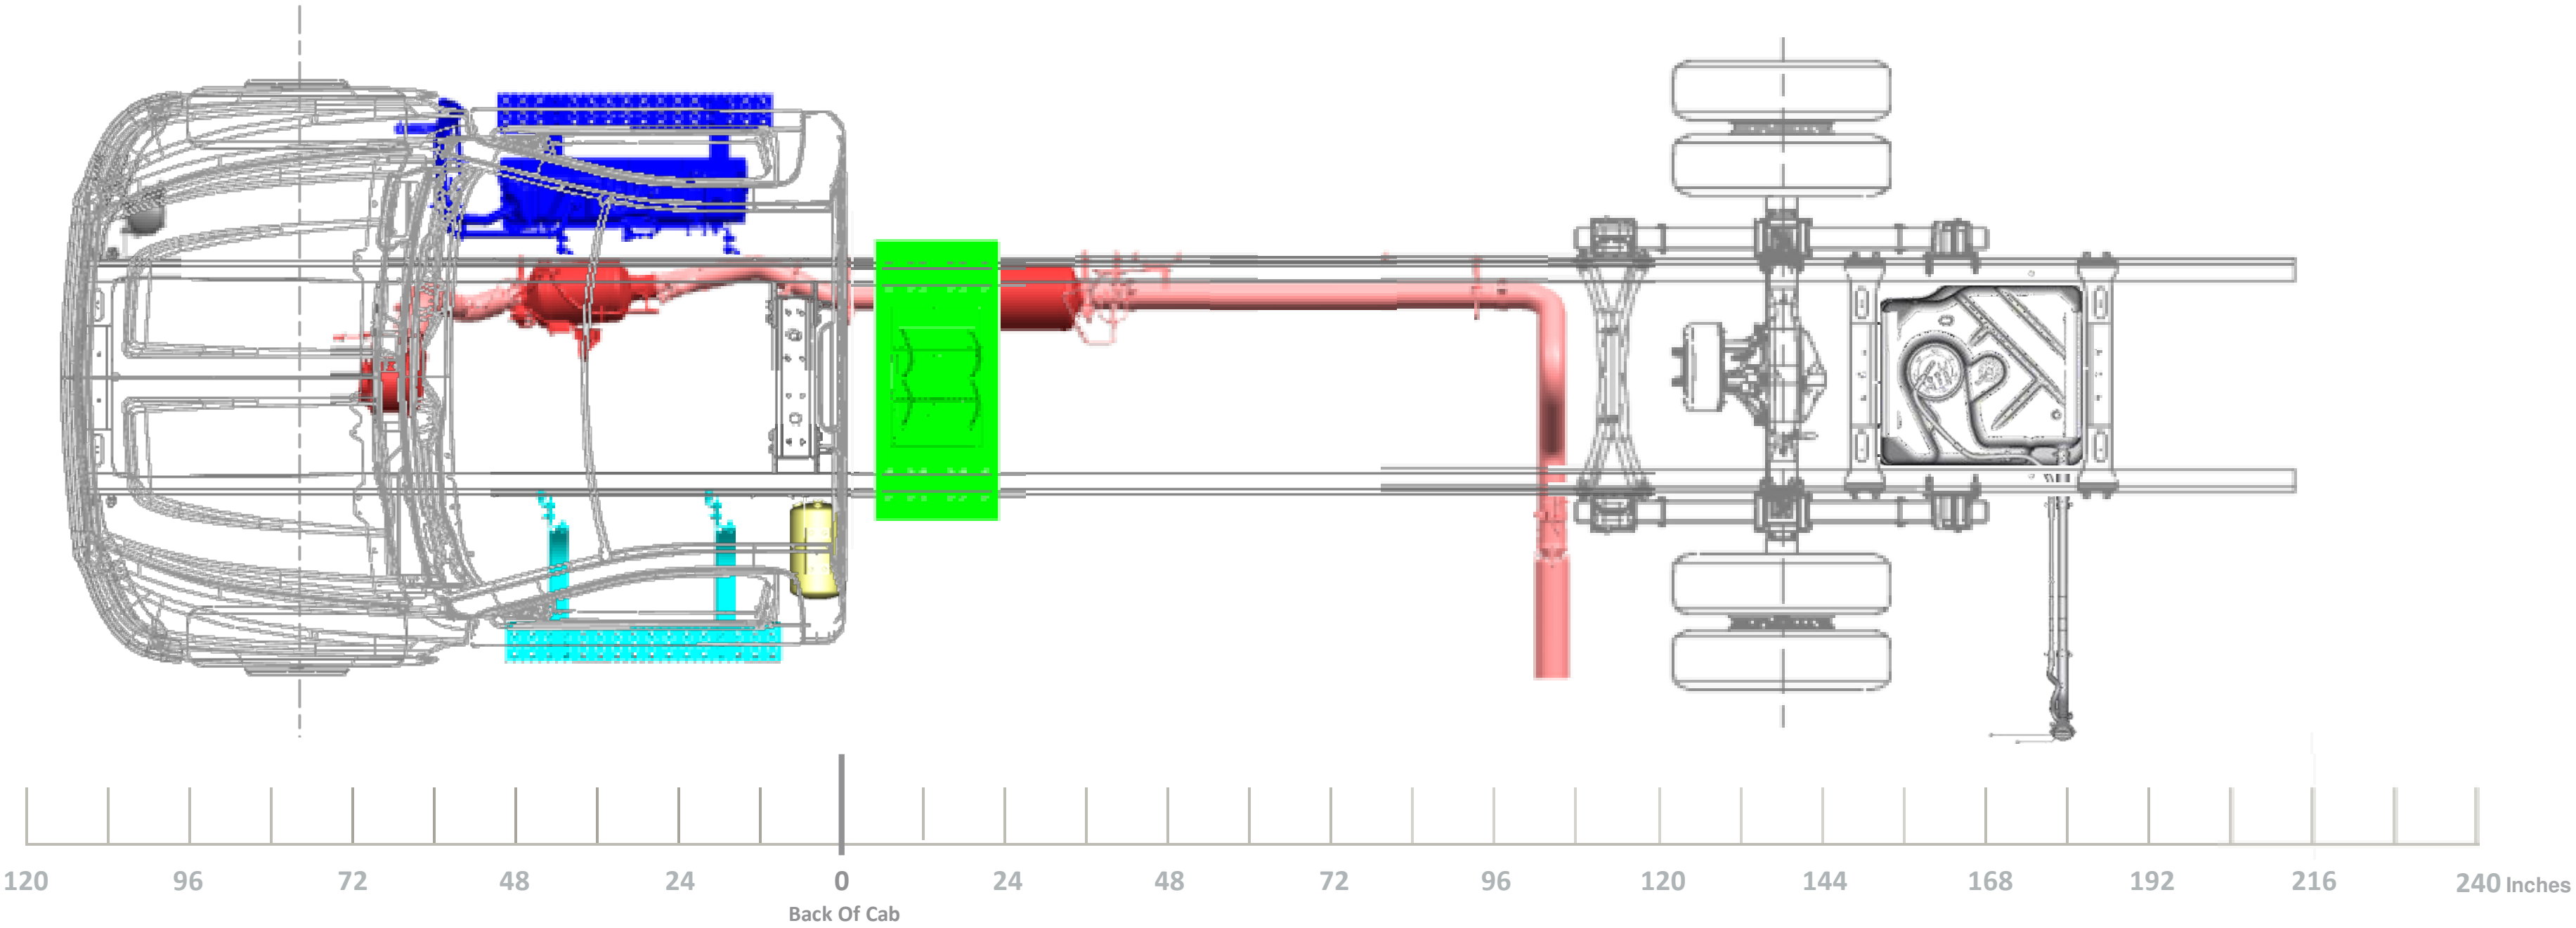
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

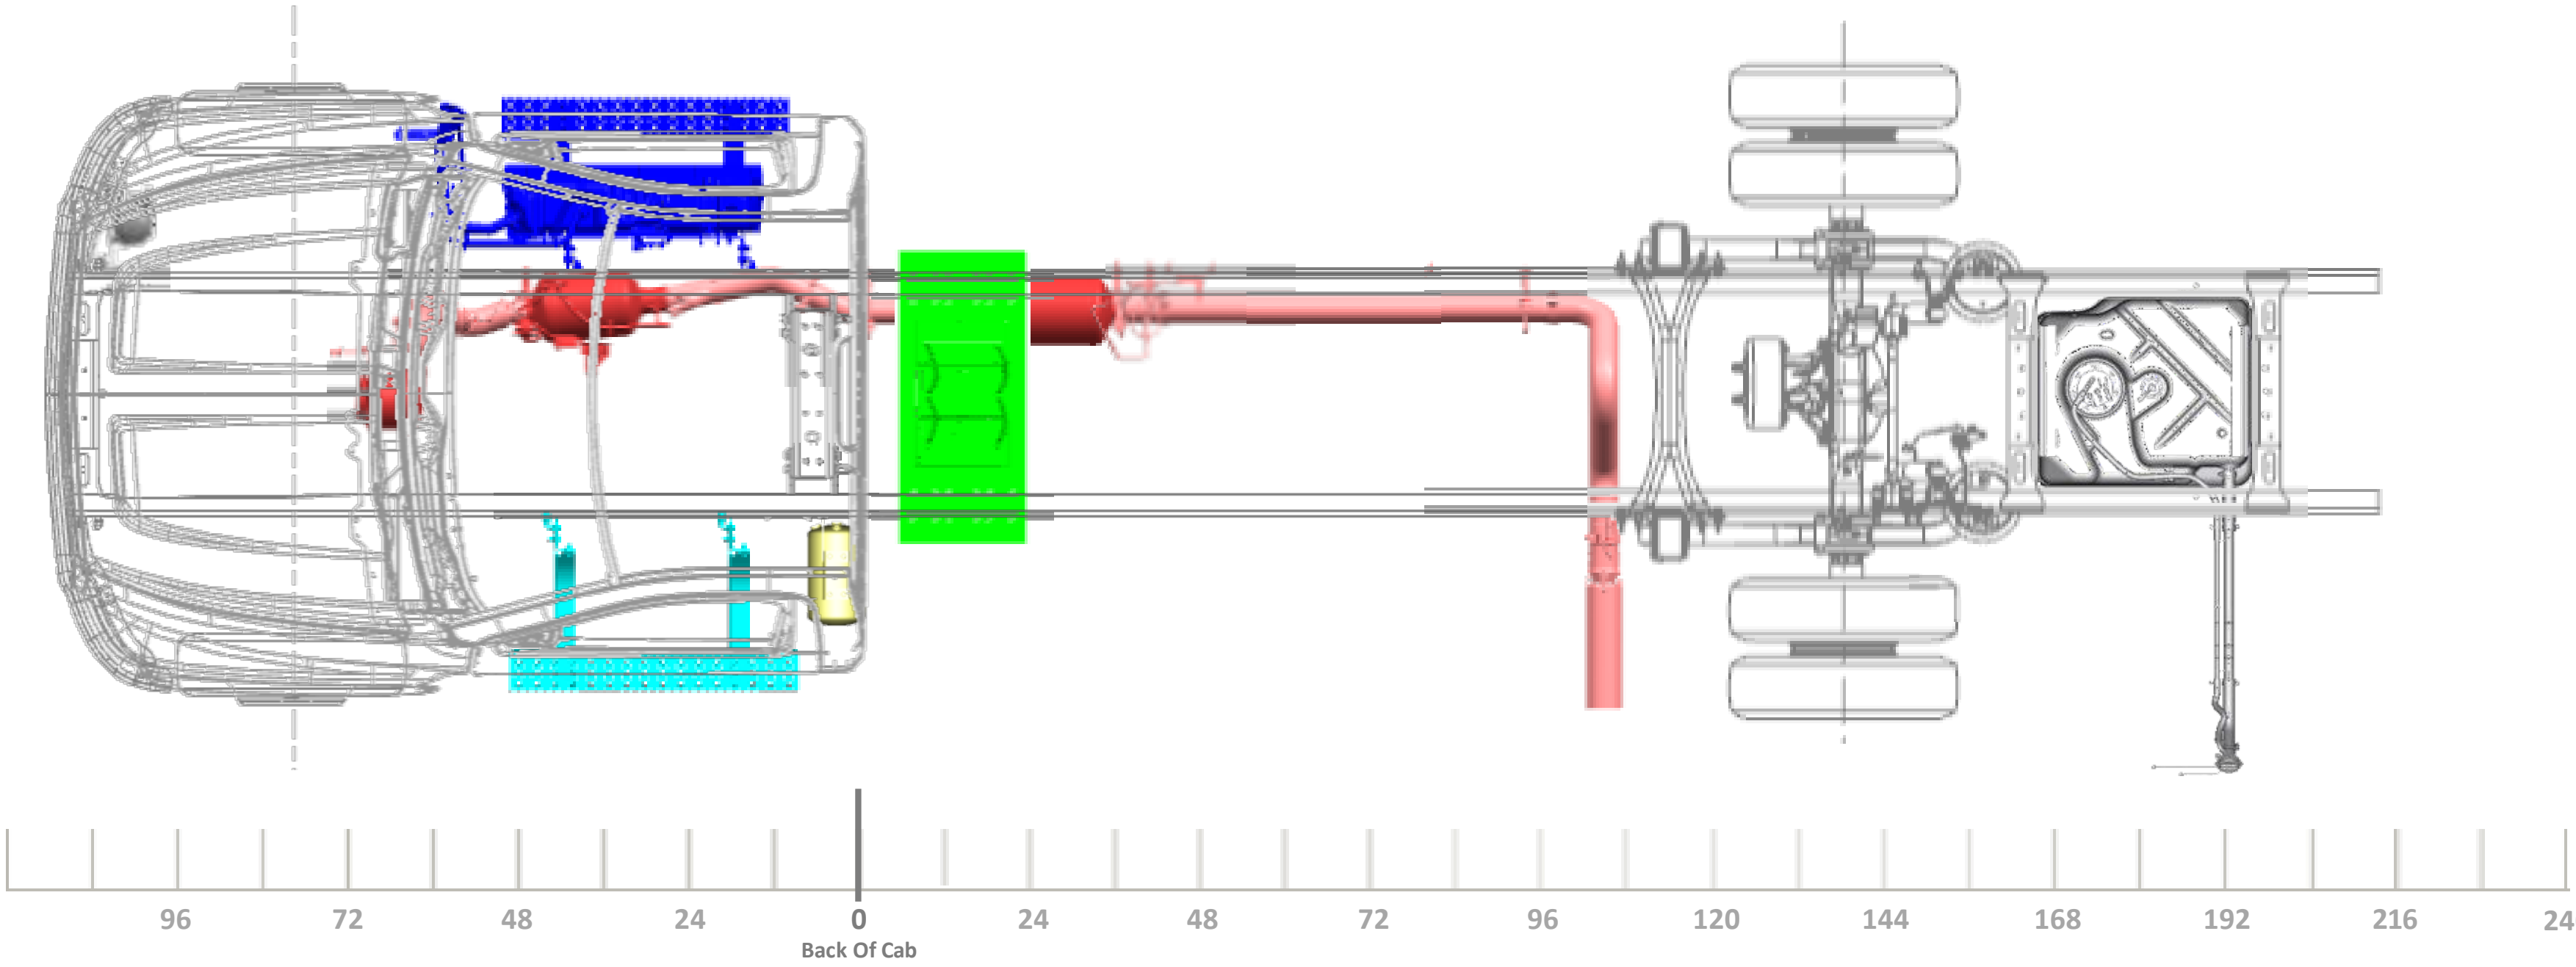

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

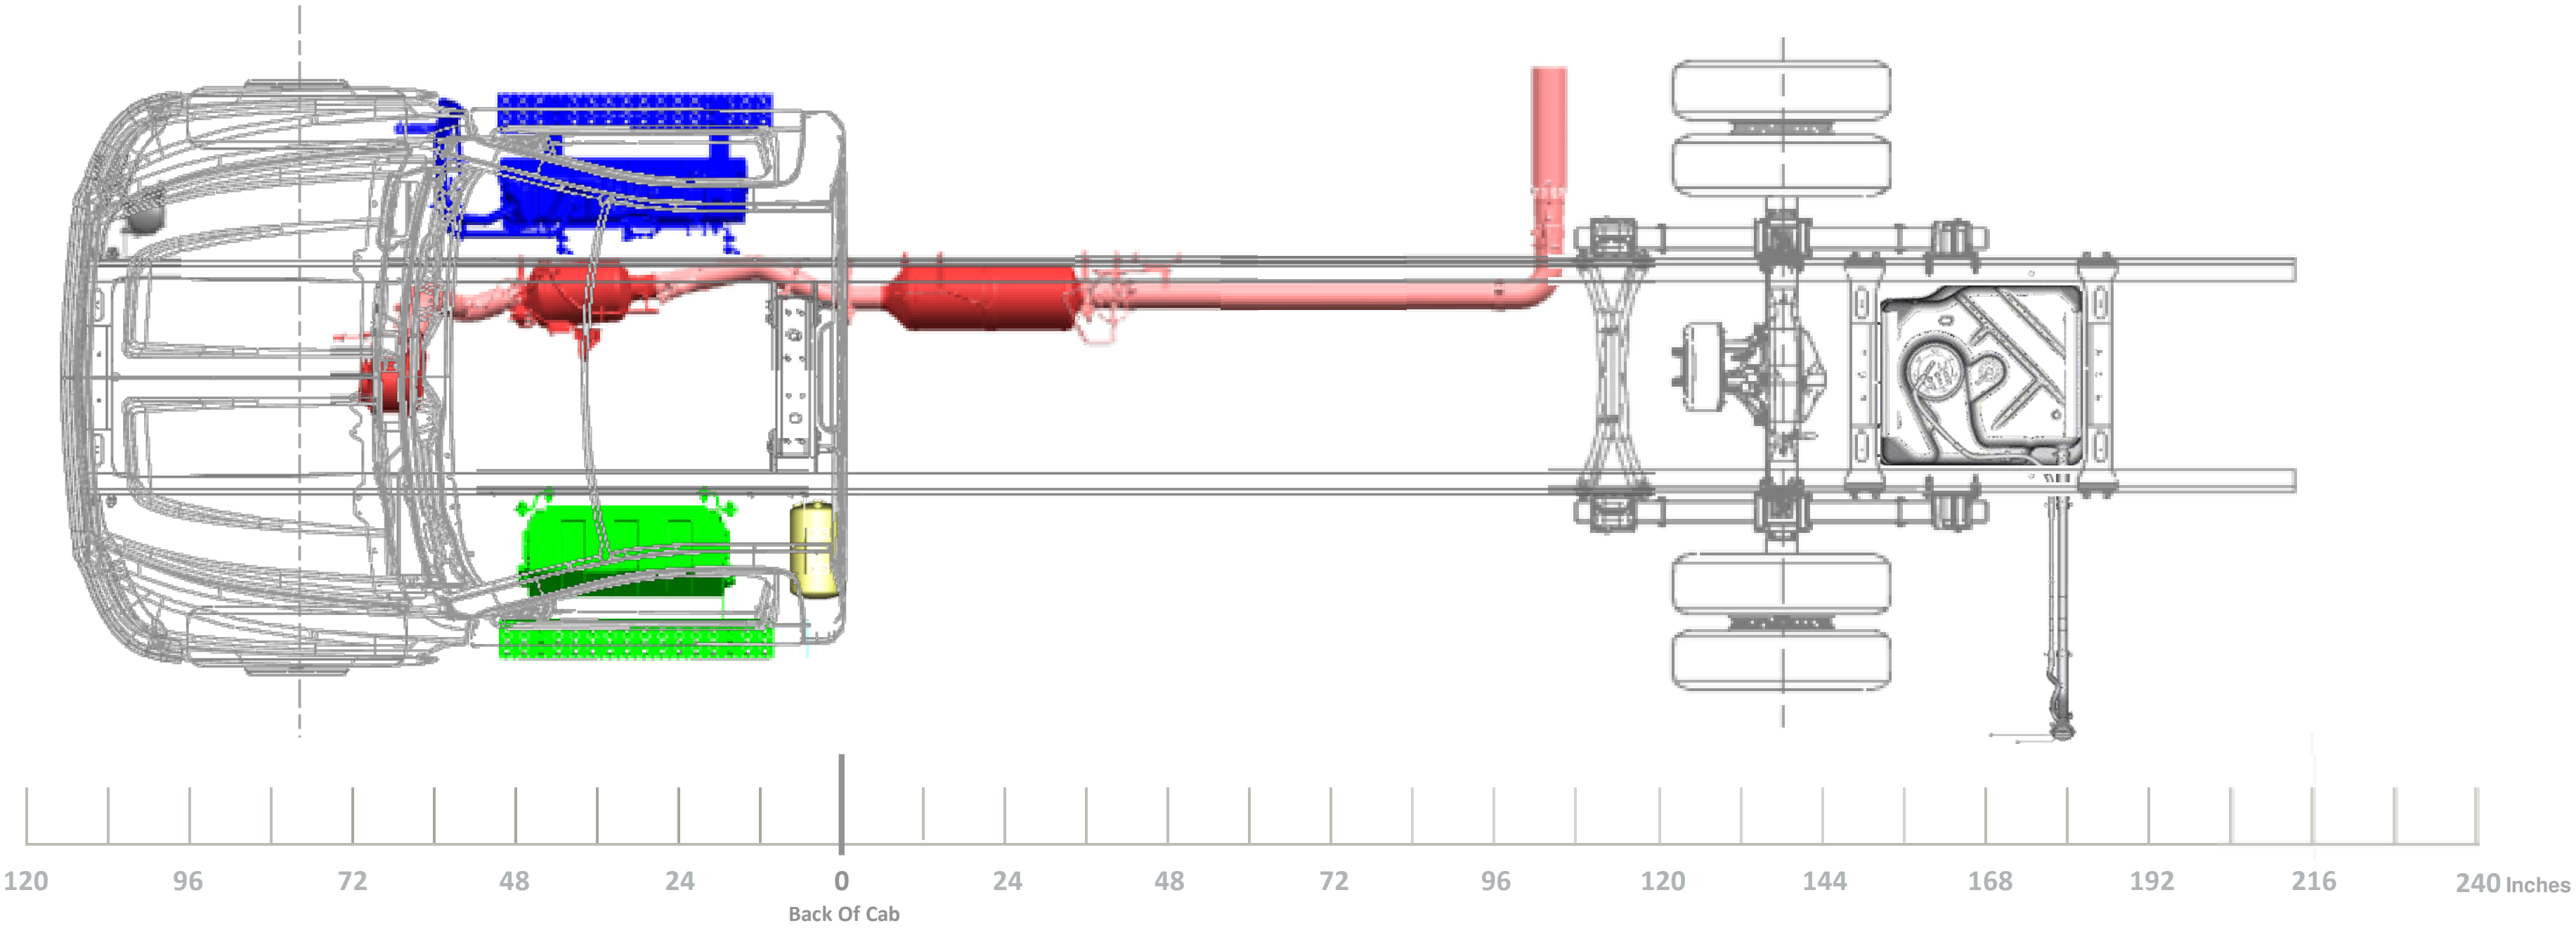
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

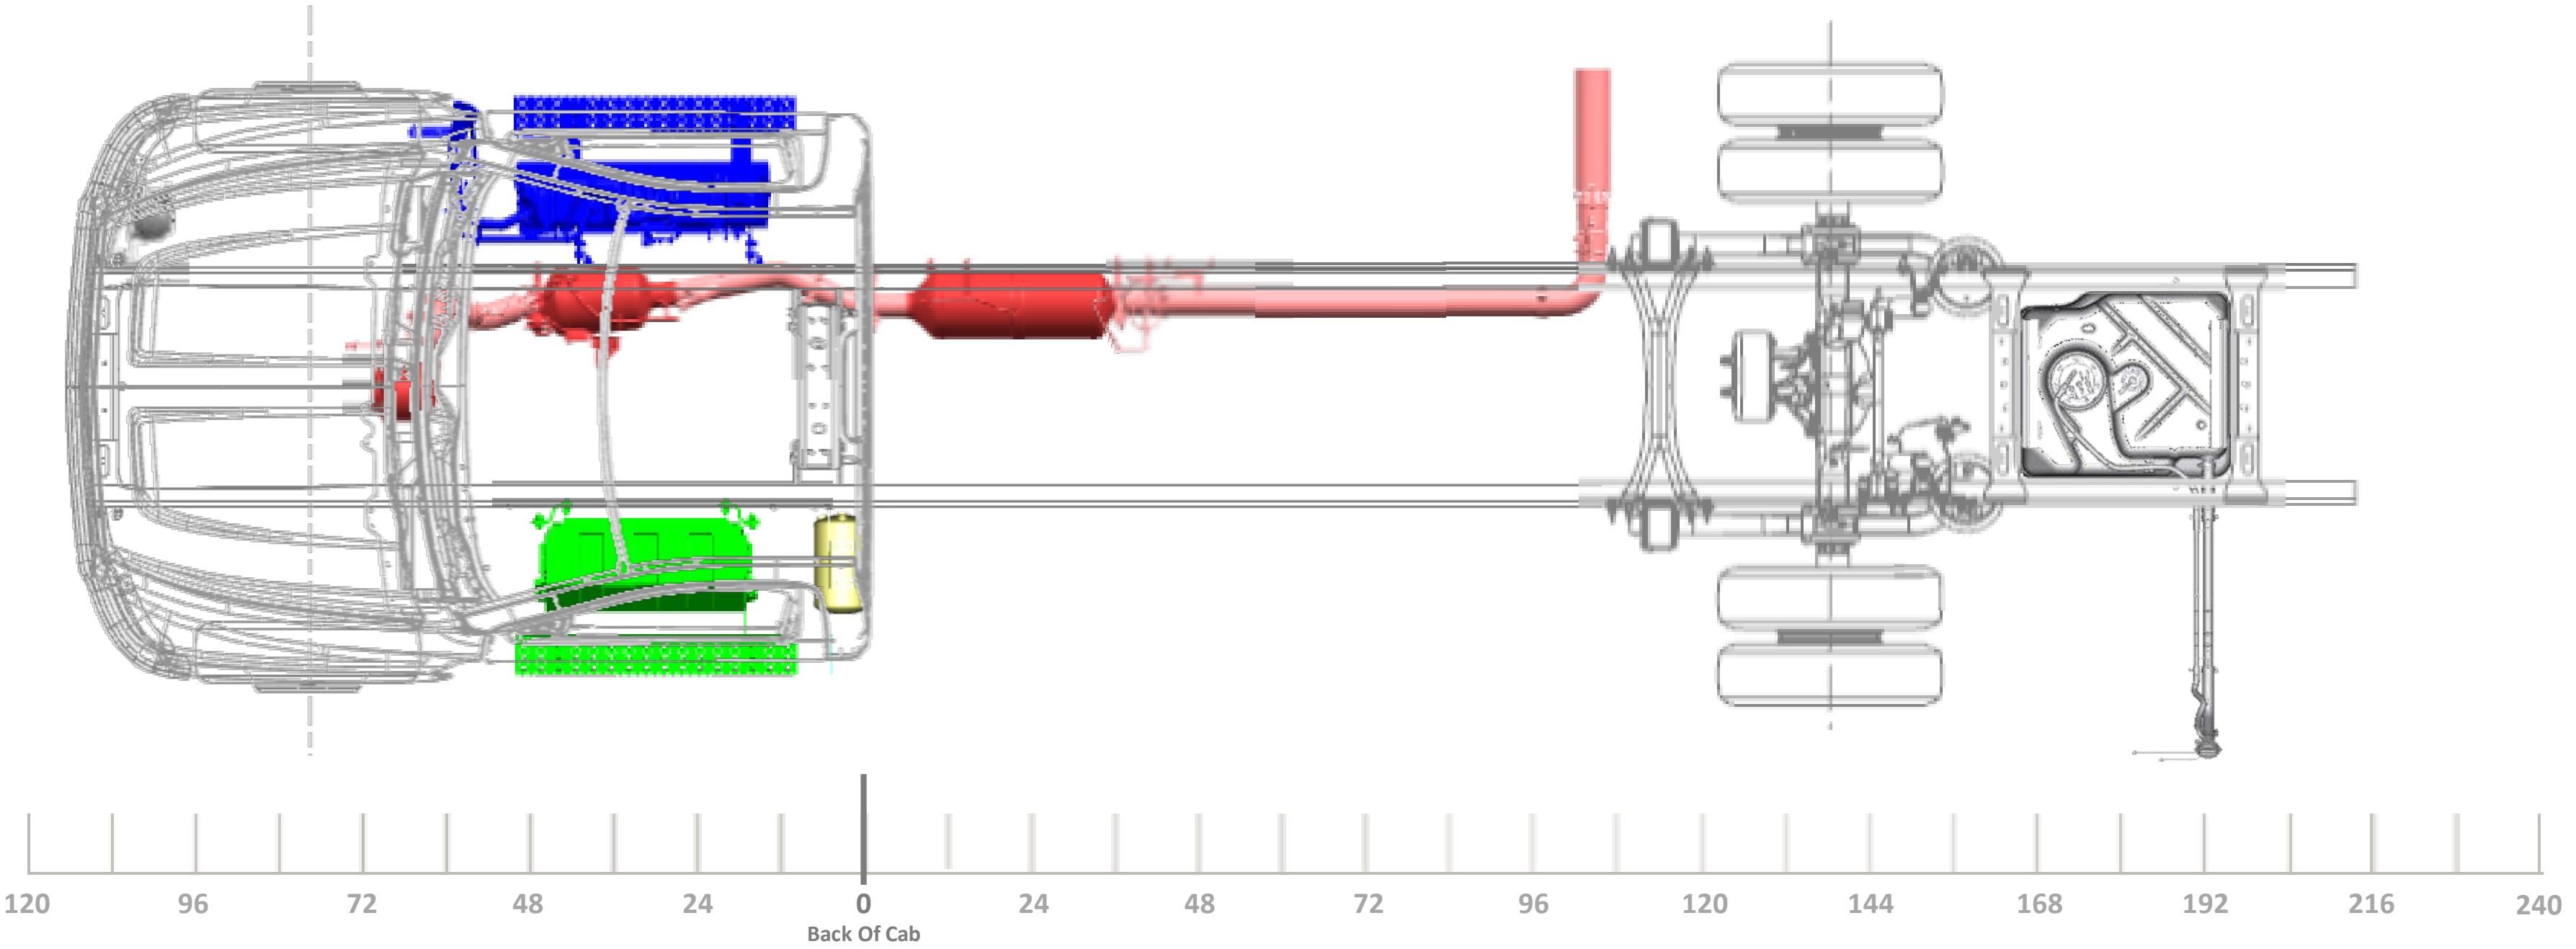

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

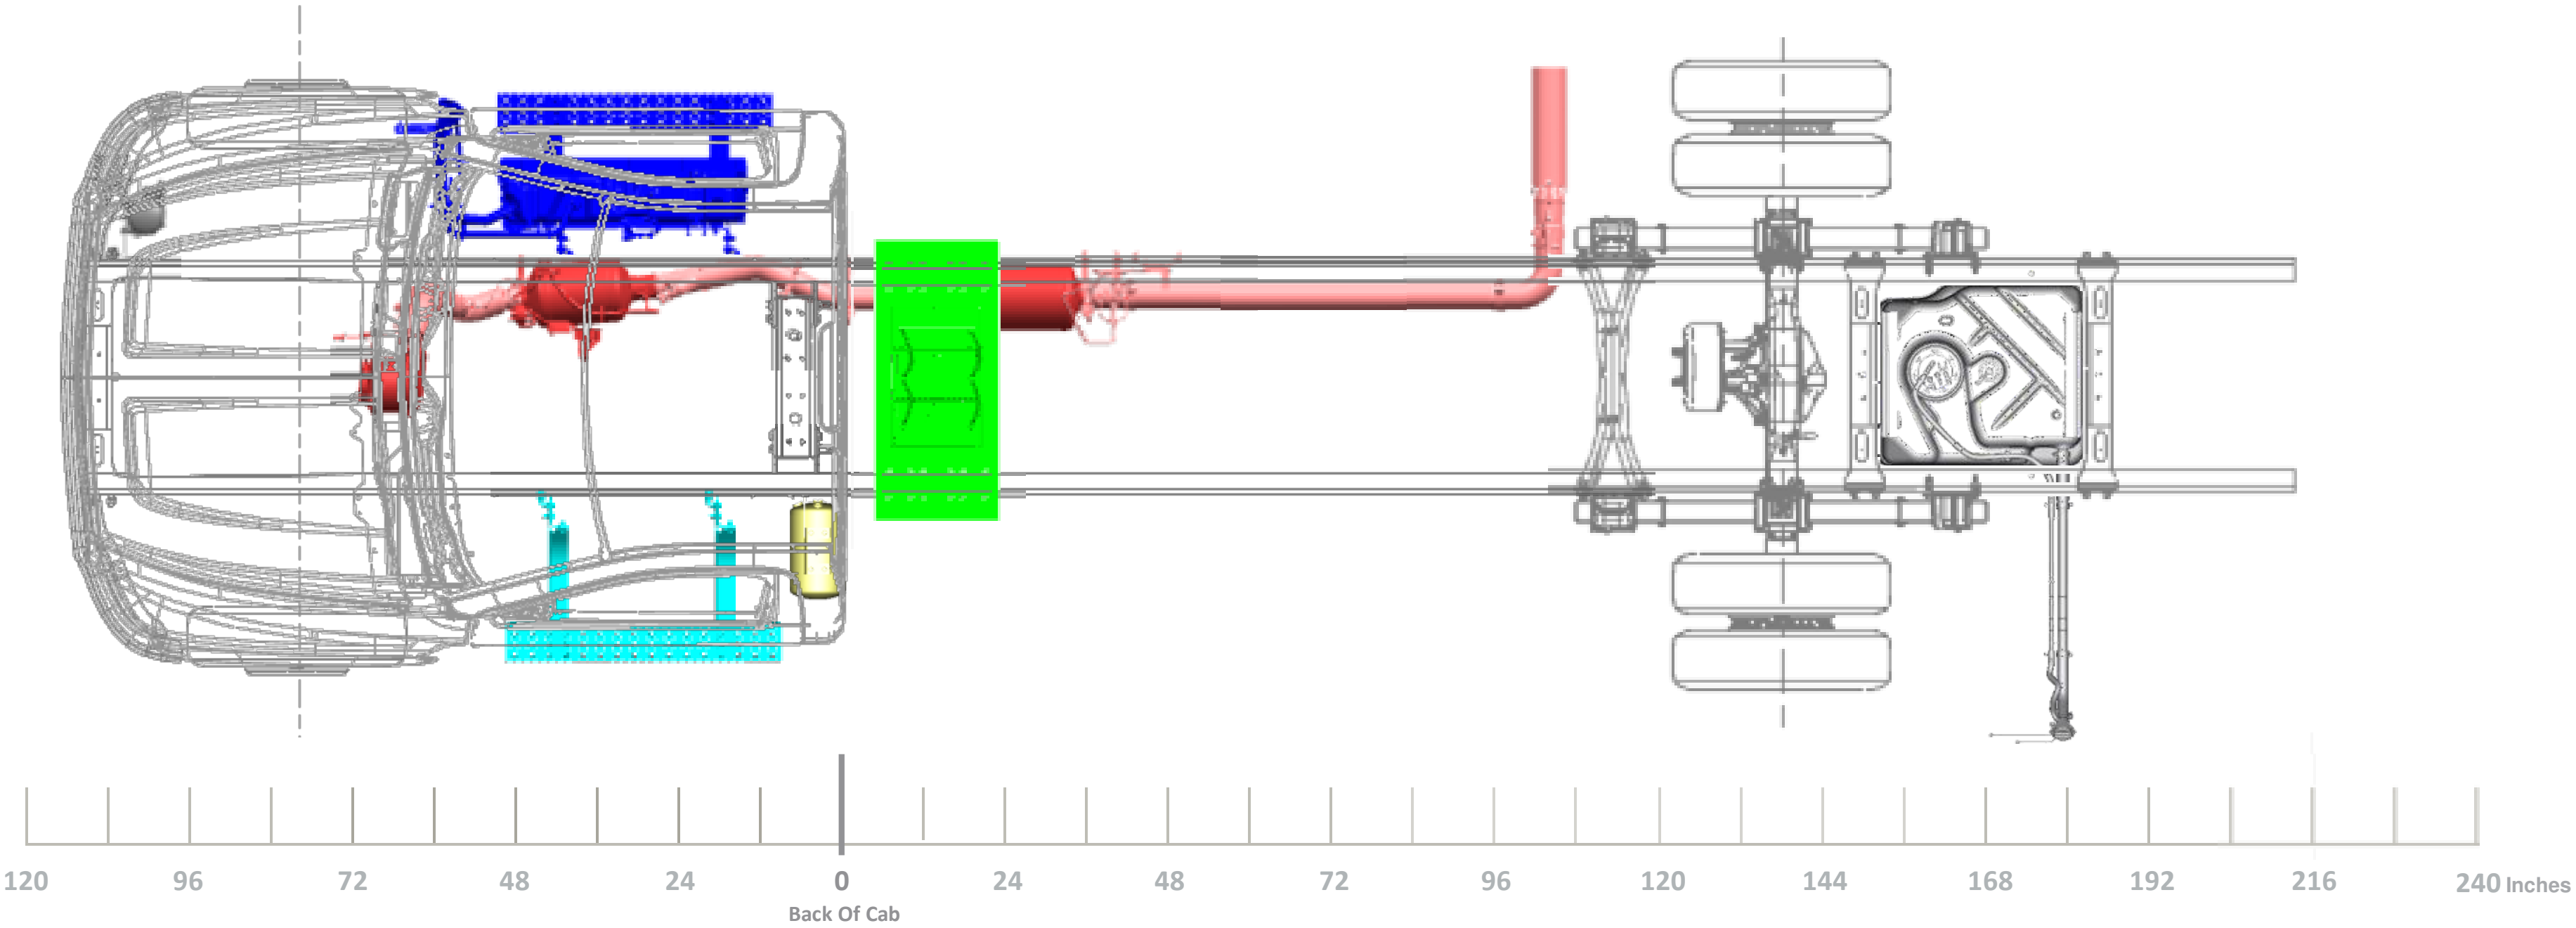
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

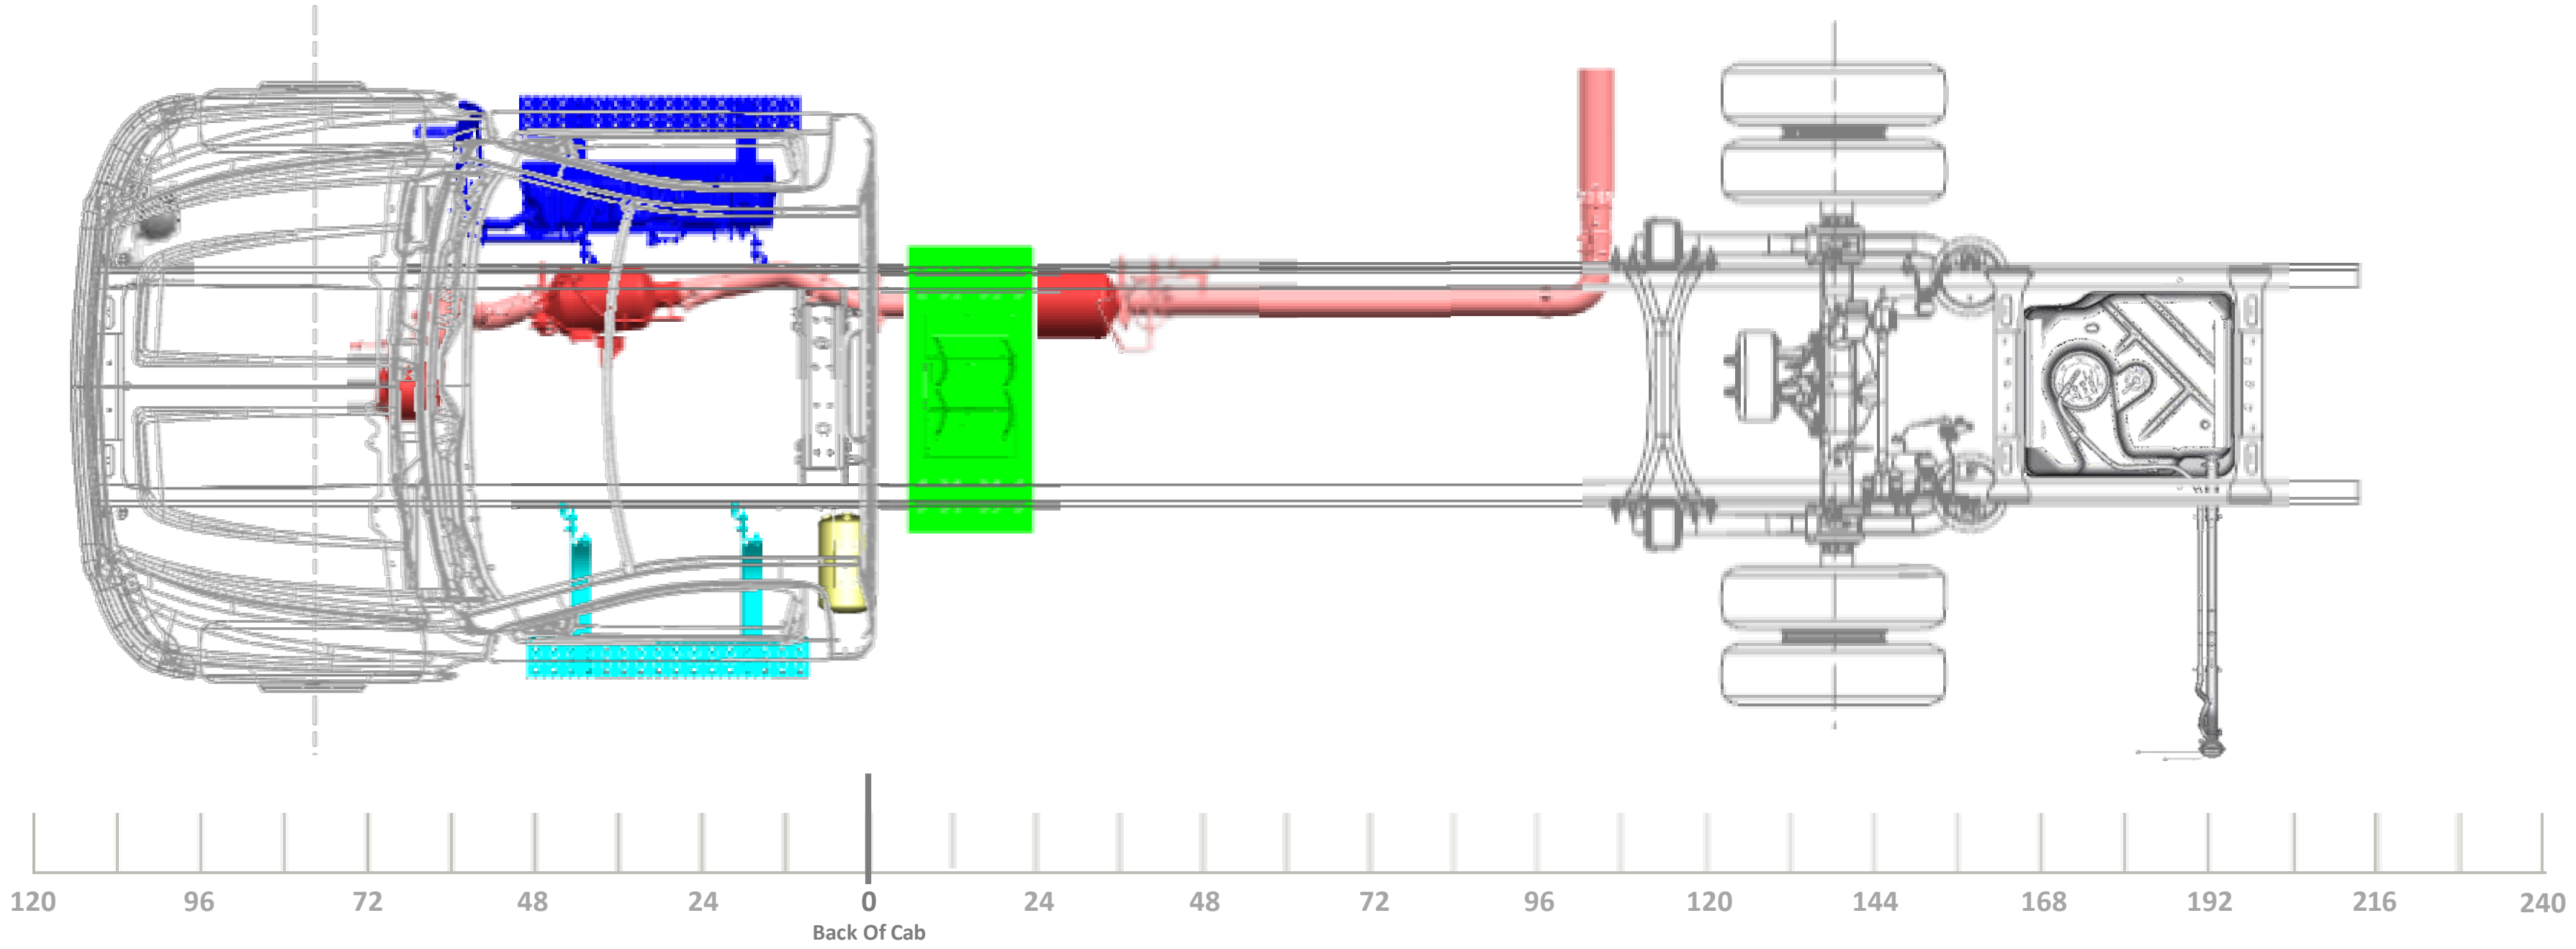

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

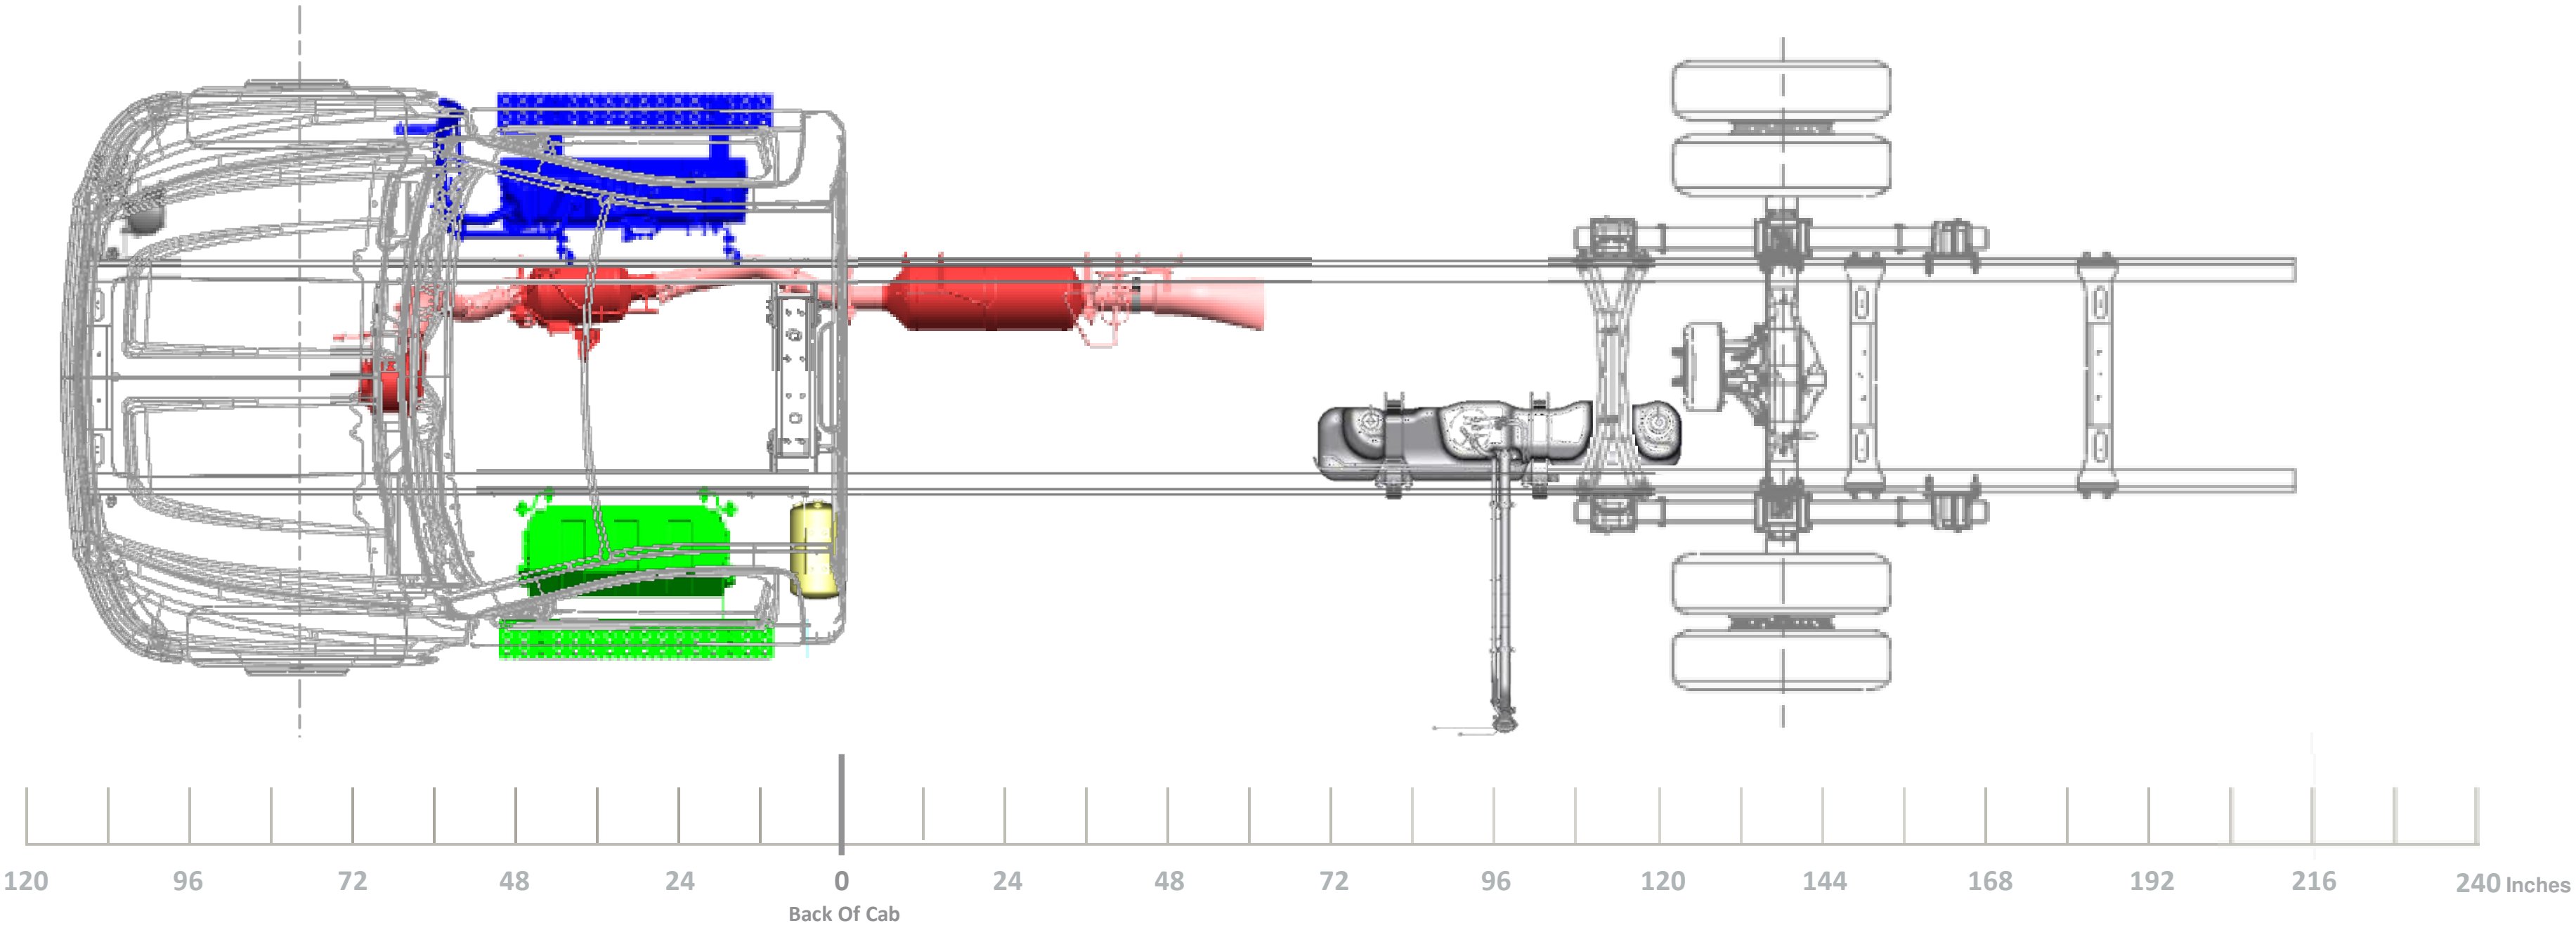
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

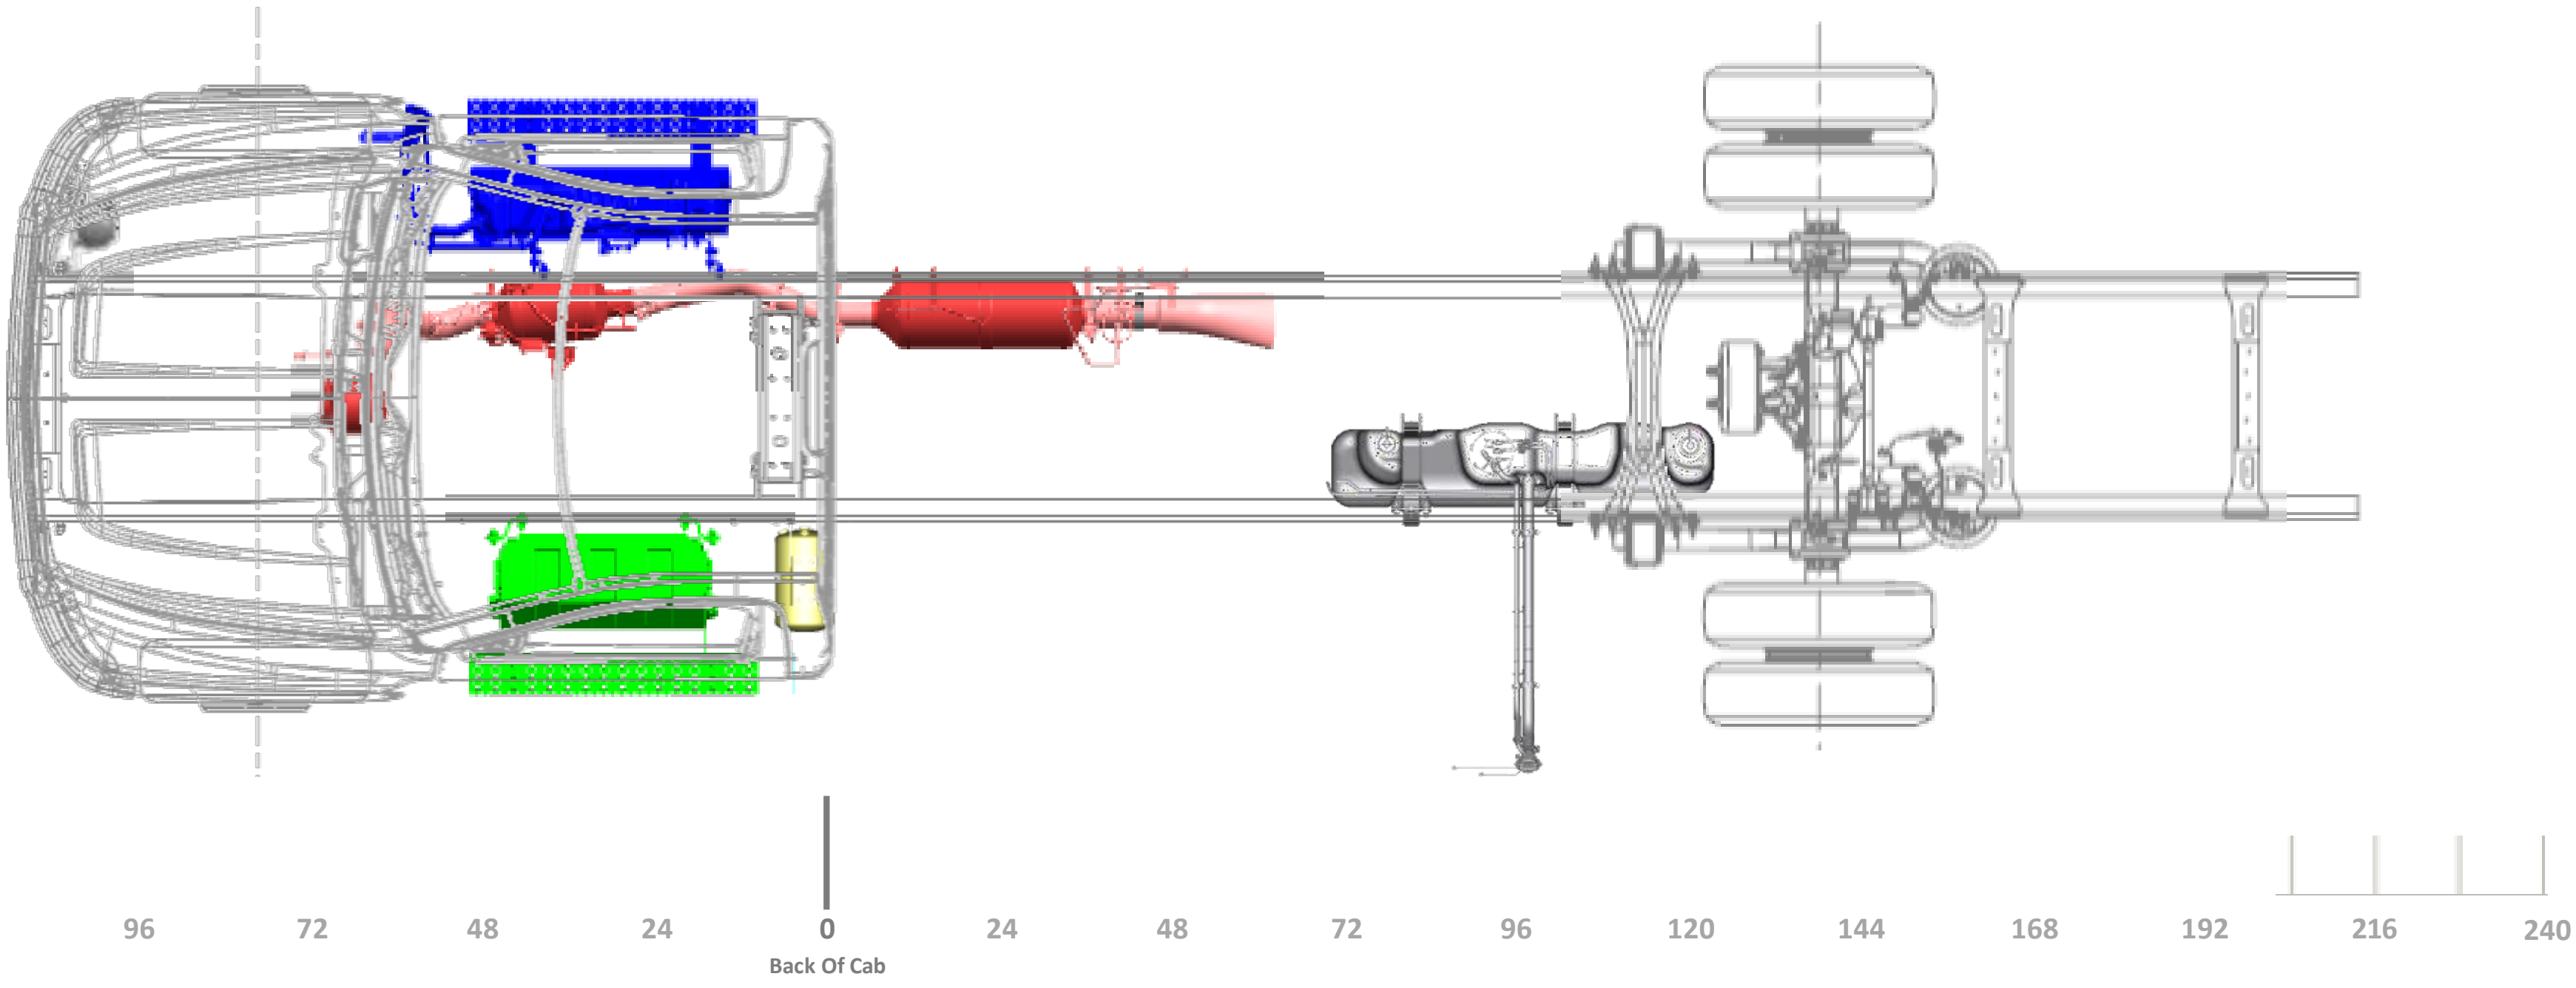

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

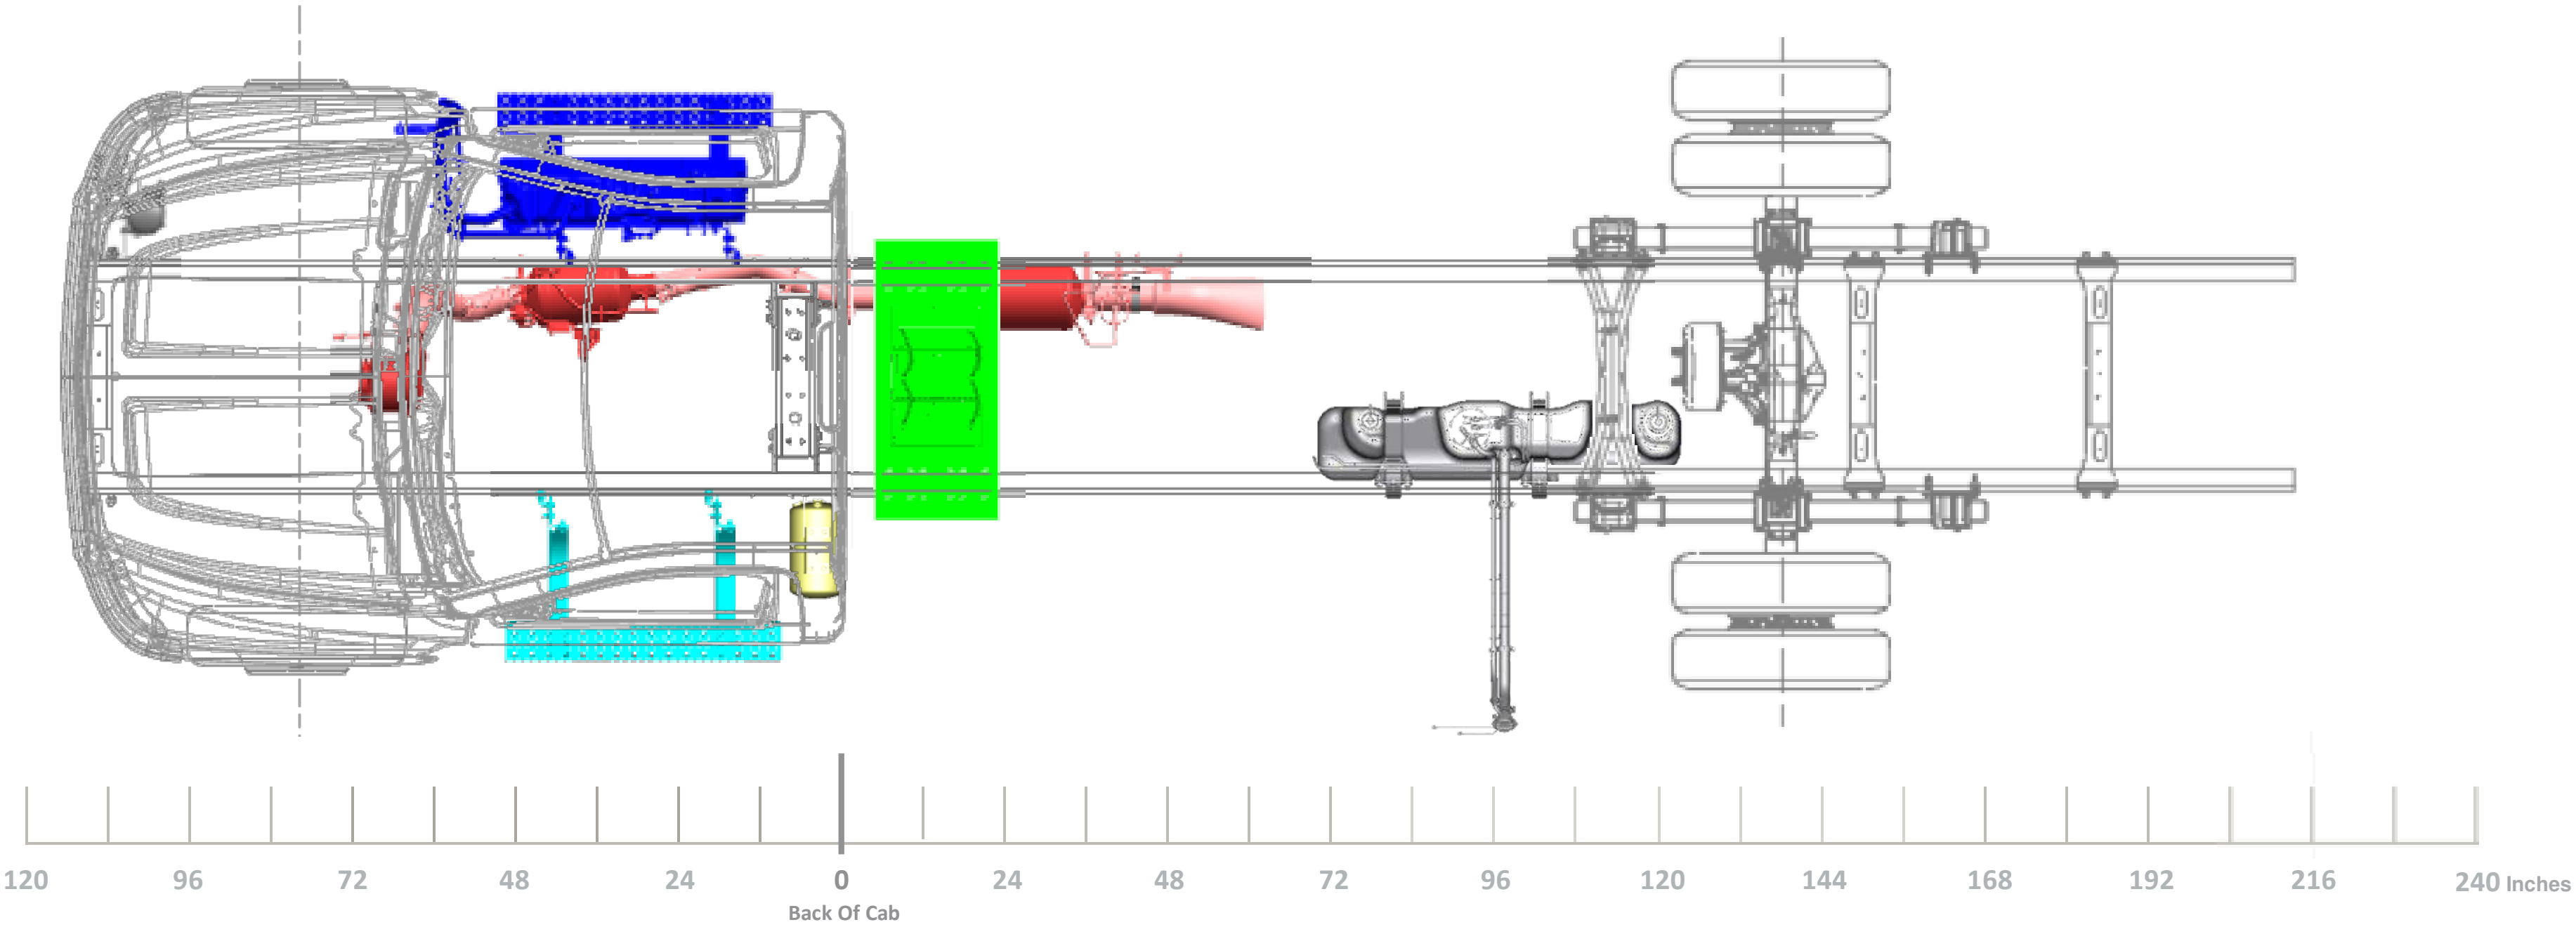
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

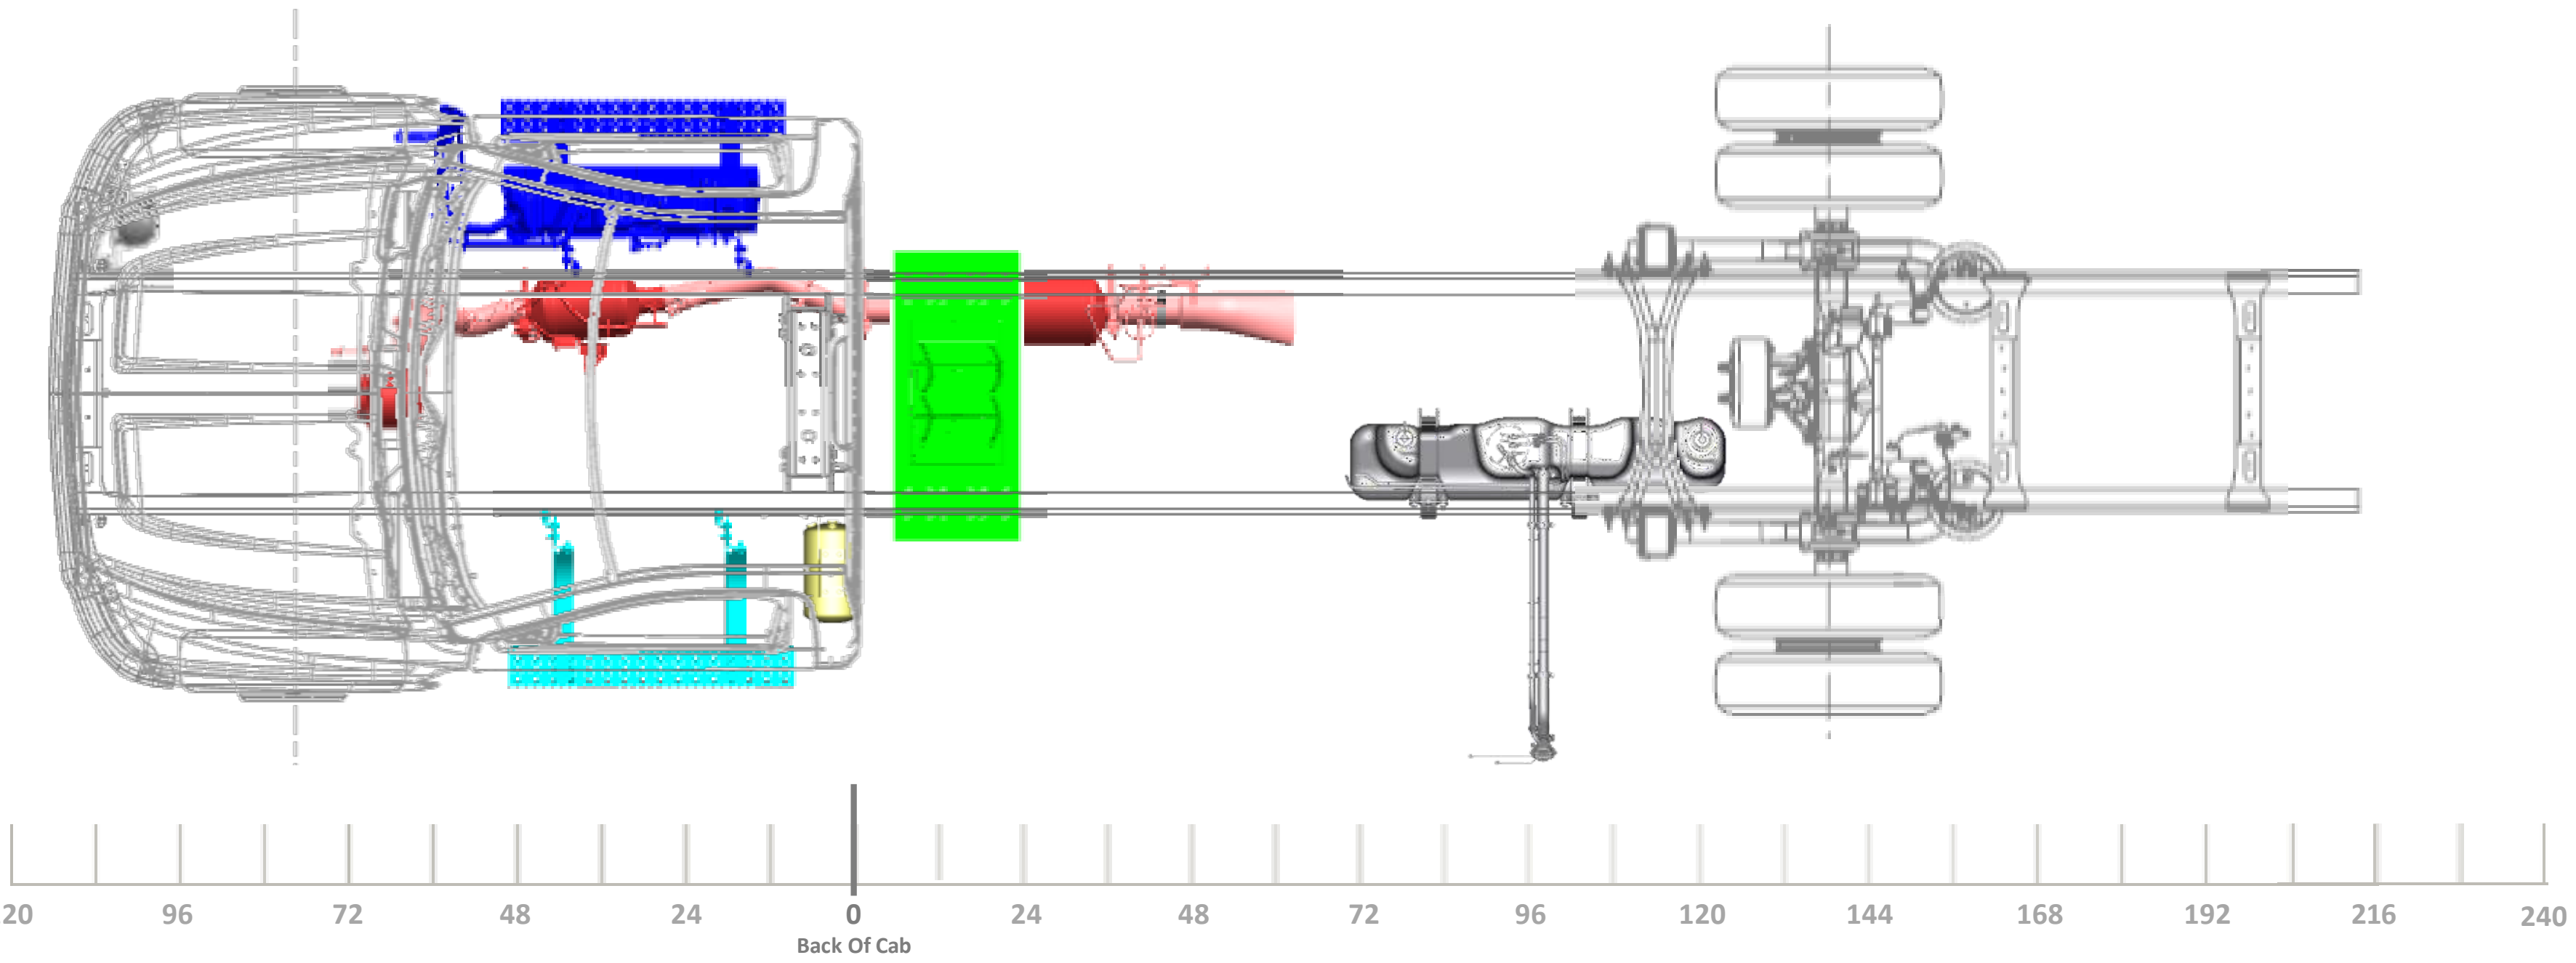

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

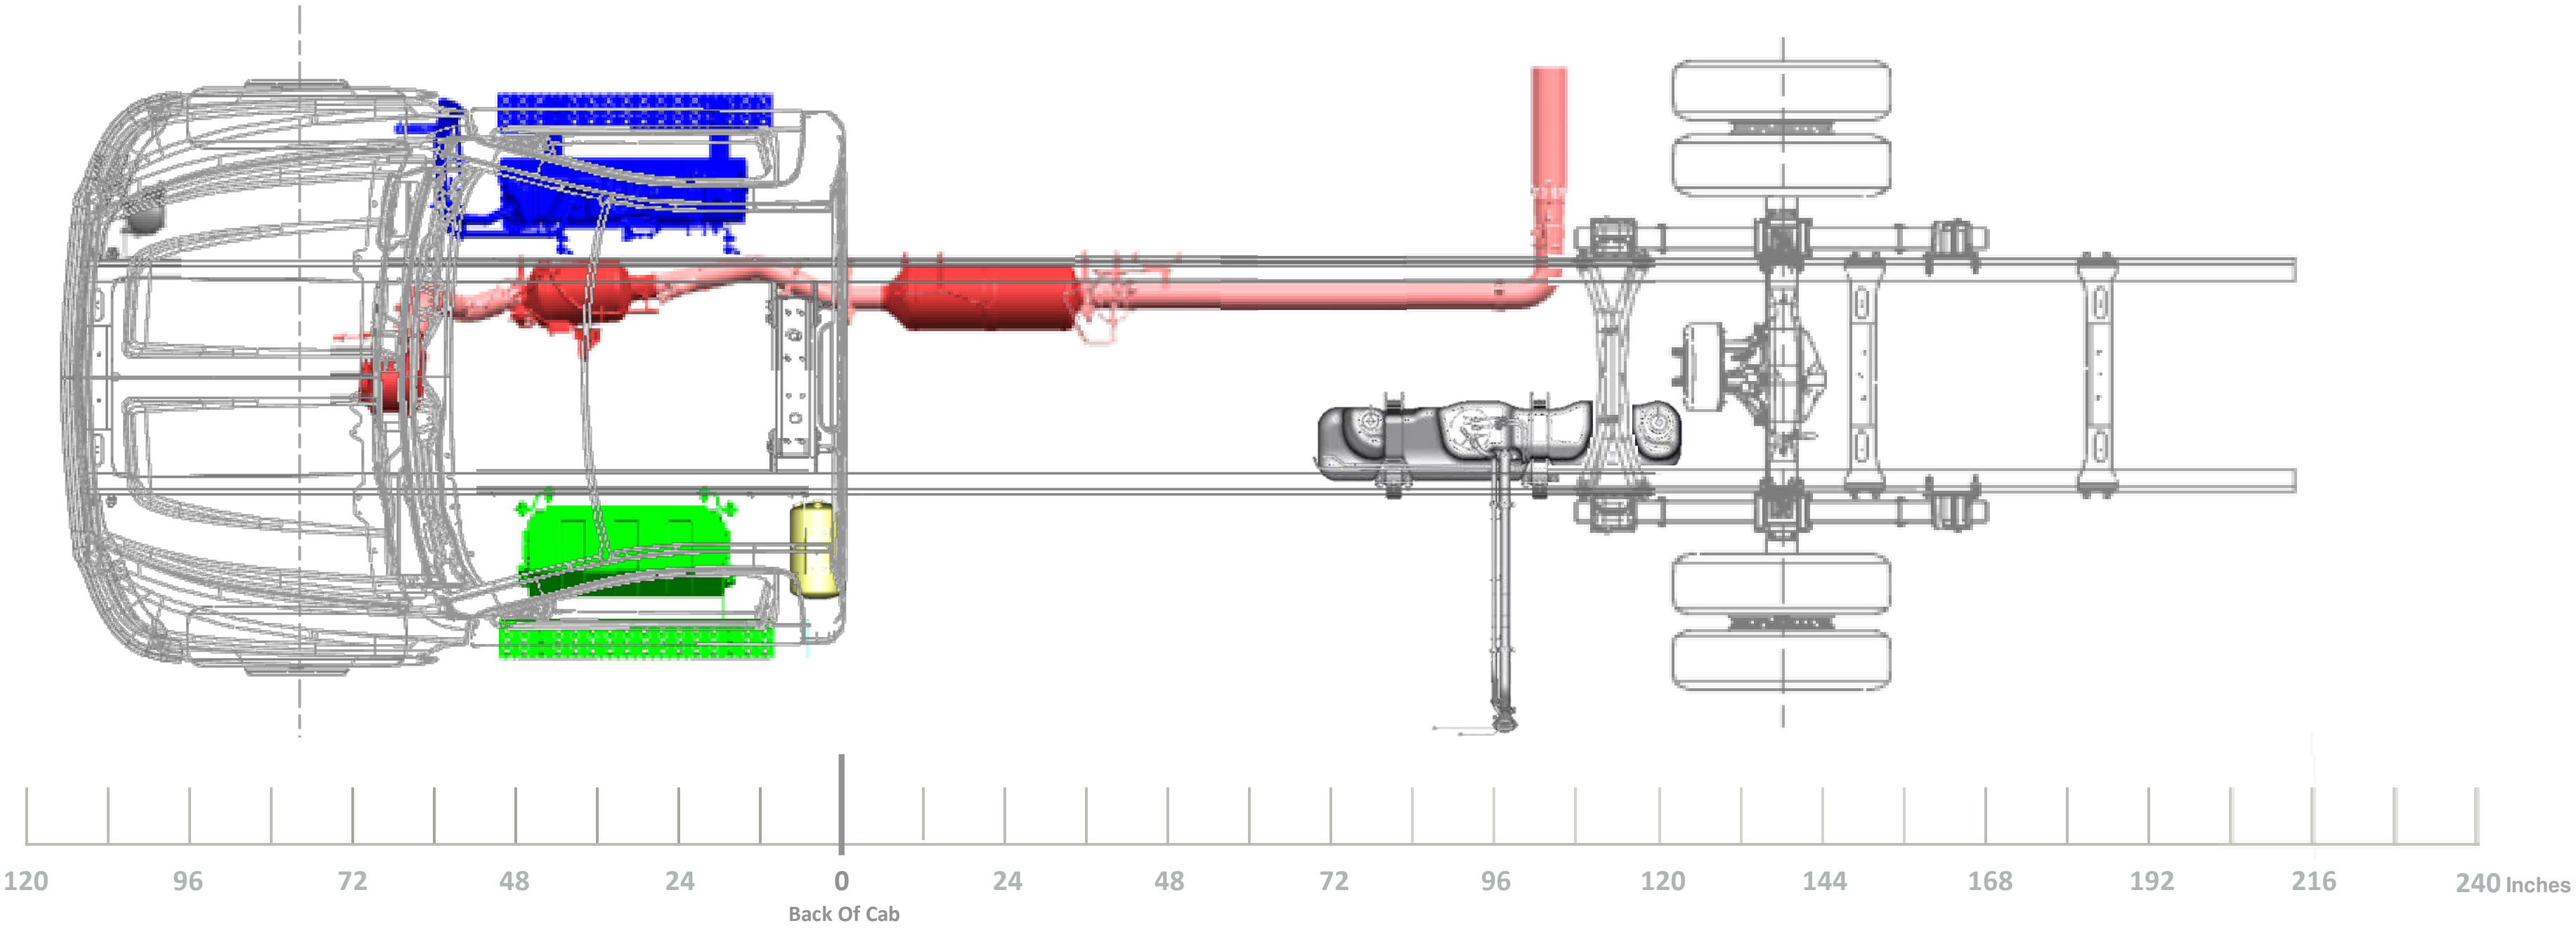
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

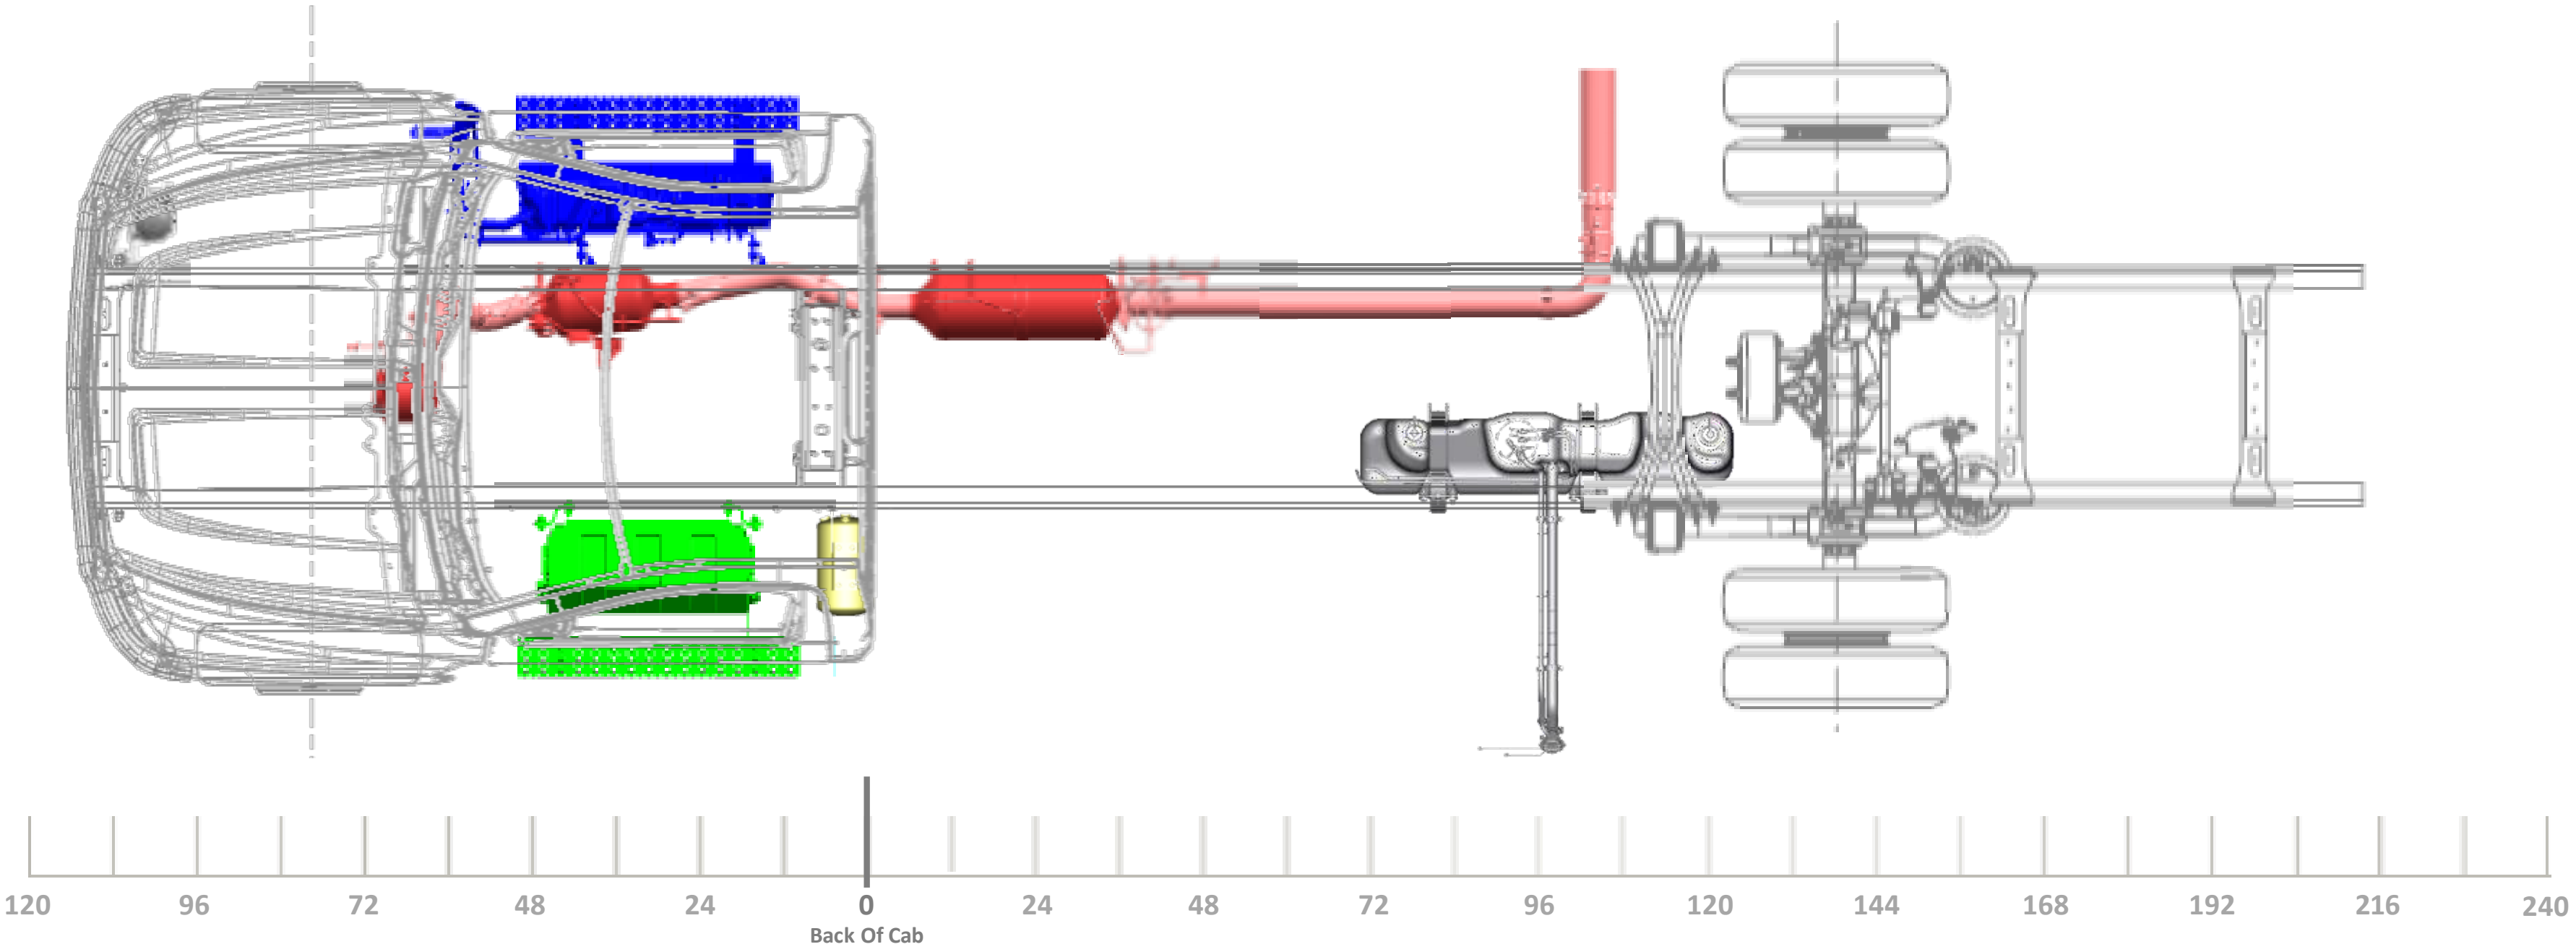

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

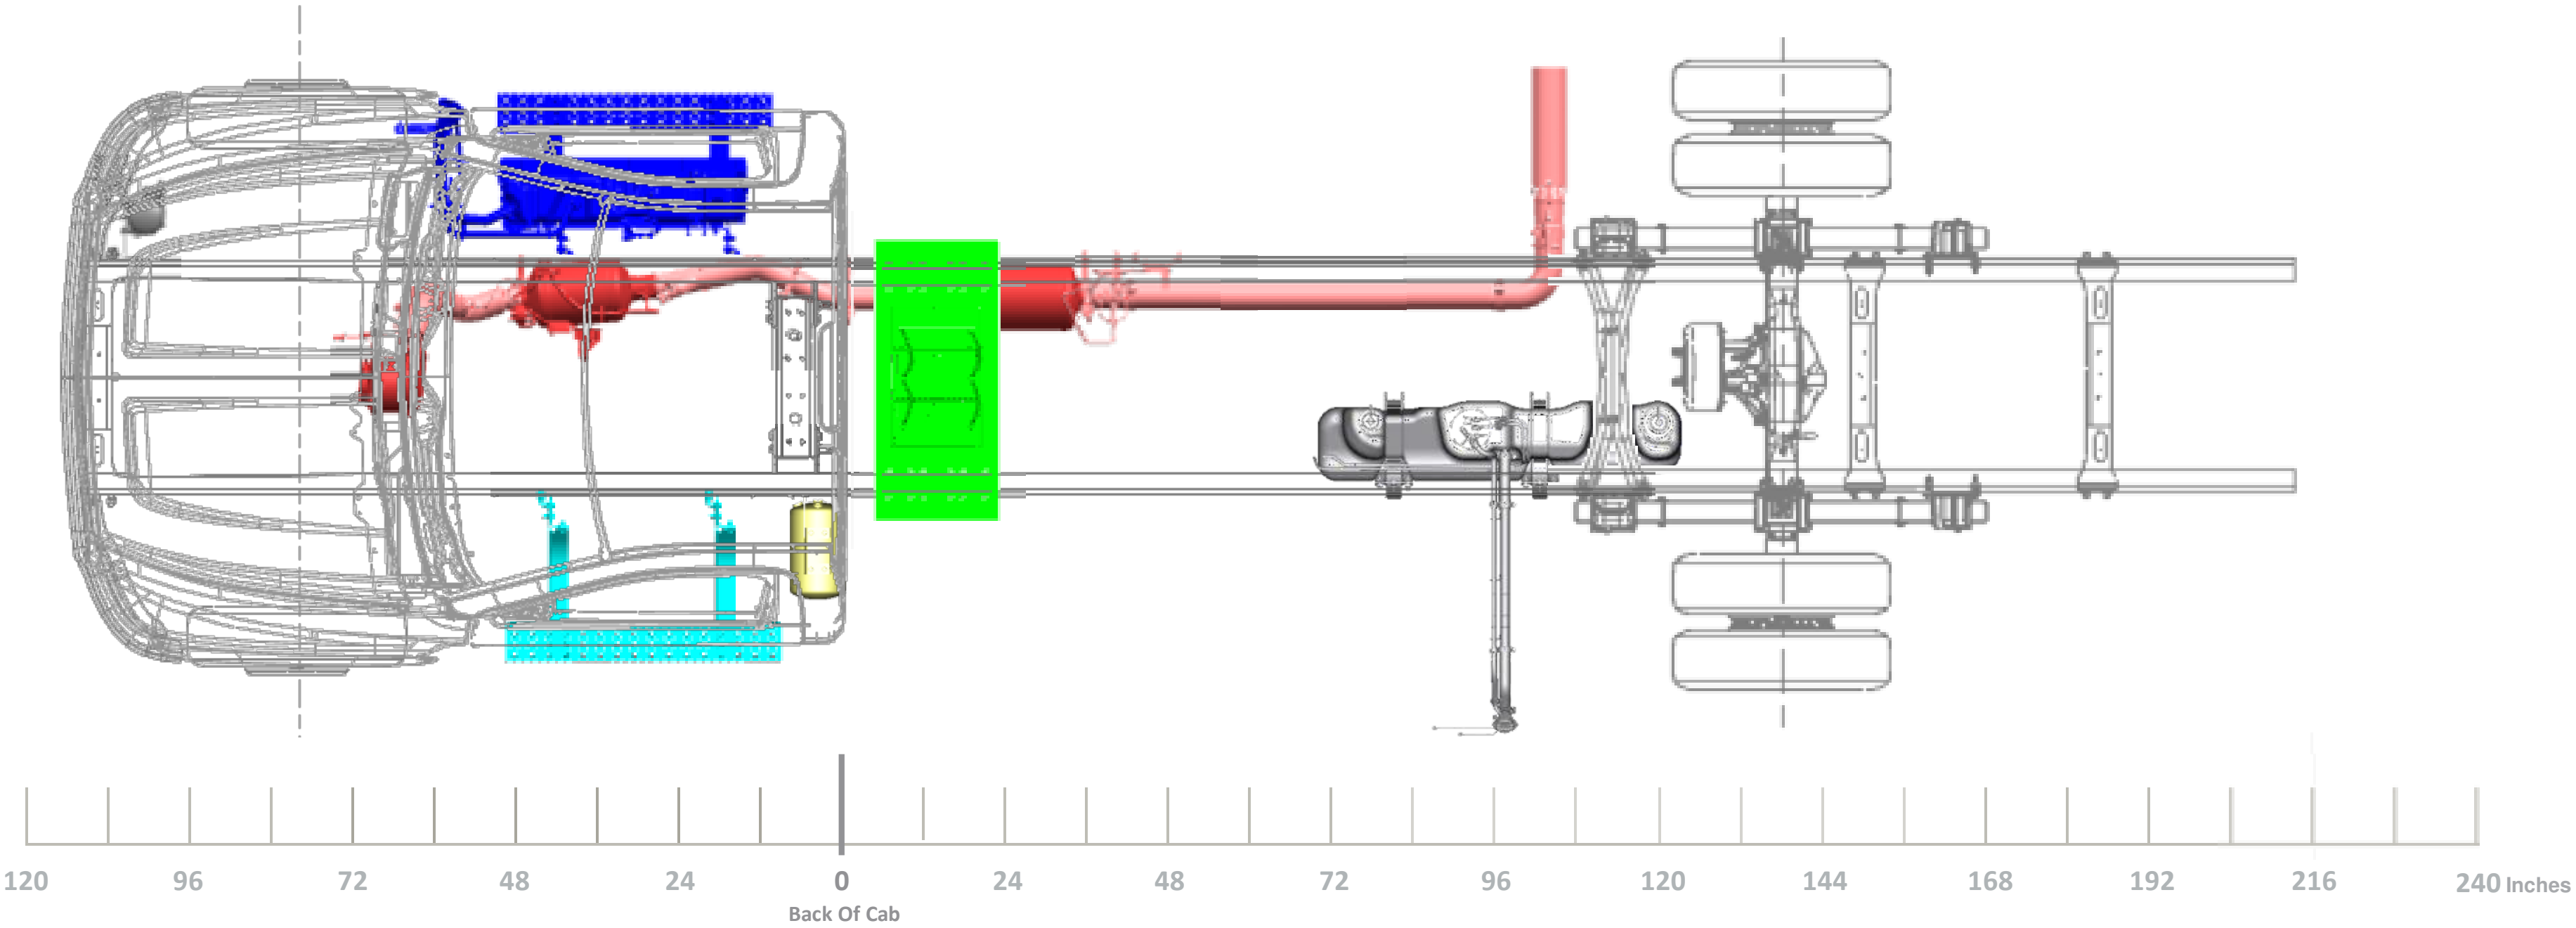
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

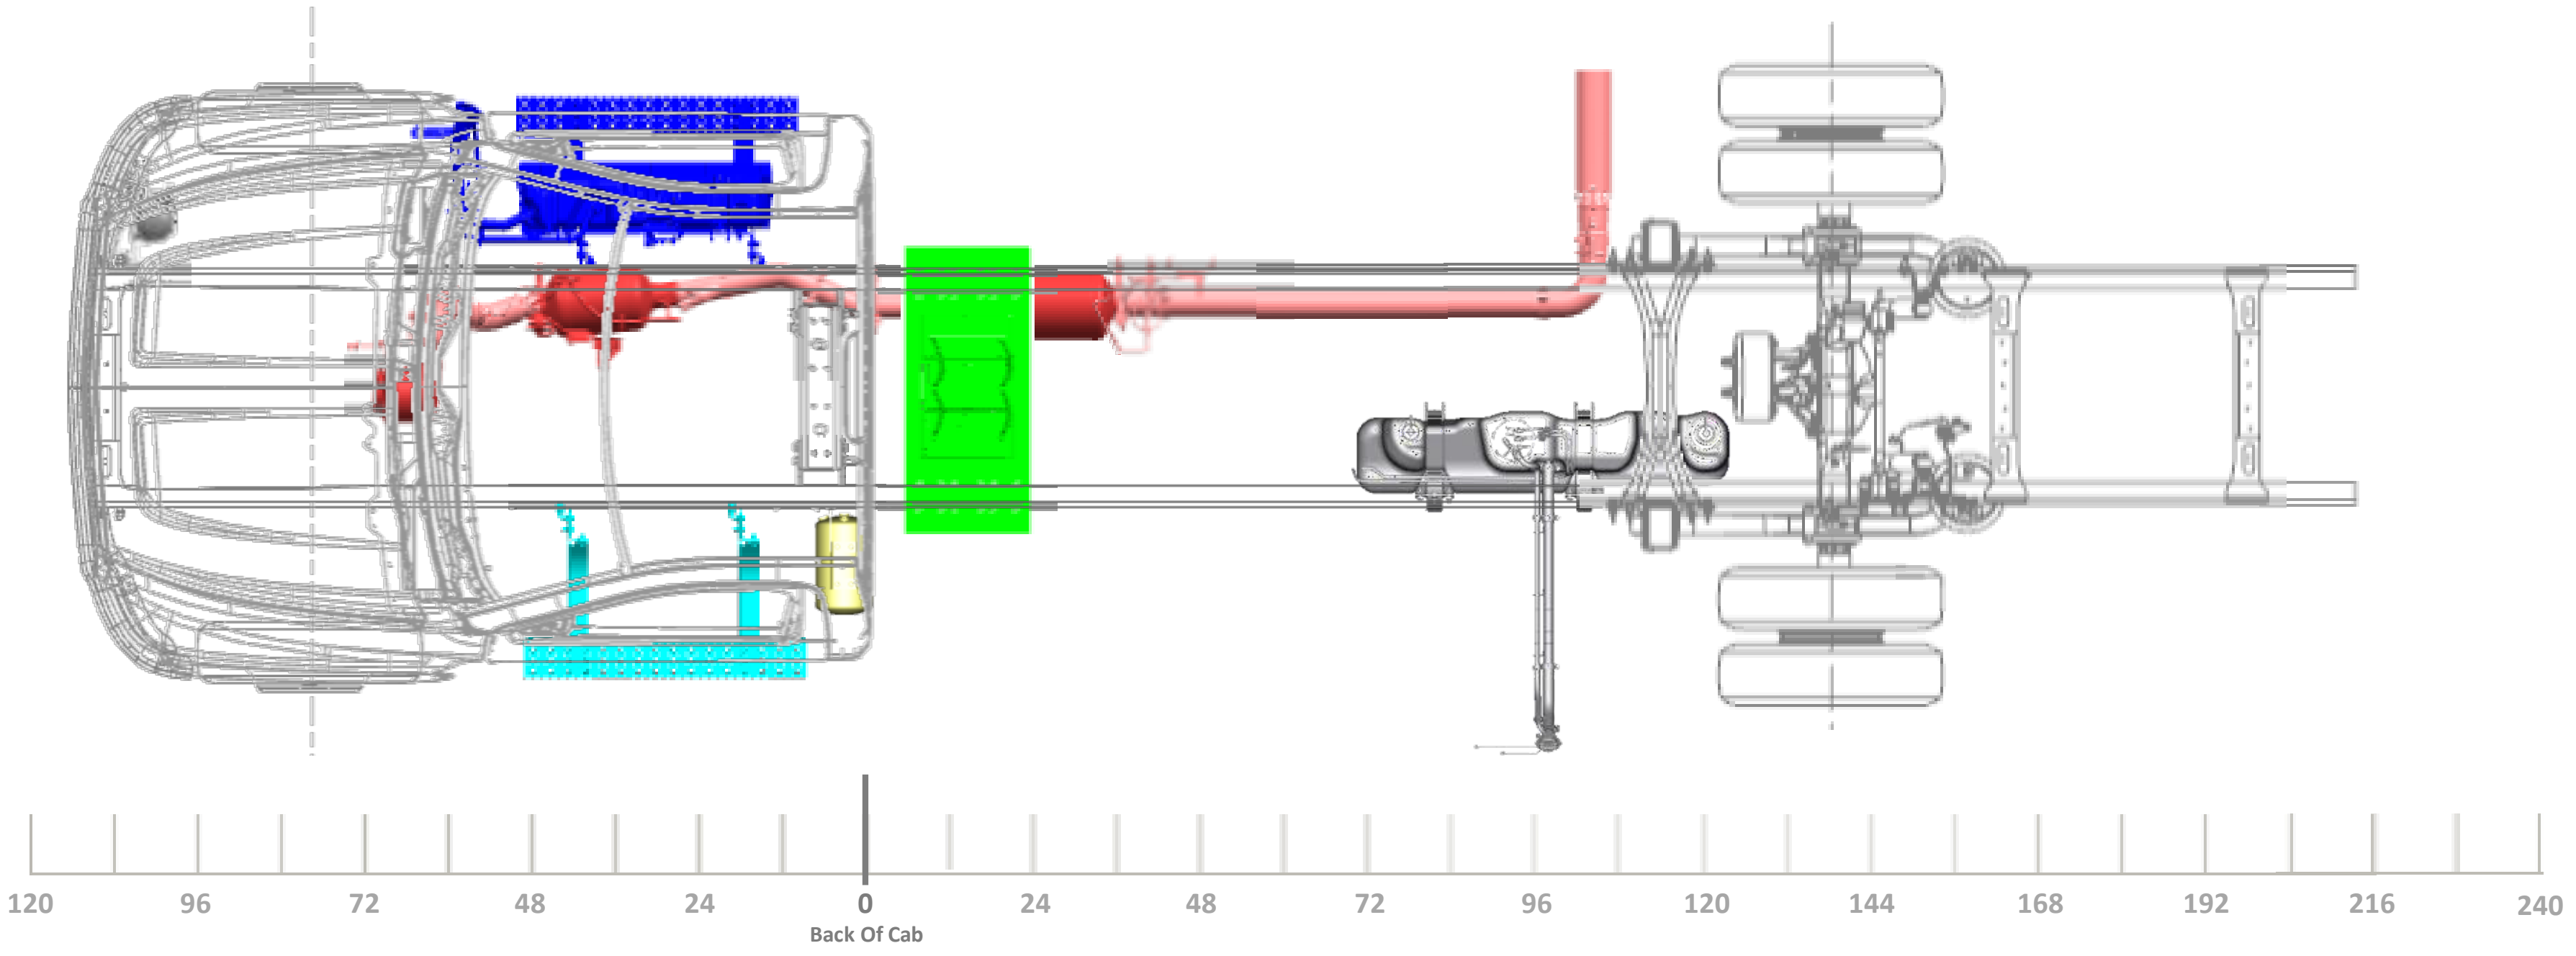

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

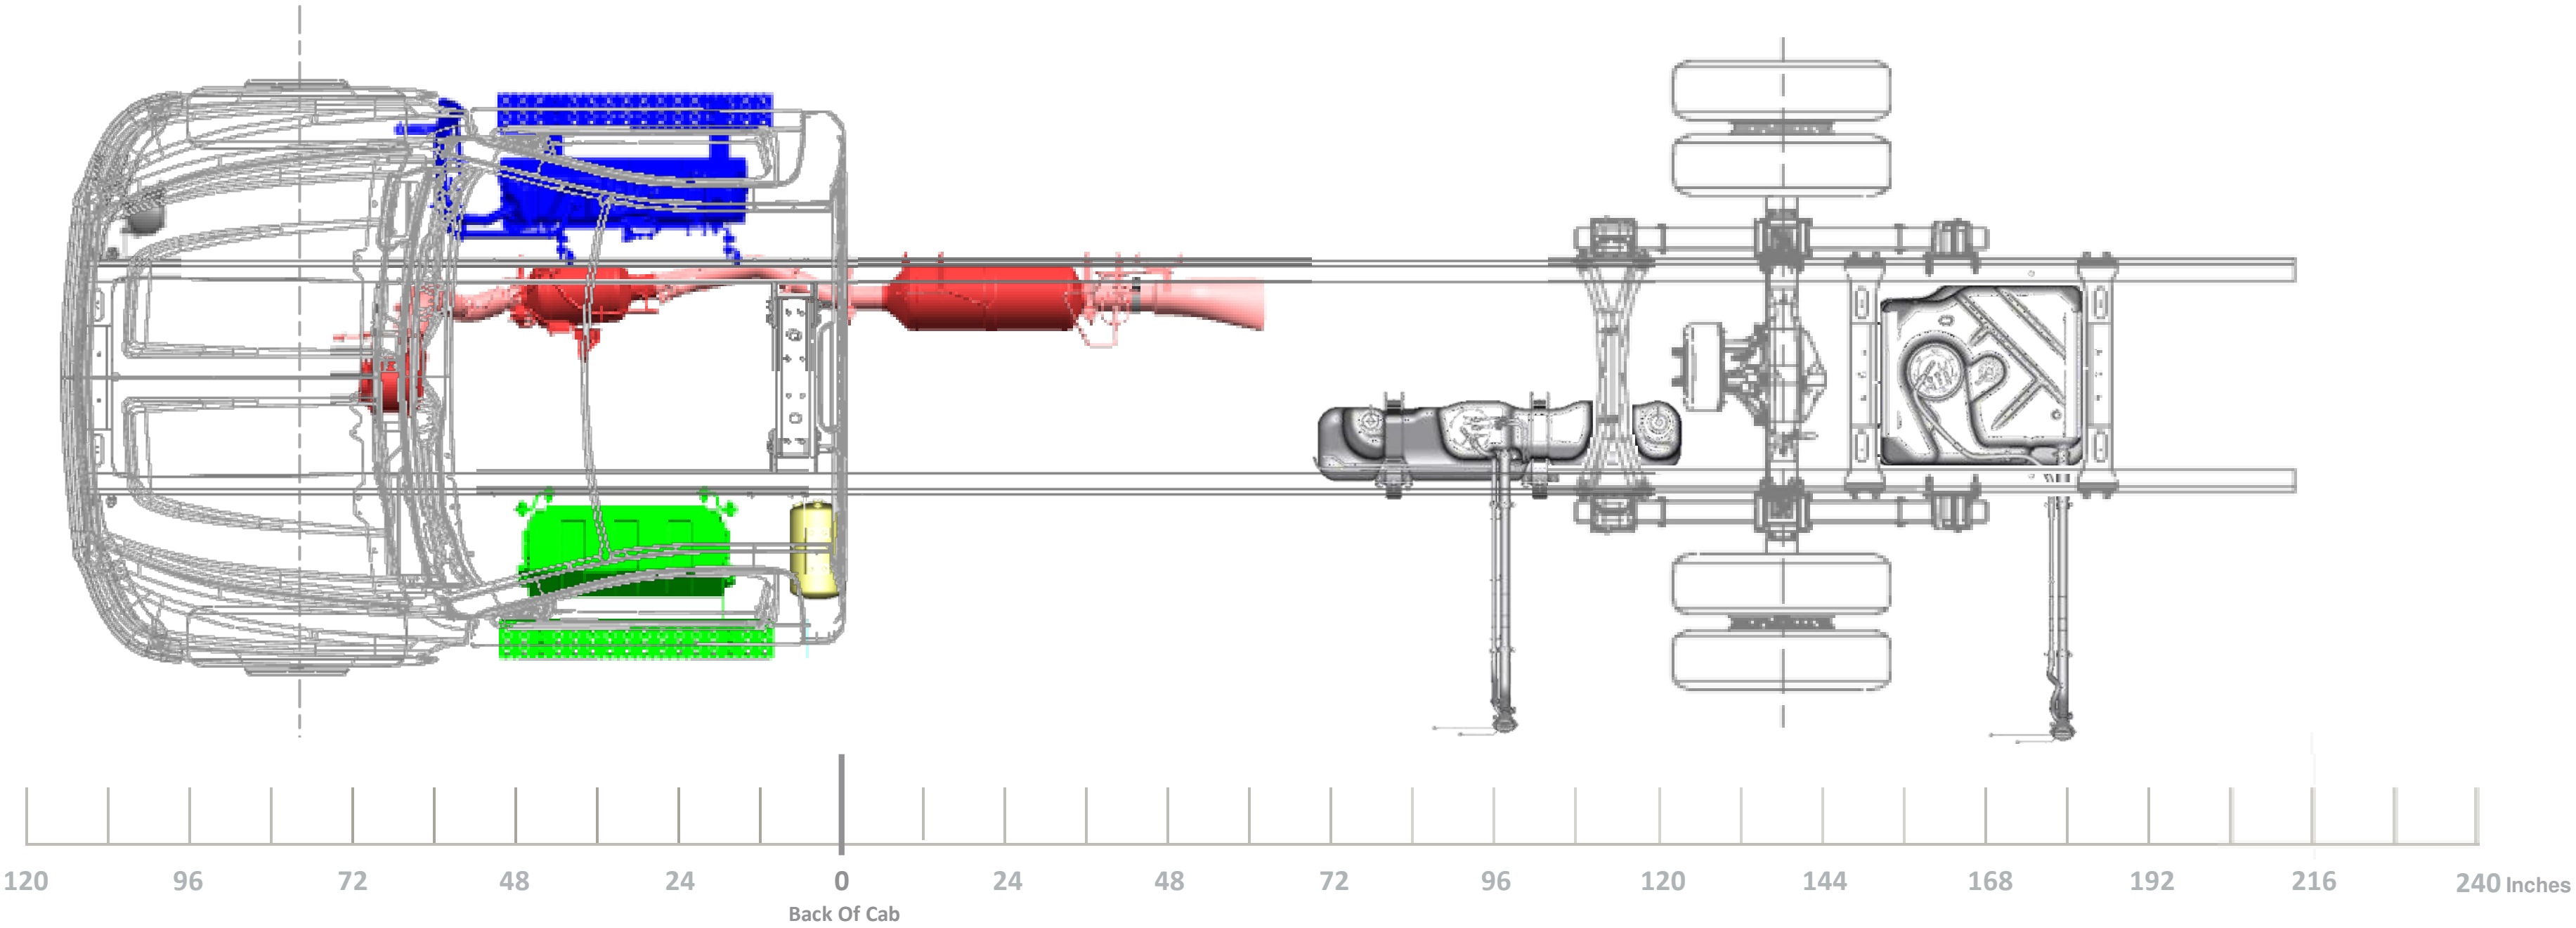
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

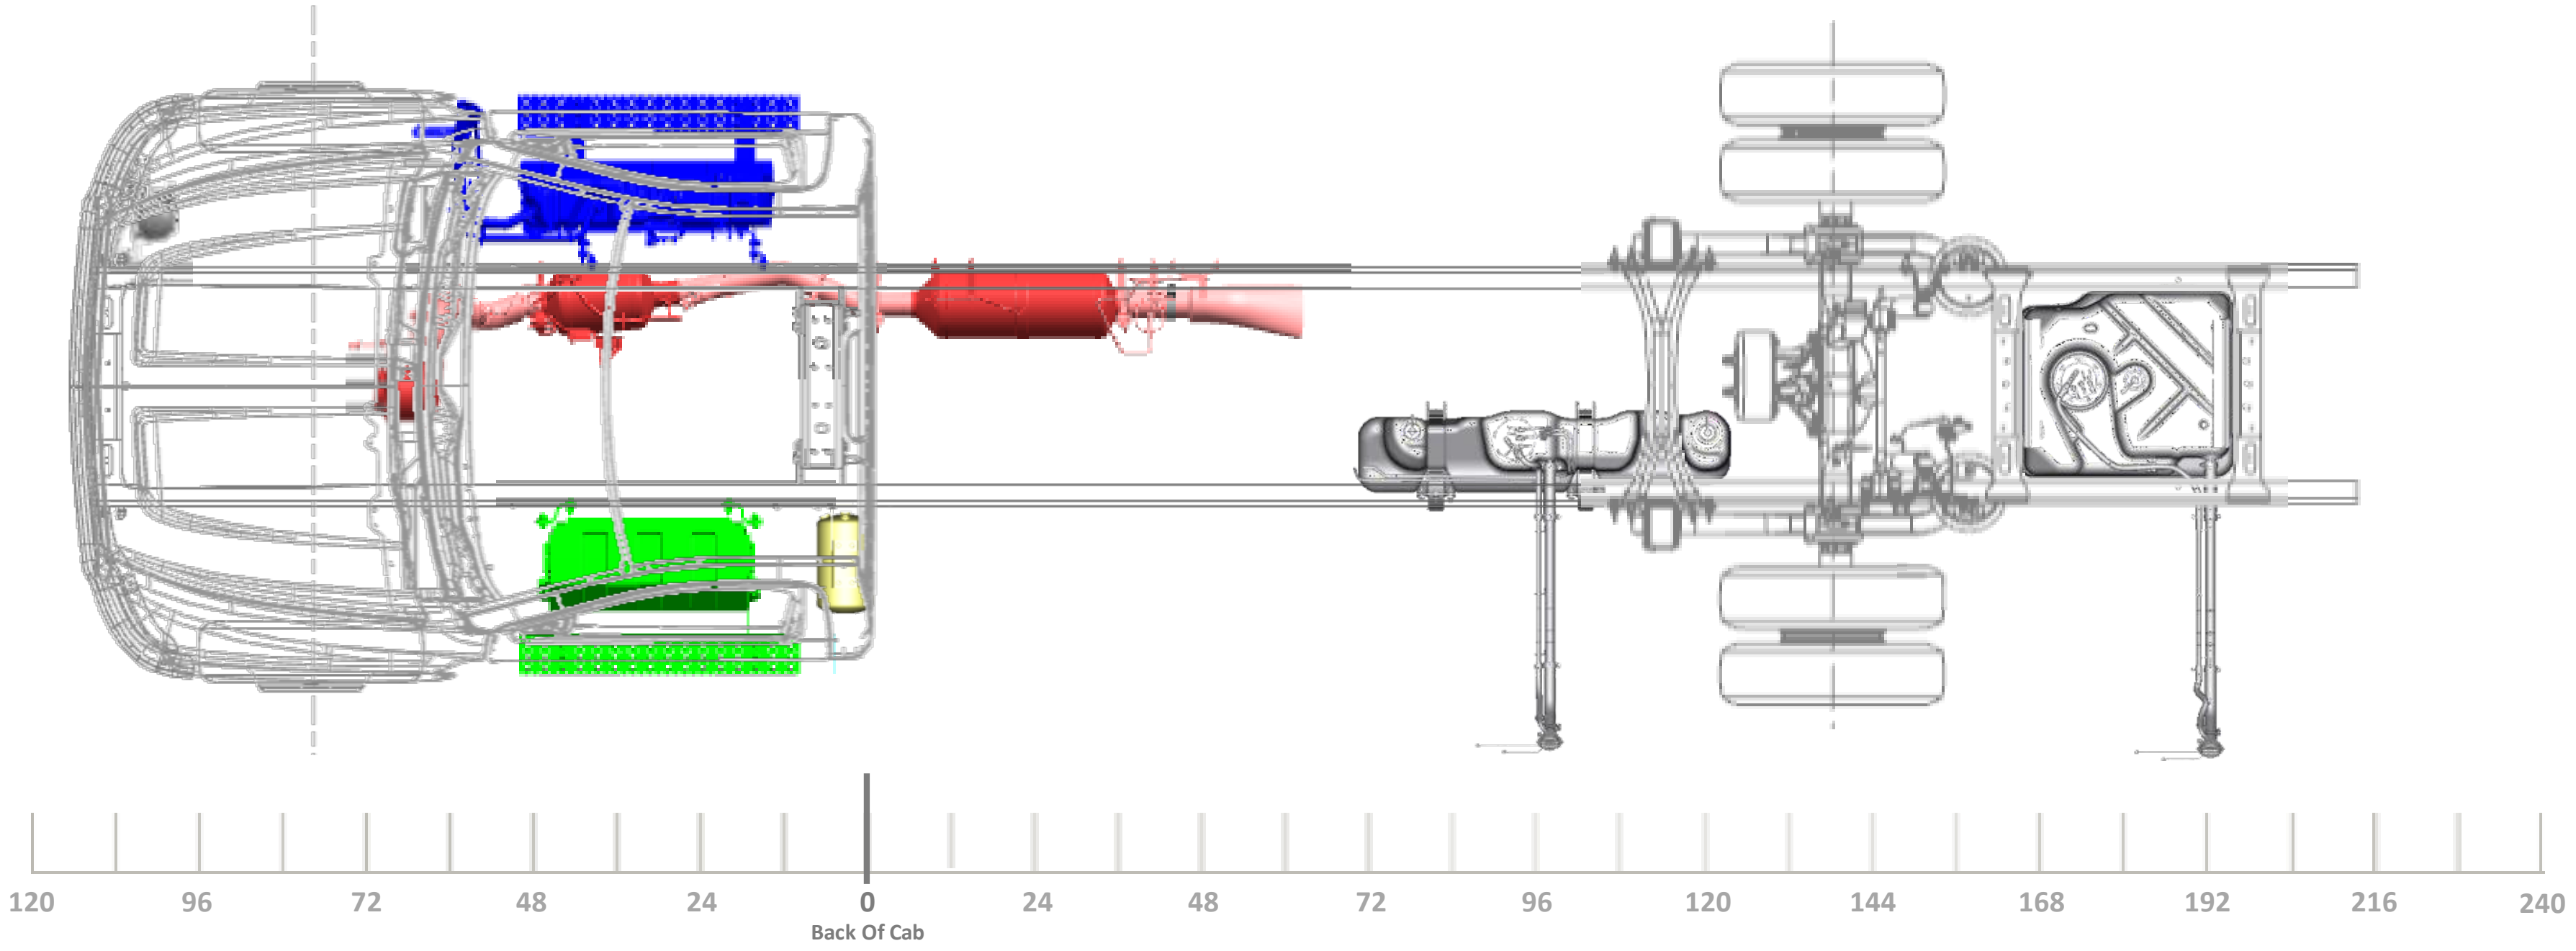

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

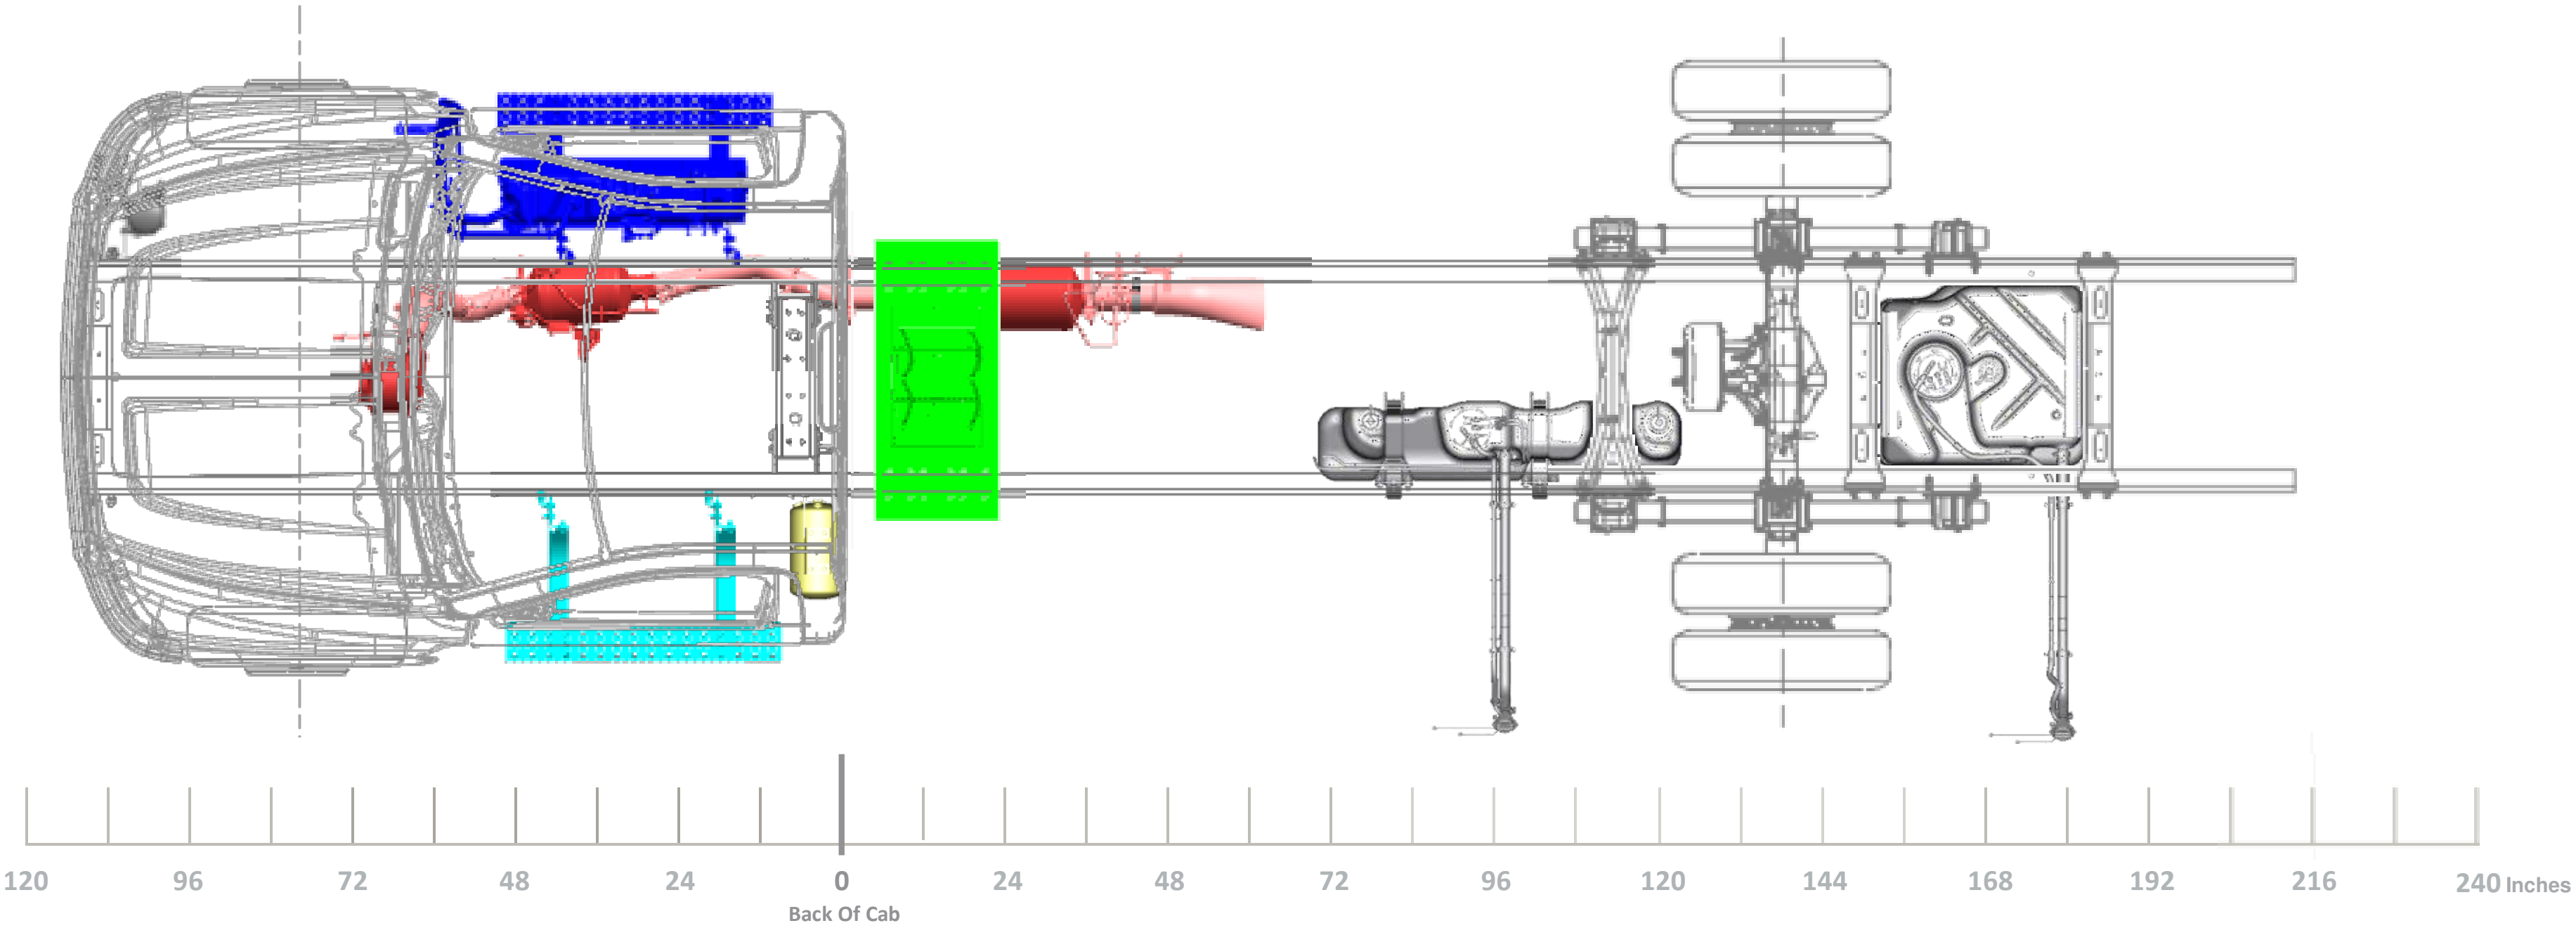
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

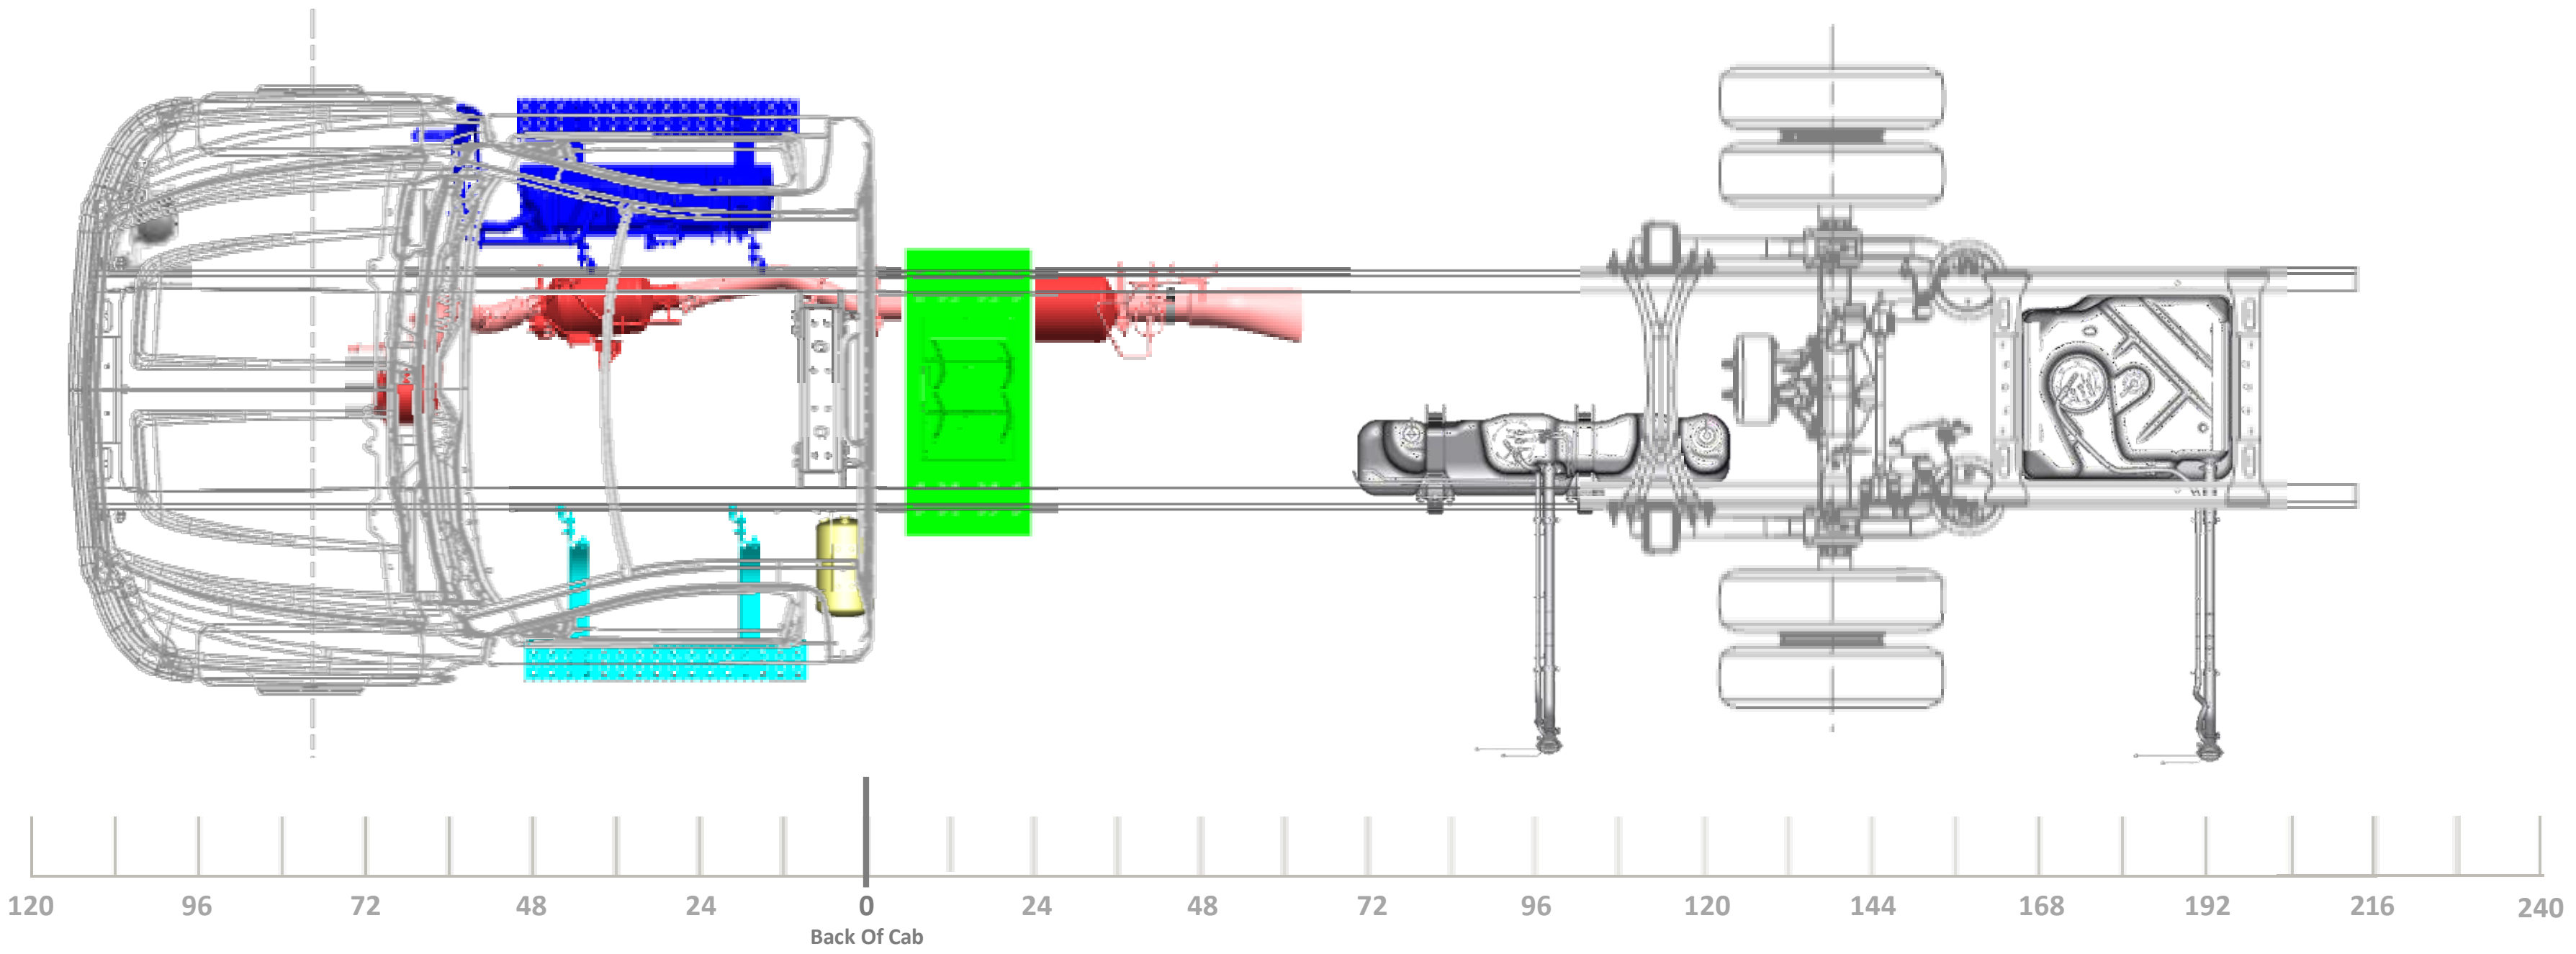

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

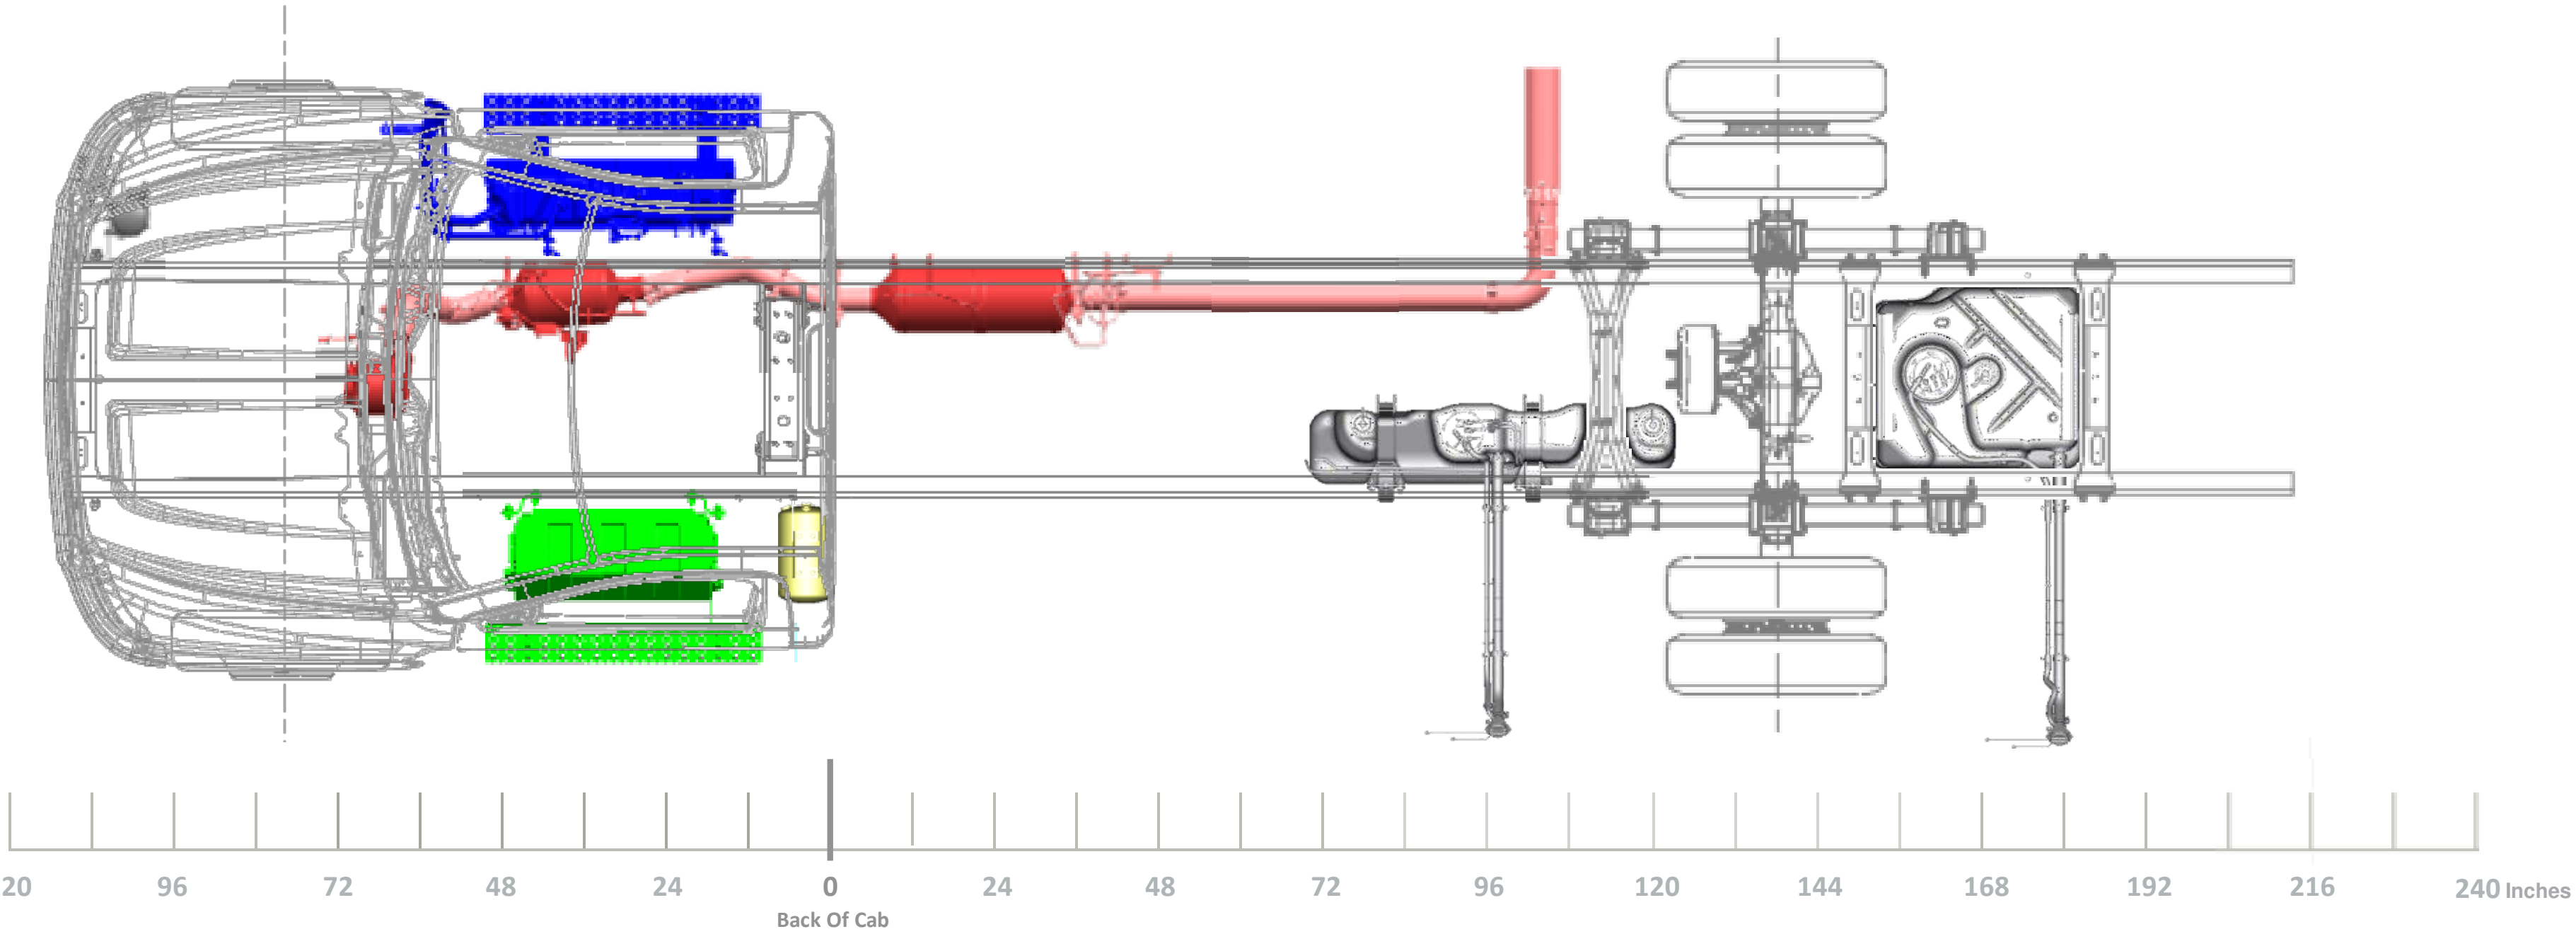
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

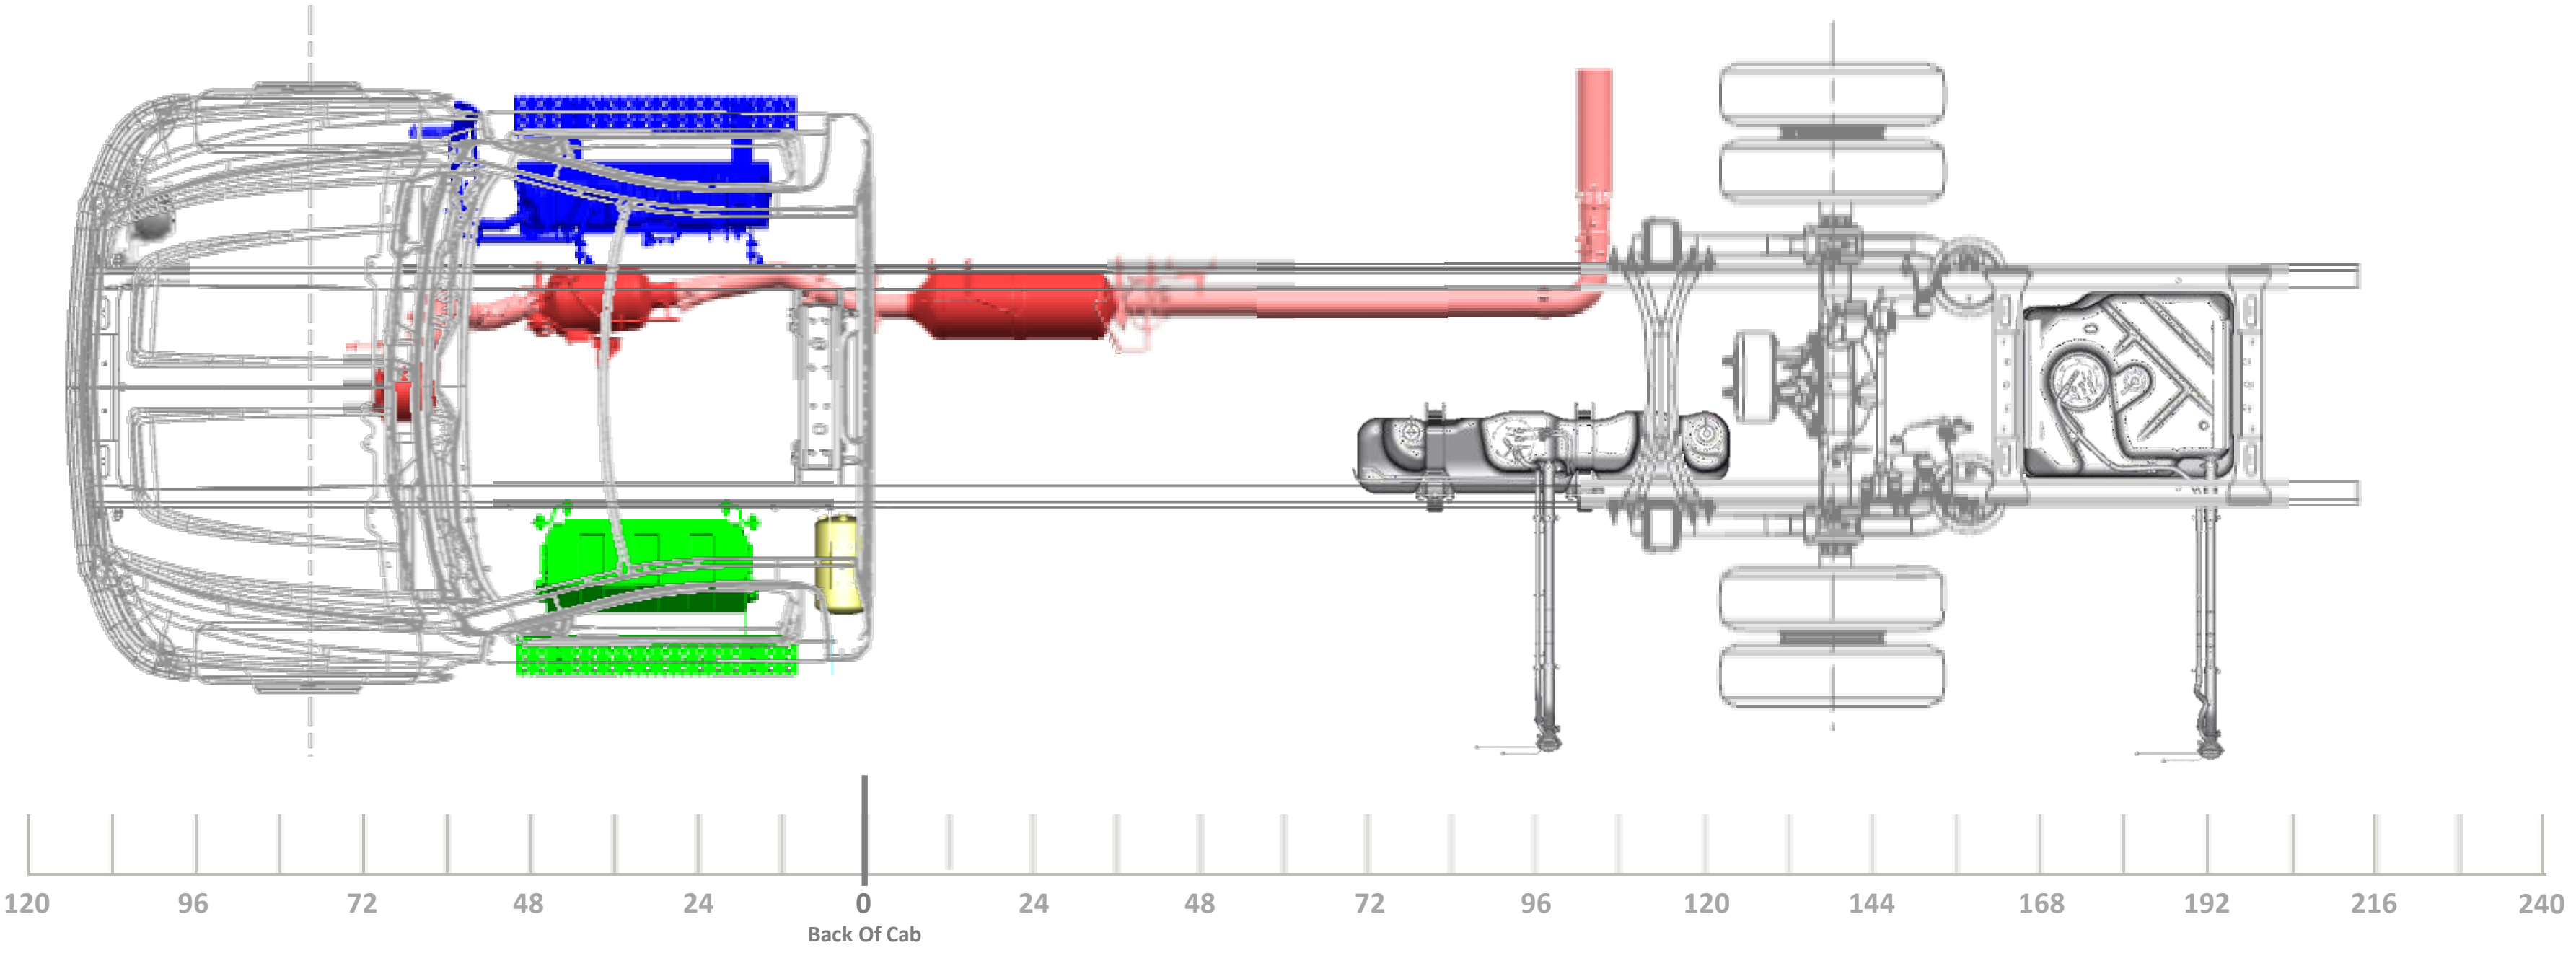

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

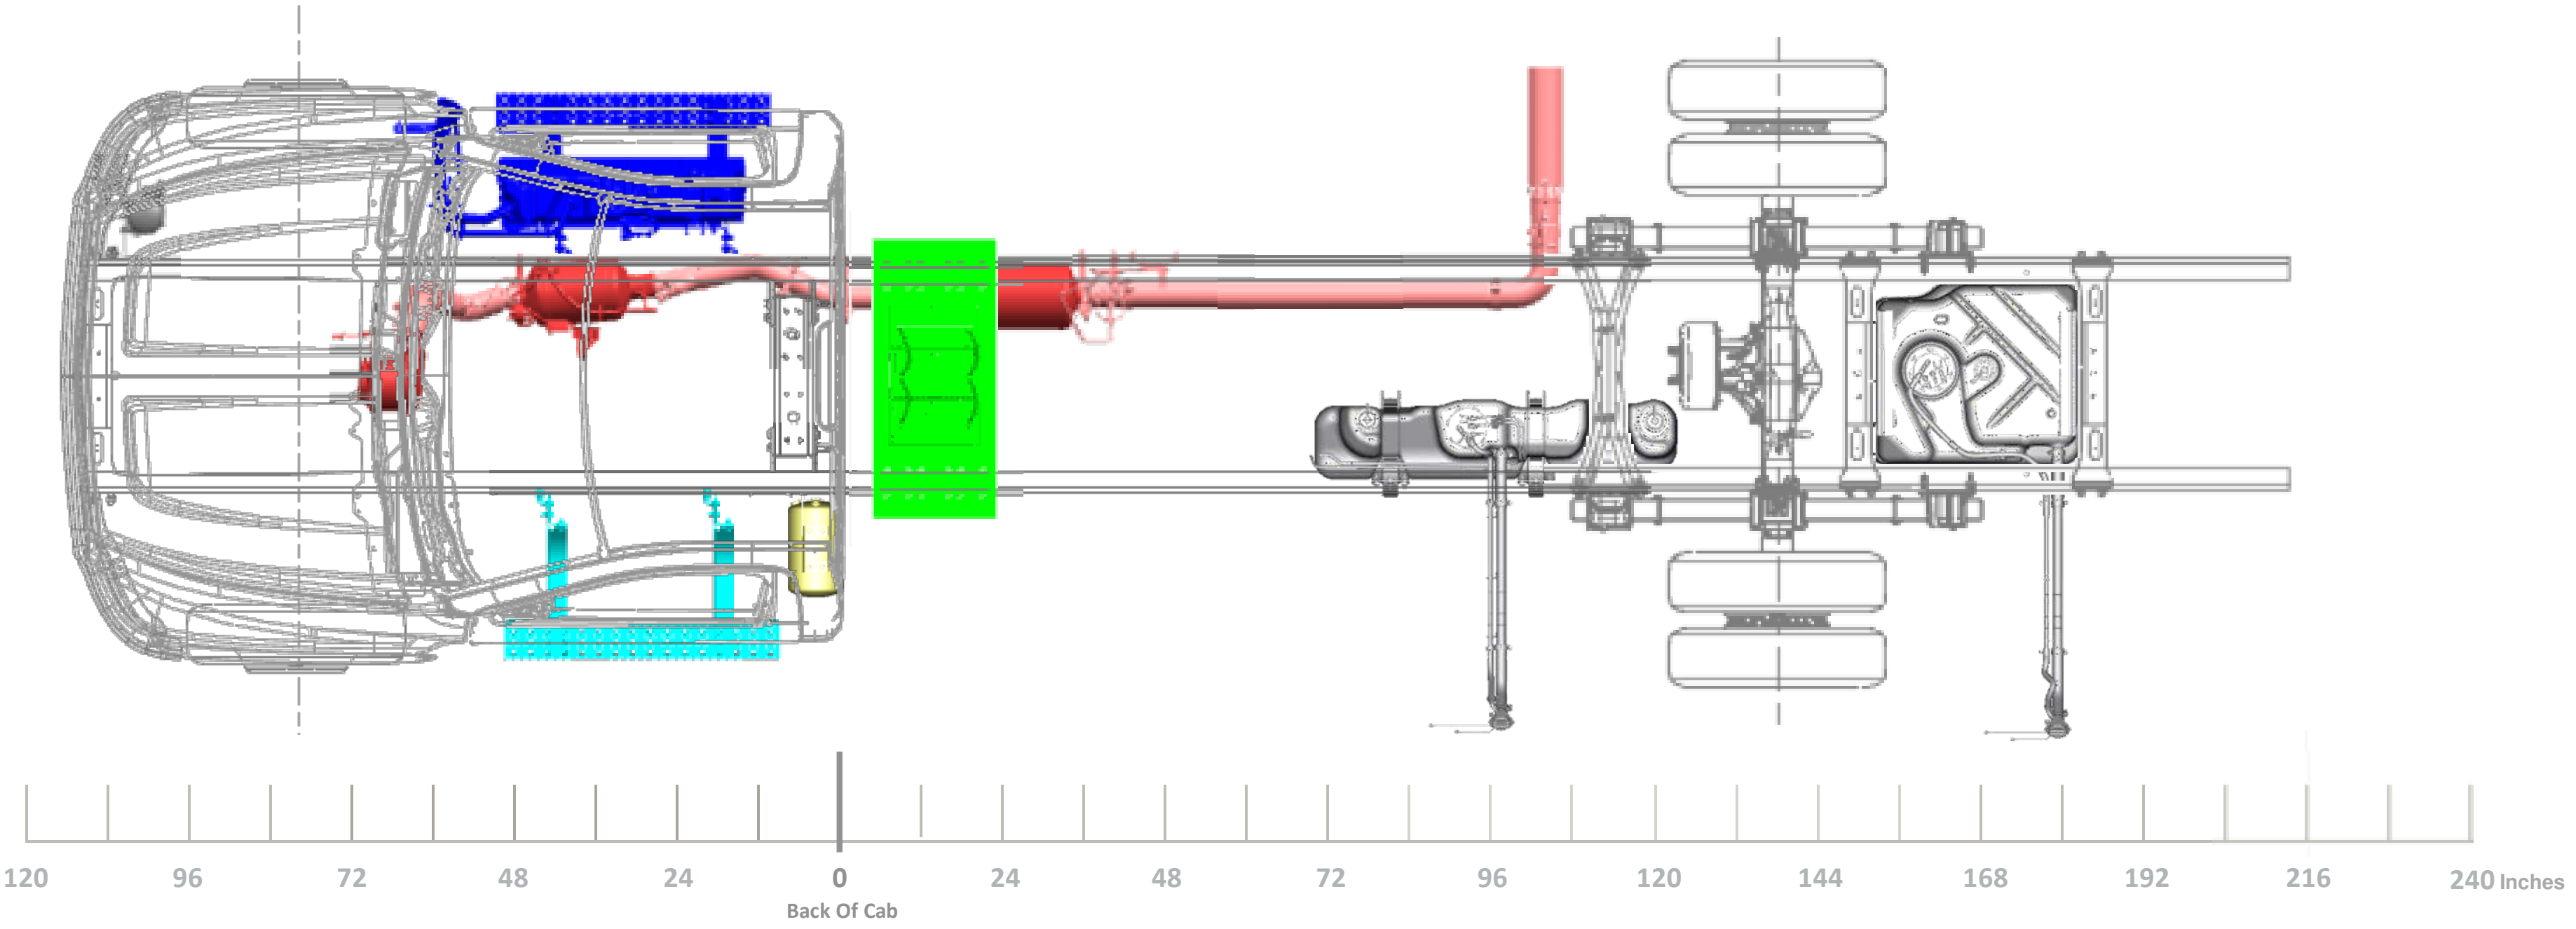
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
219” WB (138” CA) 75” AF

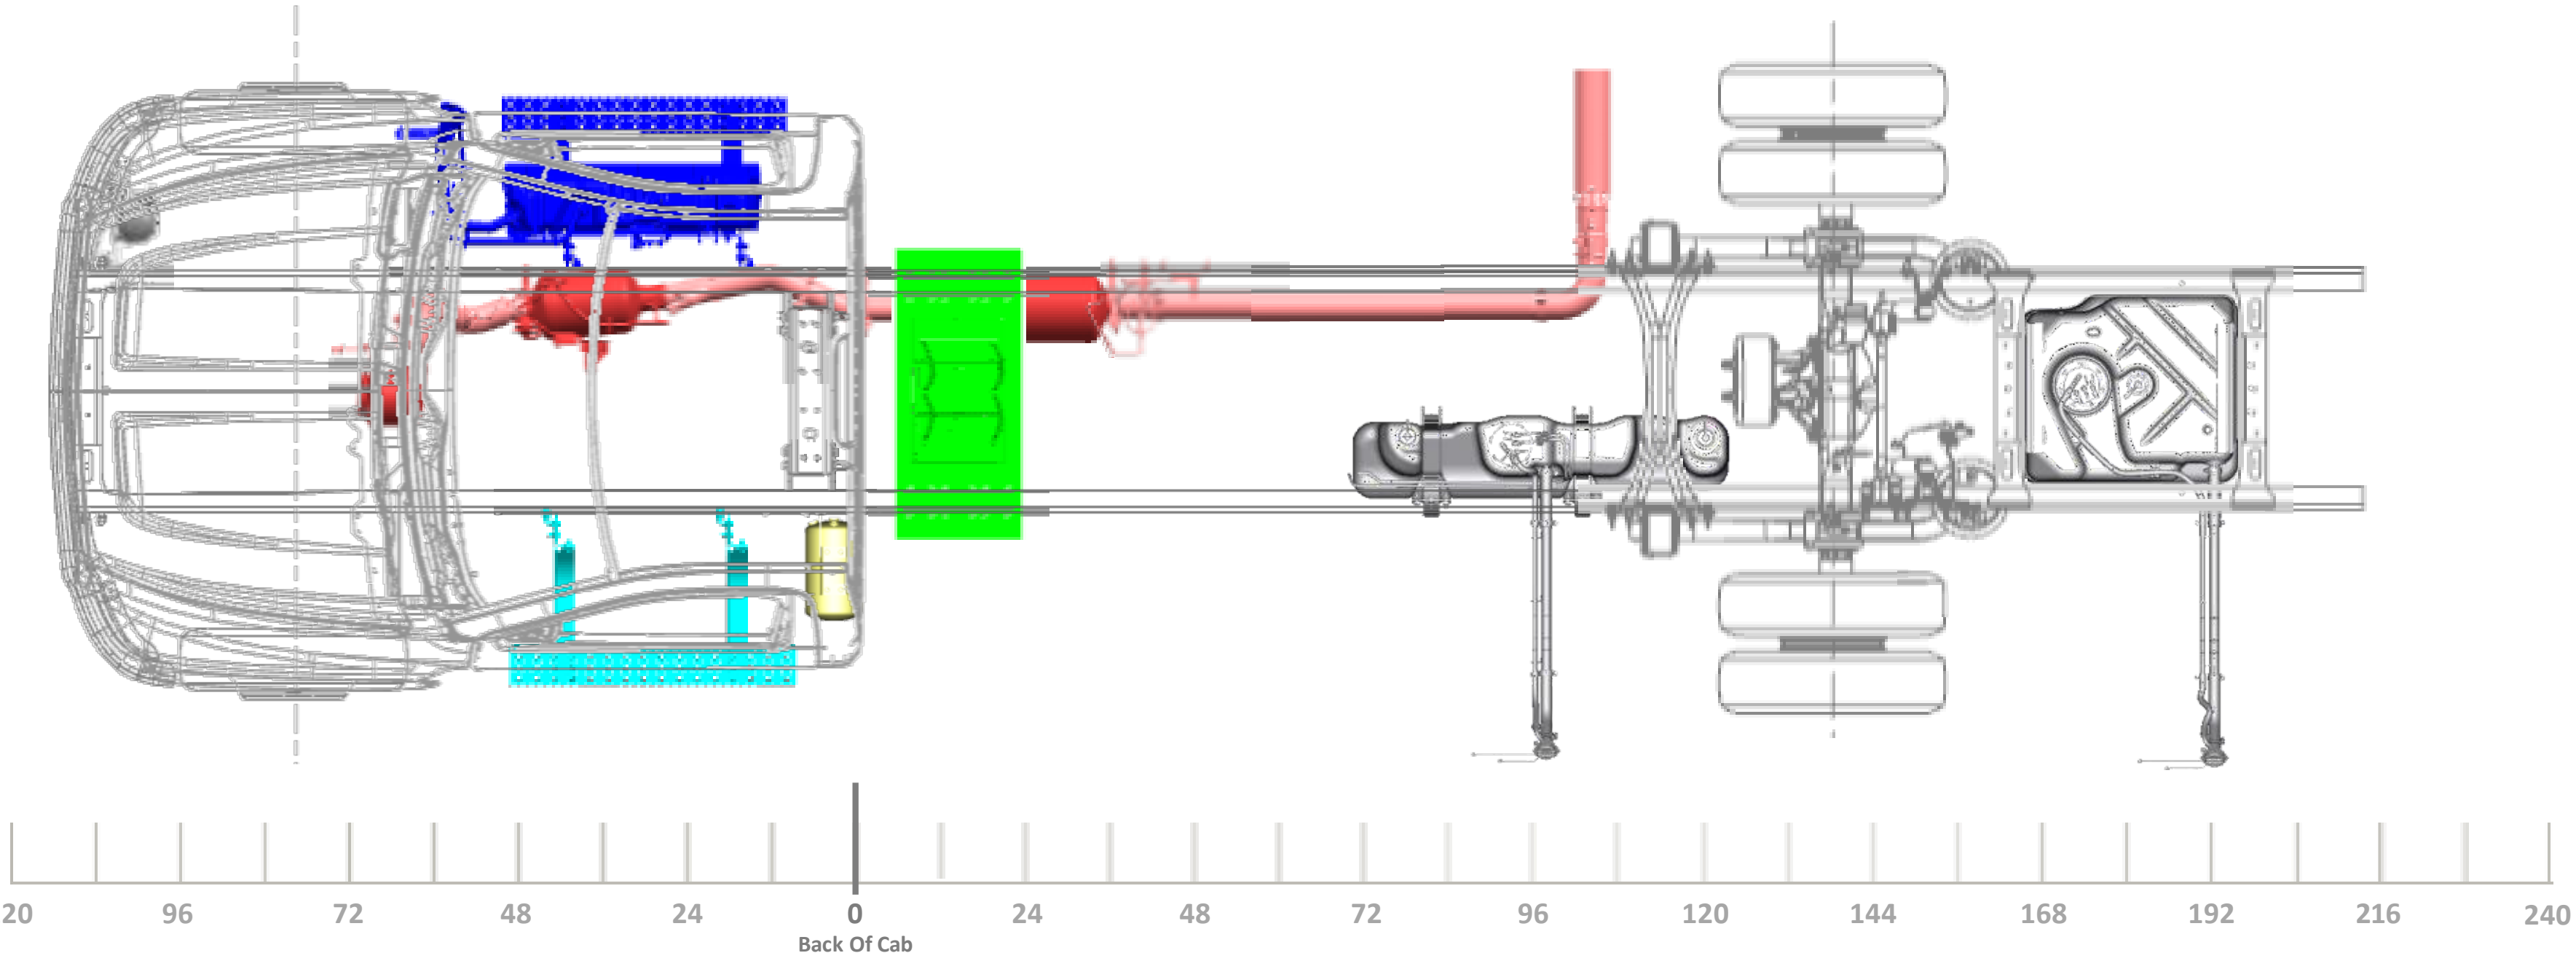

Regular Cab – 231” WB

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

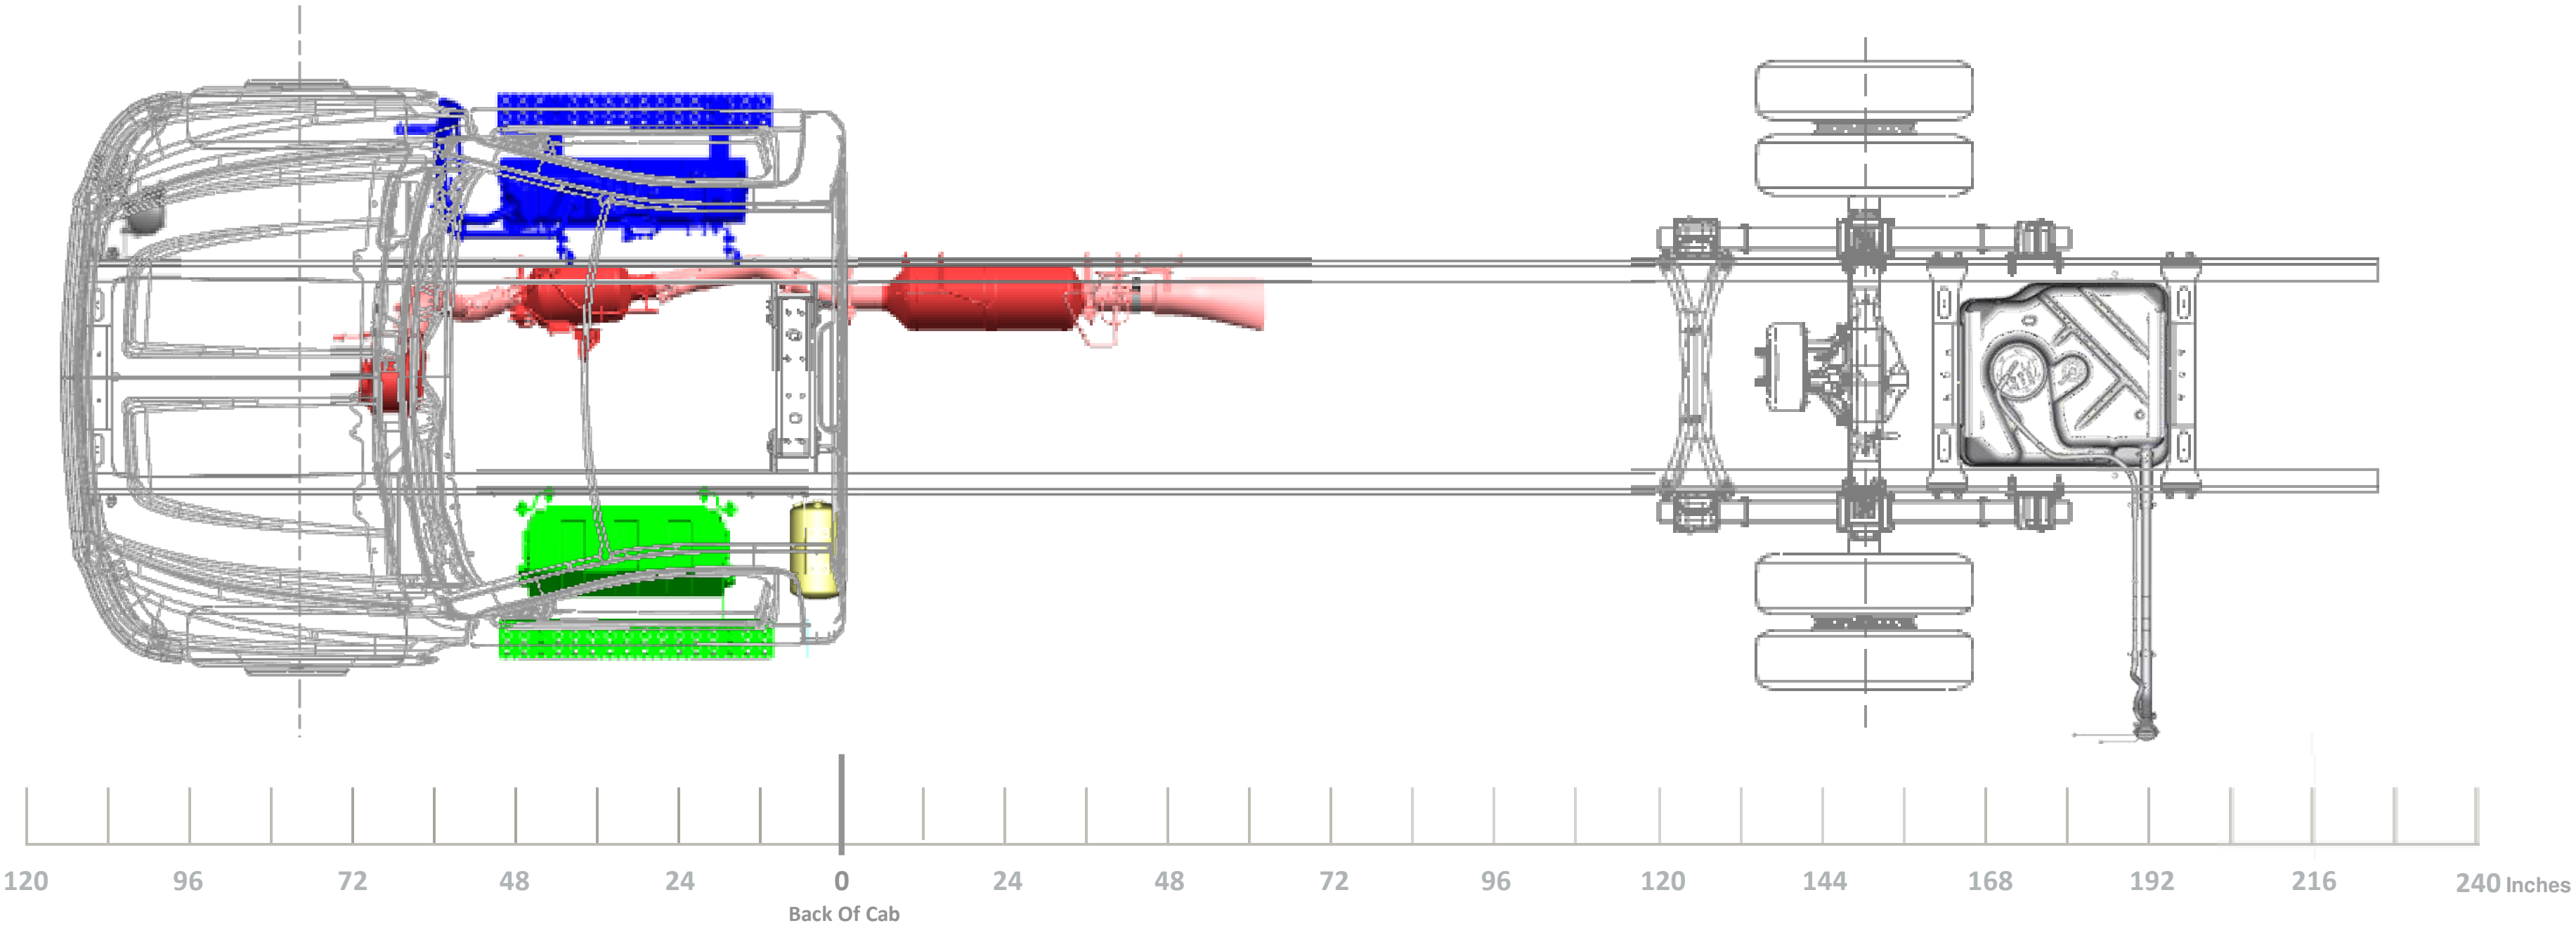
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231" WB (150" CA) 91" AF

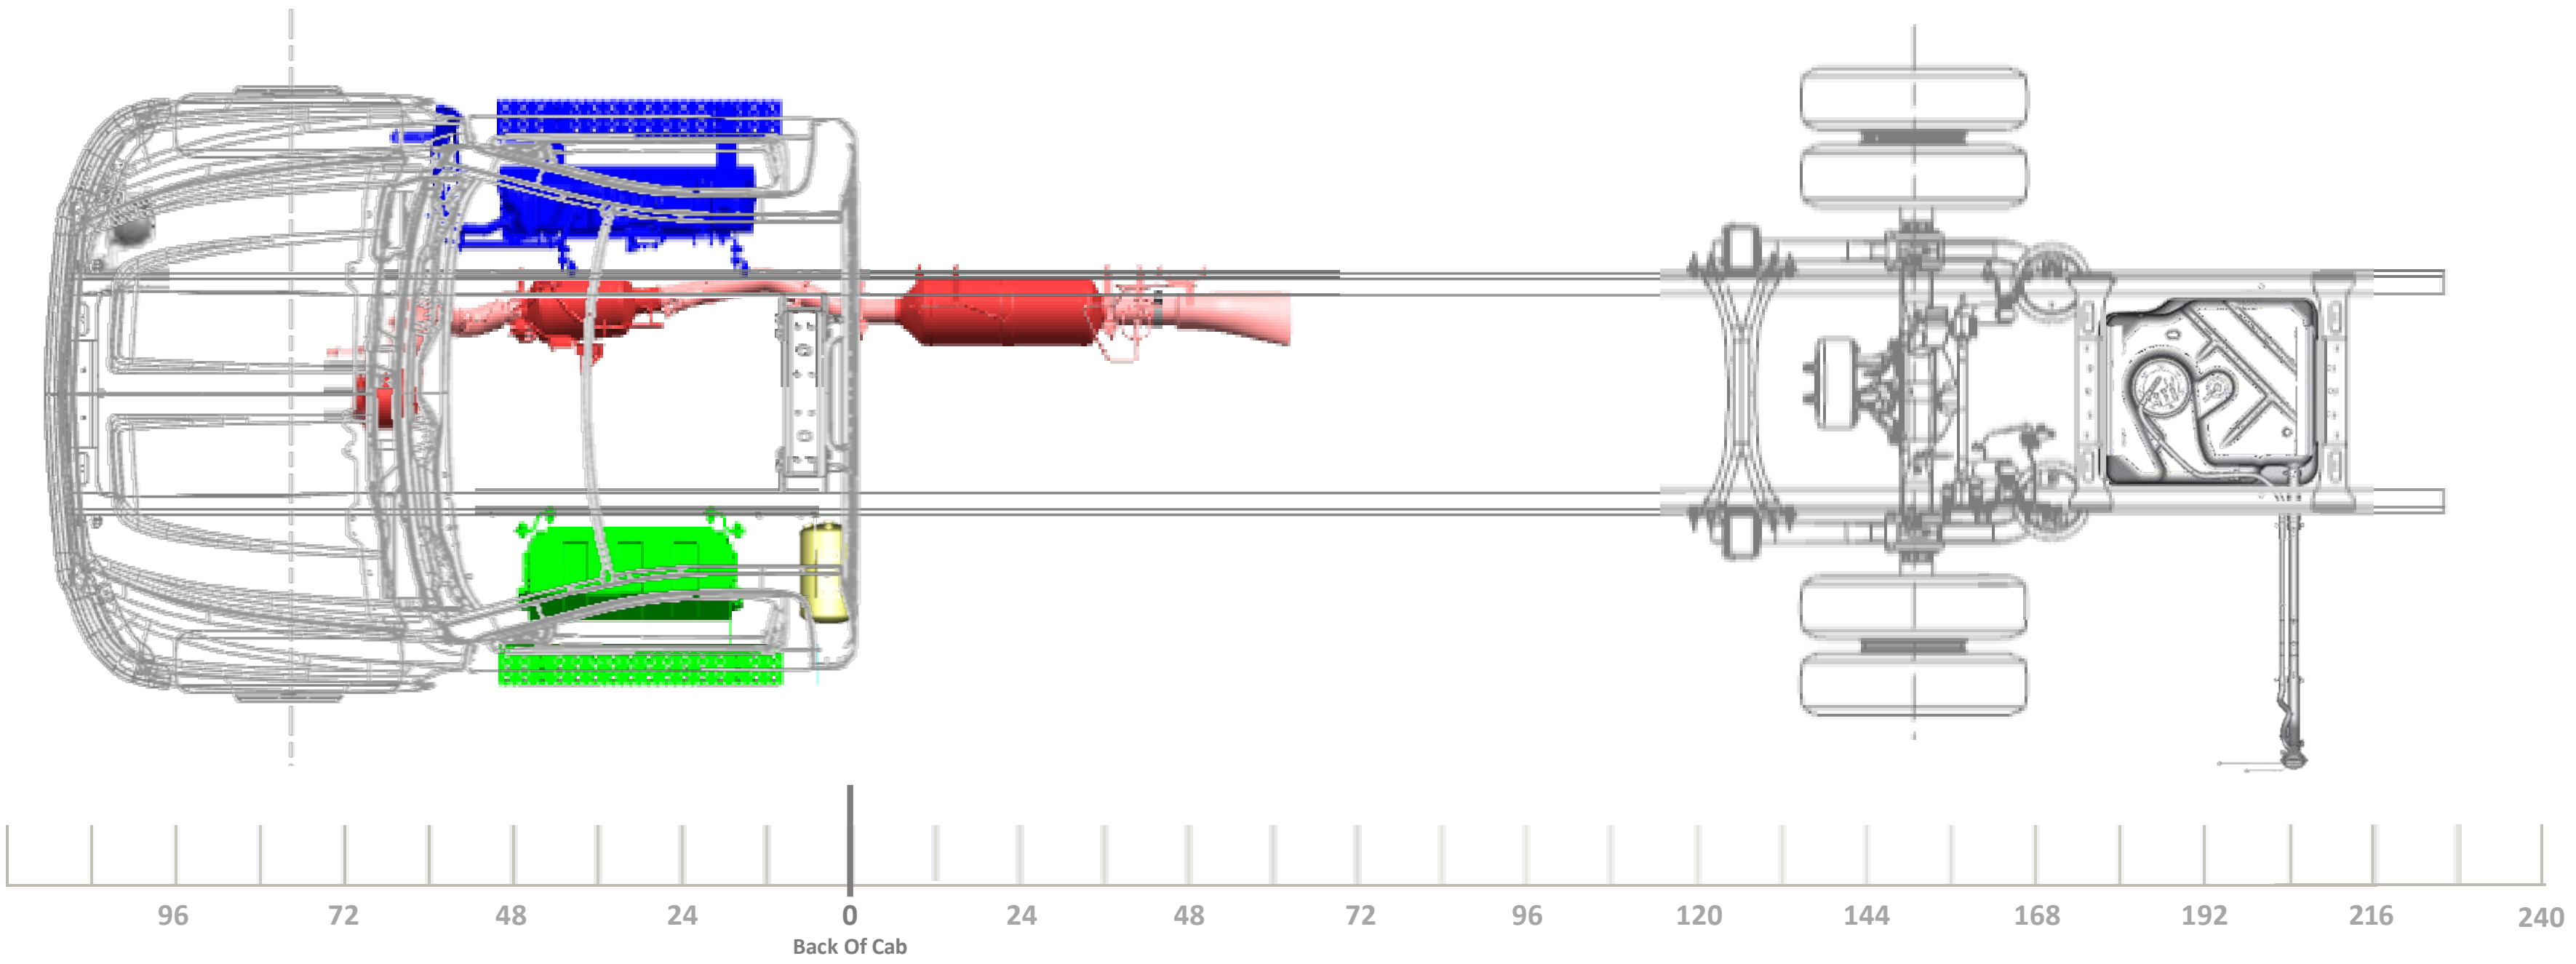

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

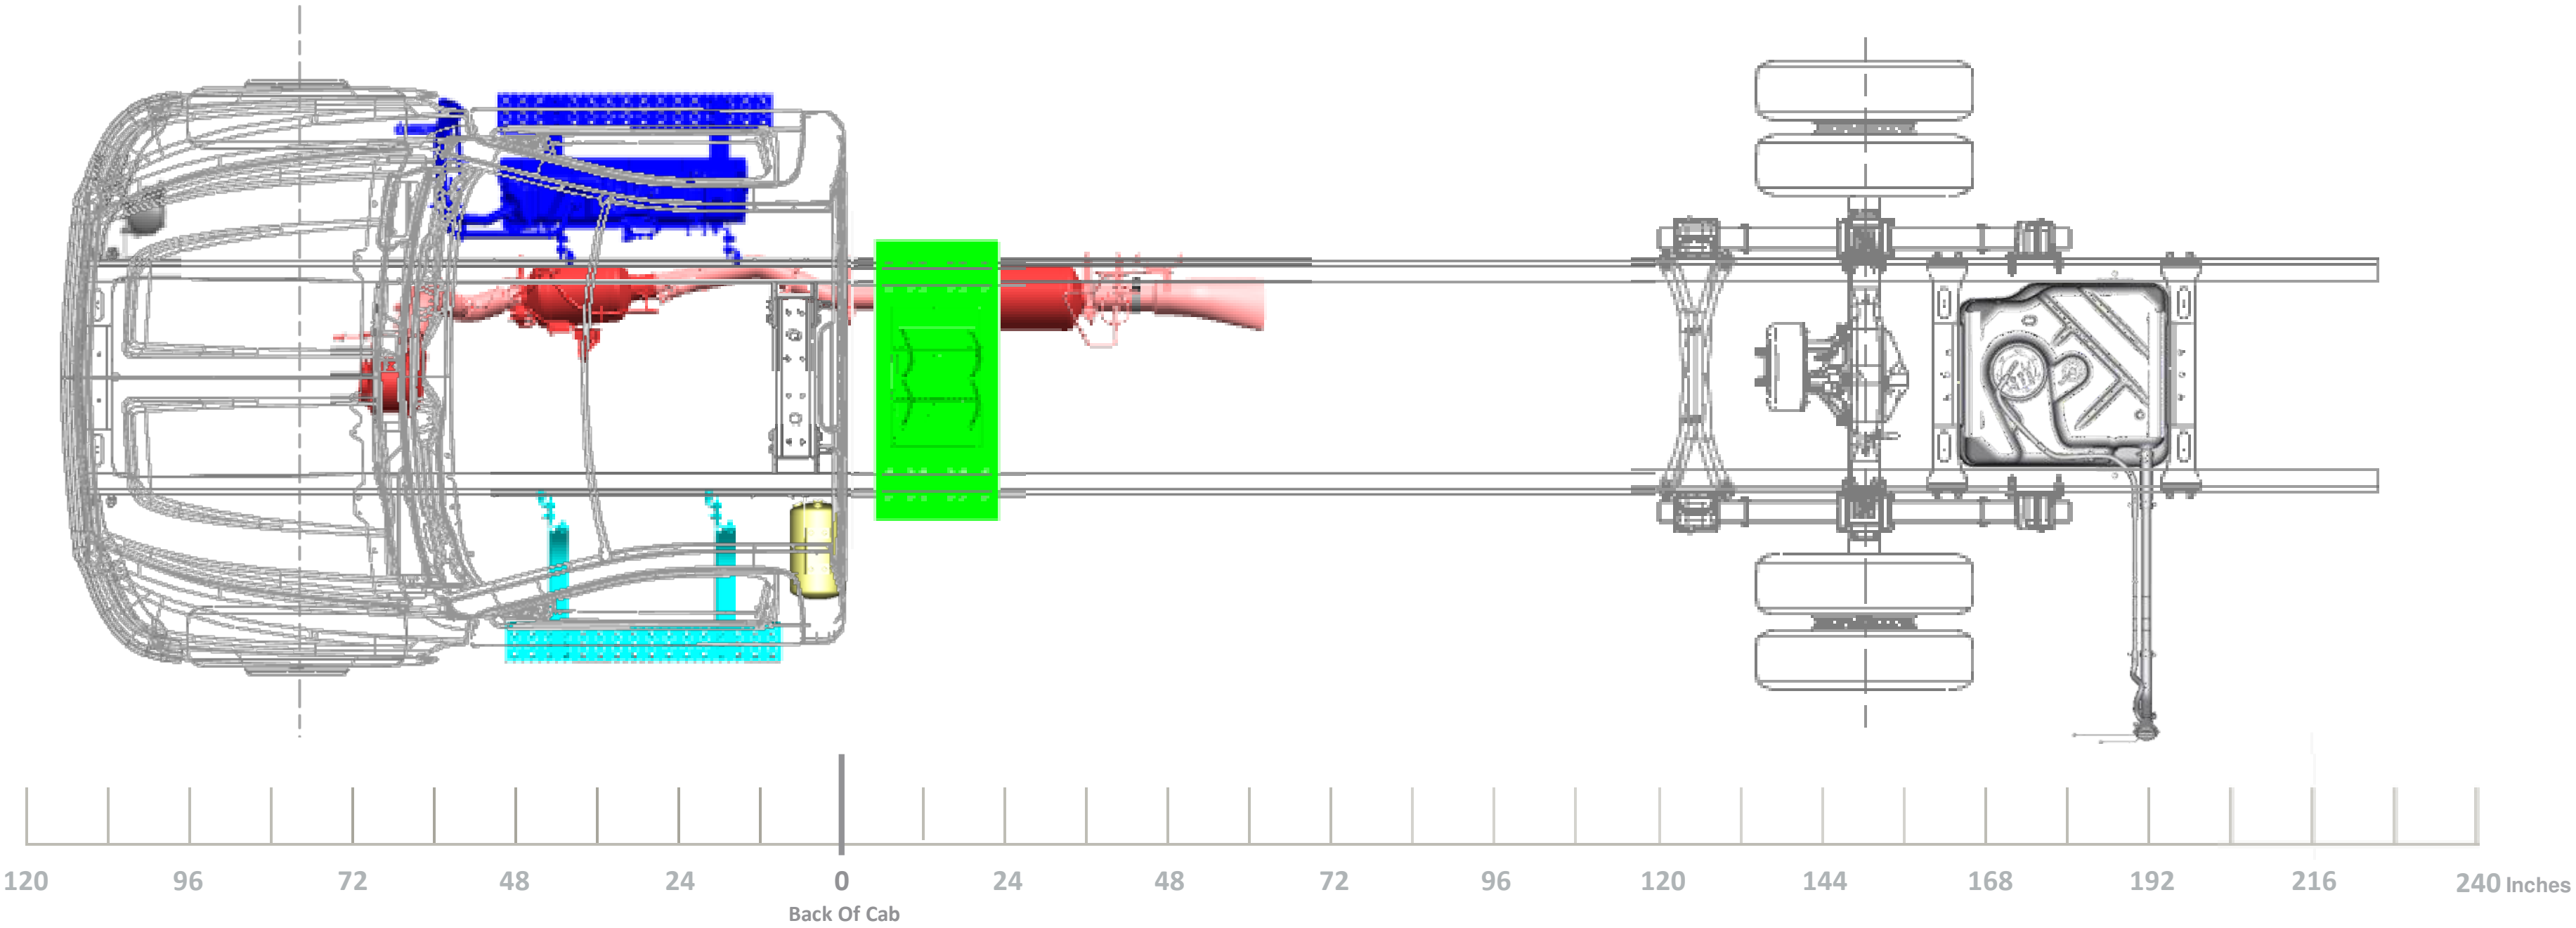
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

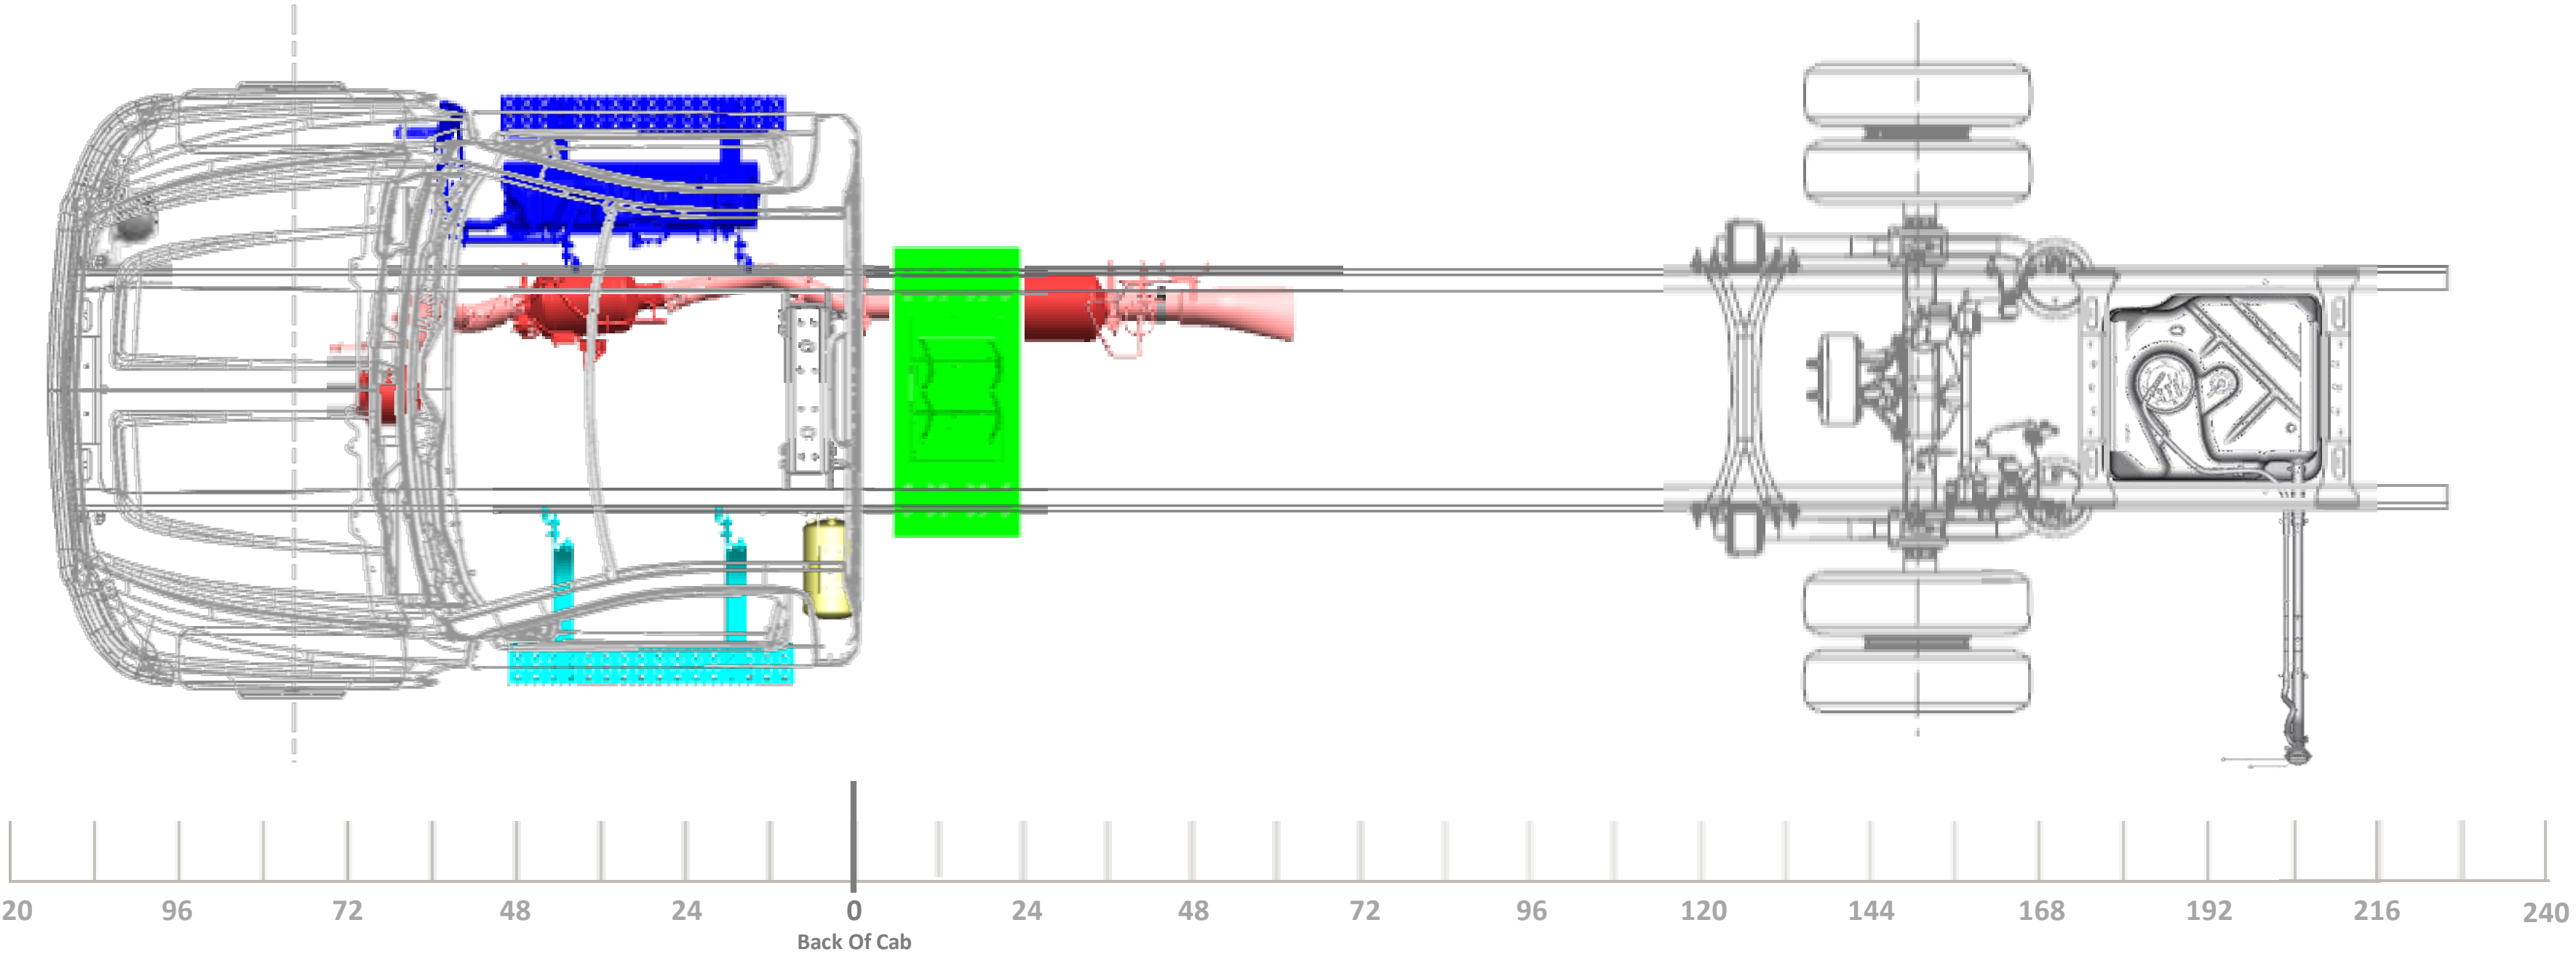

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

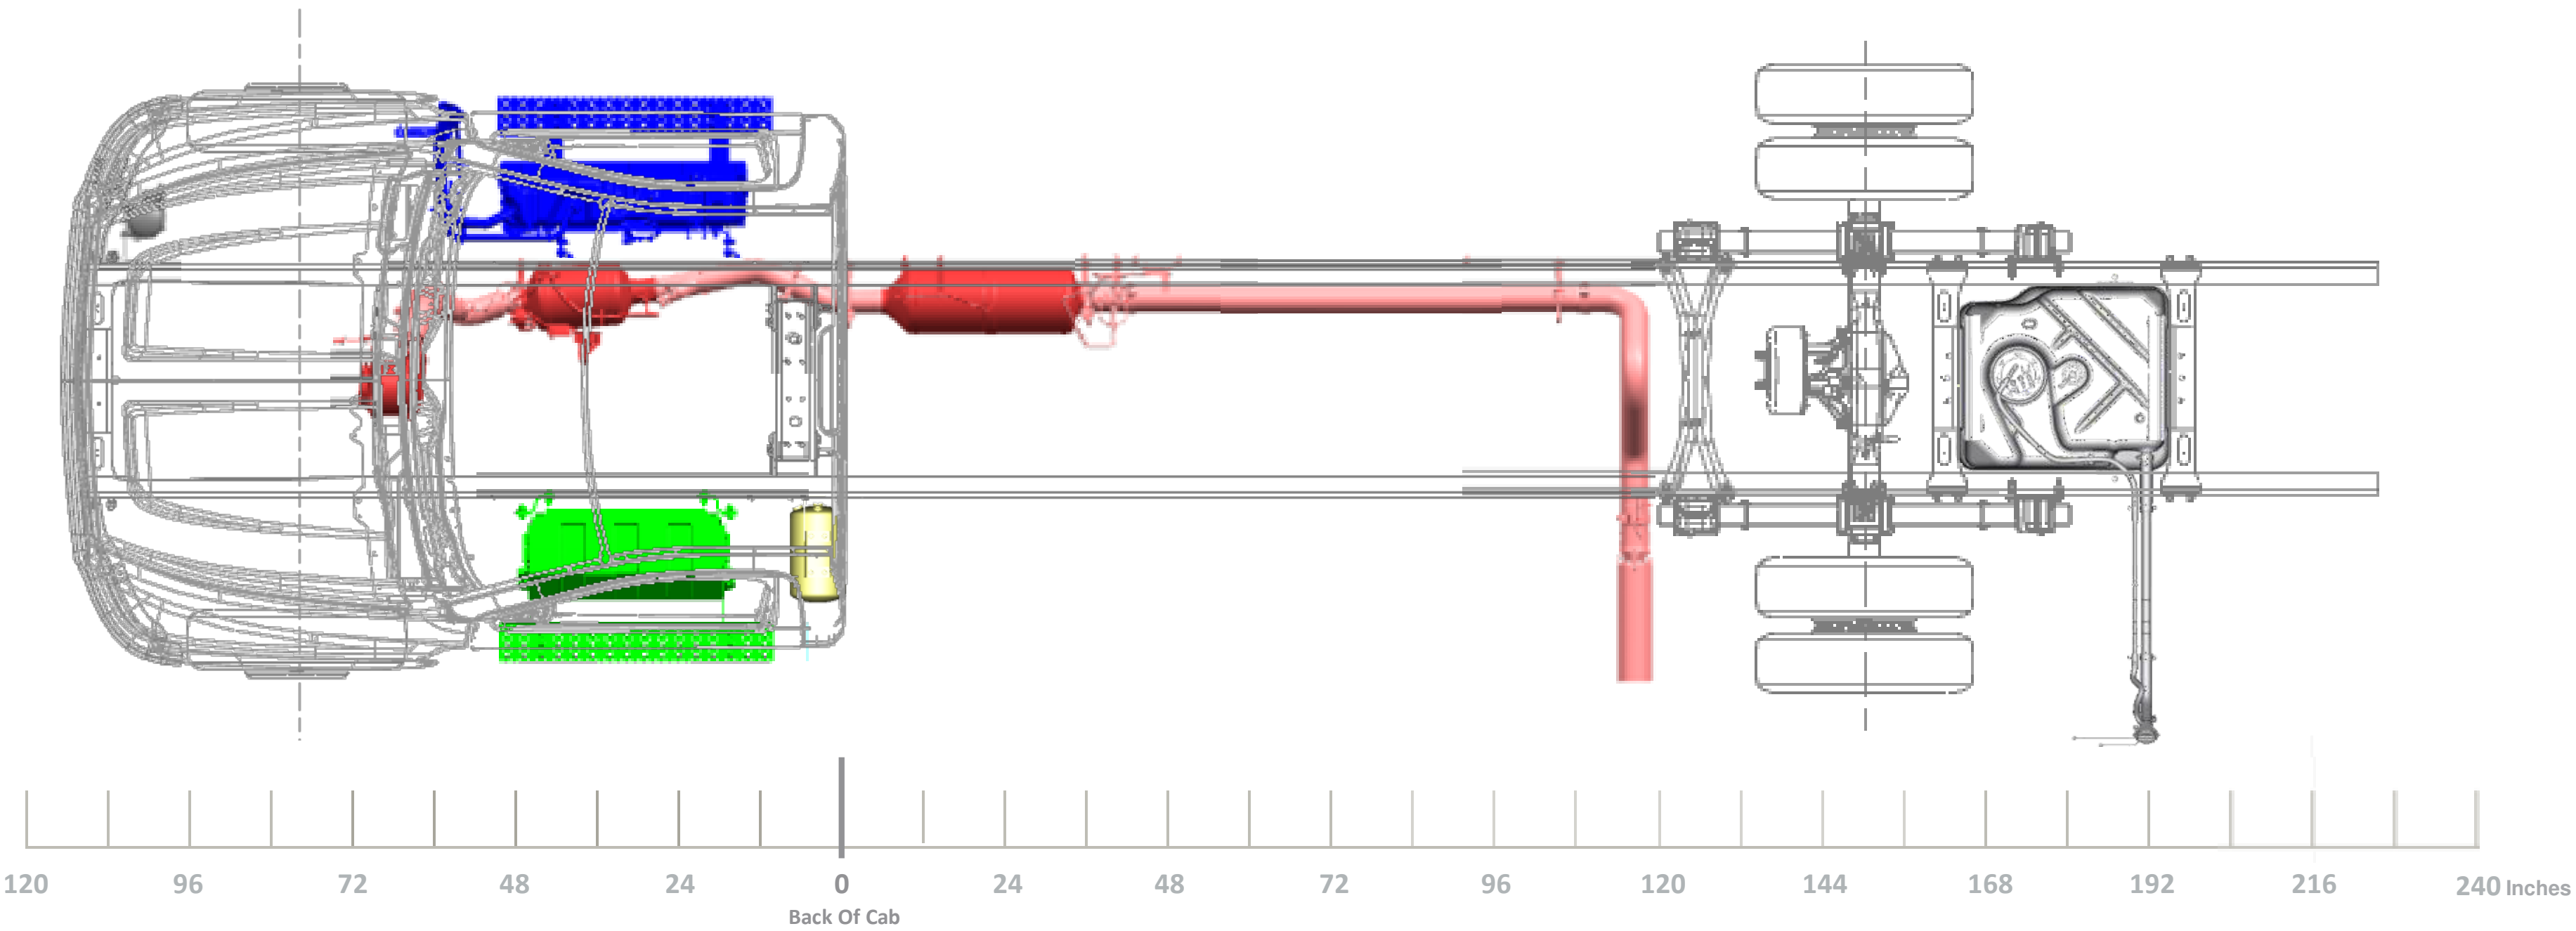
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

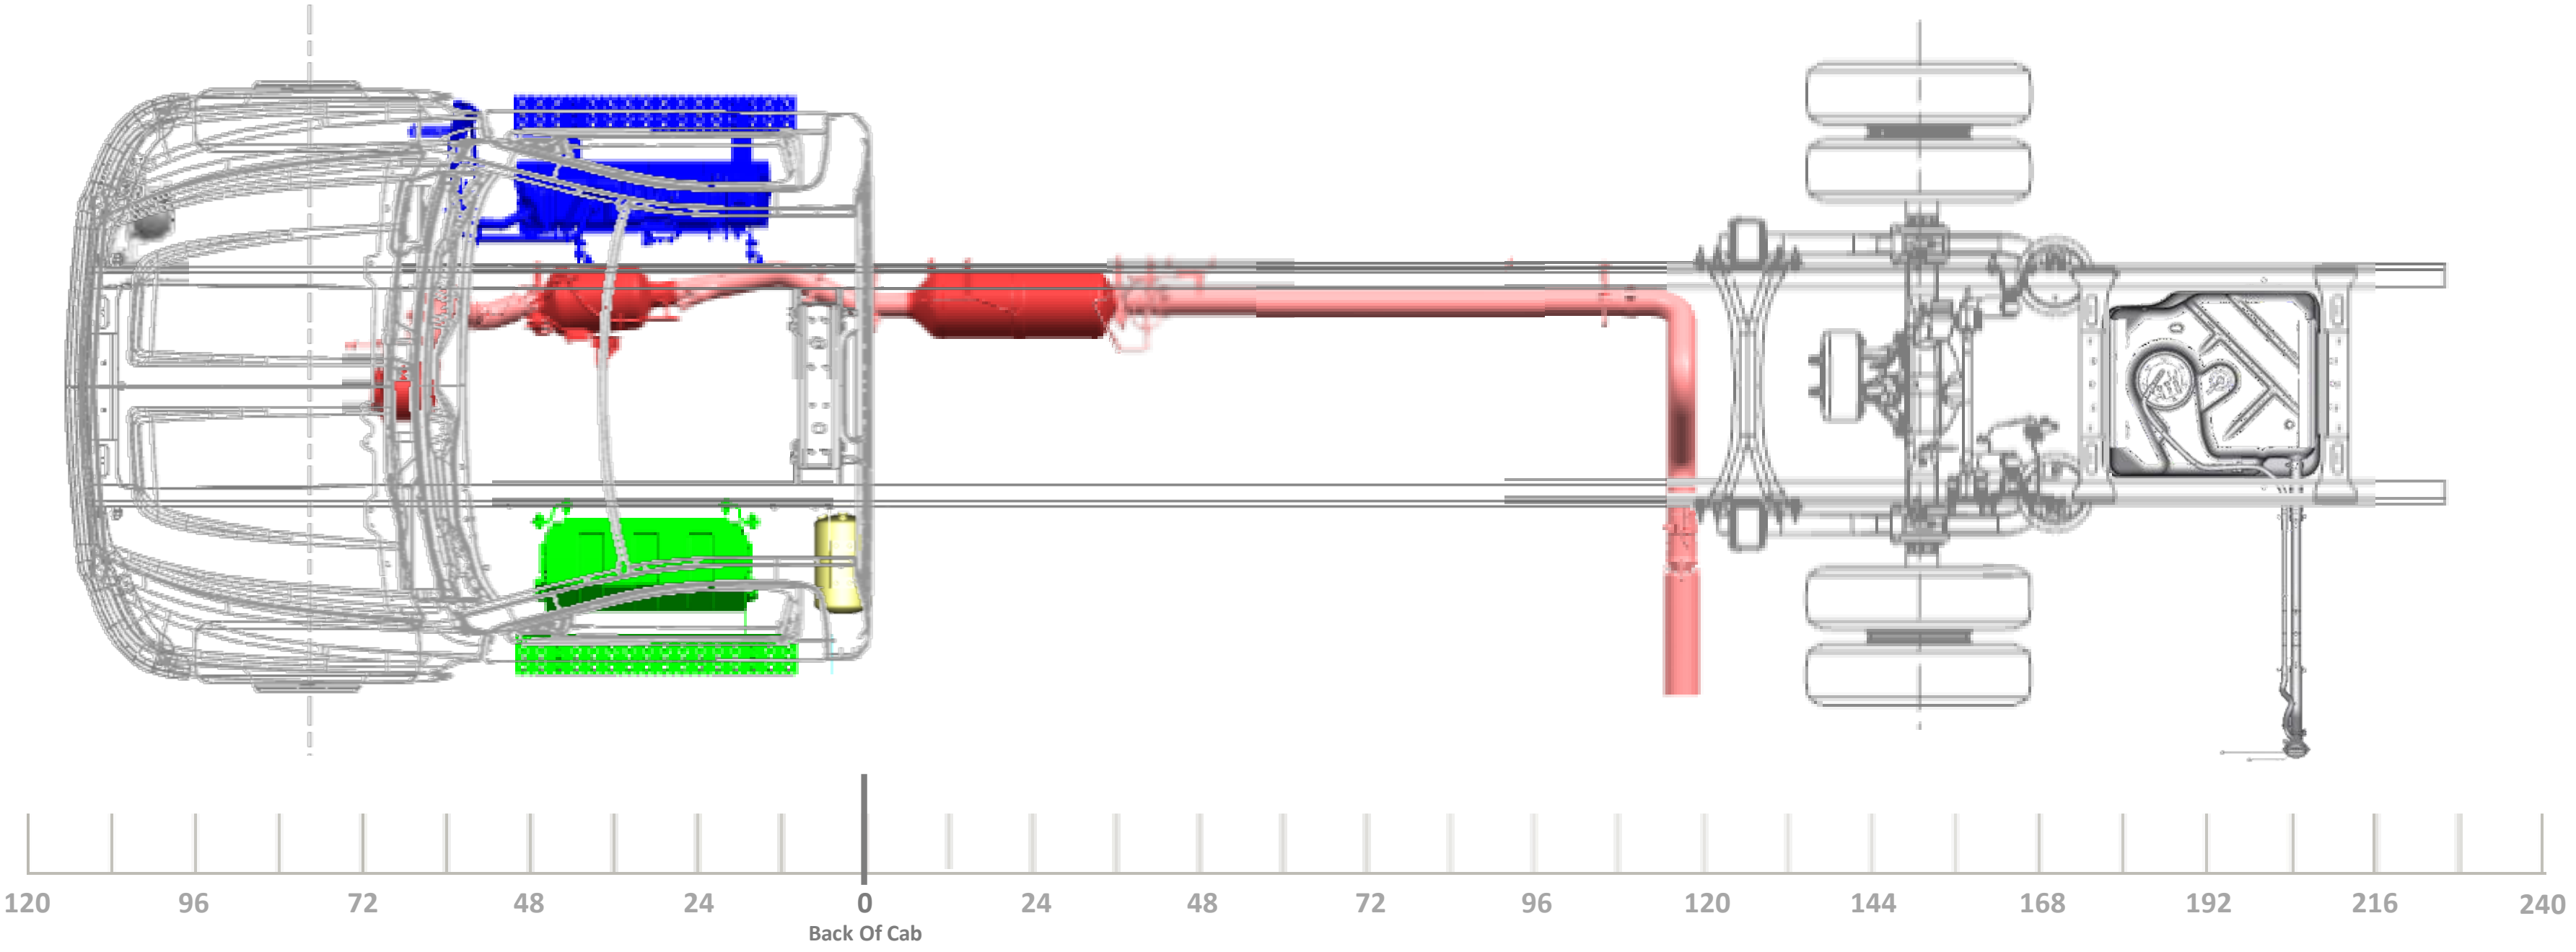

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

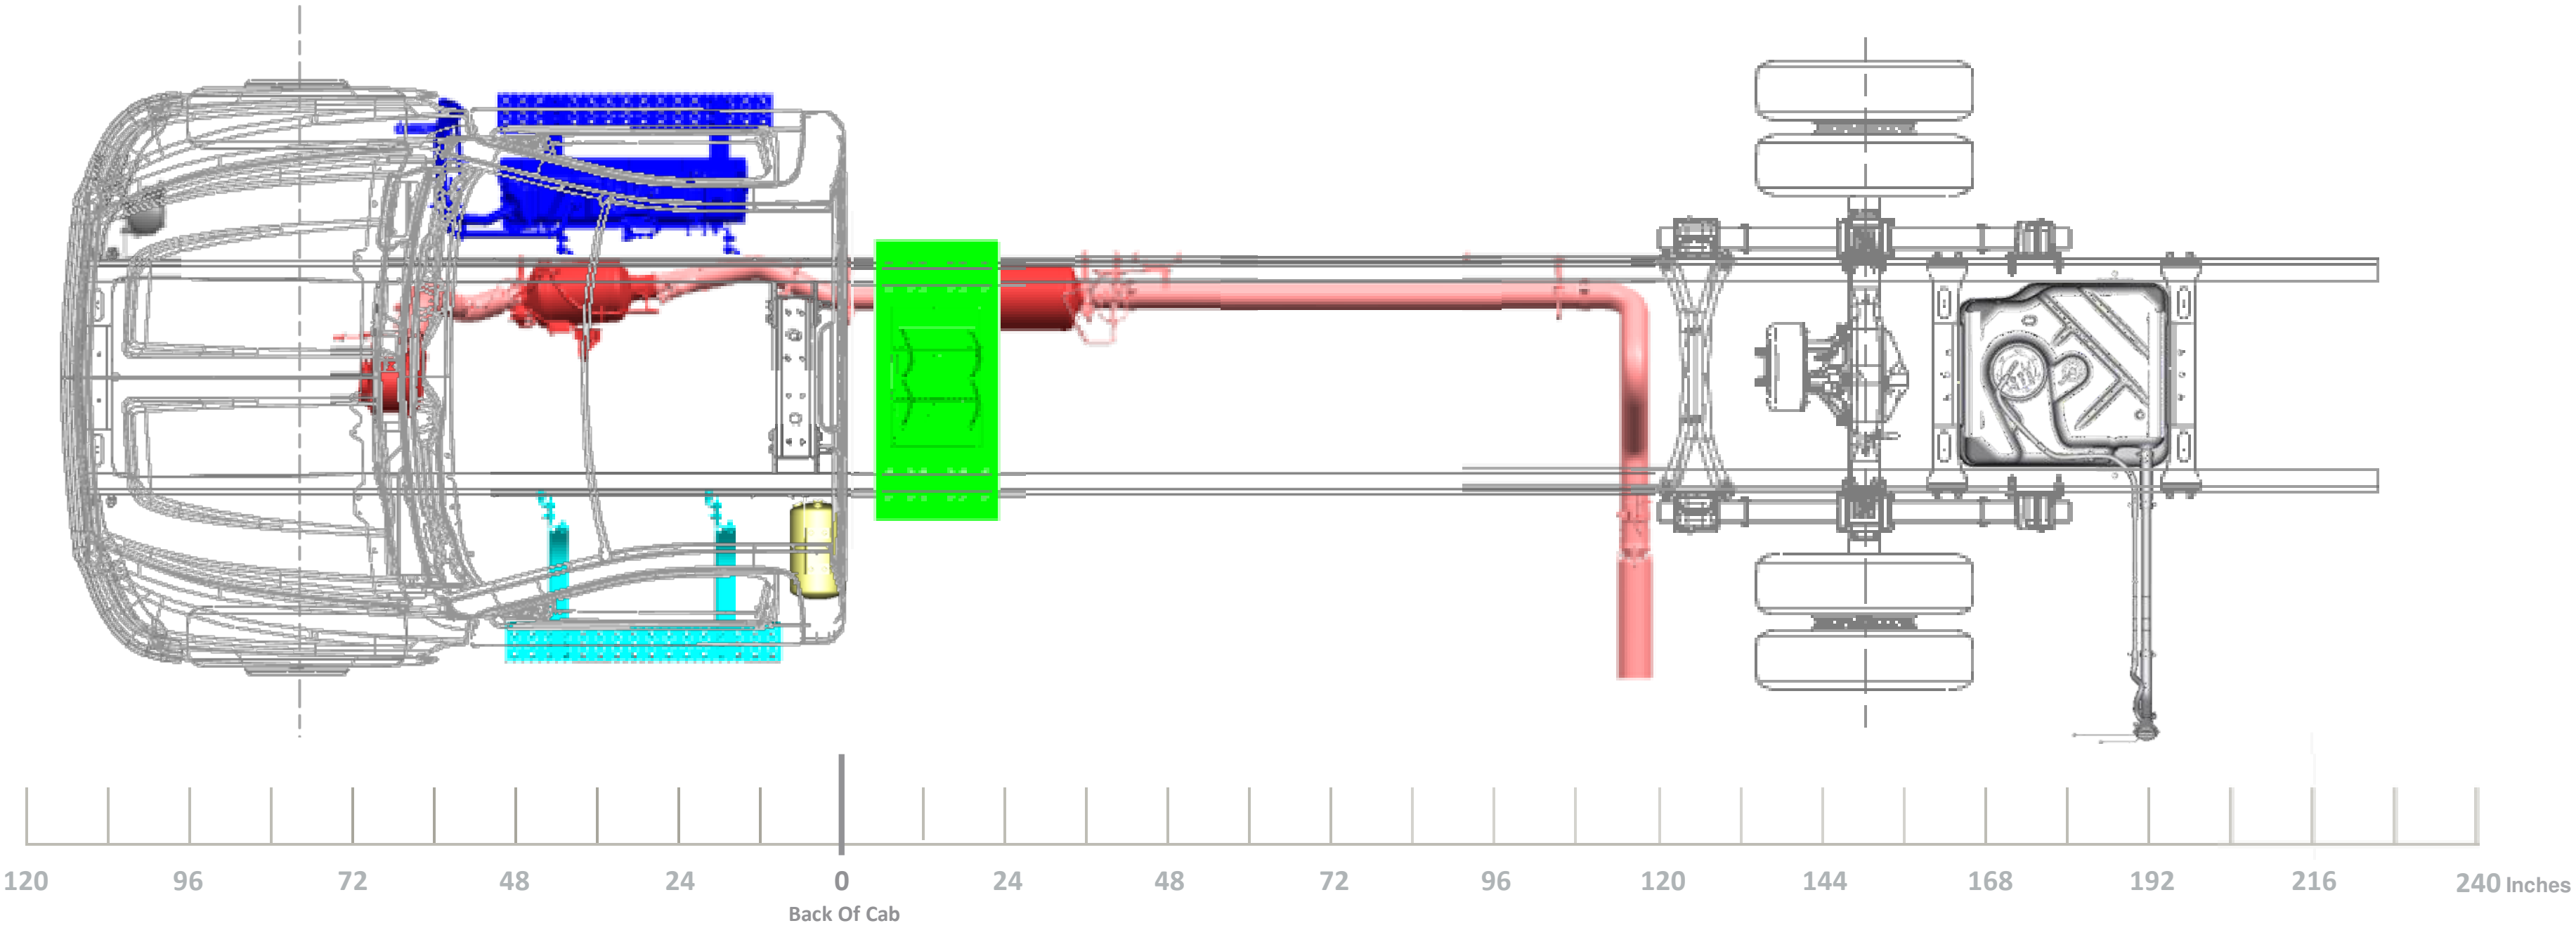
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

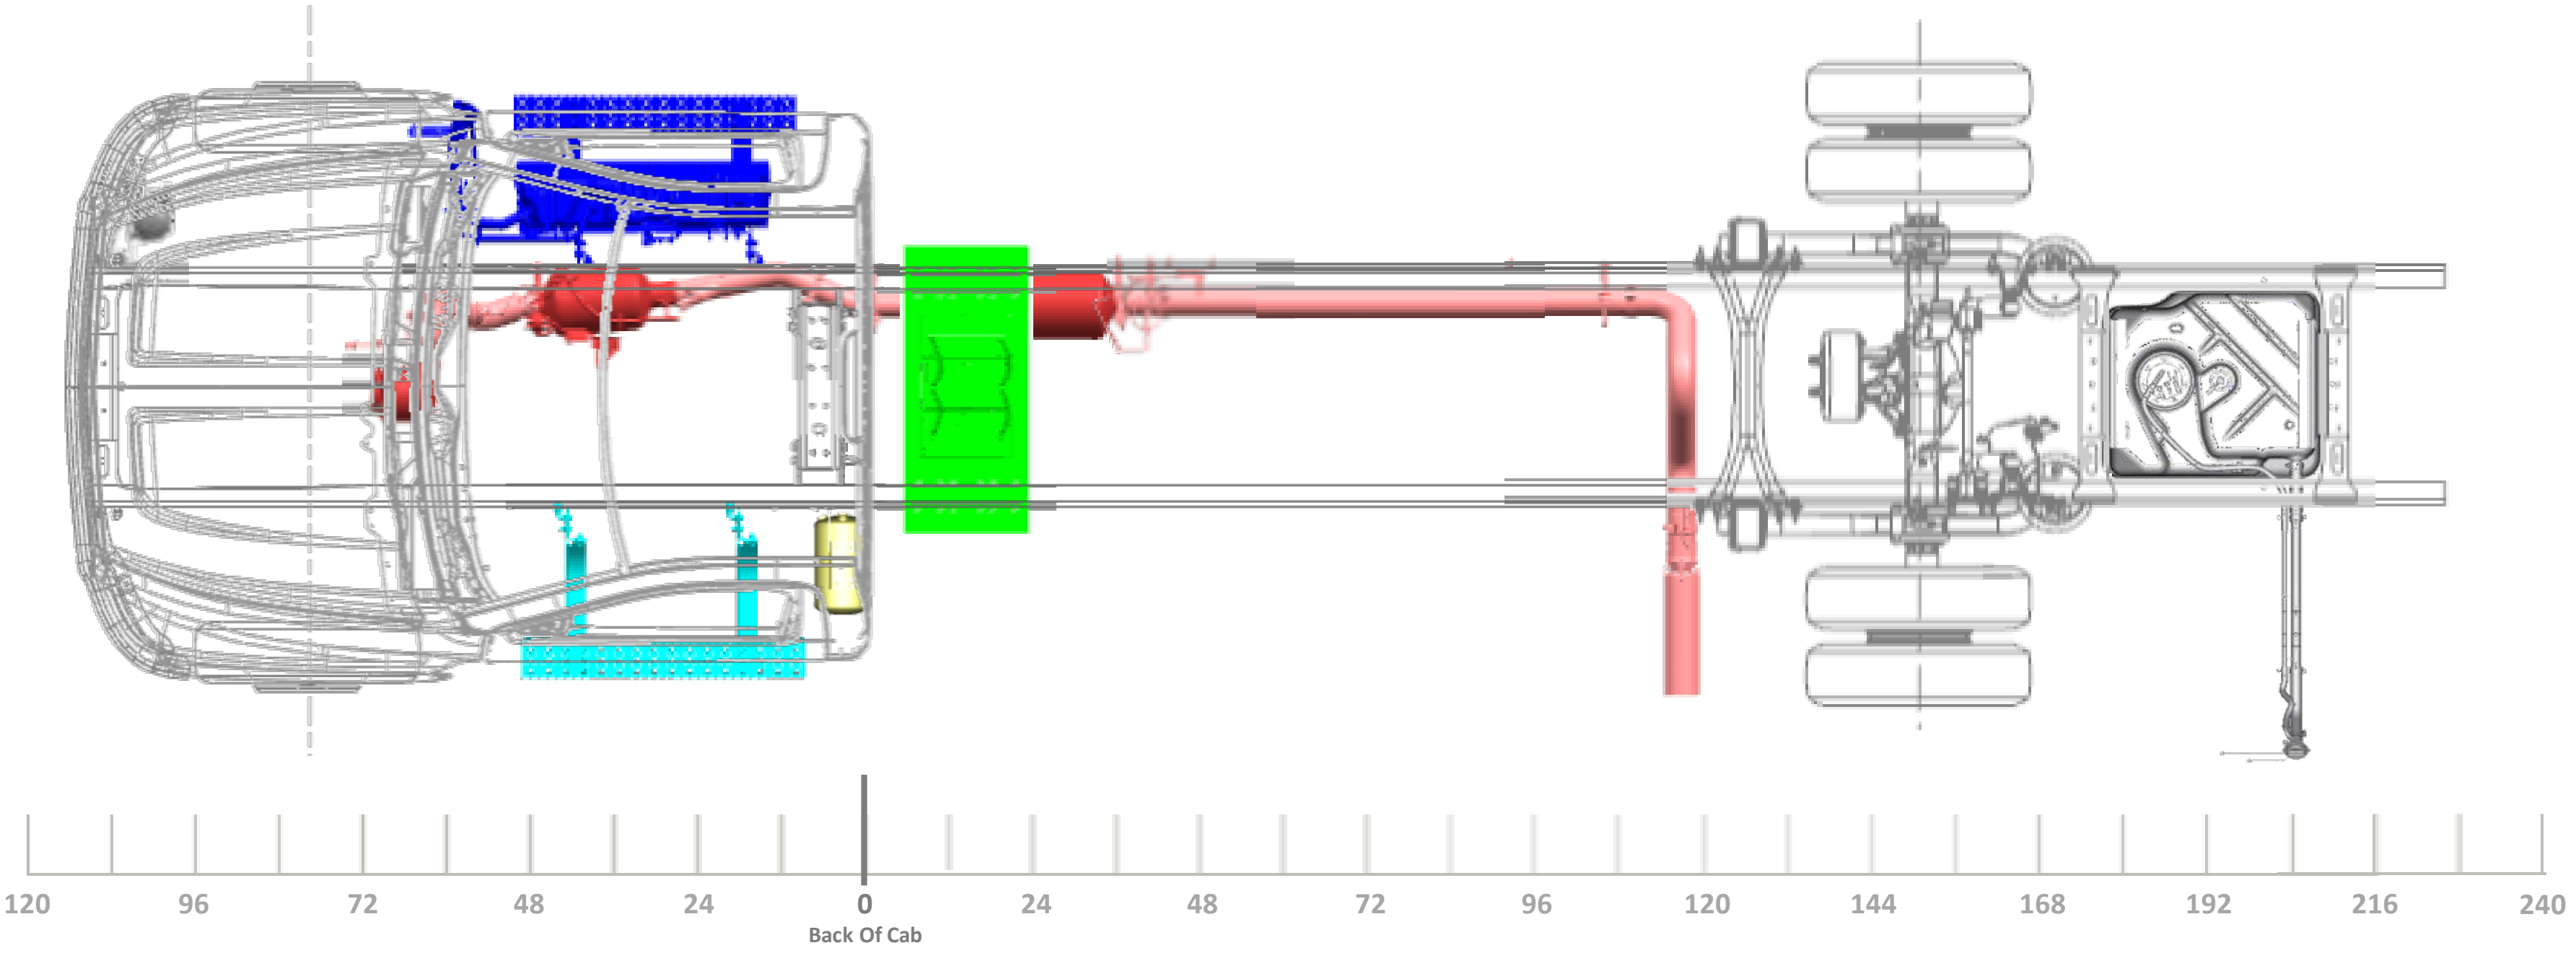

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

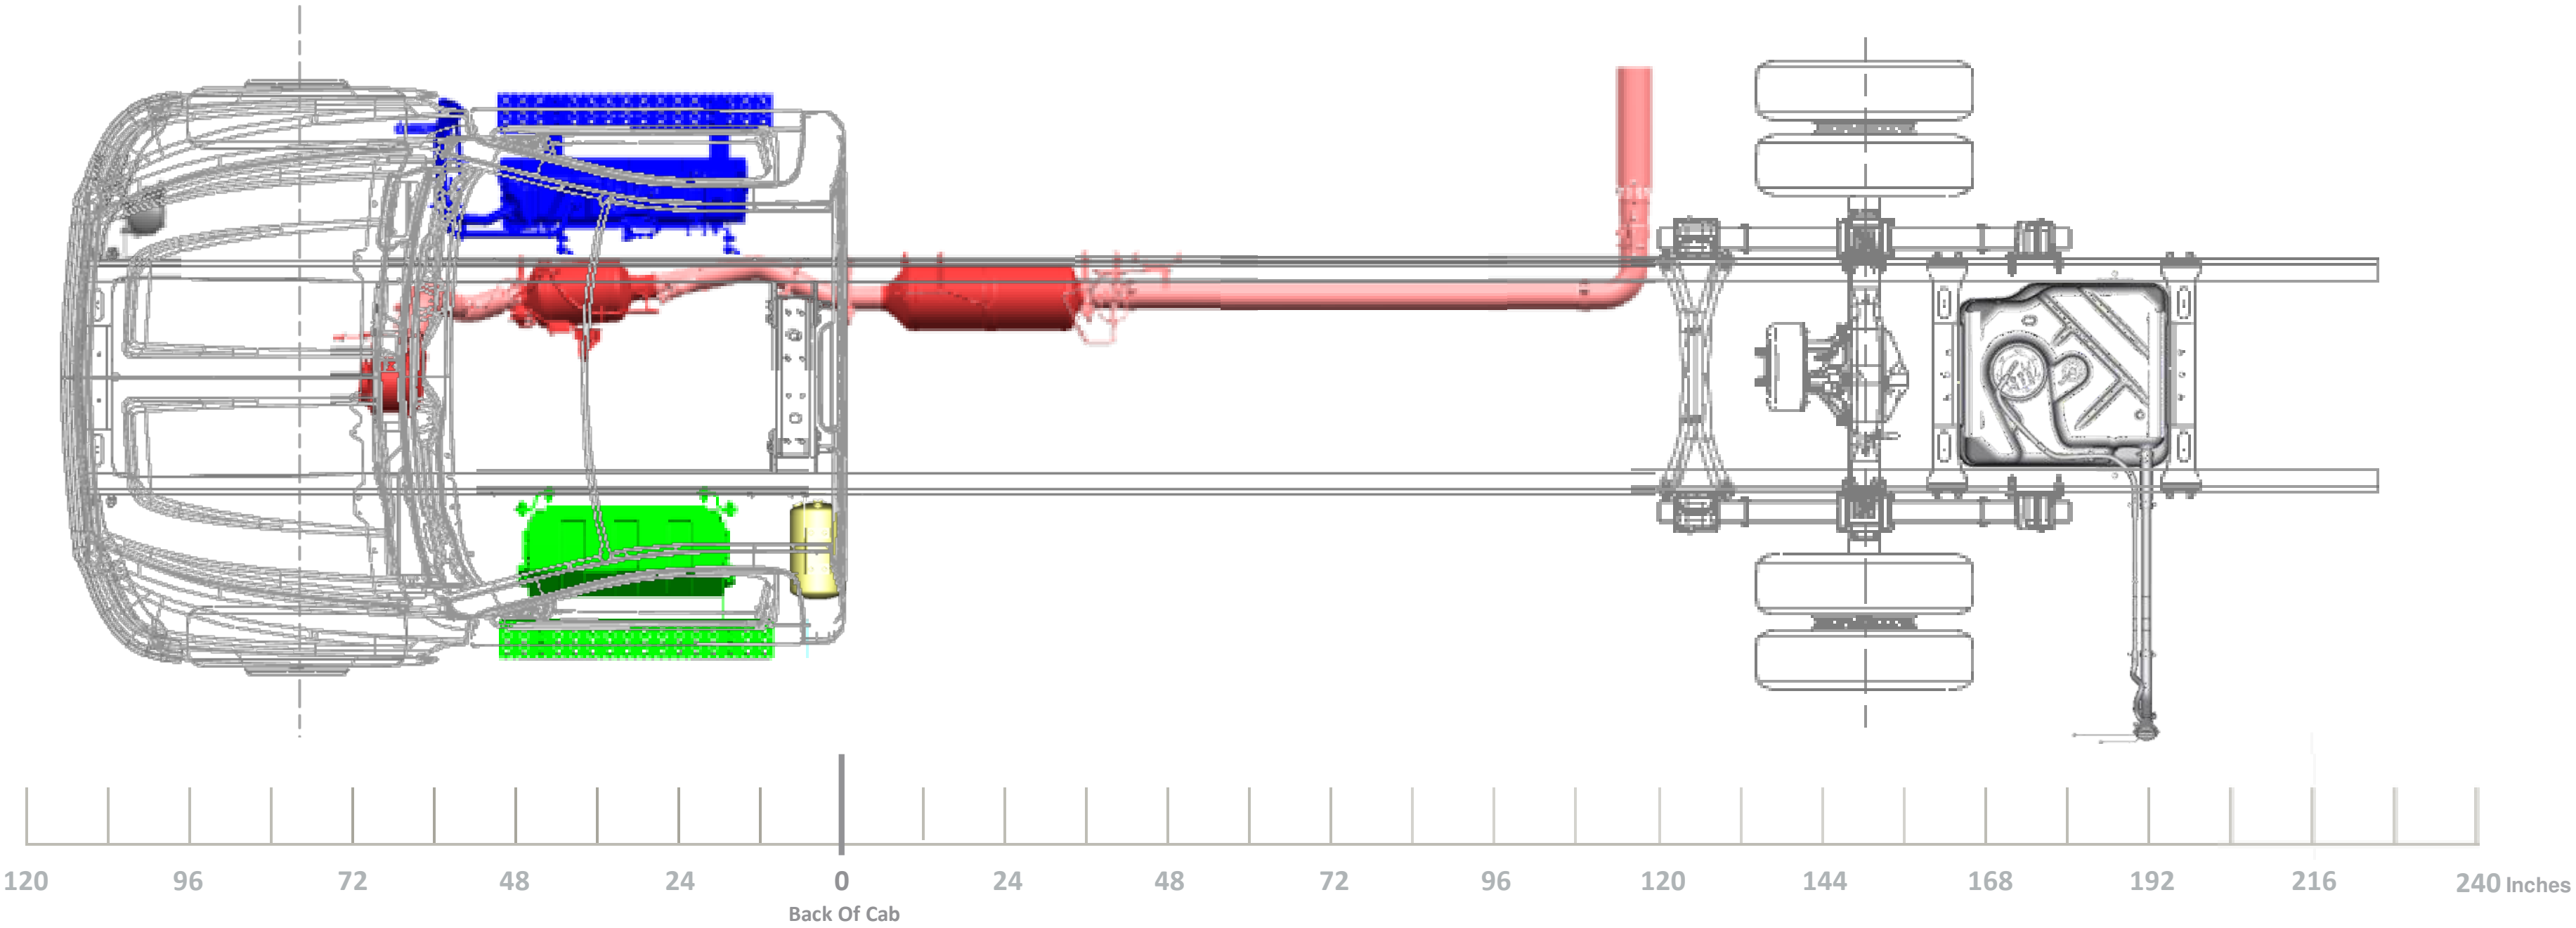
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

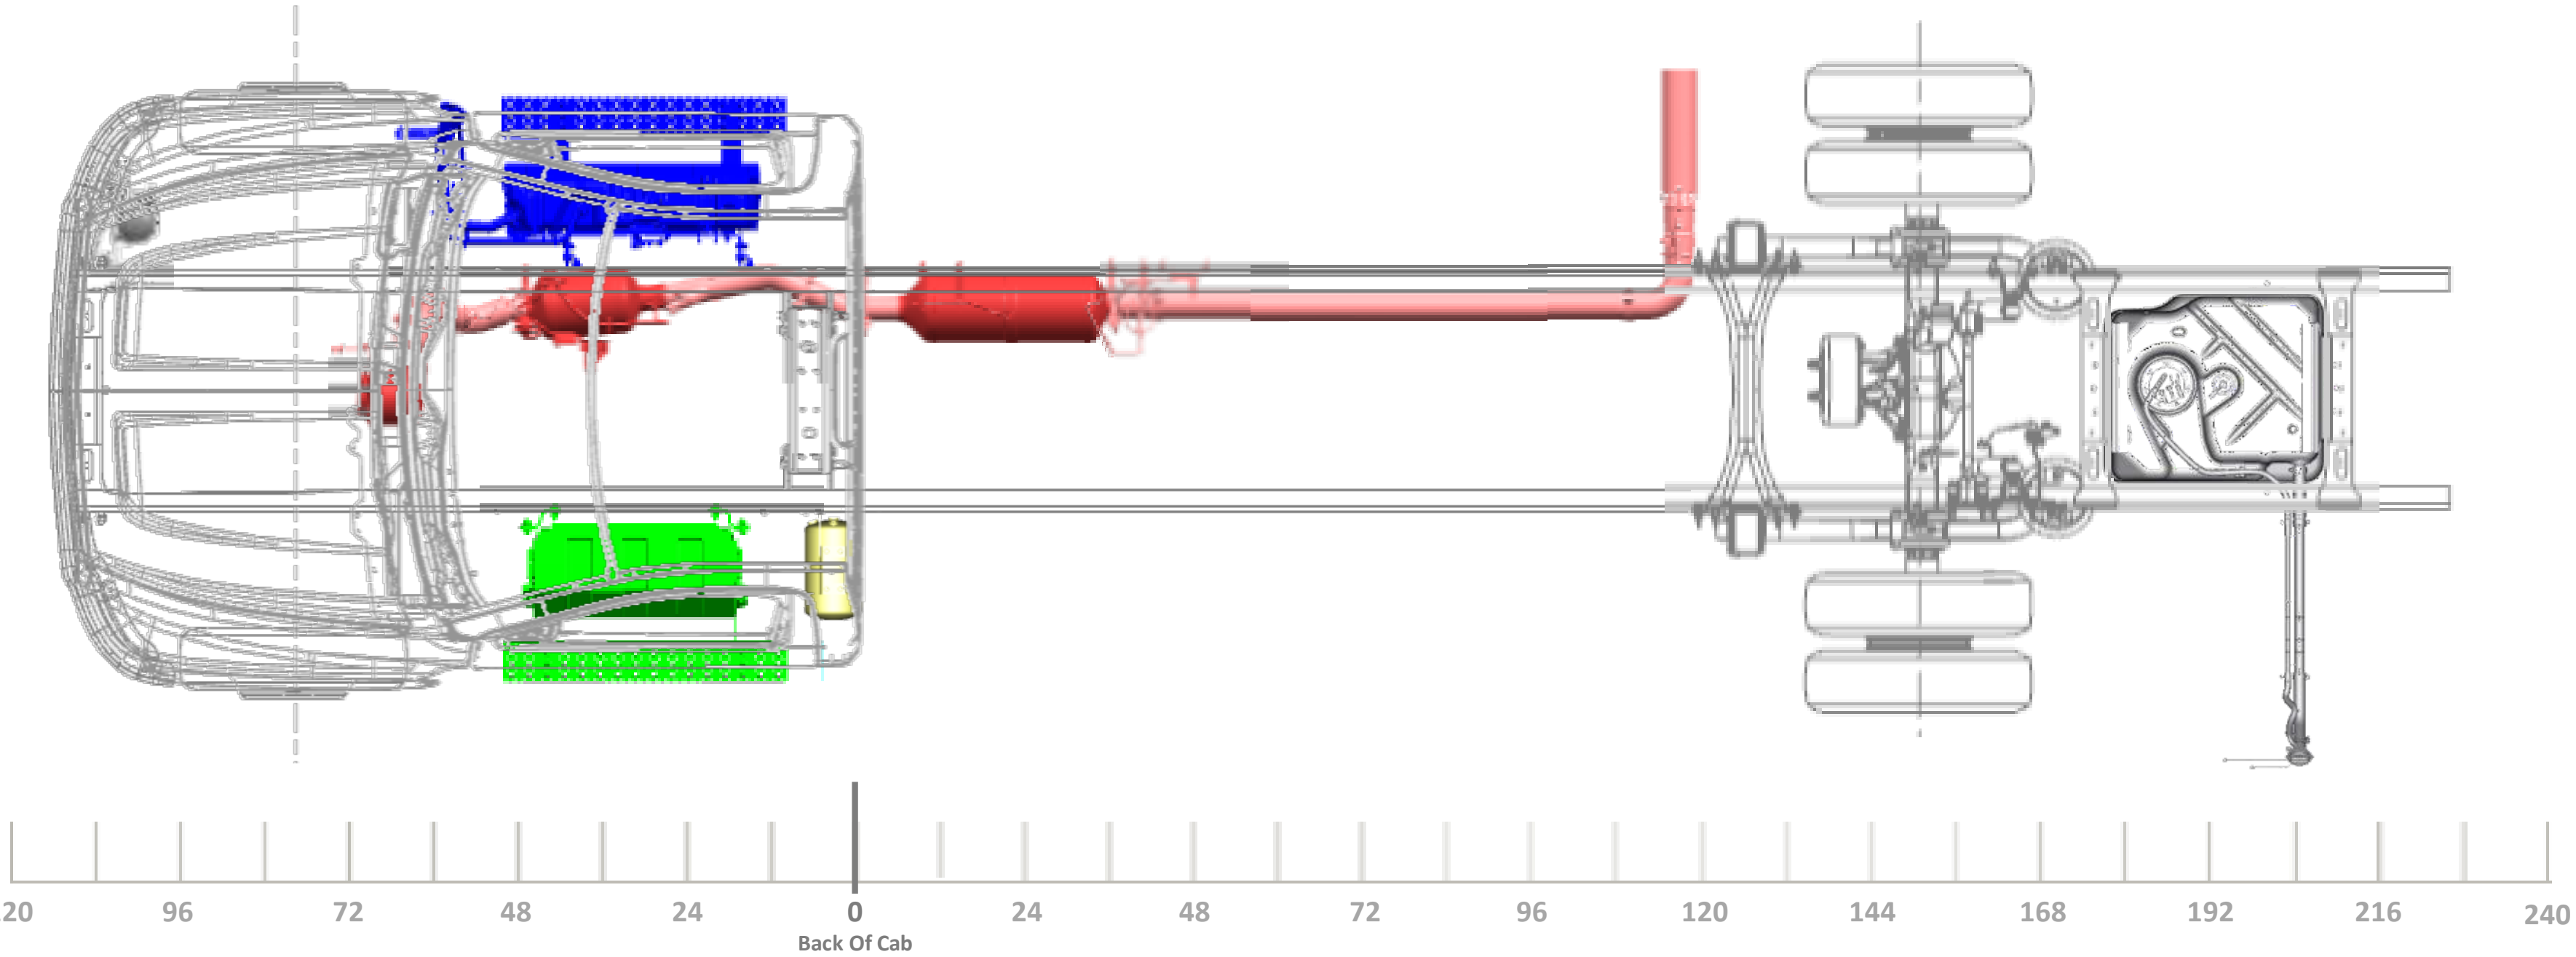

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

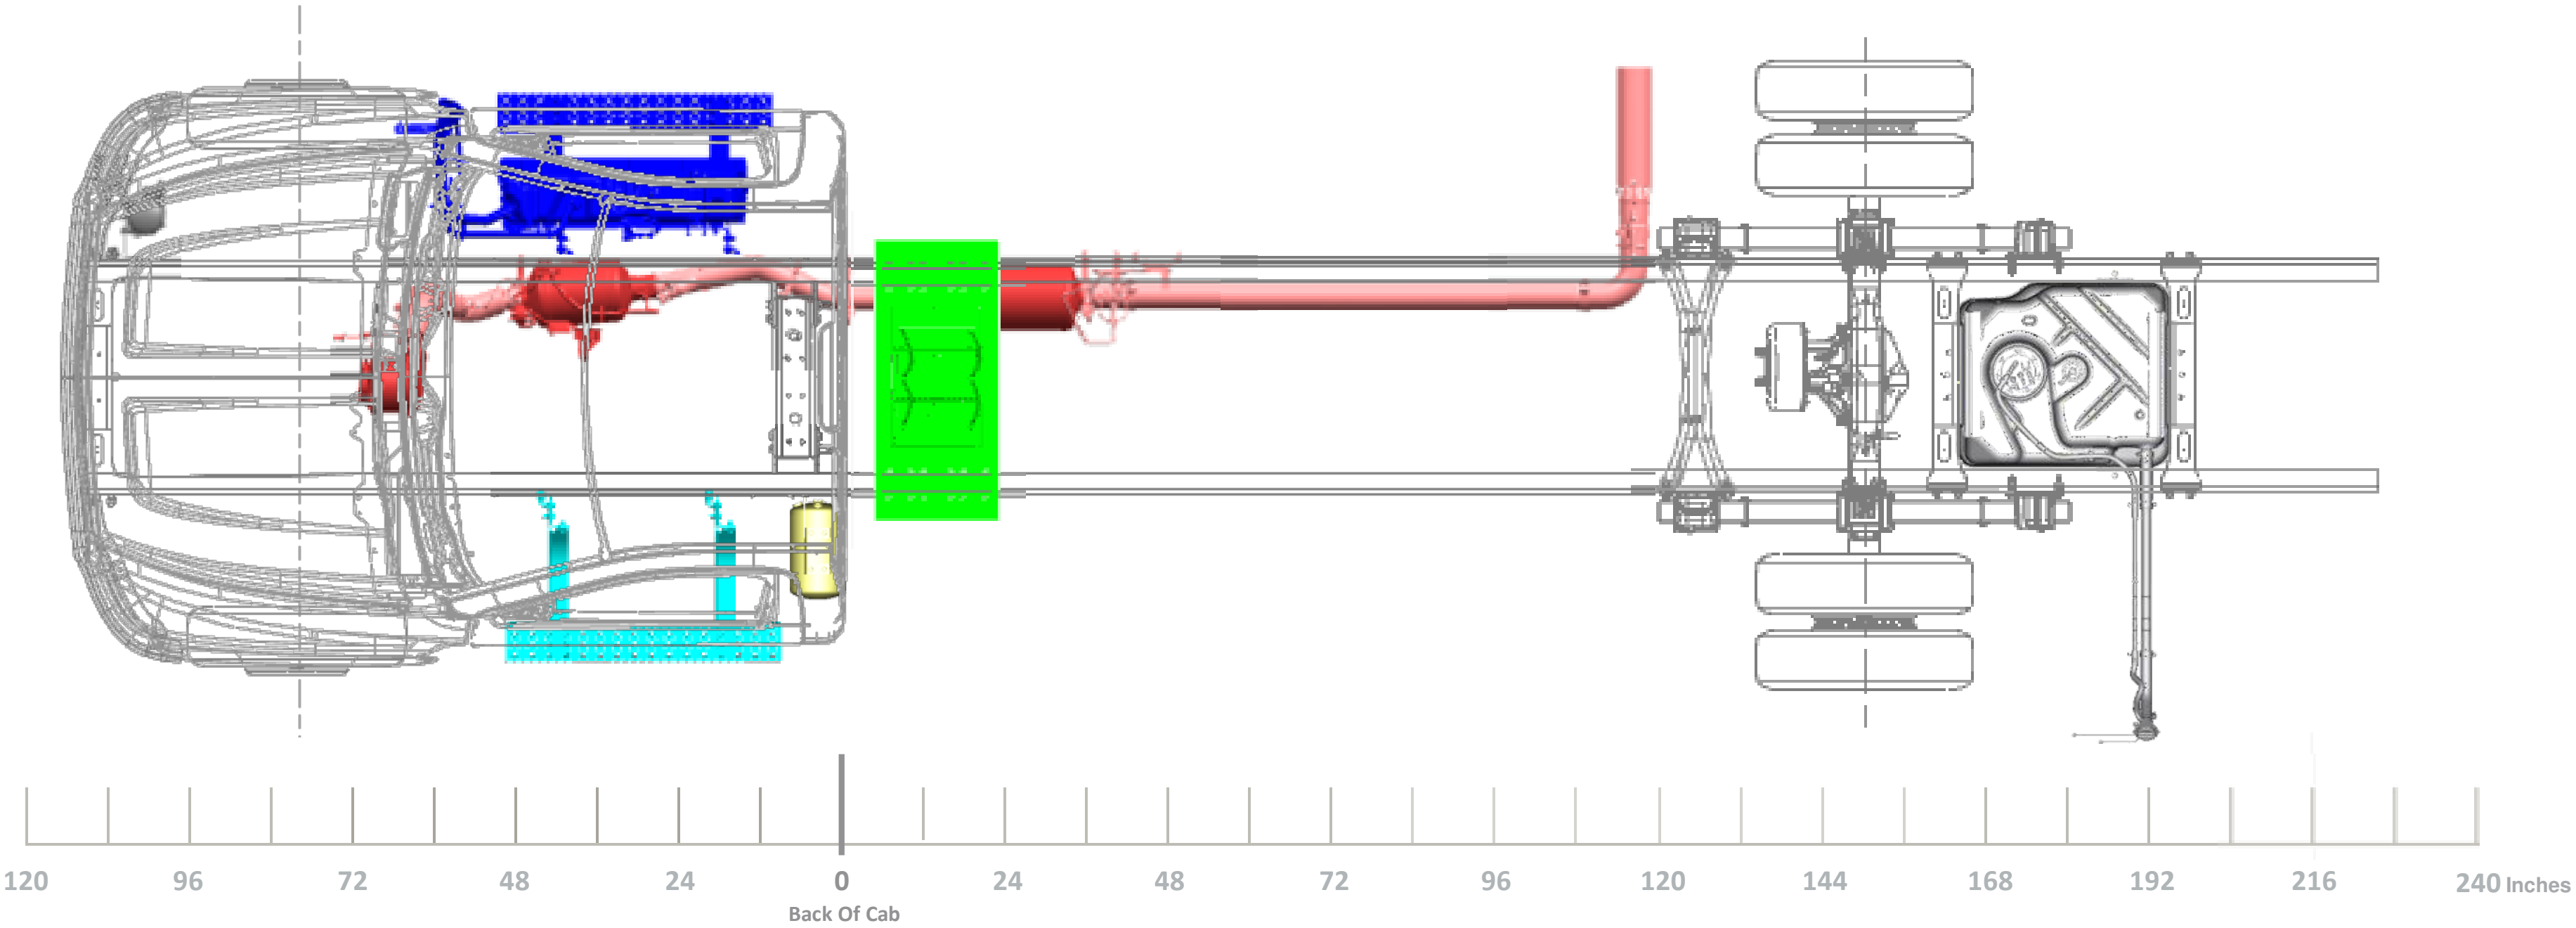
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION VARI-RATE REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231" WB (150" CA) 91" AF

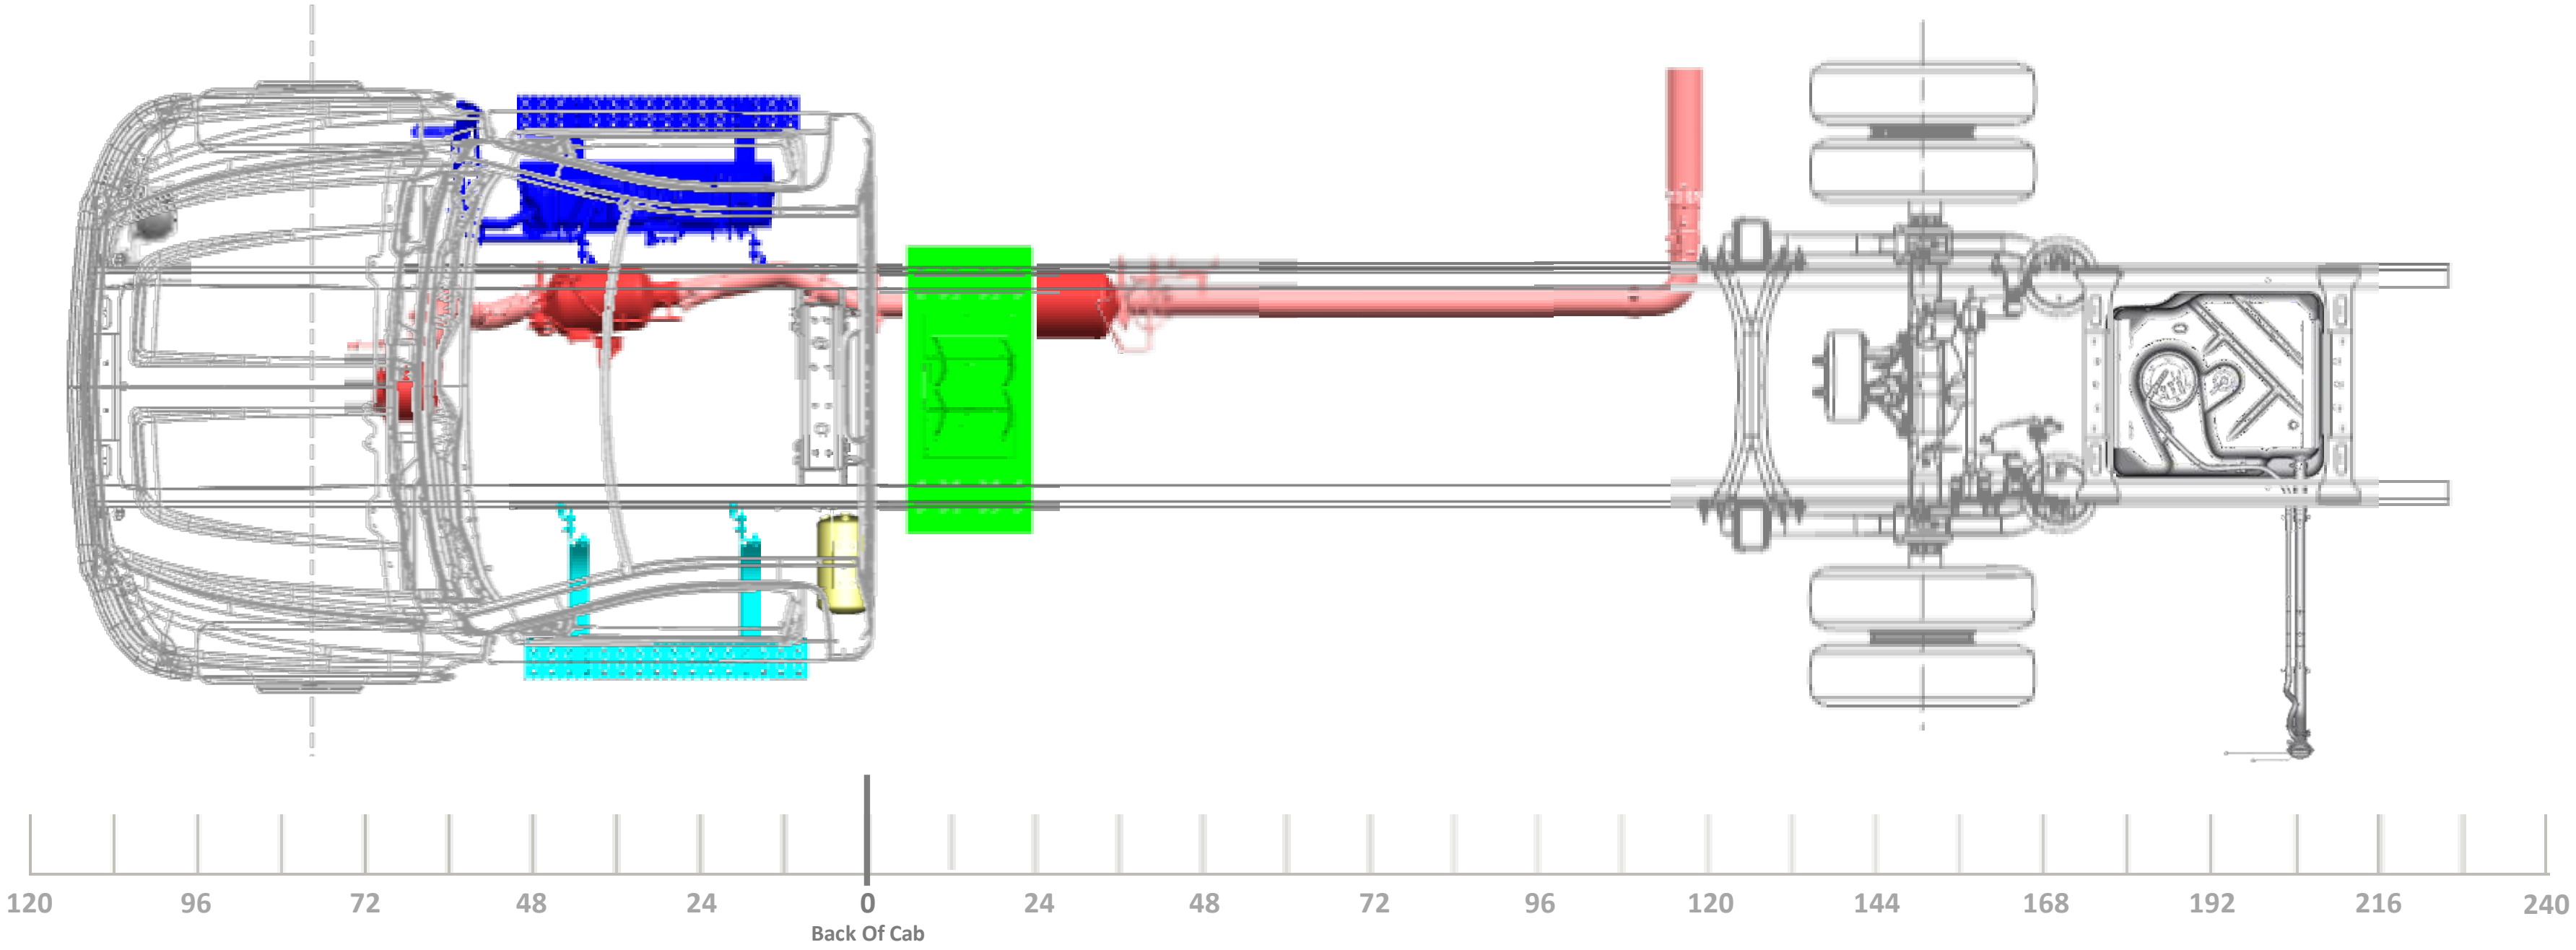

Model/Feature Information

Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

231” WB (150” CA) 91” AF

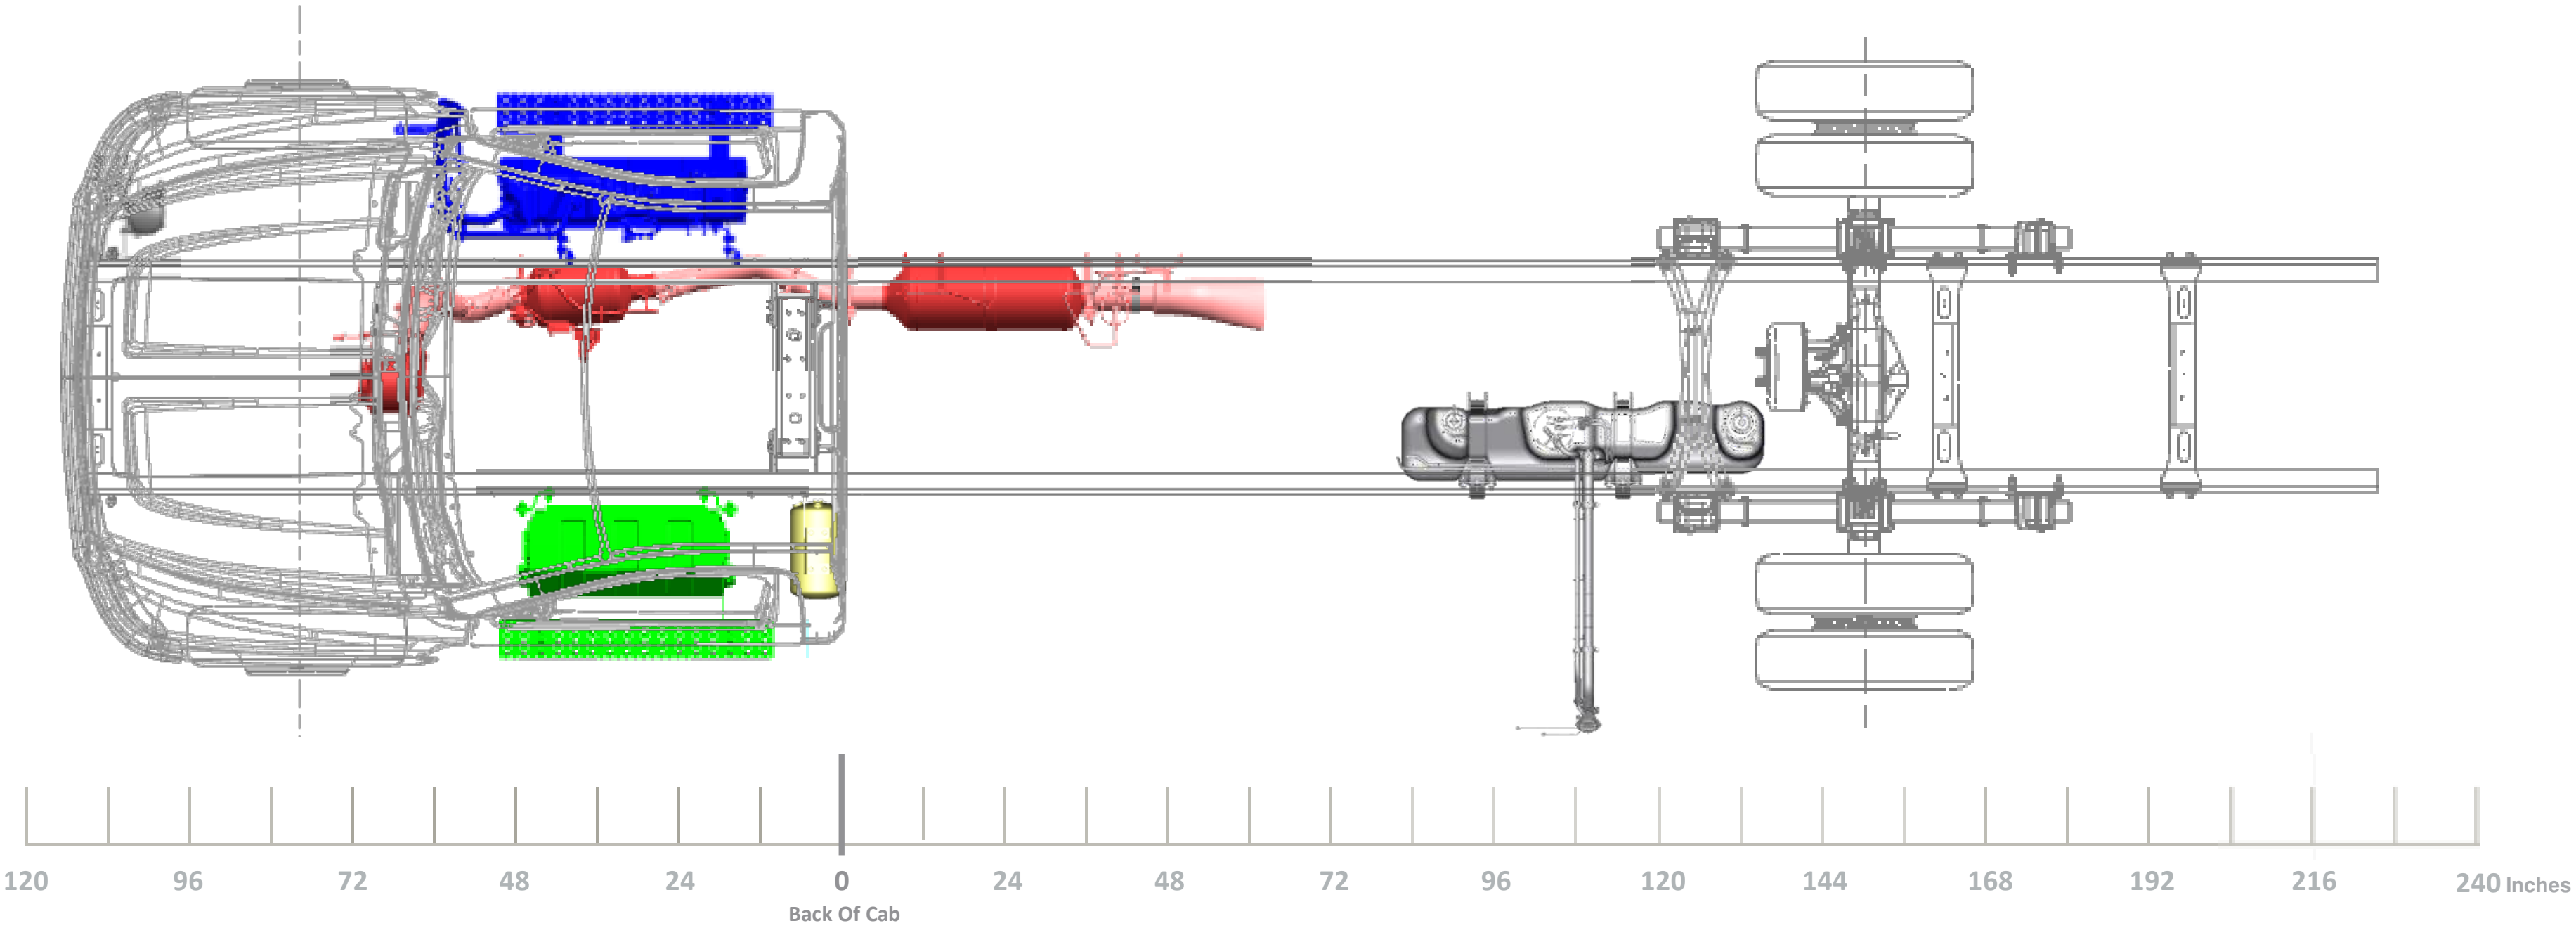
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

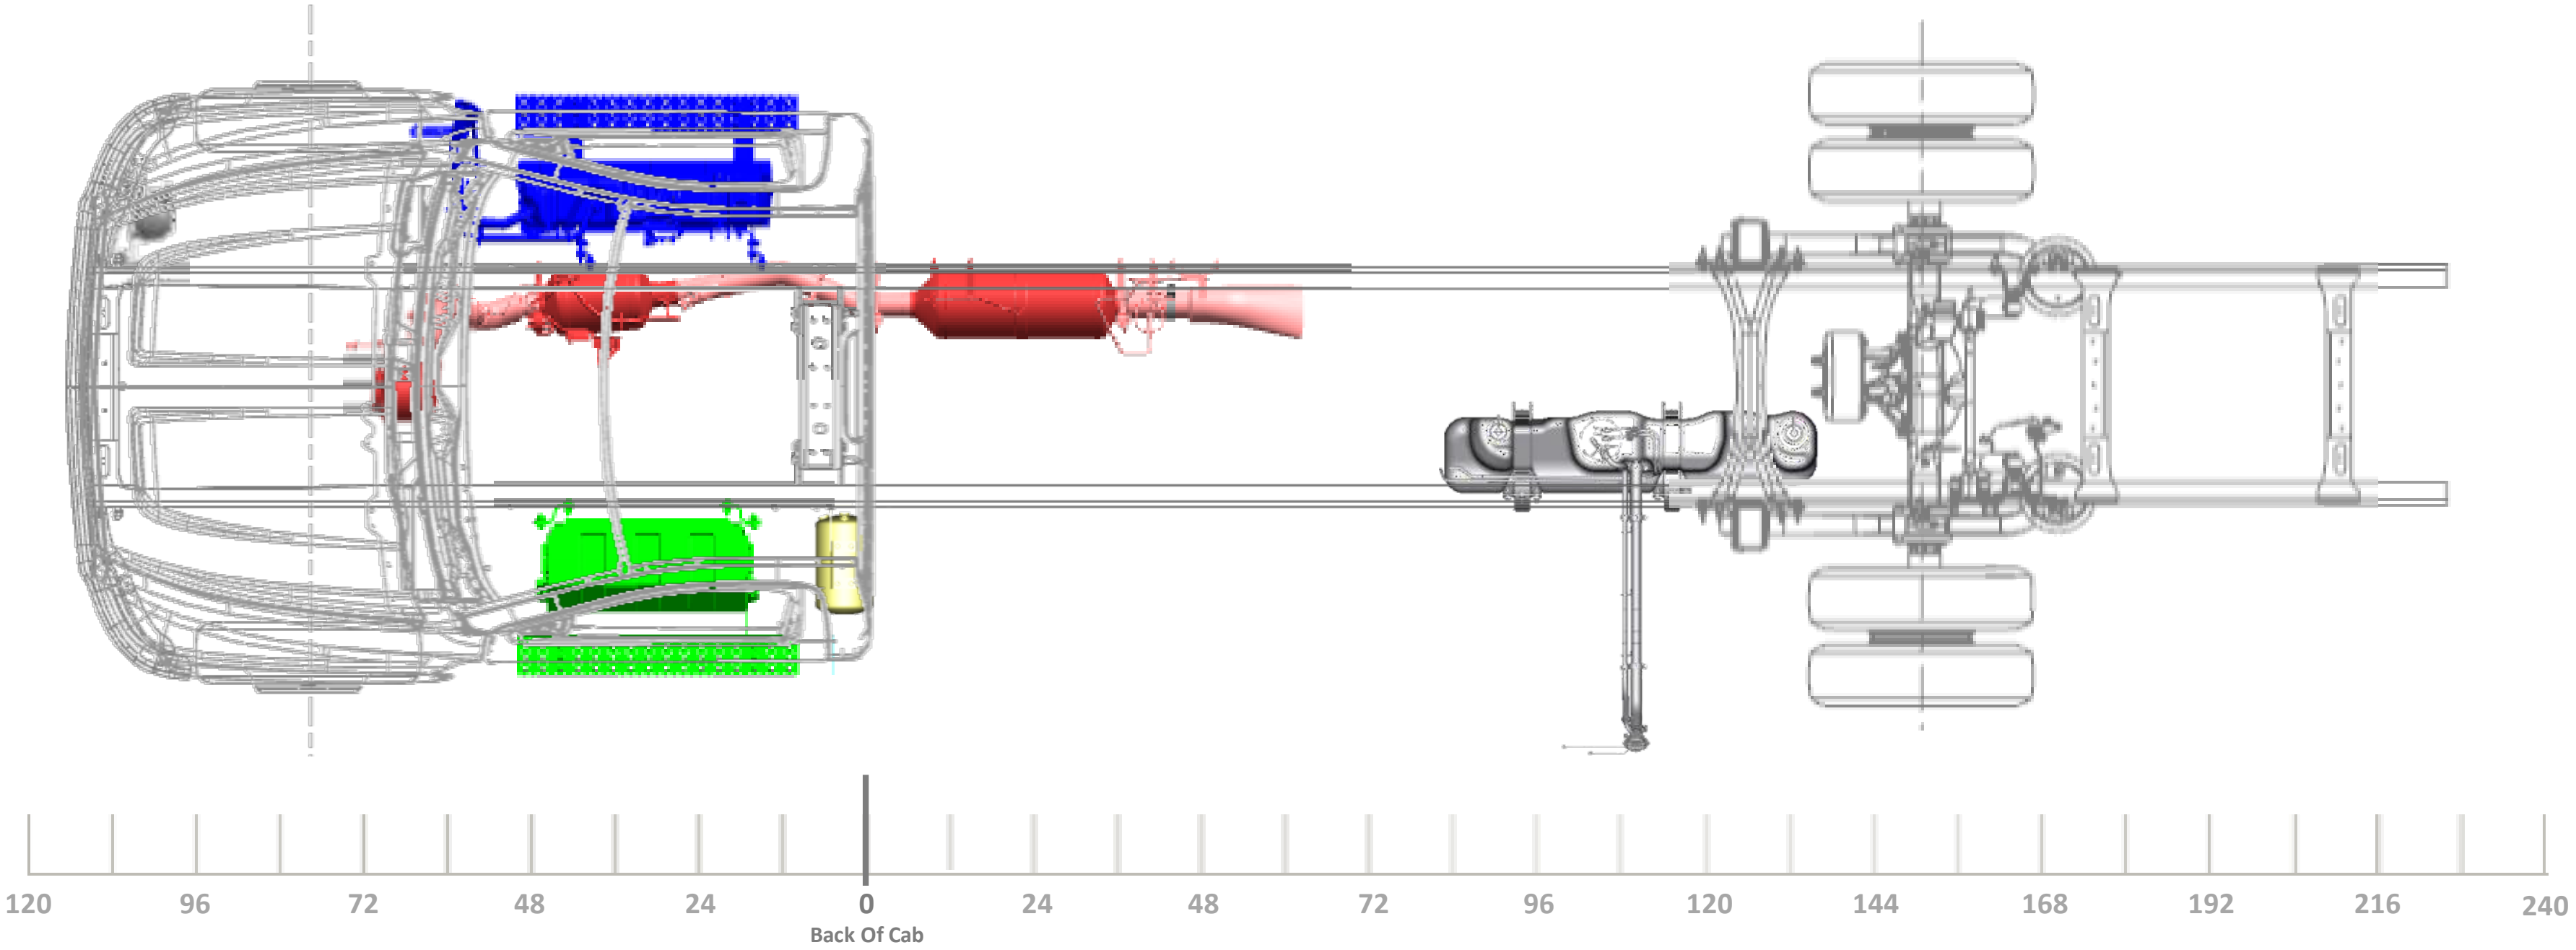

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

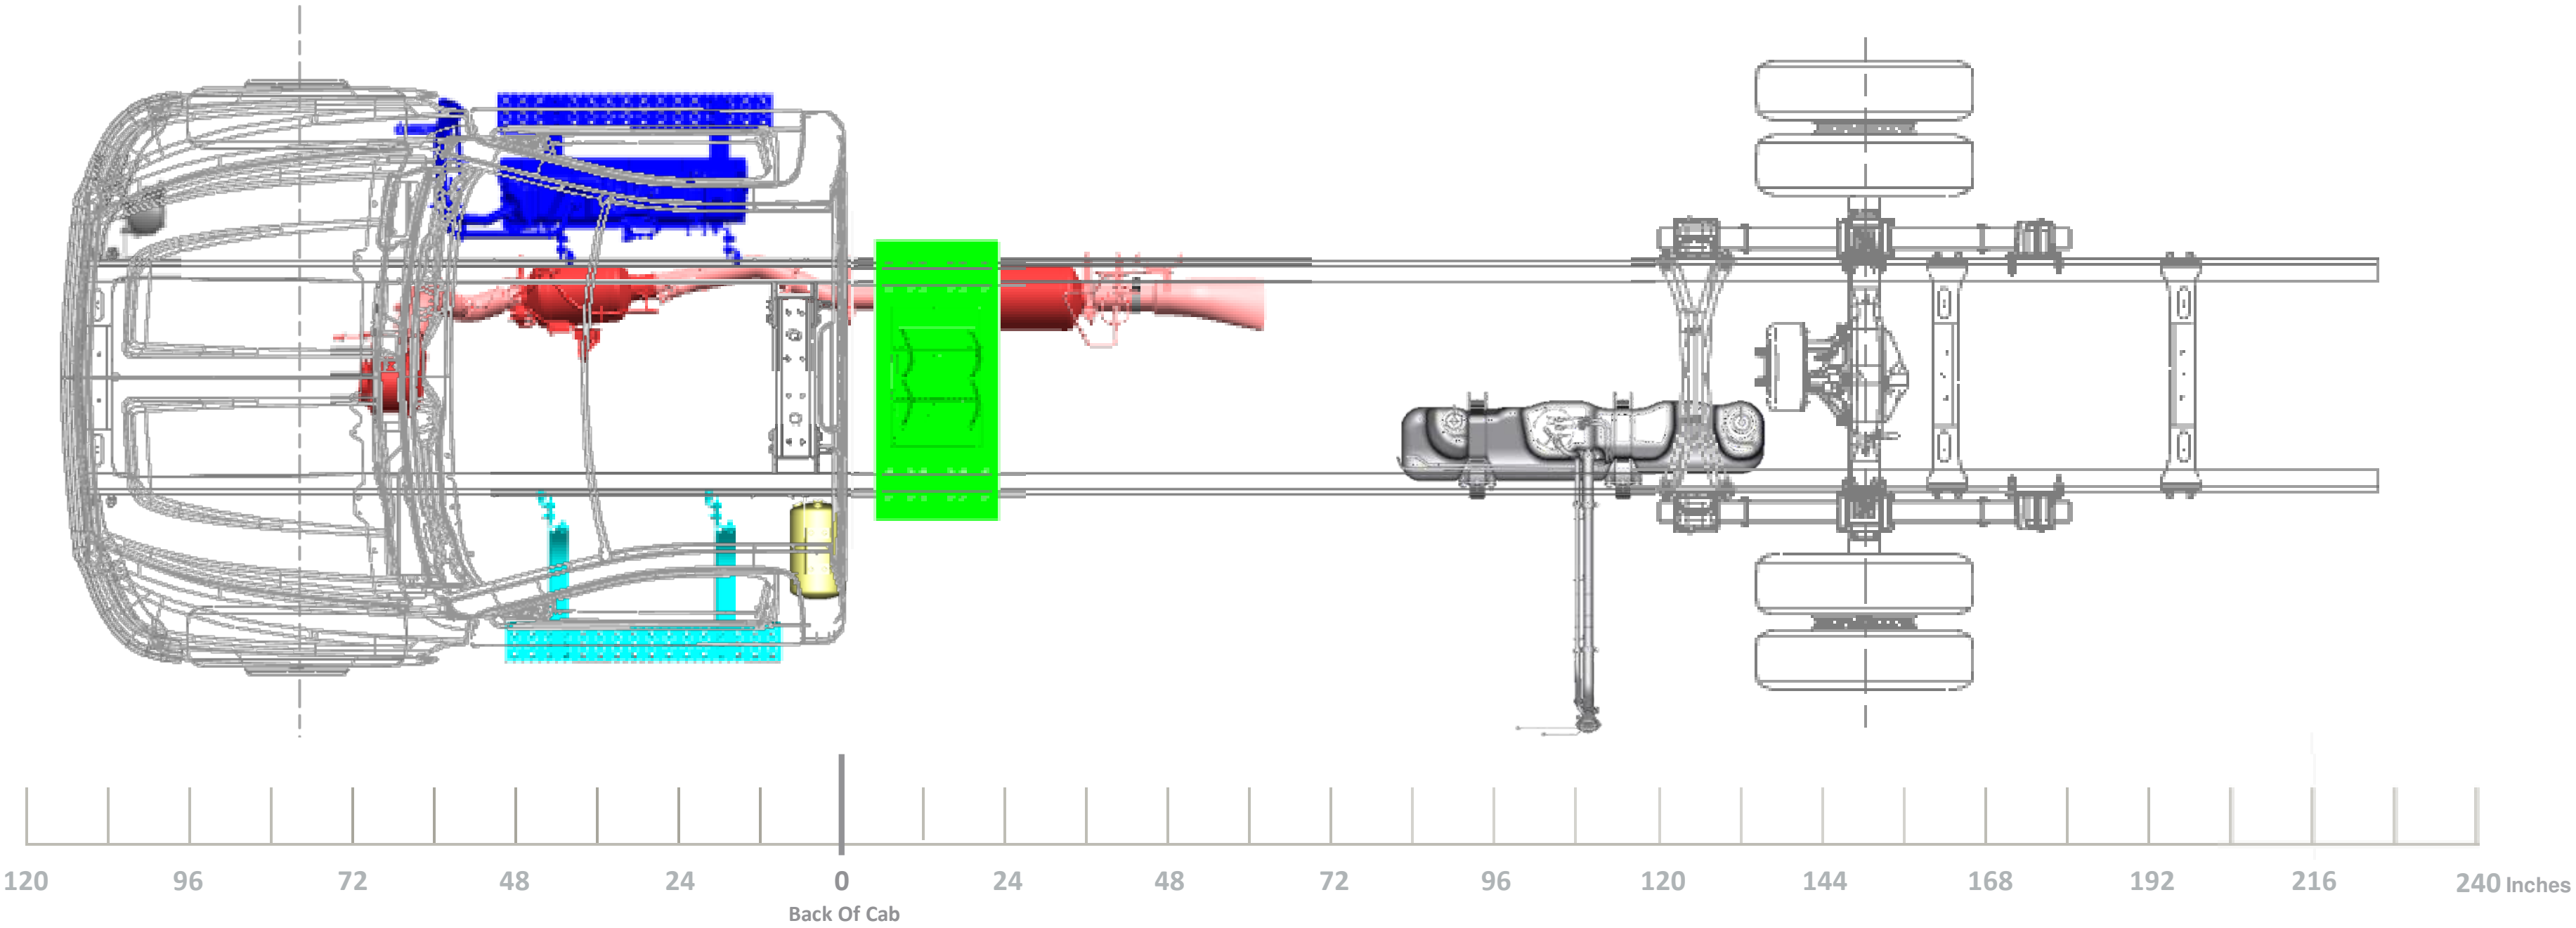

120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

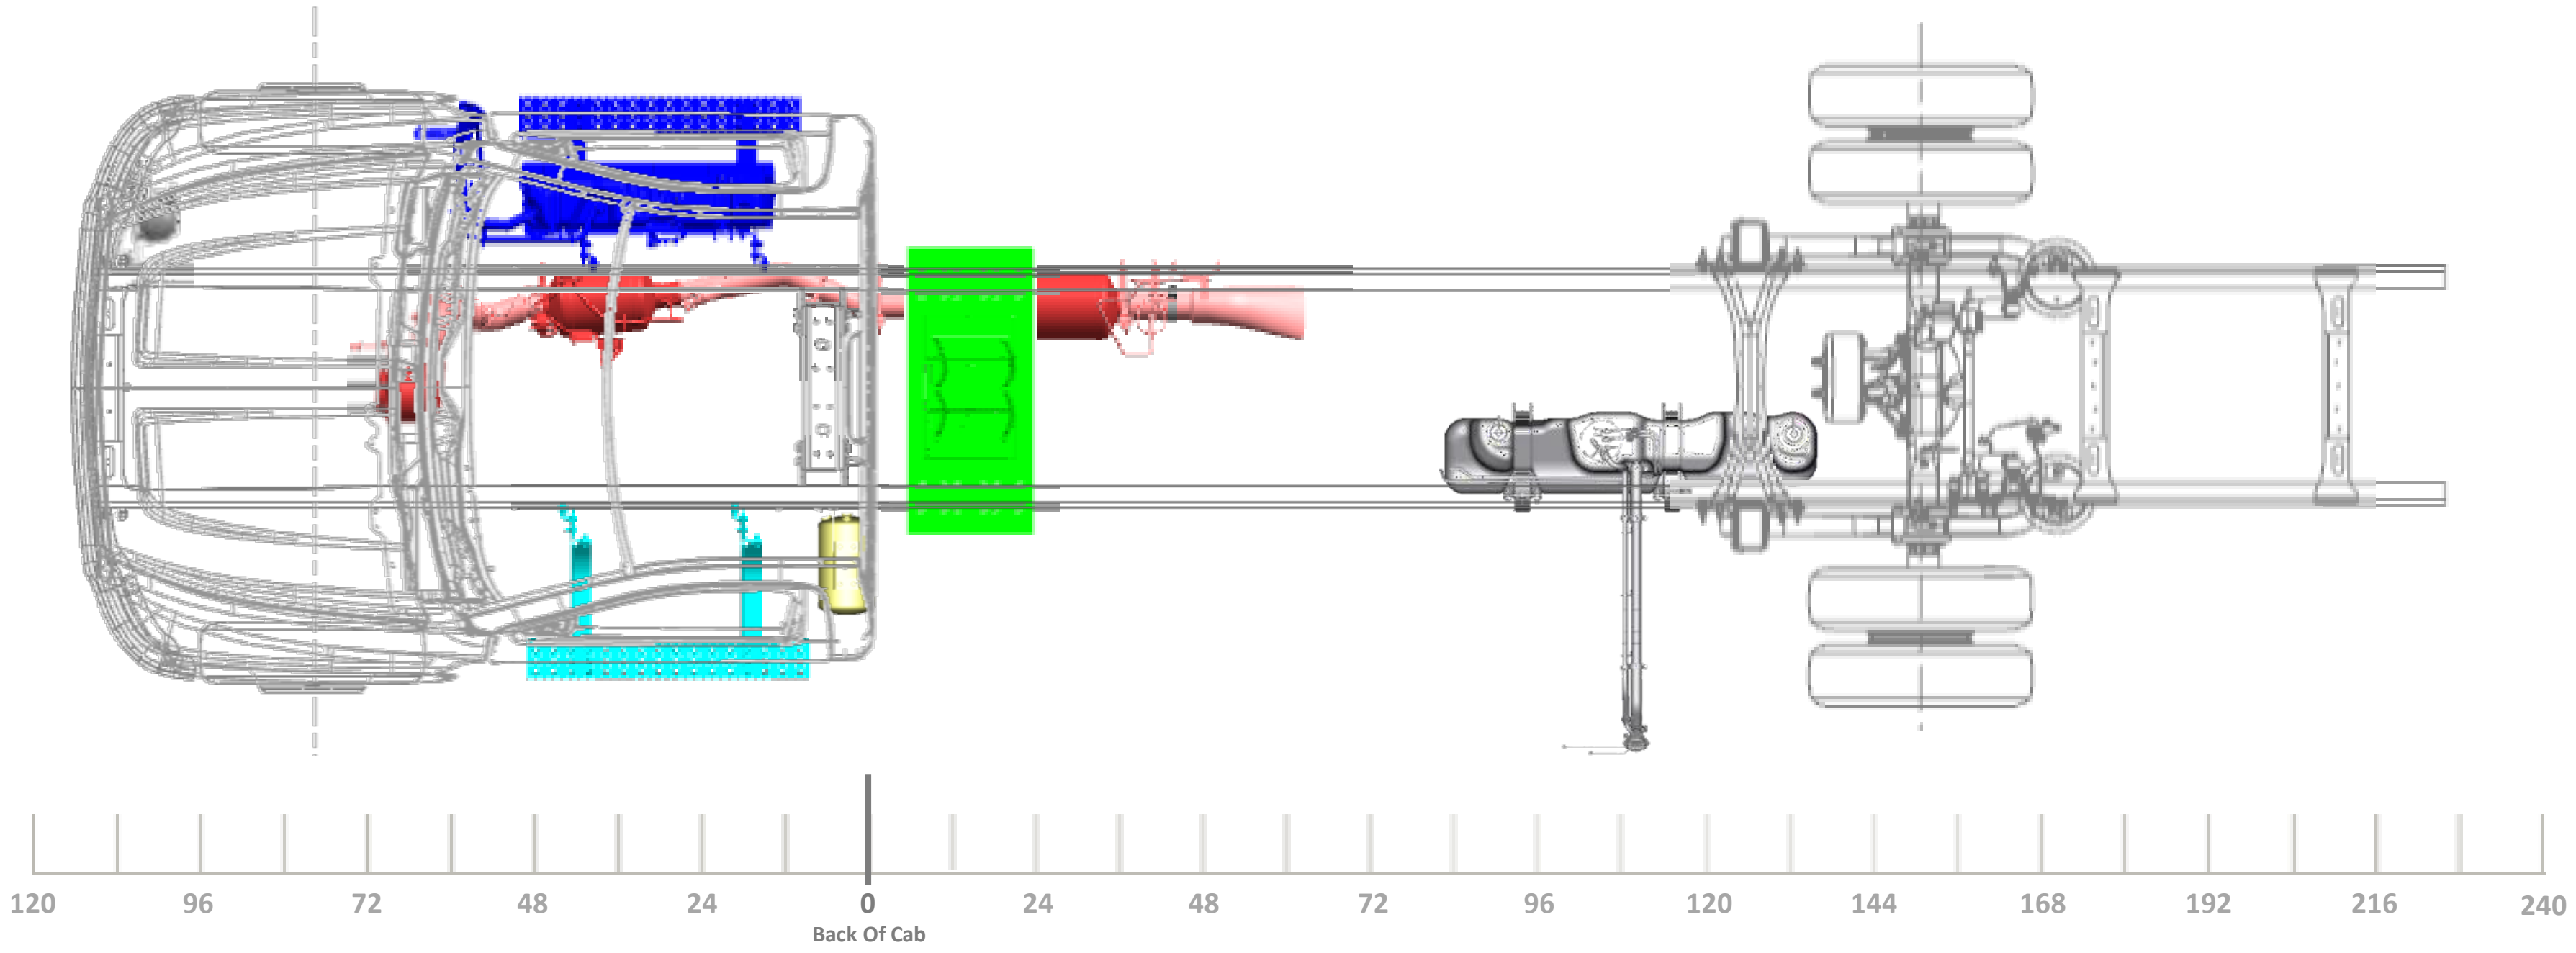

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

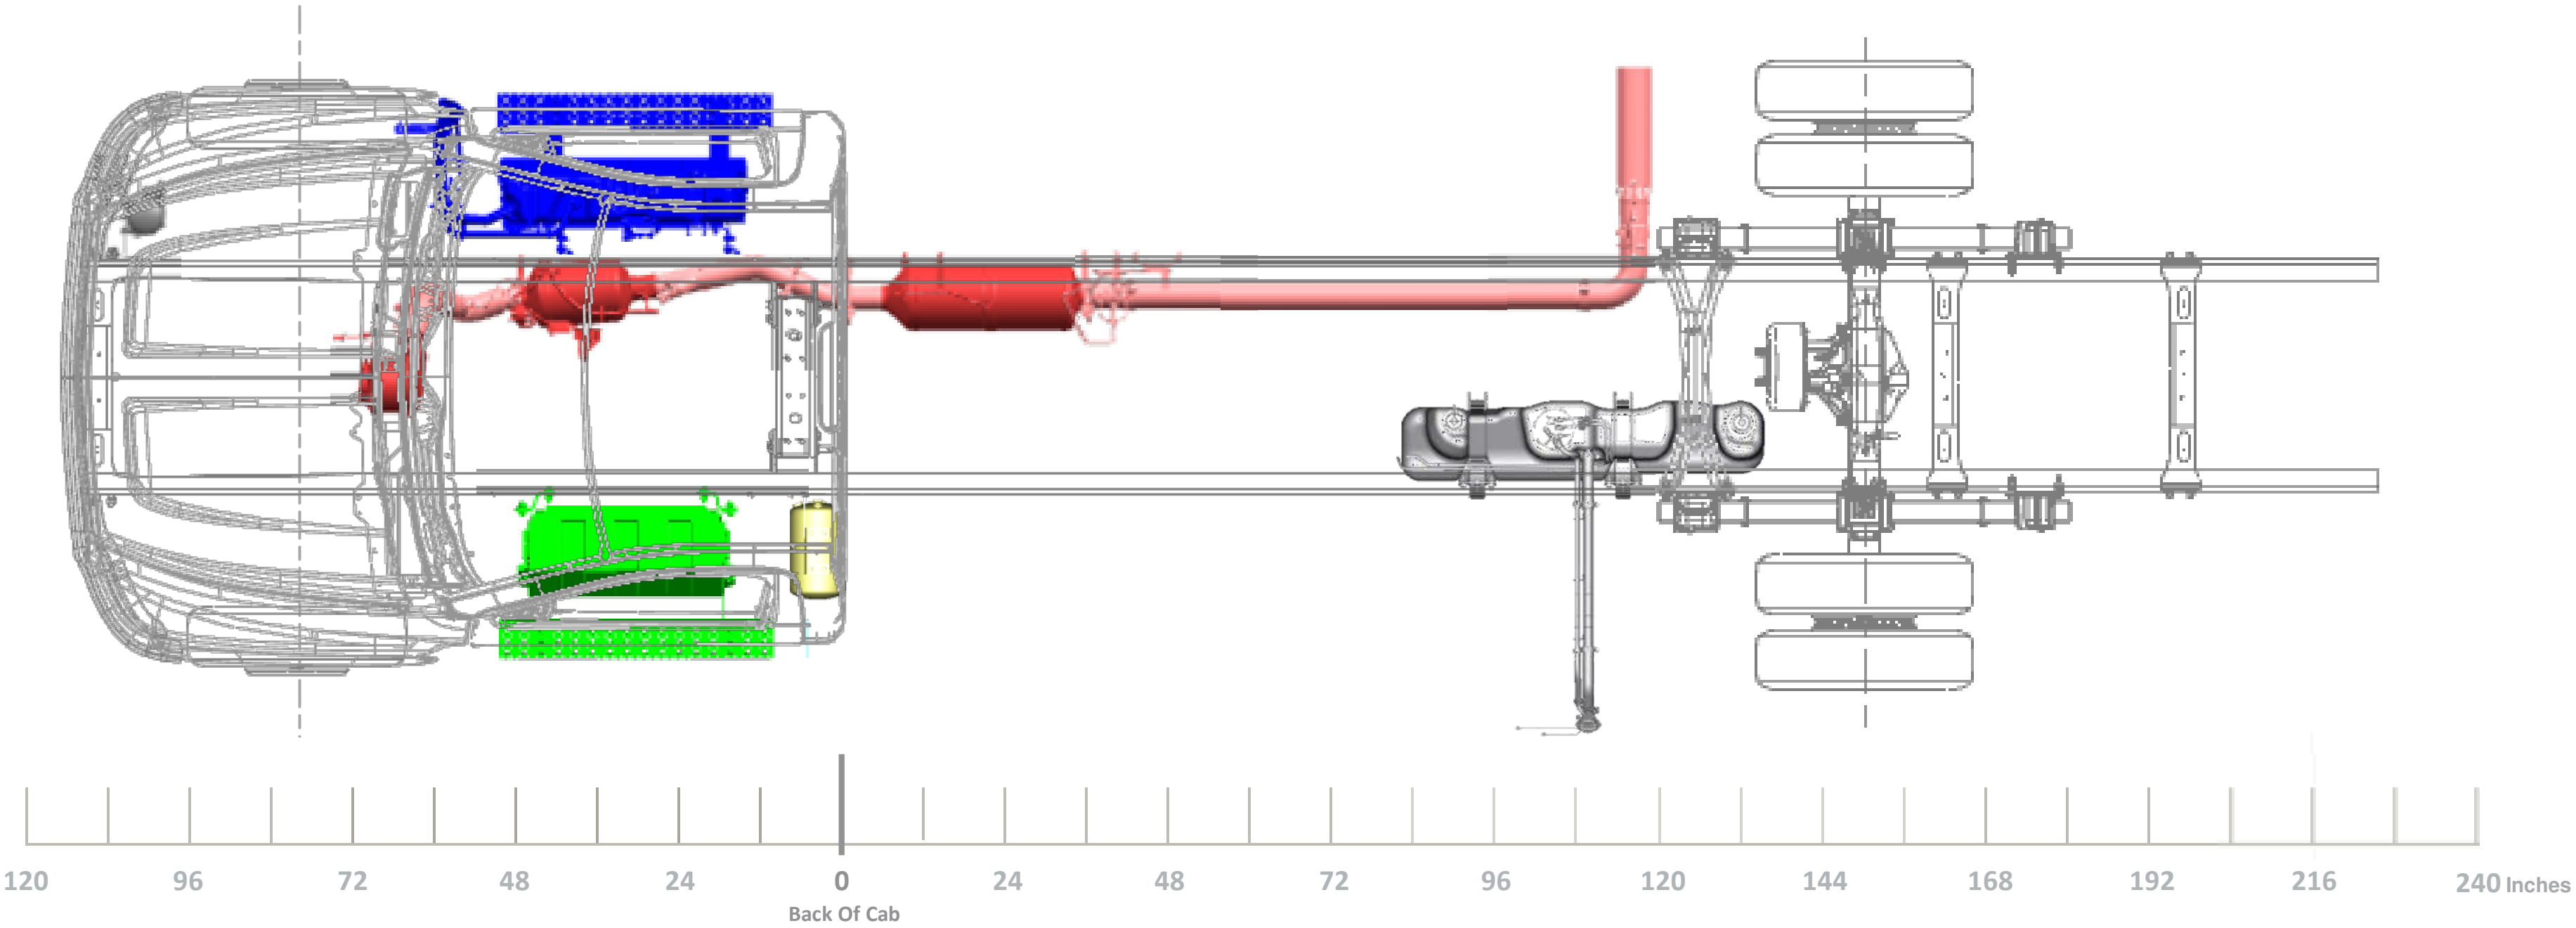
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

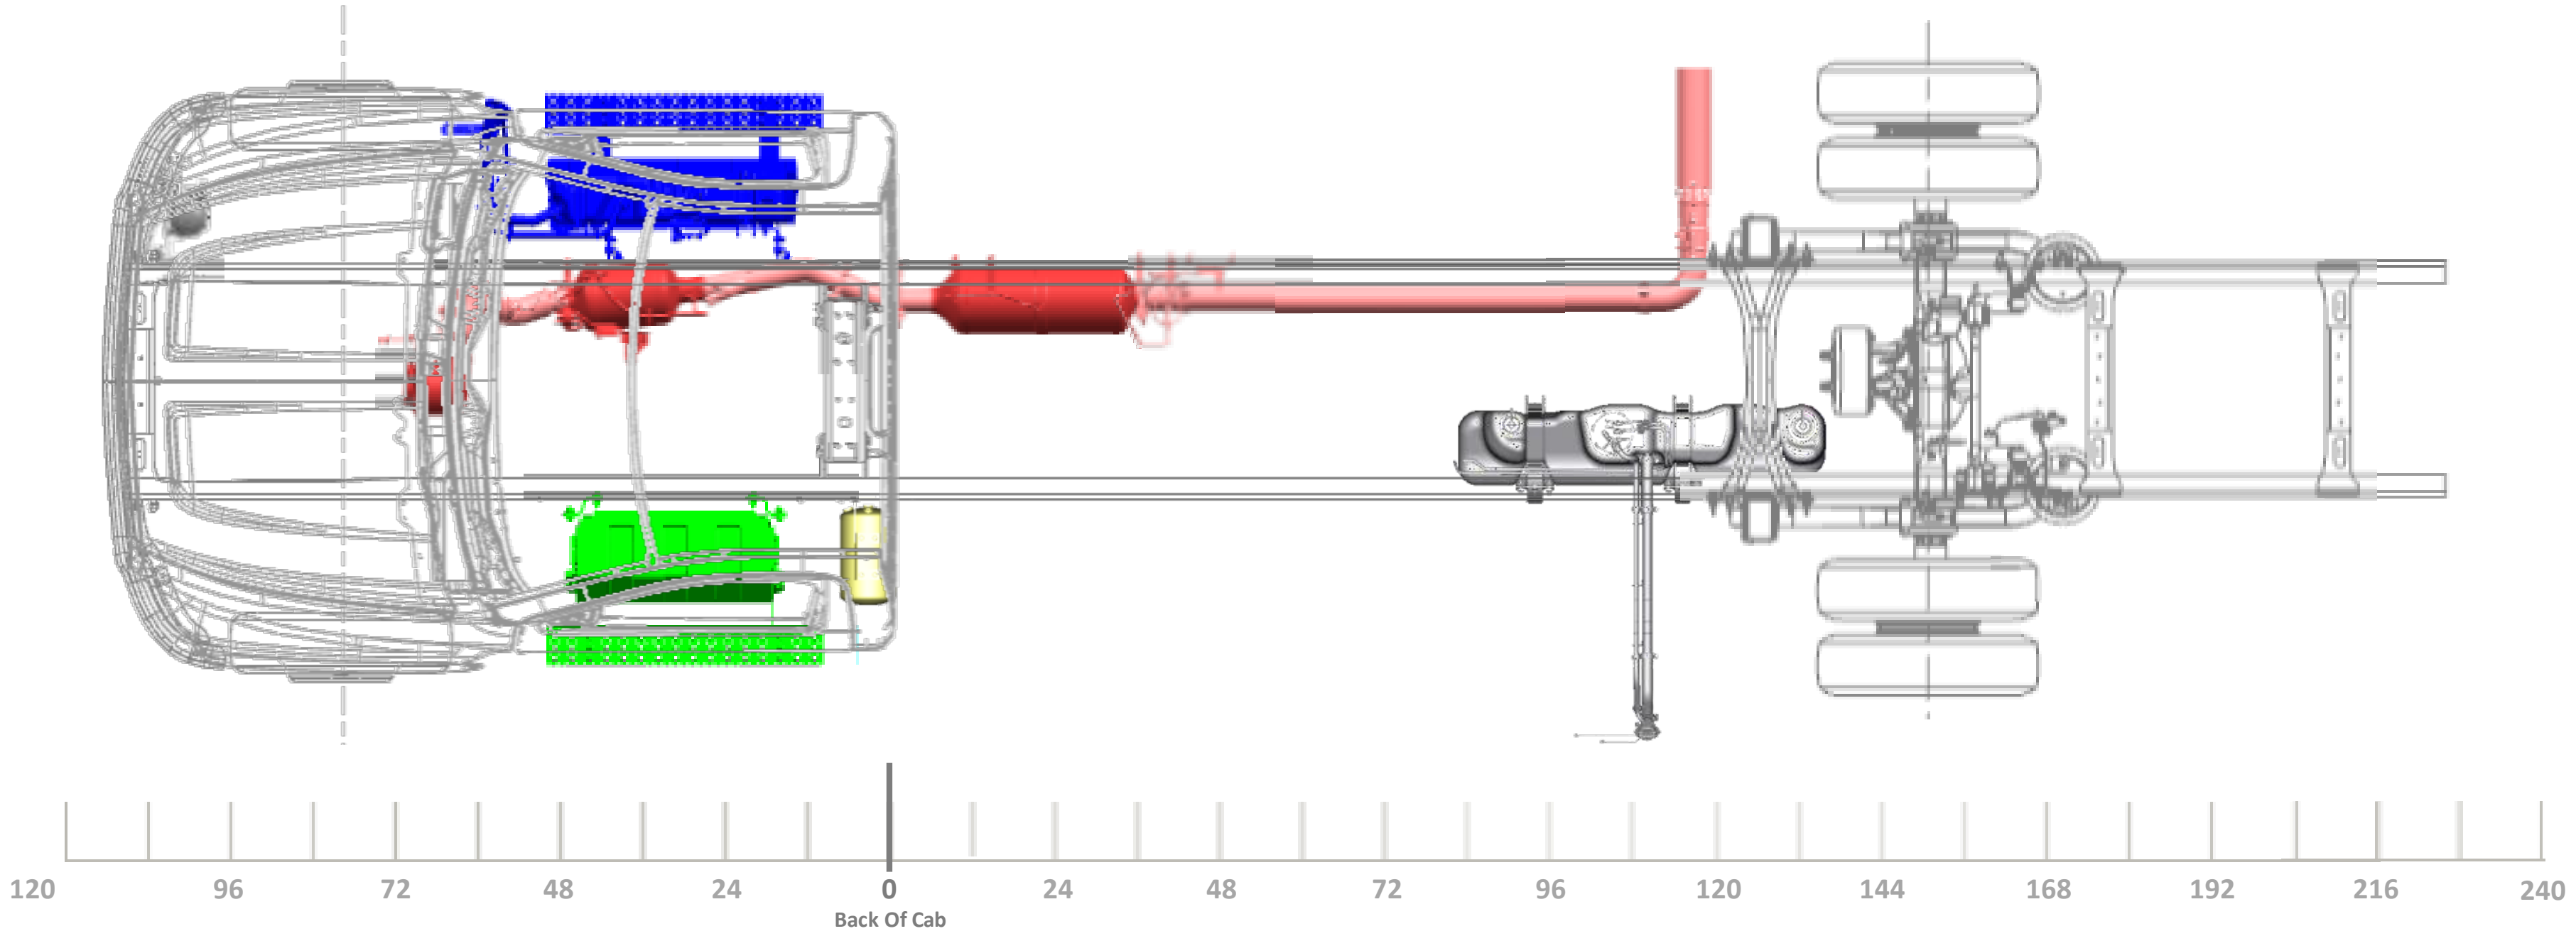

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

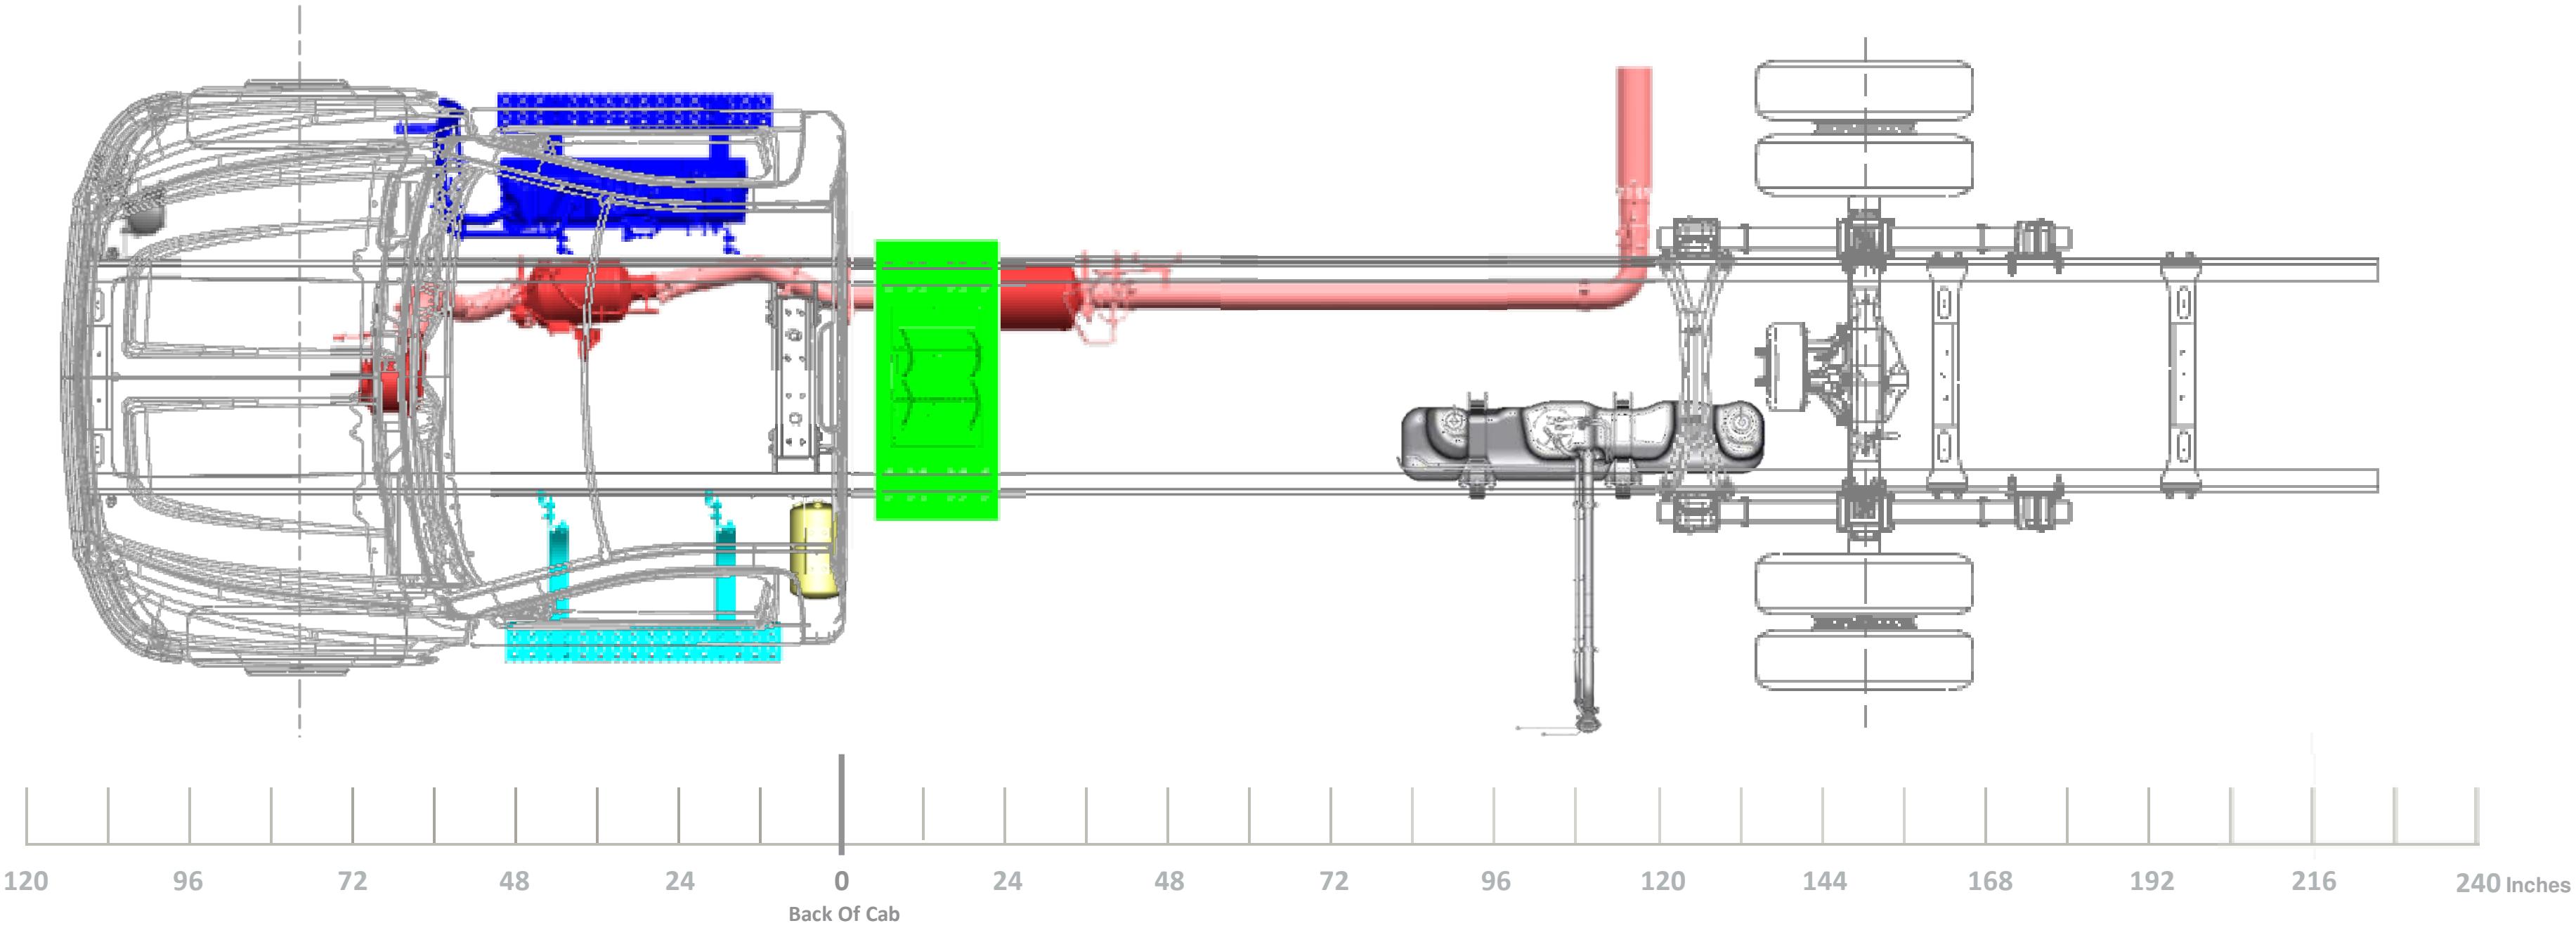
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

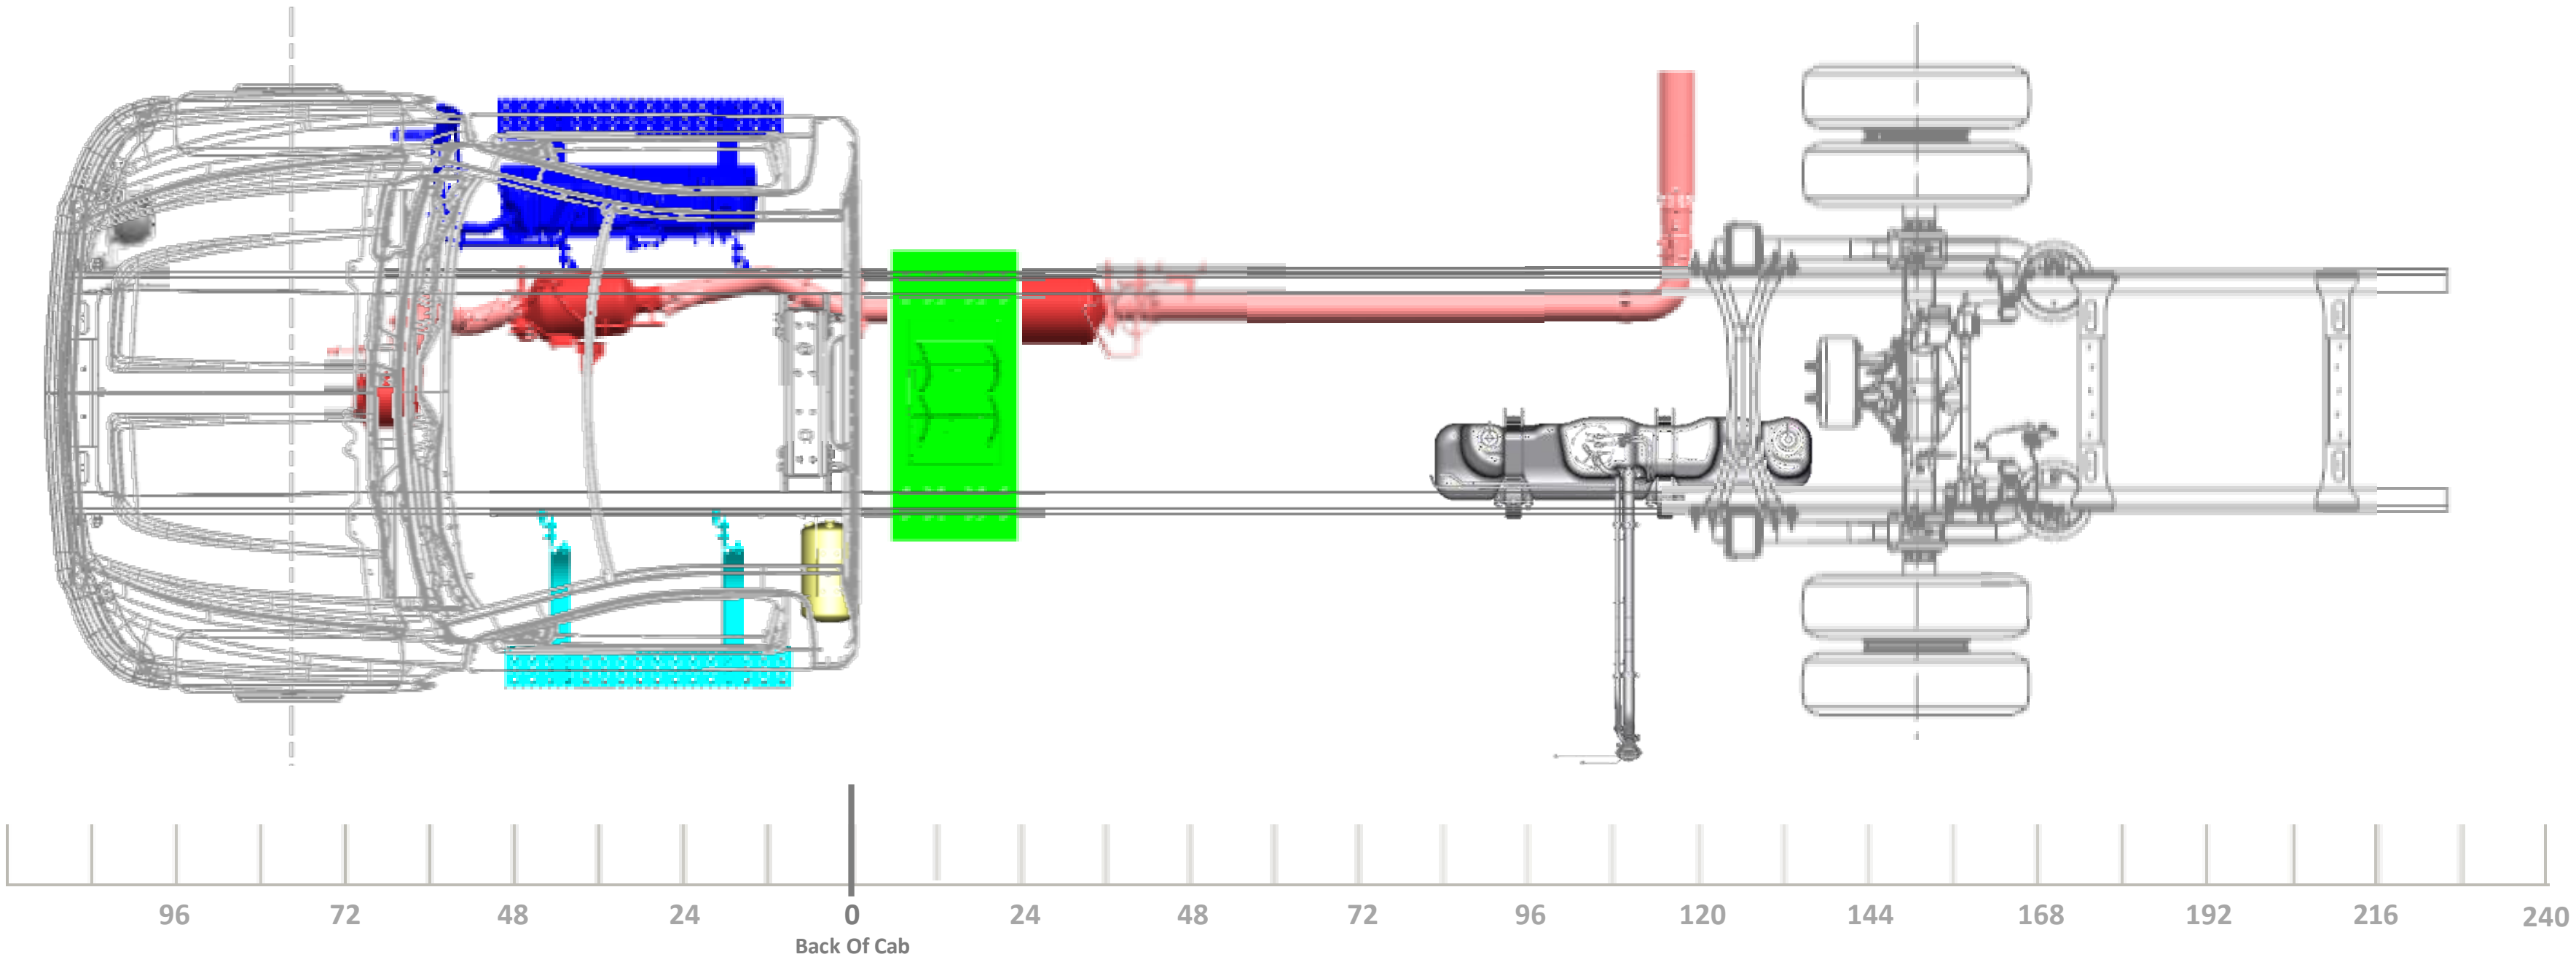

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

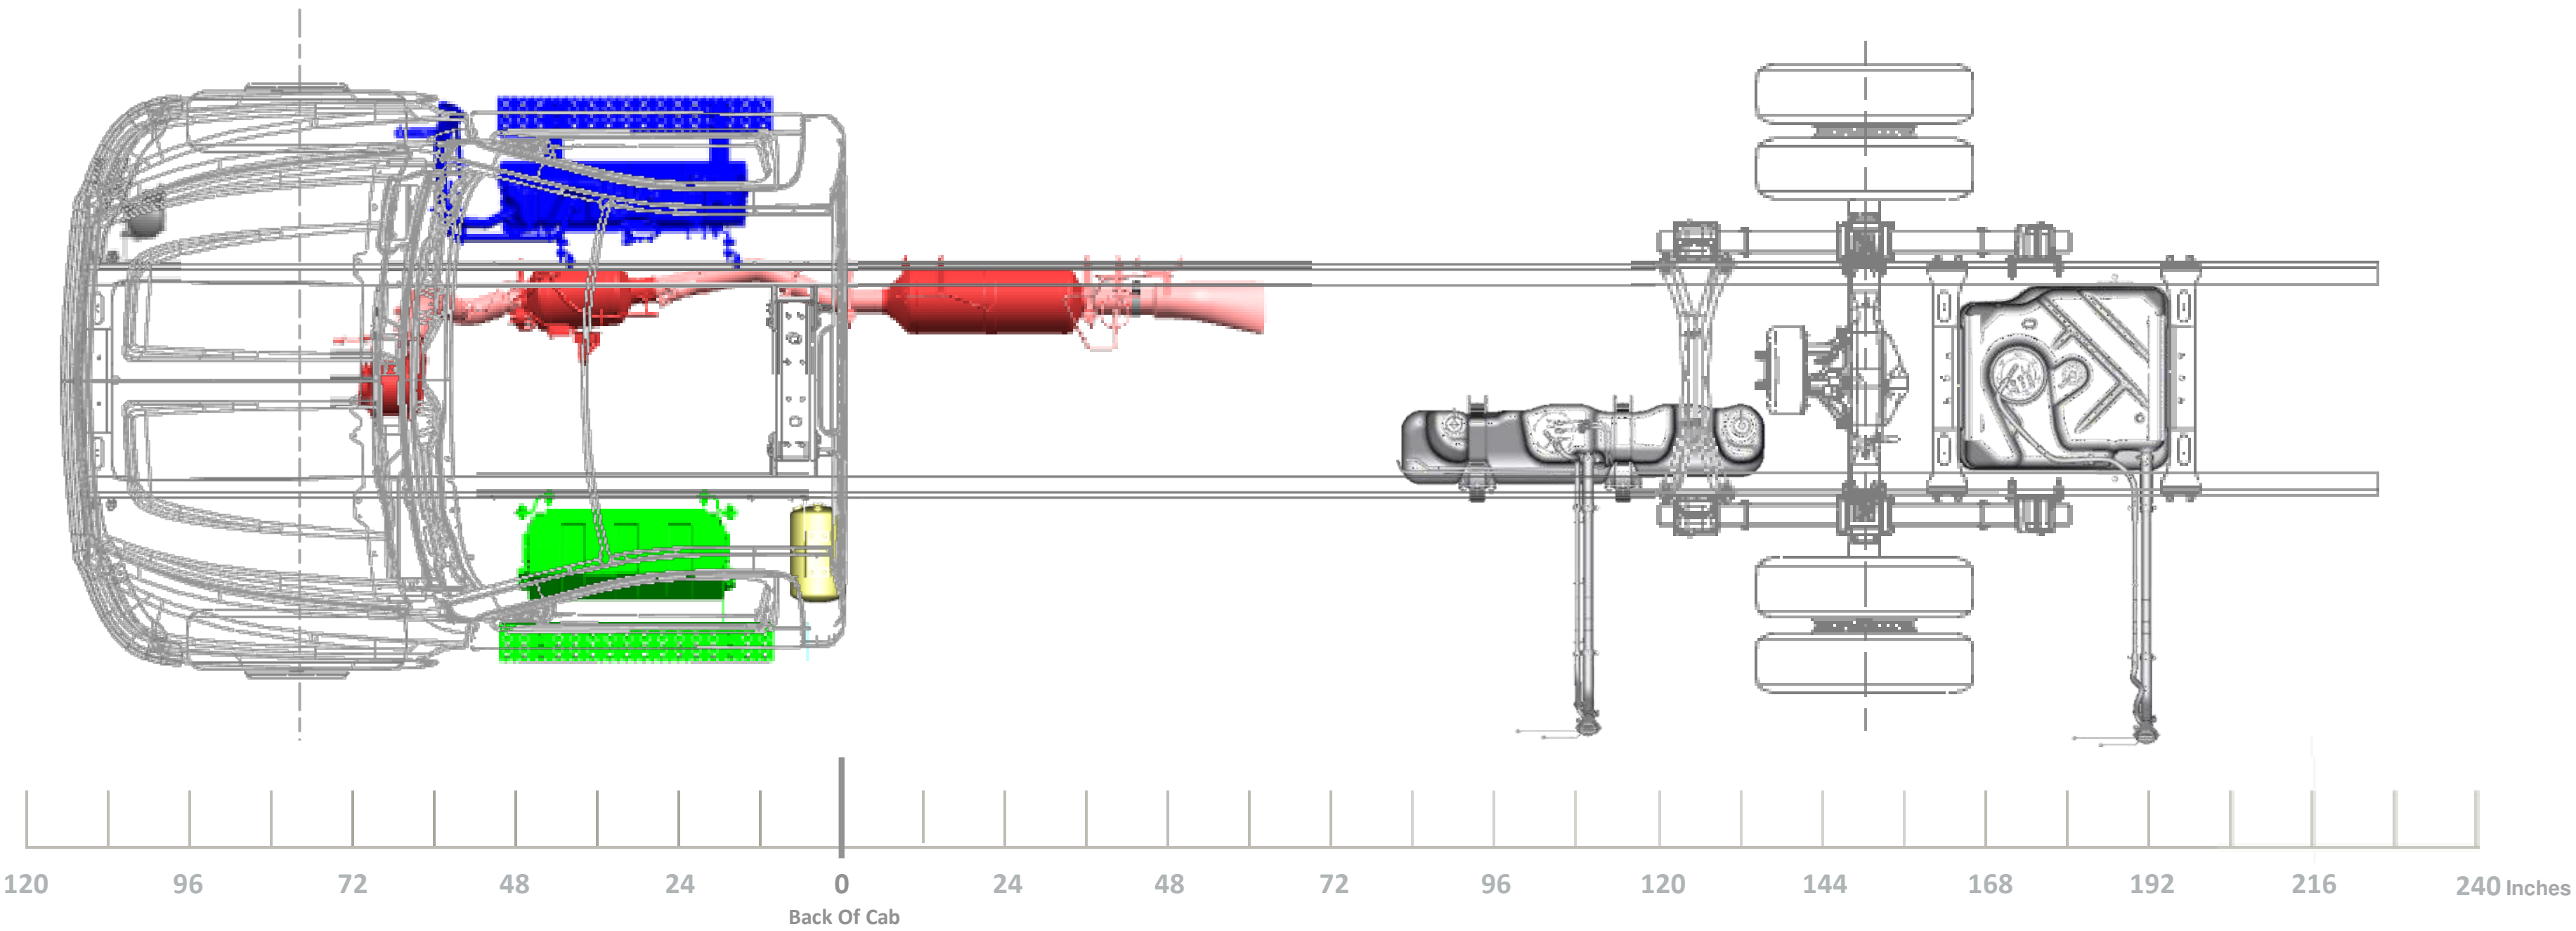
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

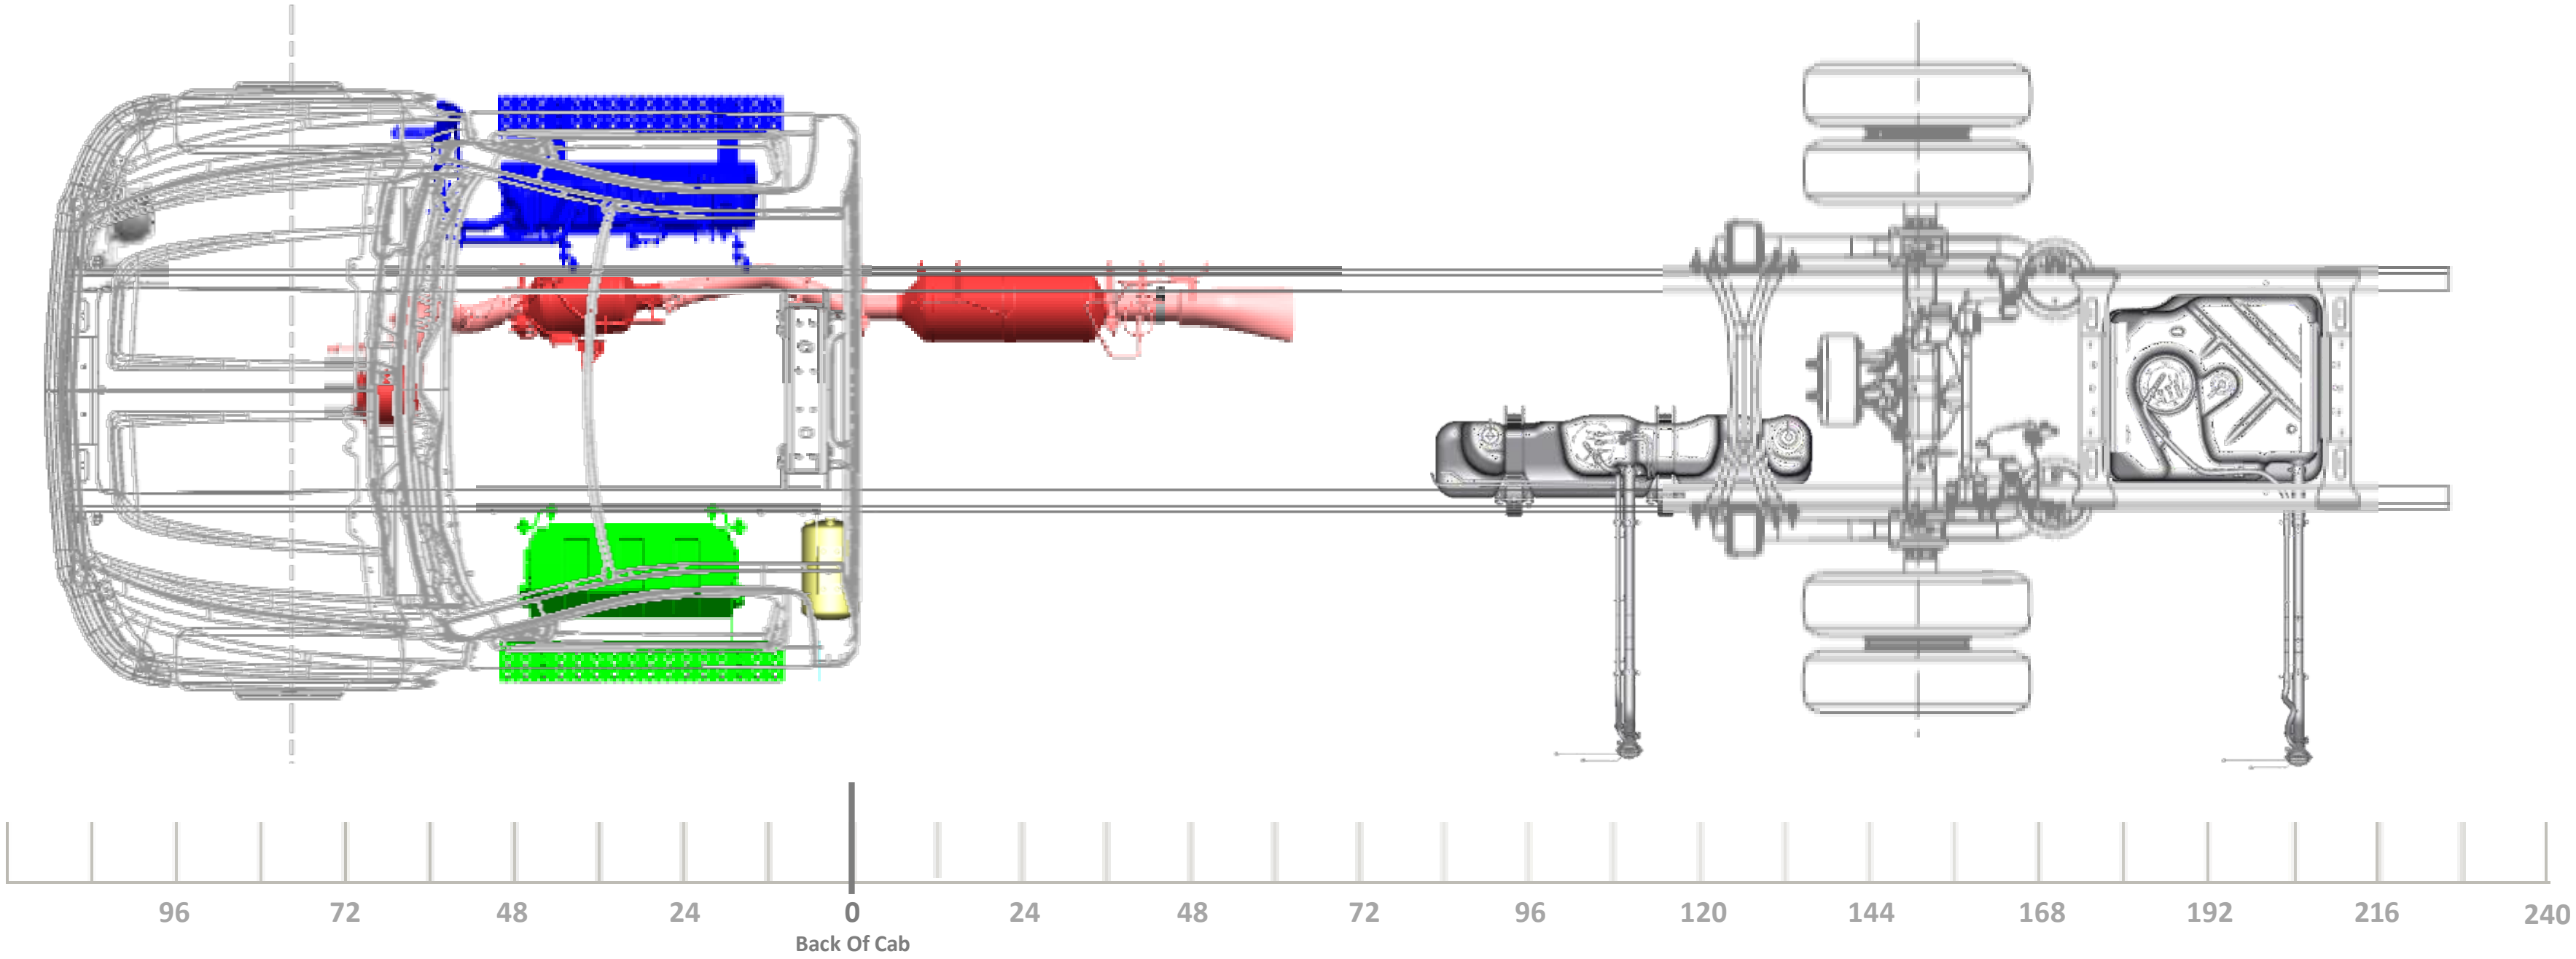

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

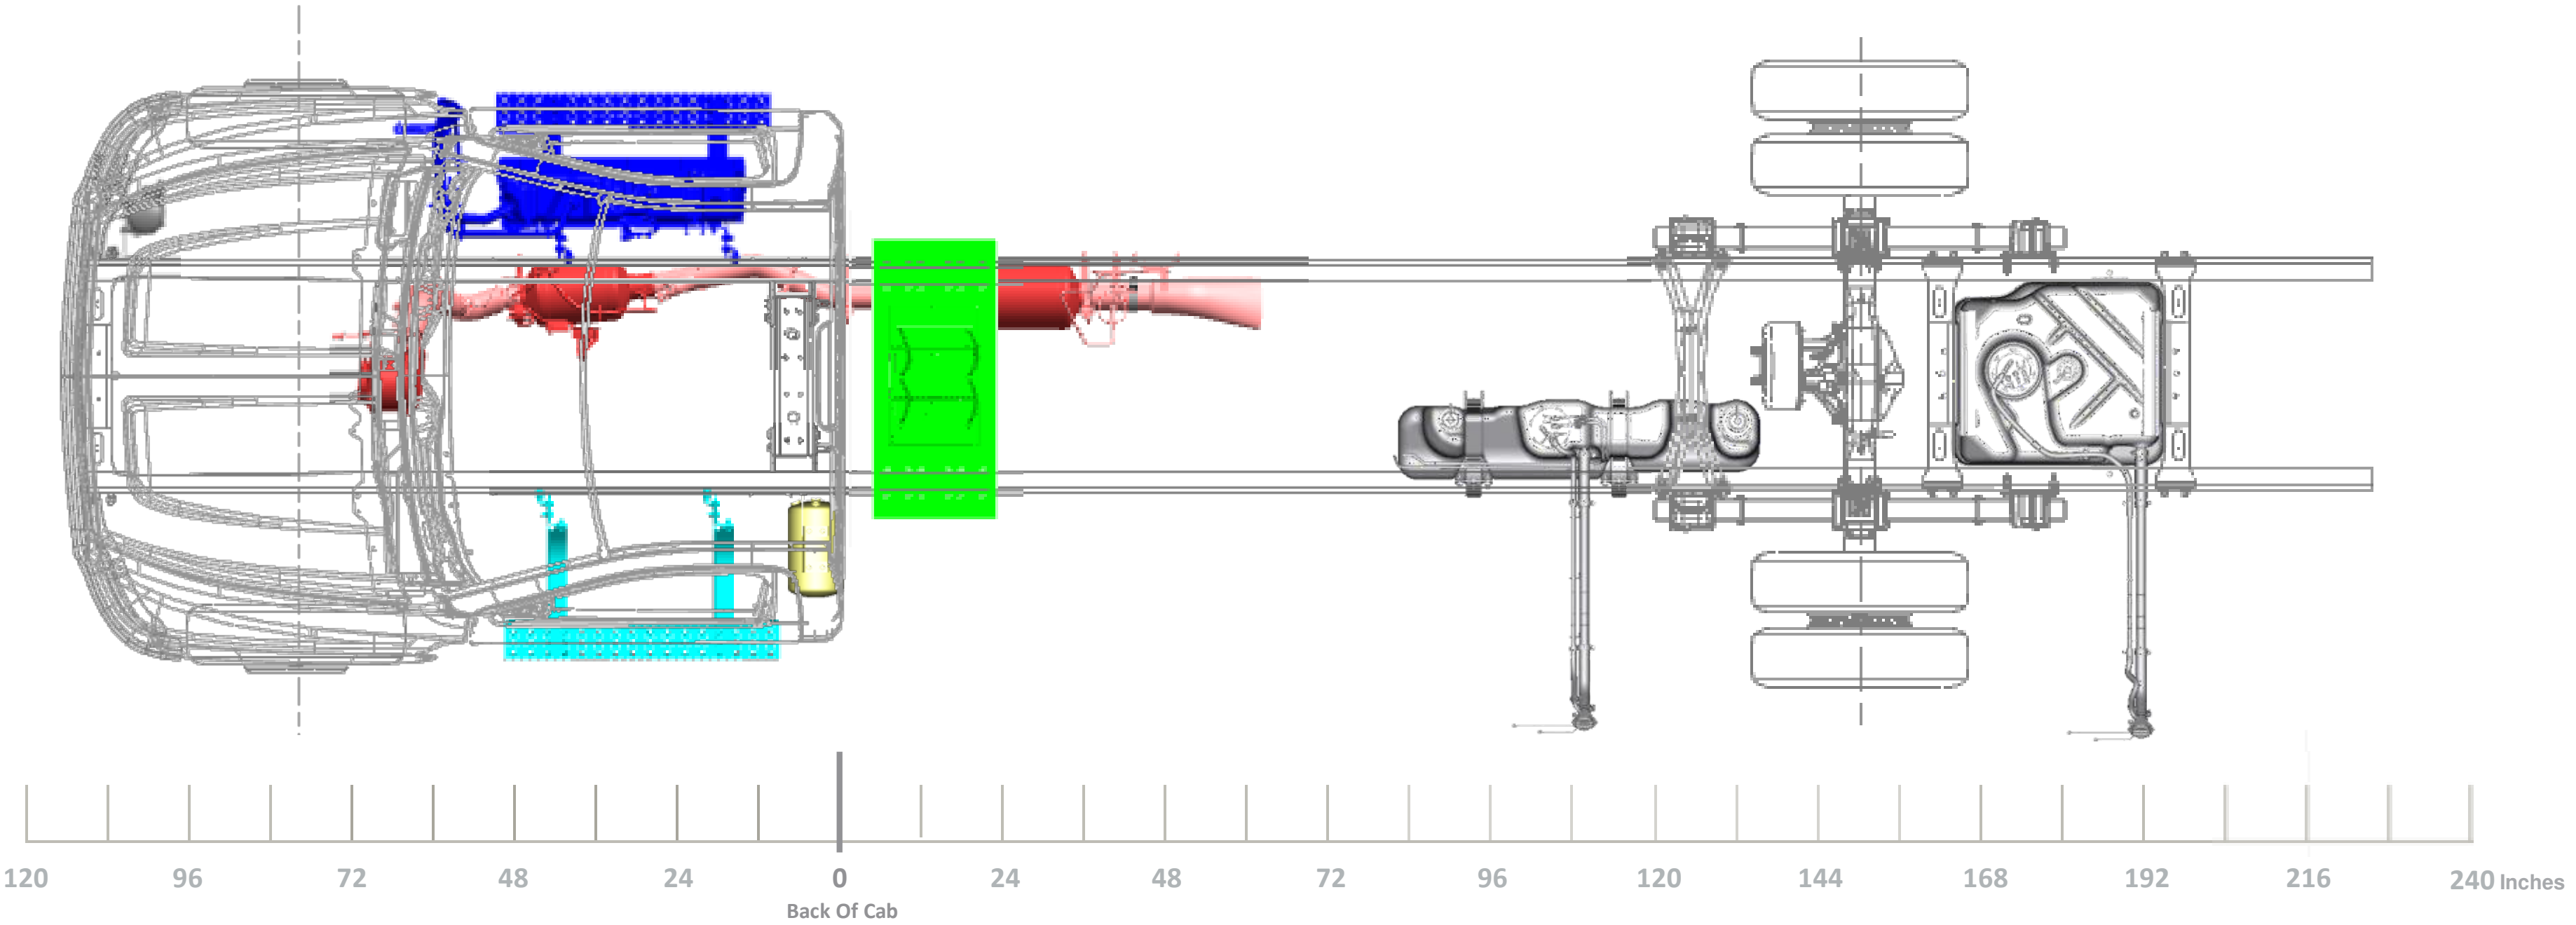
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

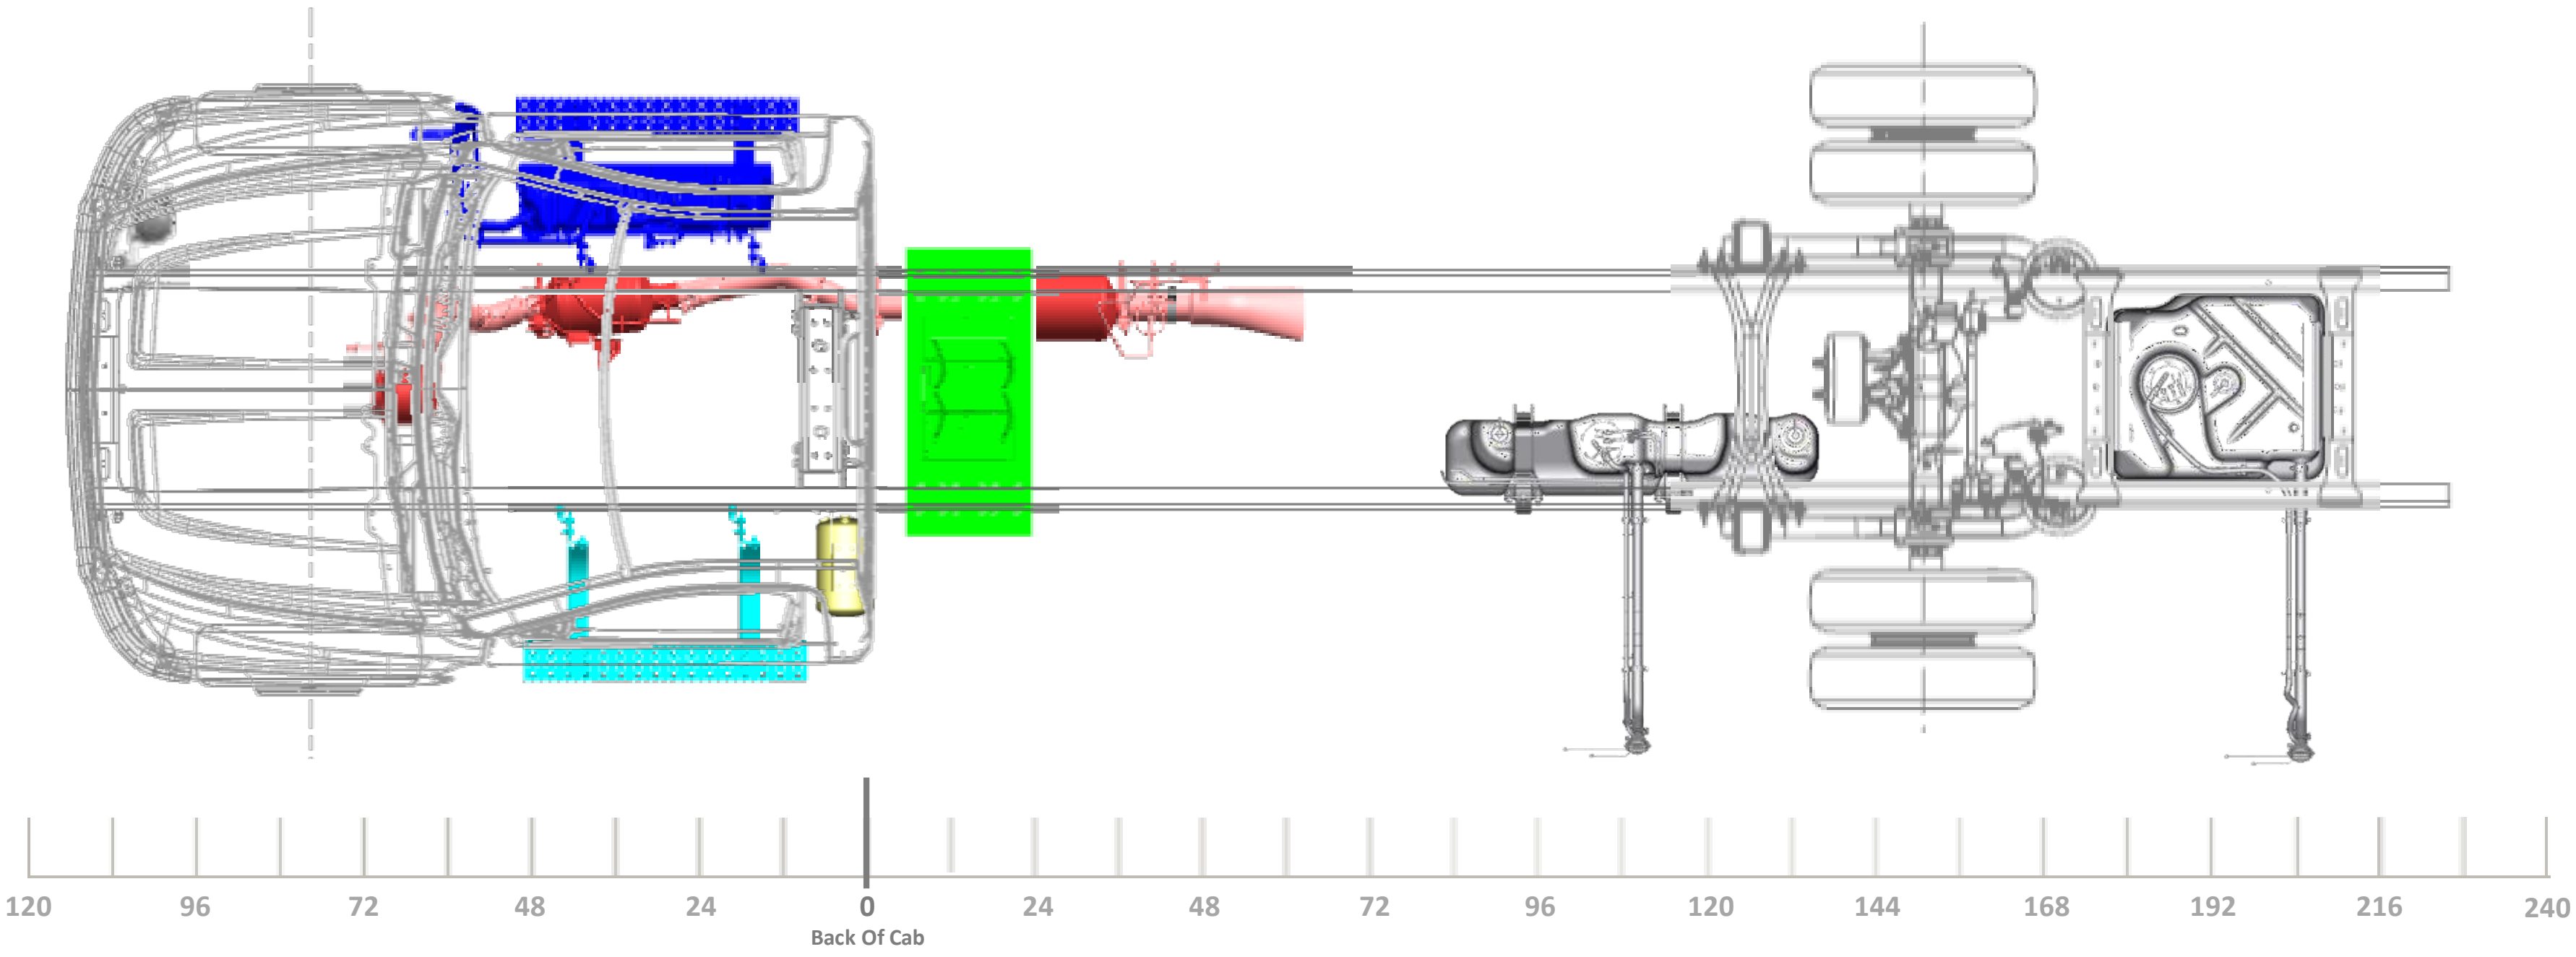

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

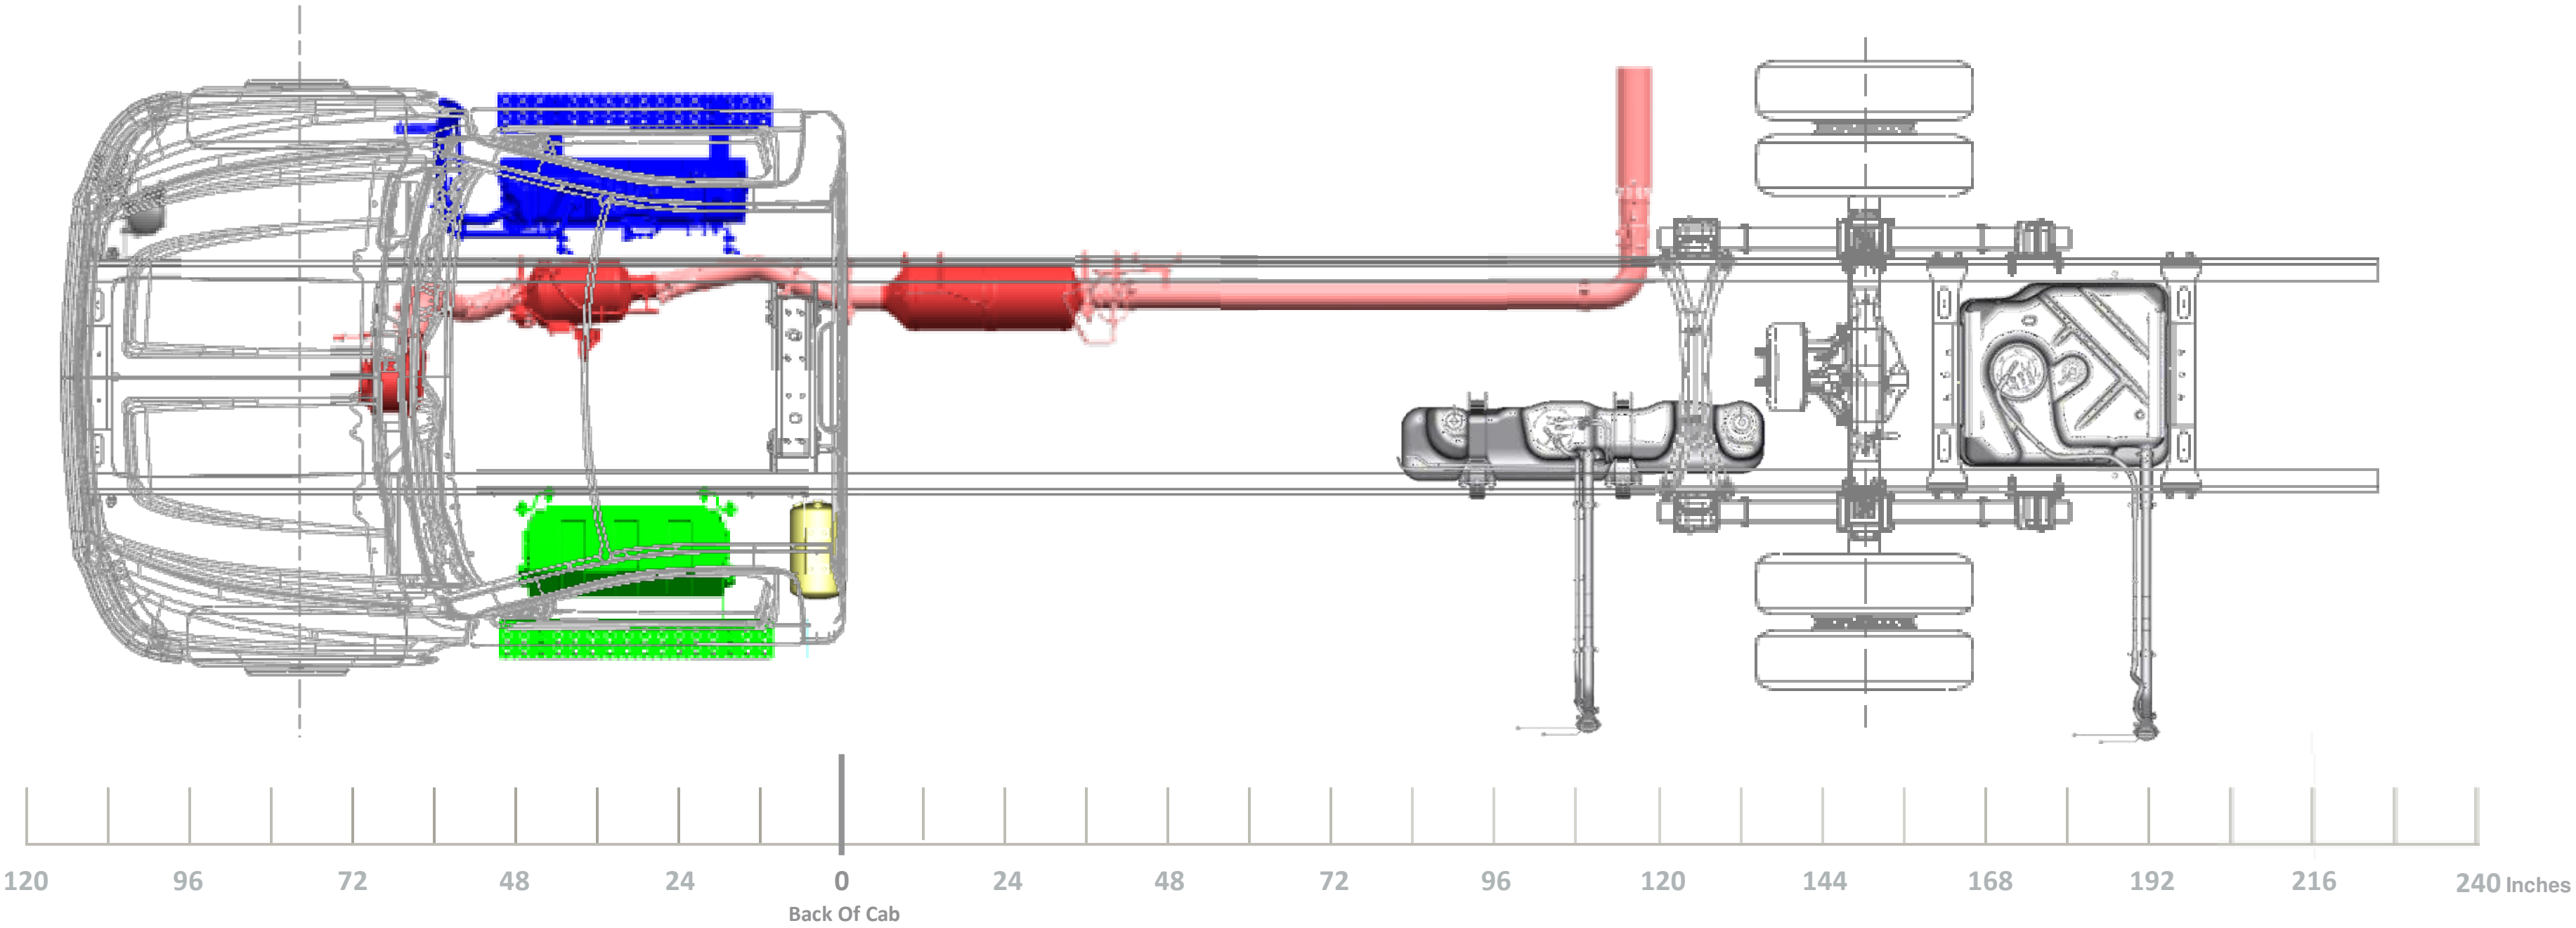
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

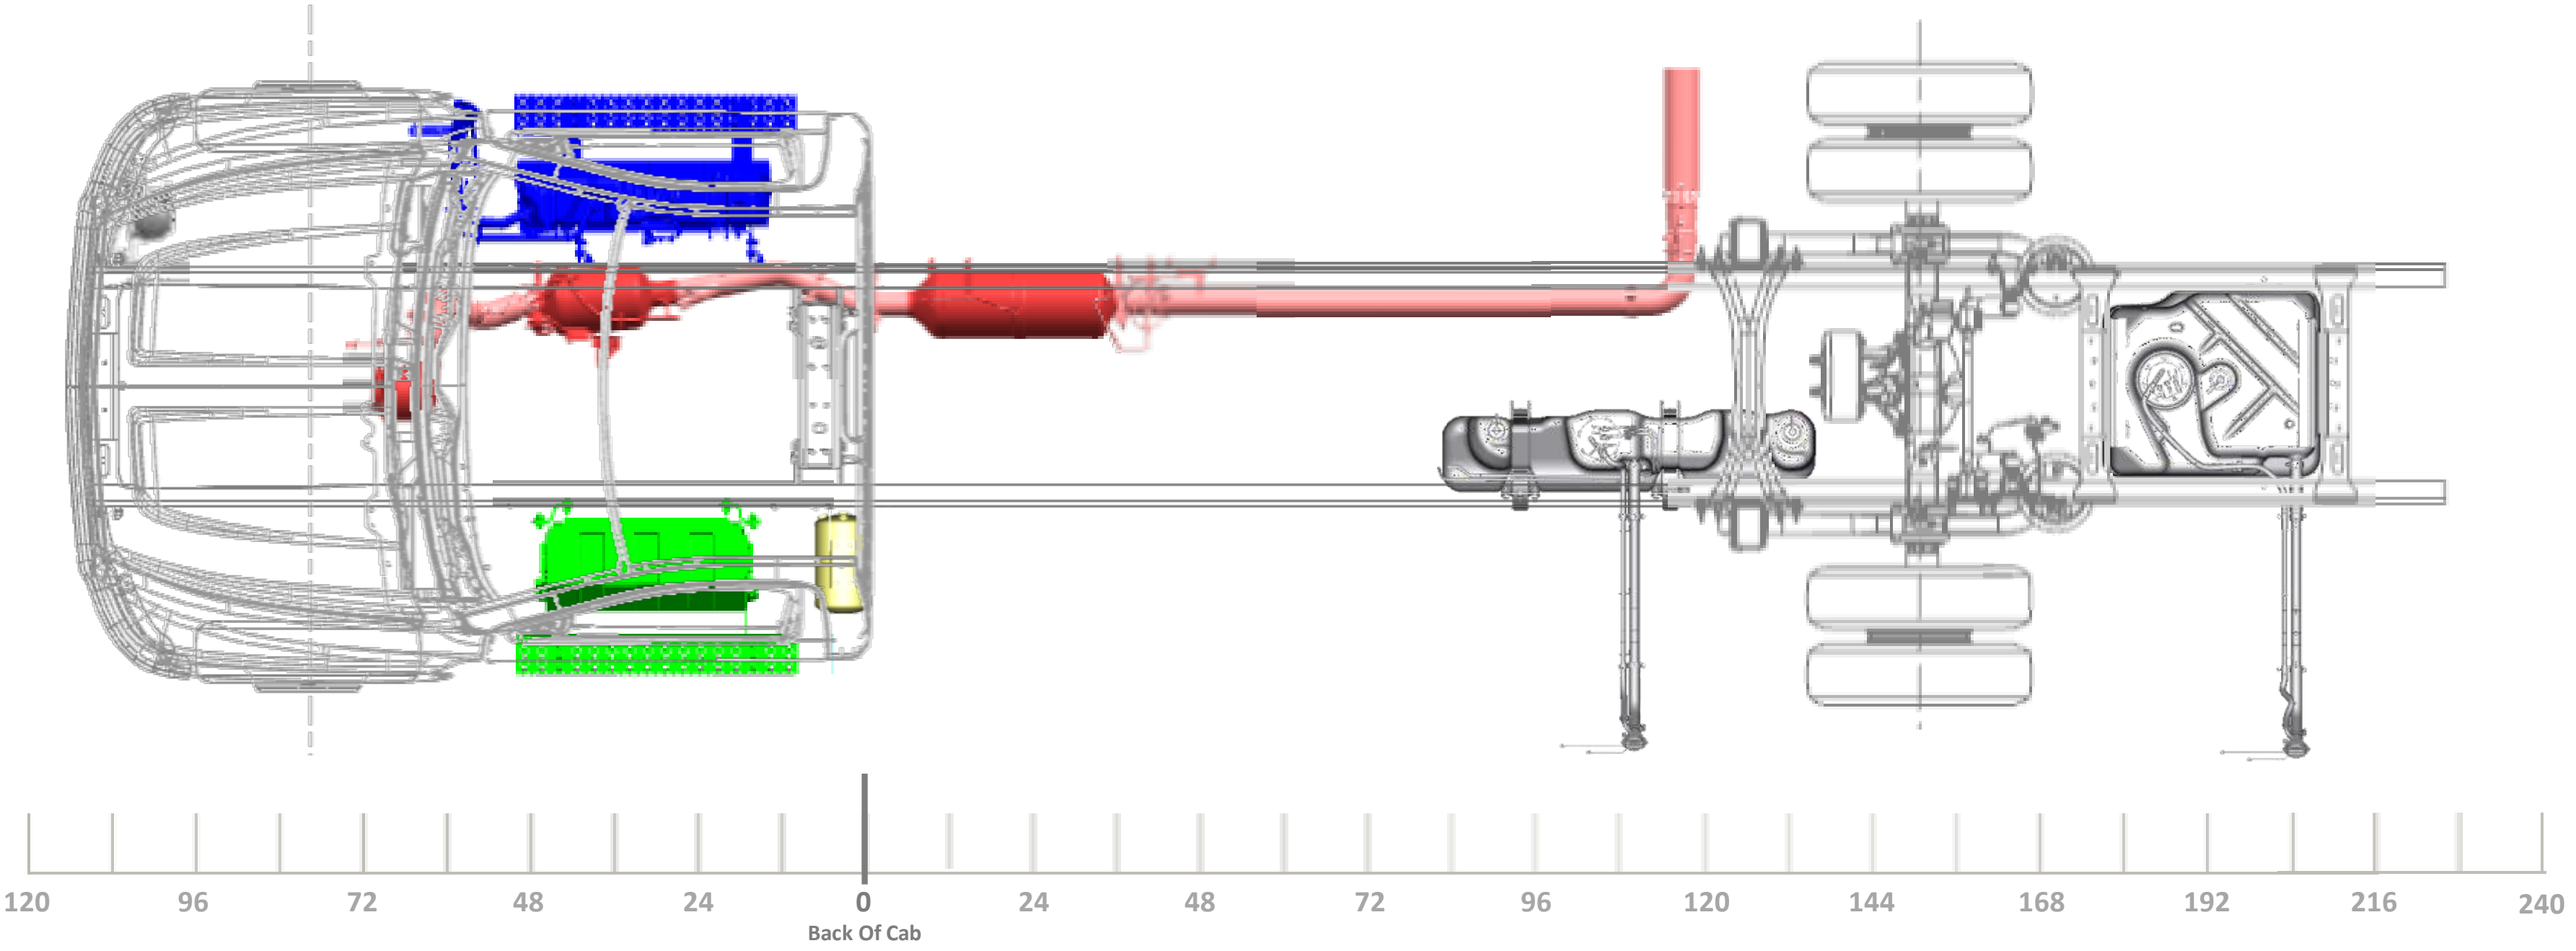

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231” WB (150” CA) 91” AF

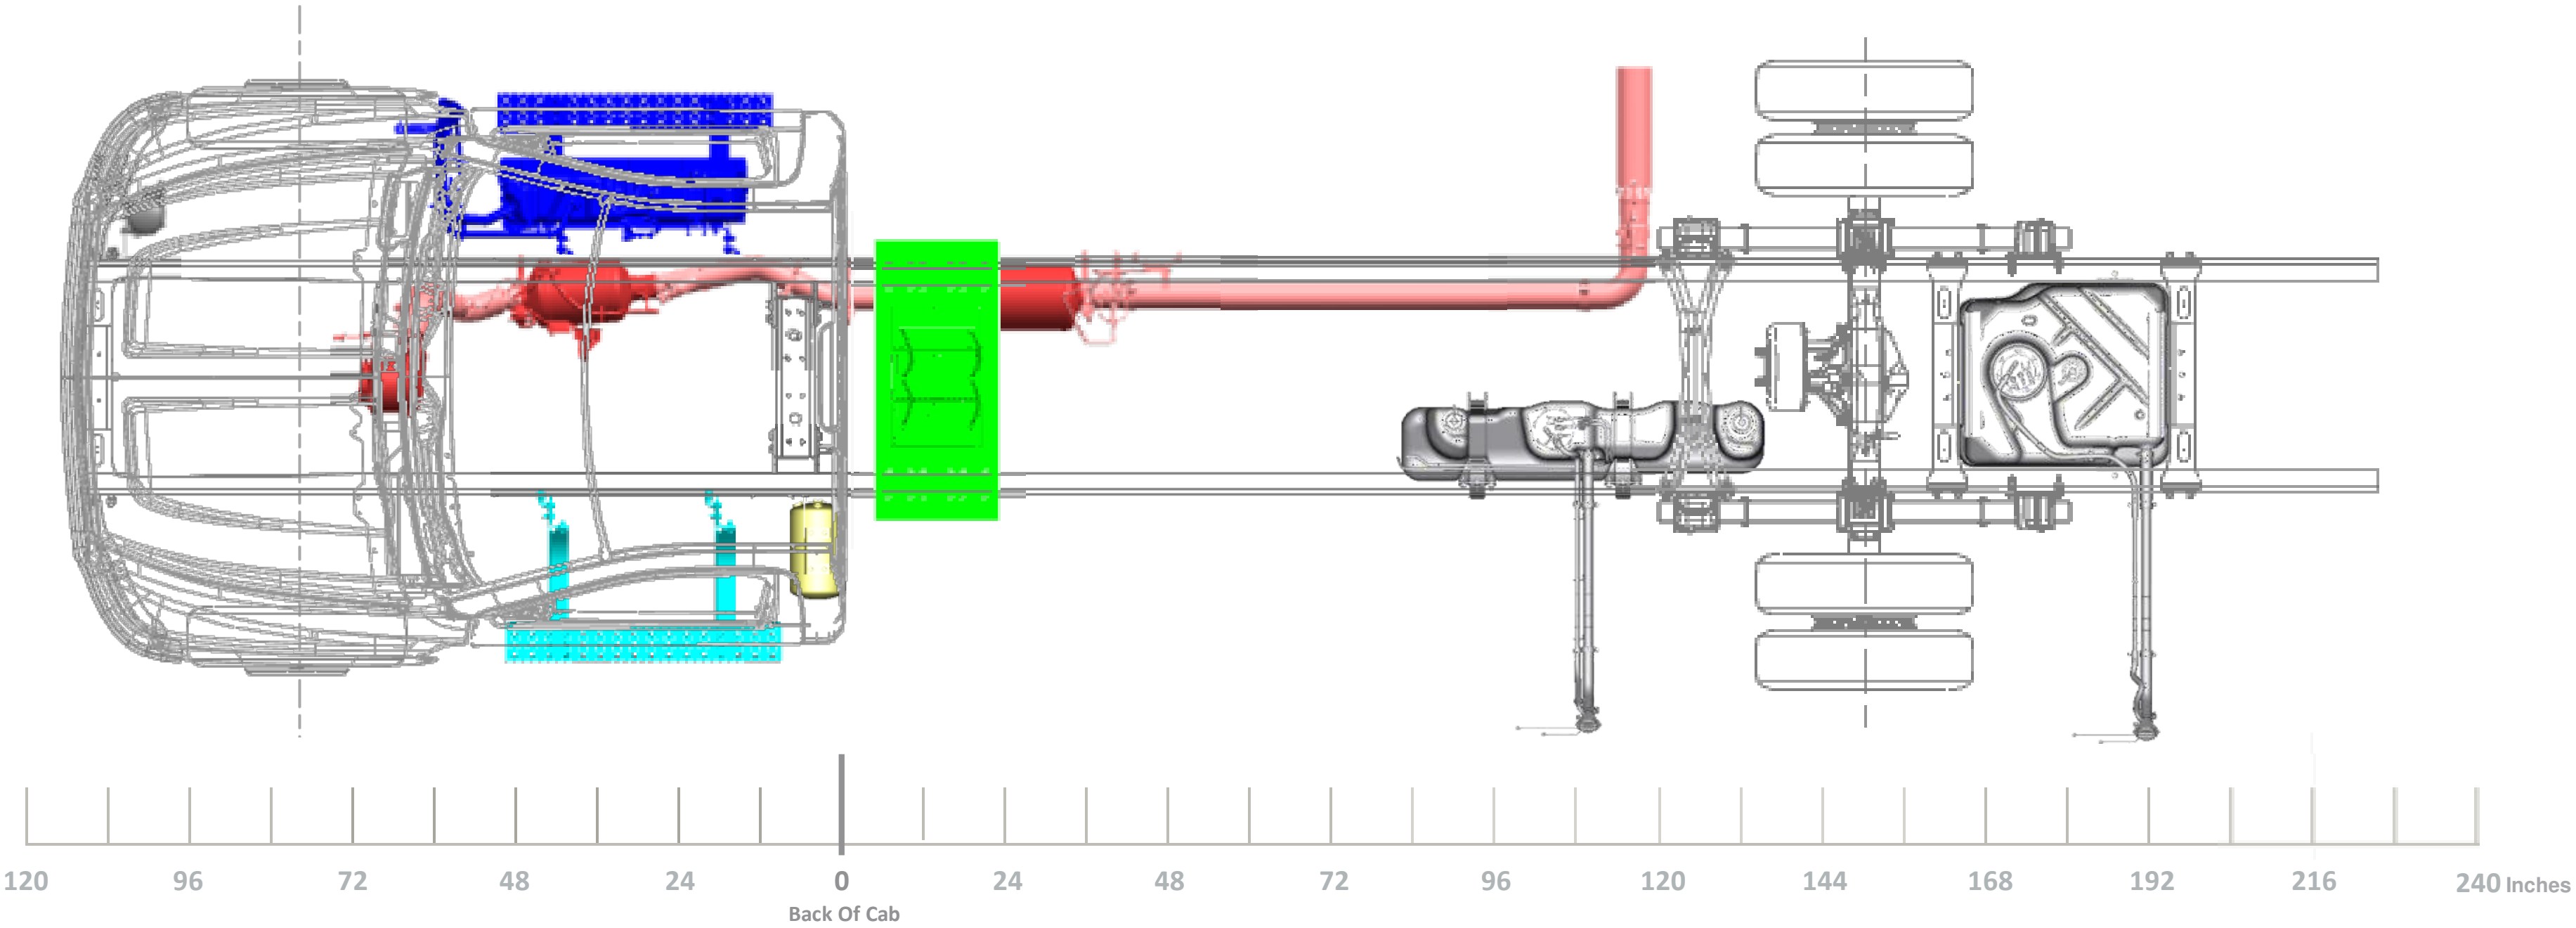

120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
231" WB (150" CA) 91" AF

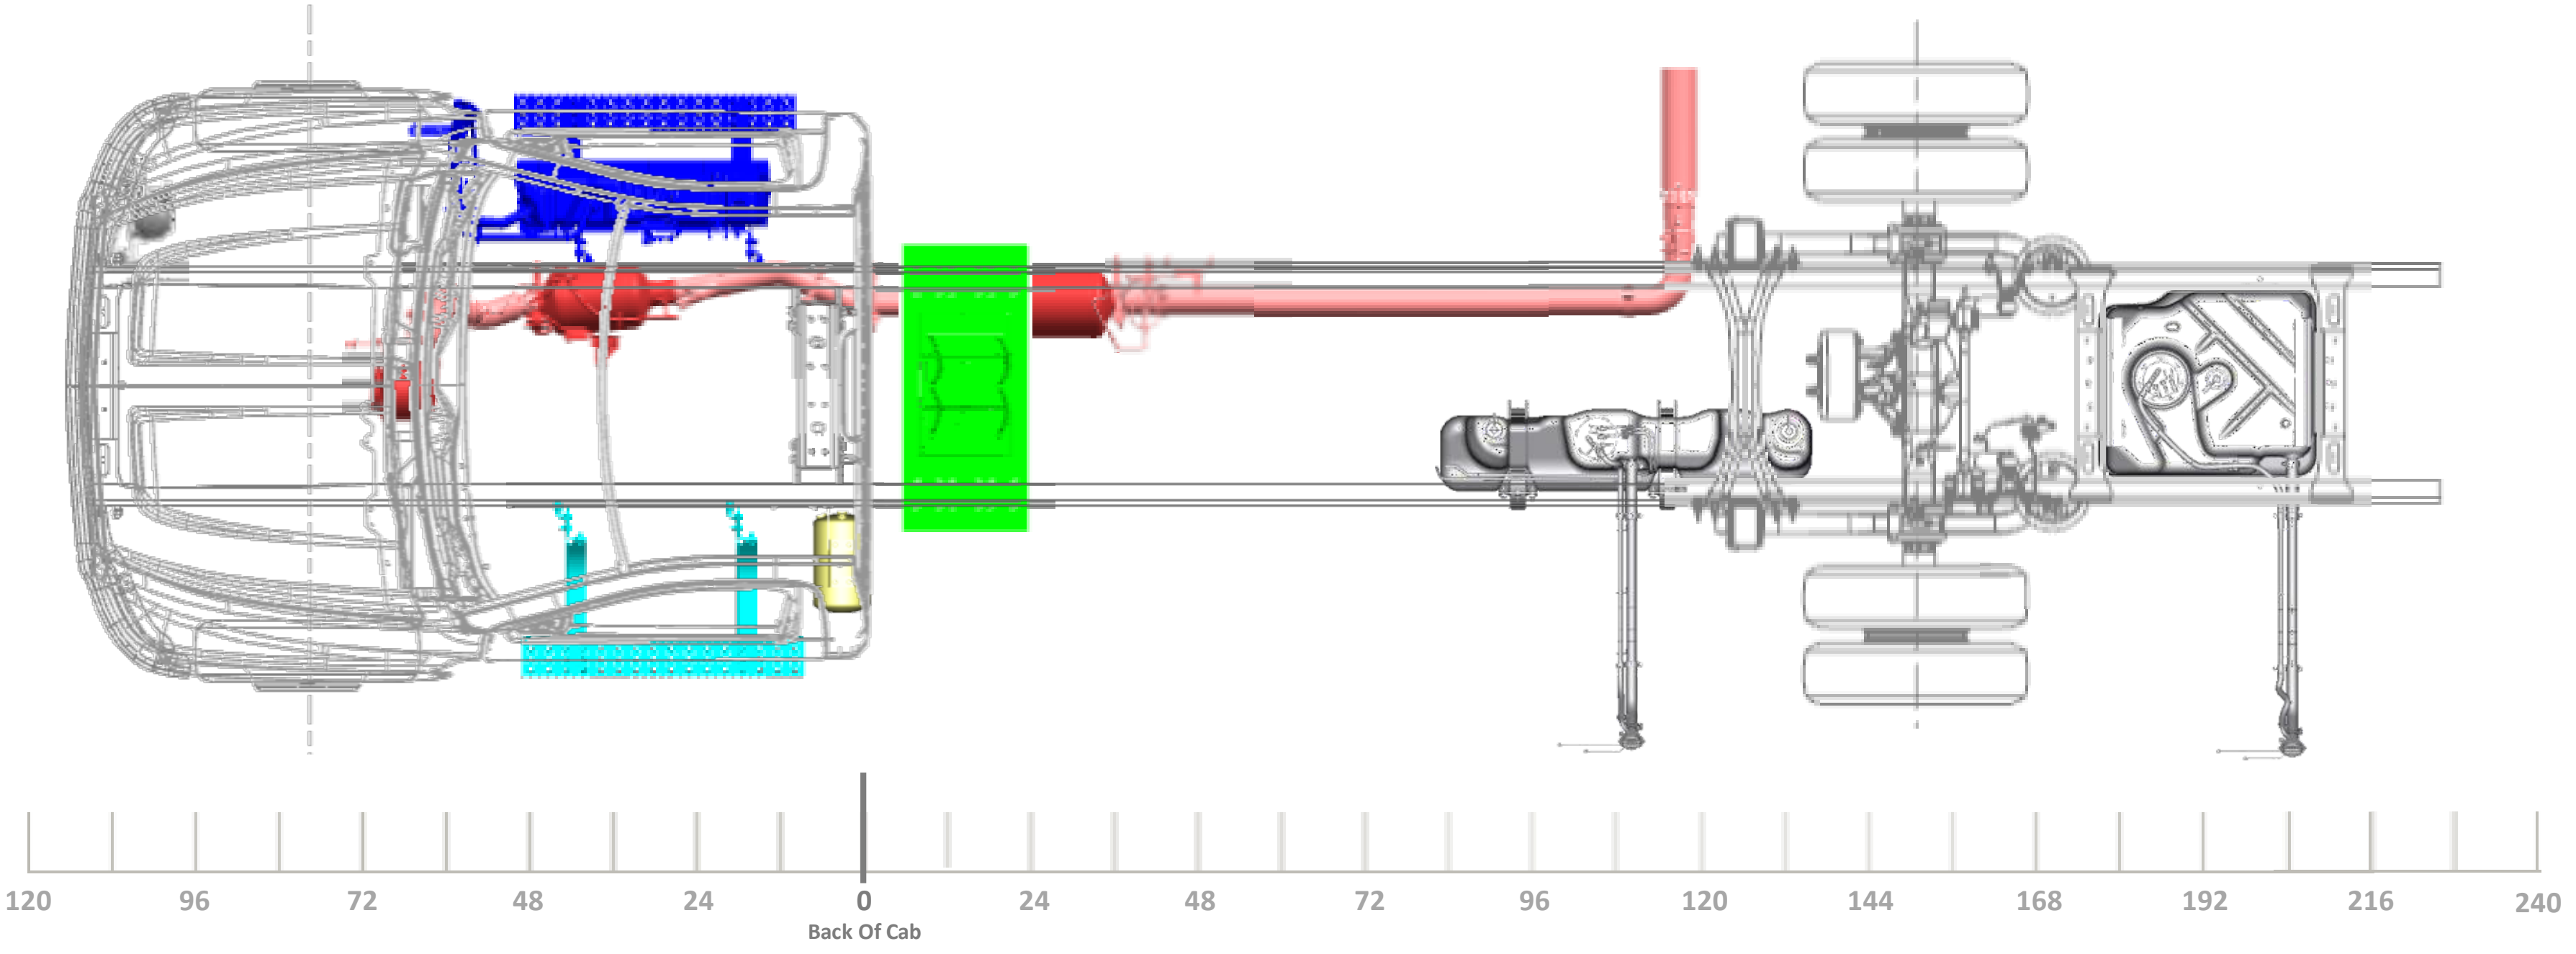

Regular Cab – 243” WB

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

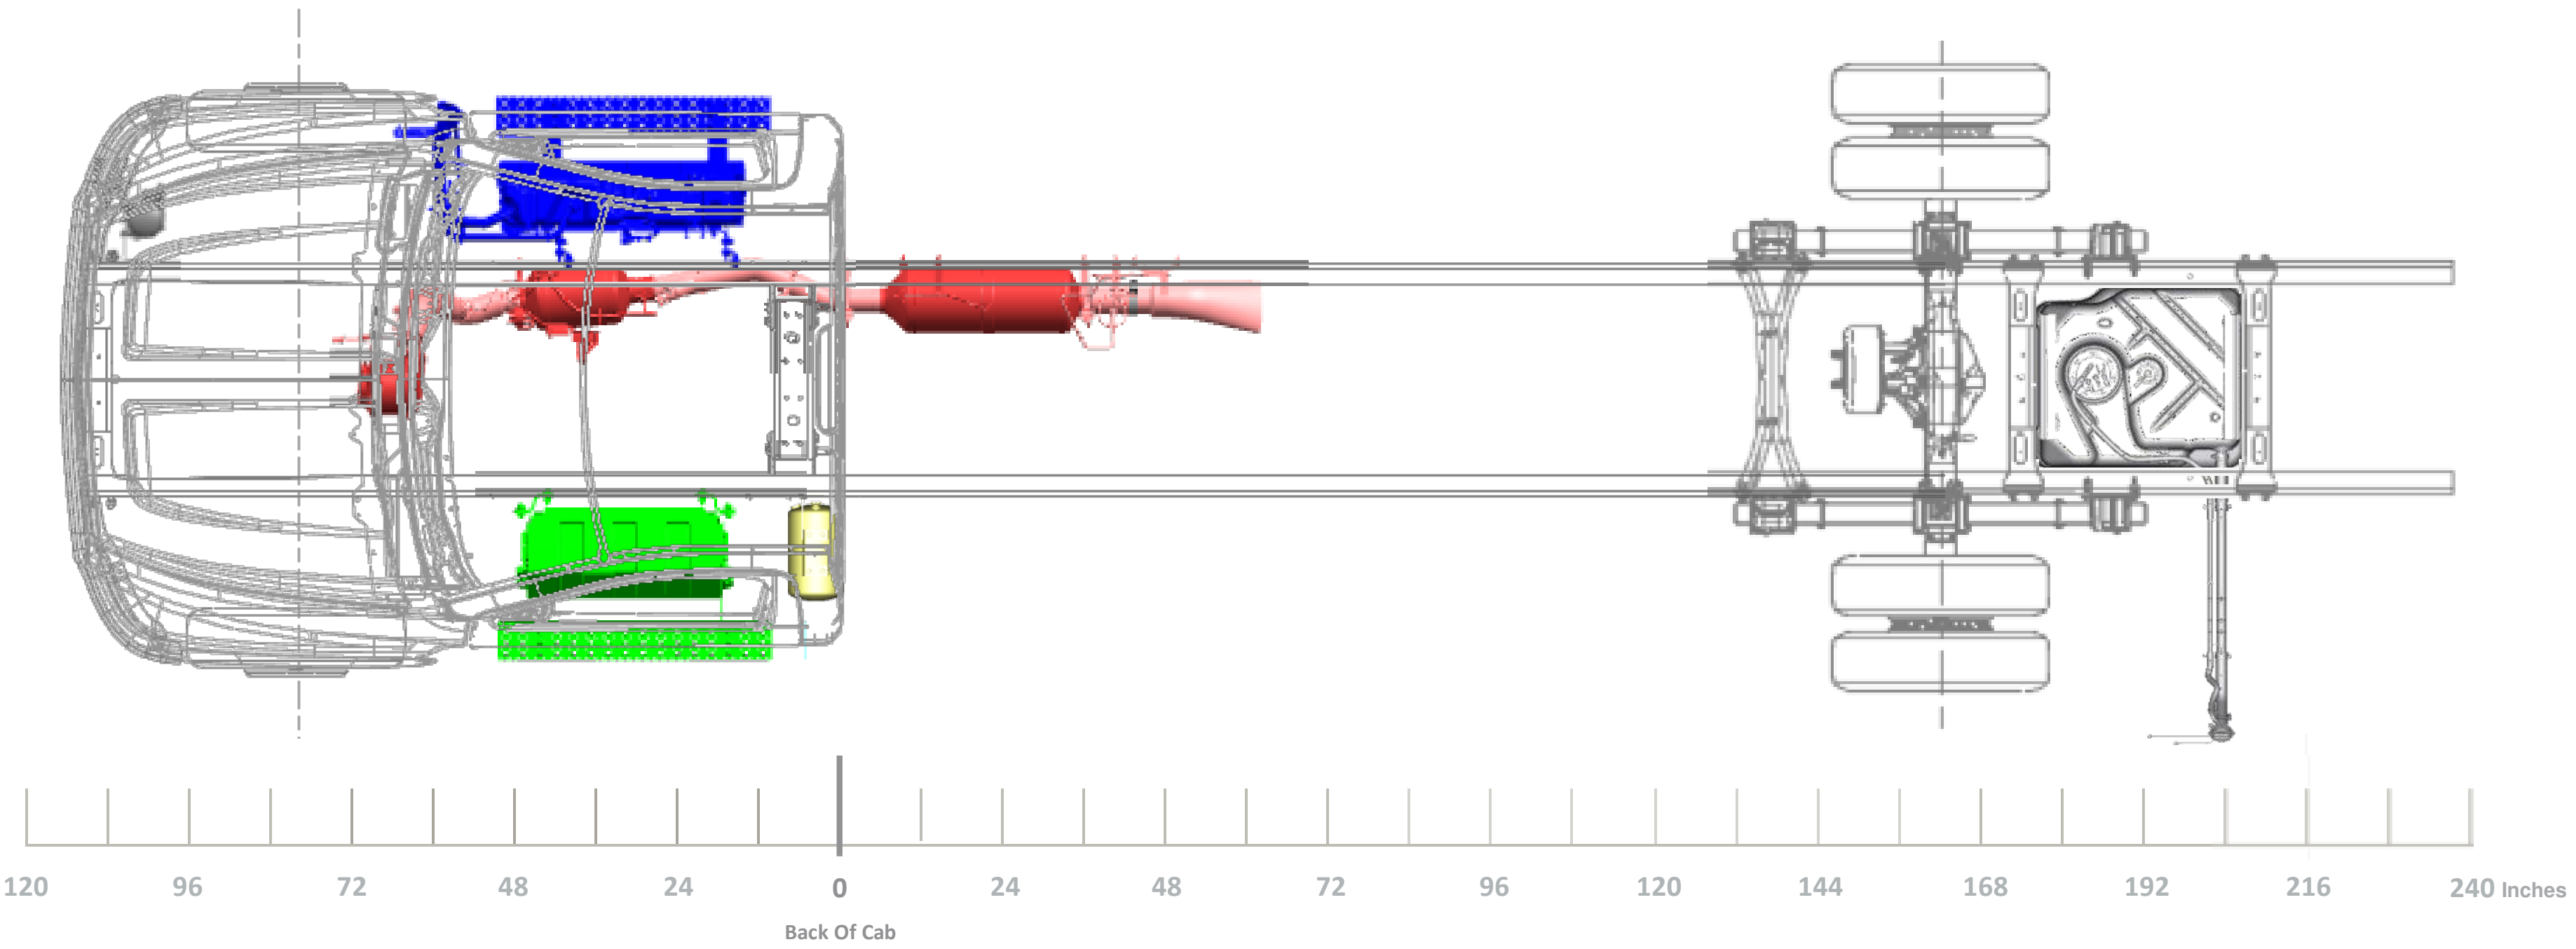
120
96
72
48
24
0
24
48
72
96
120
144
168
192
216
240 Inches
Back Of Cab

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

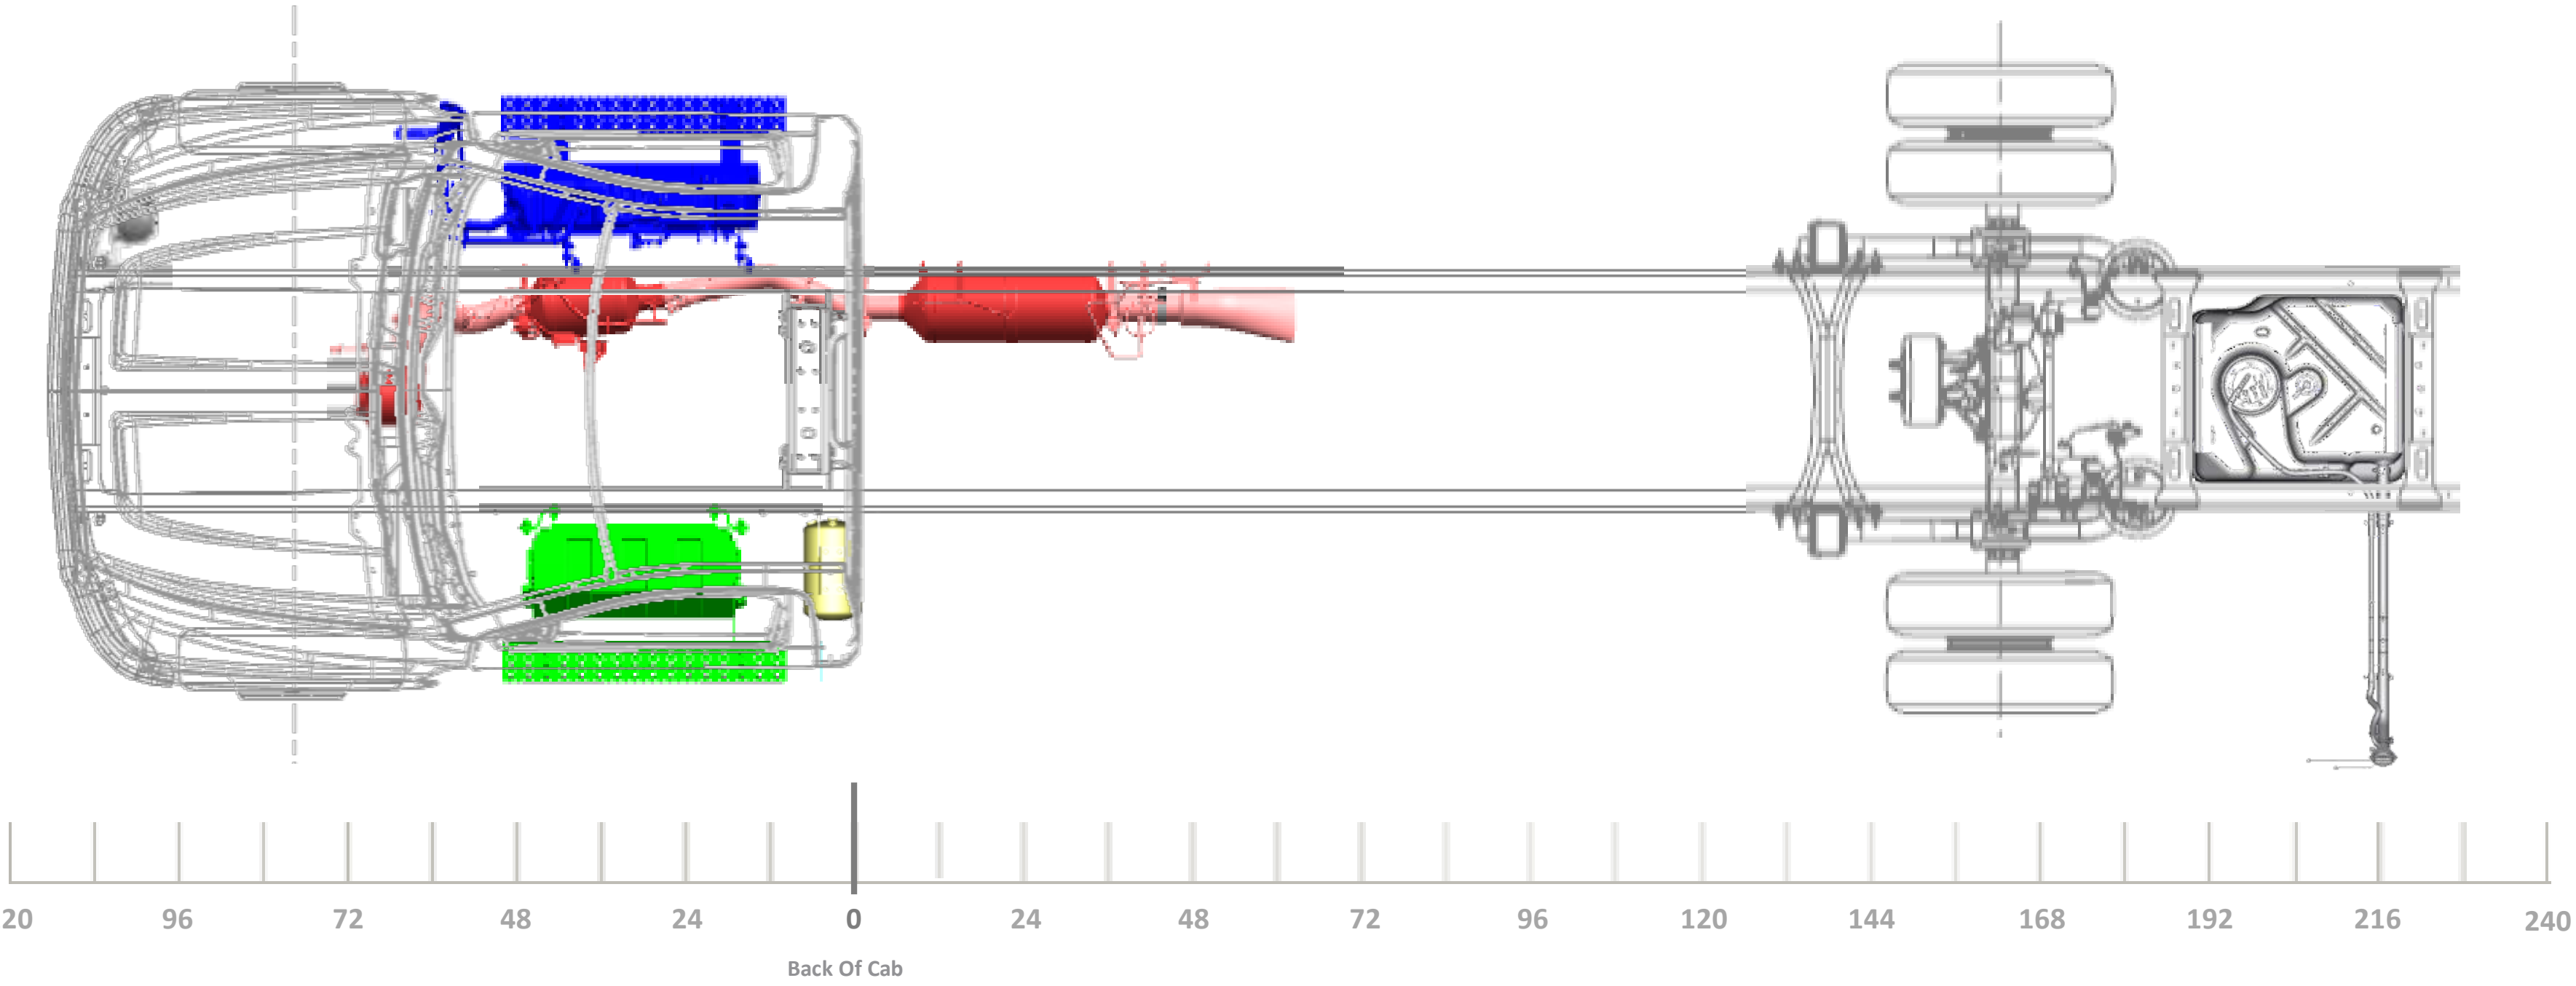

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

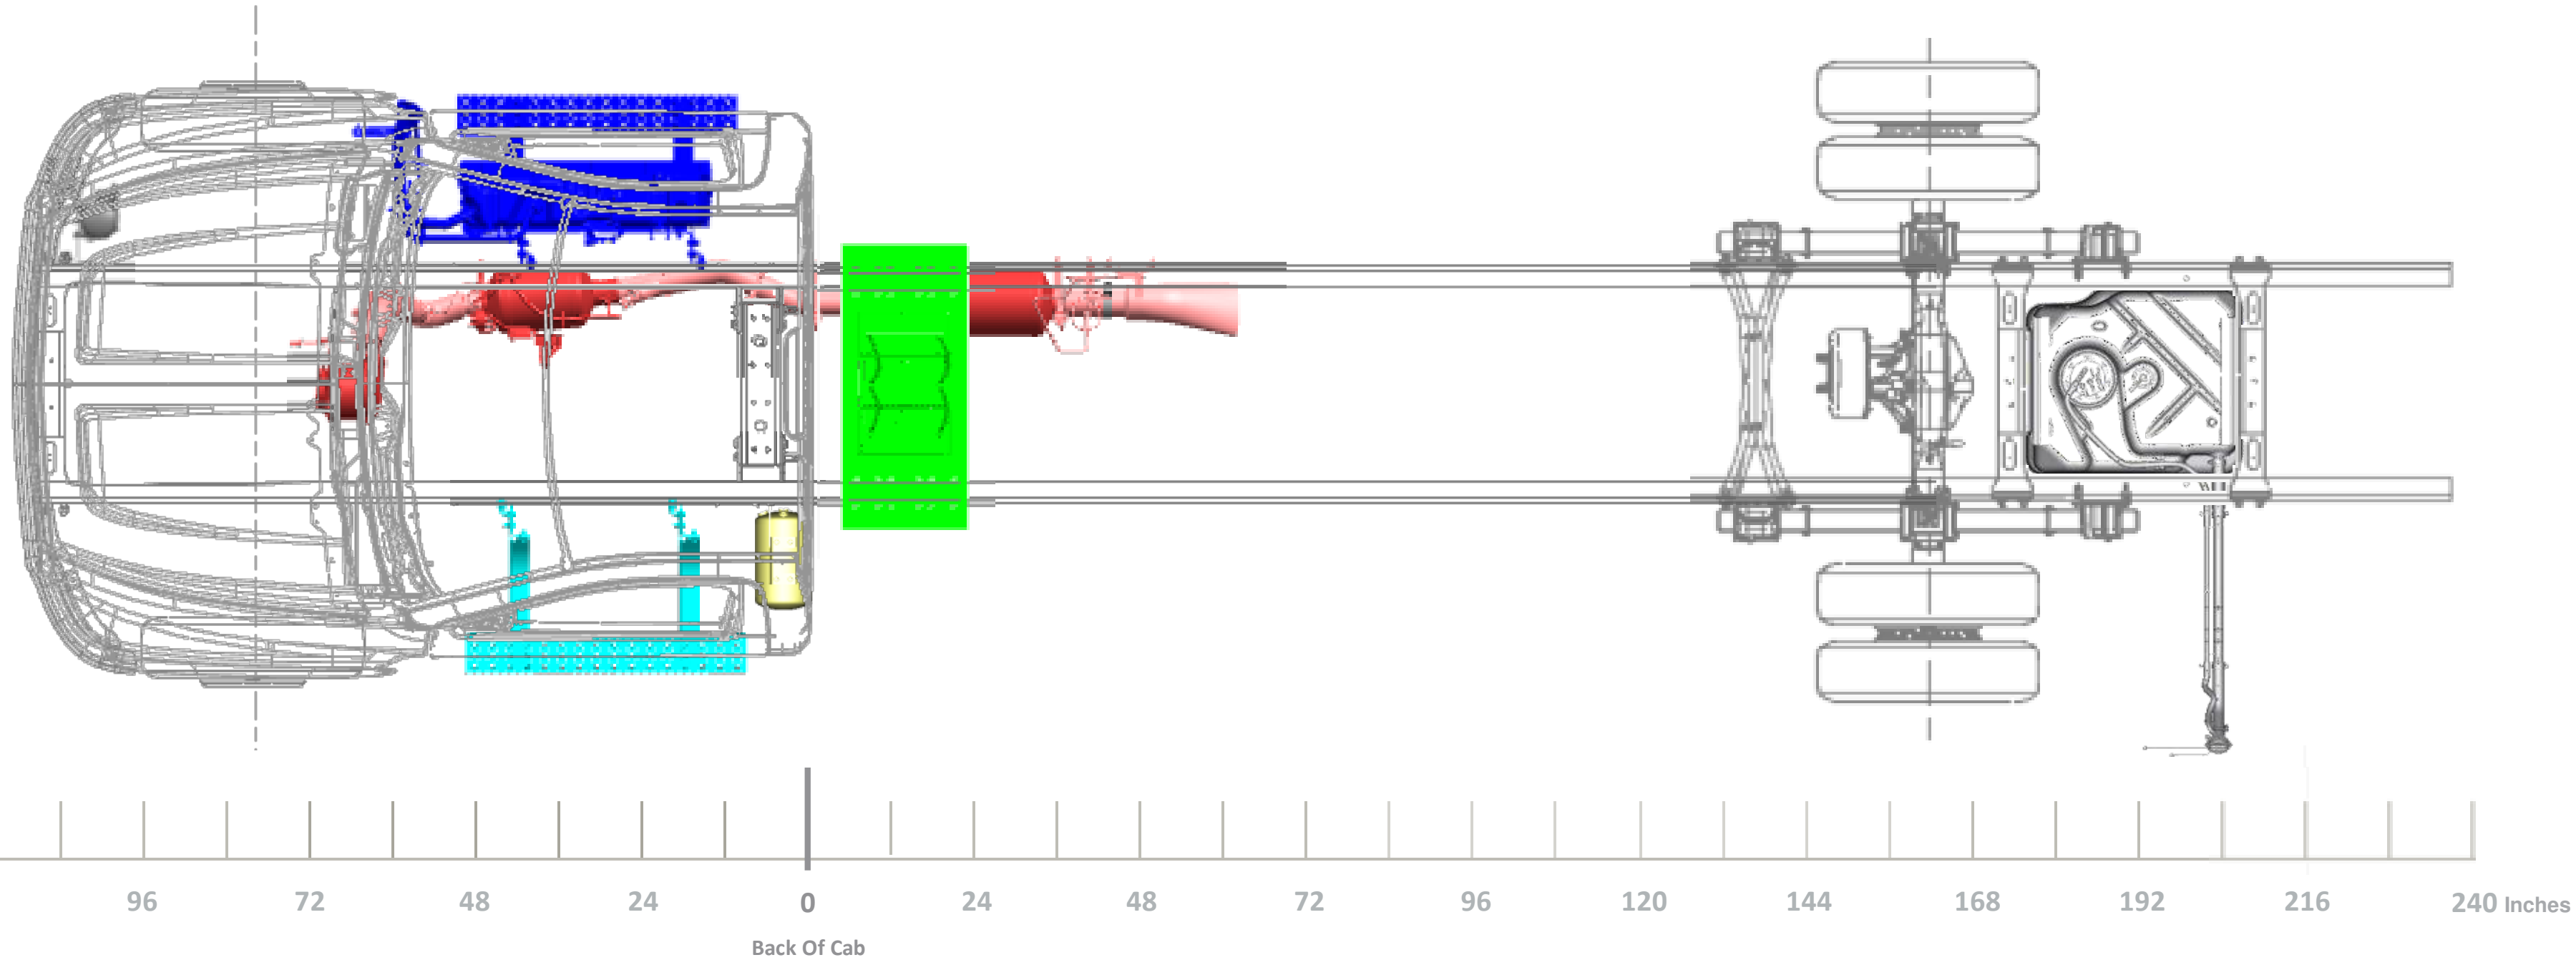
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

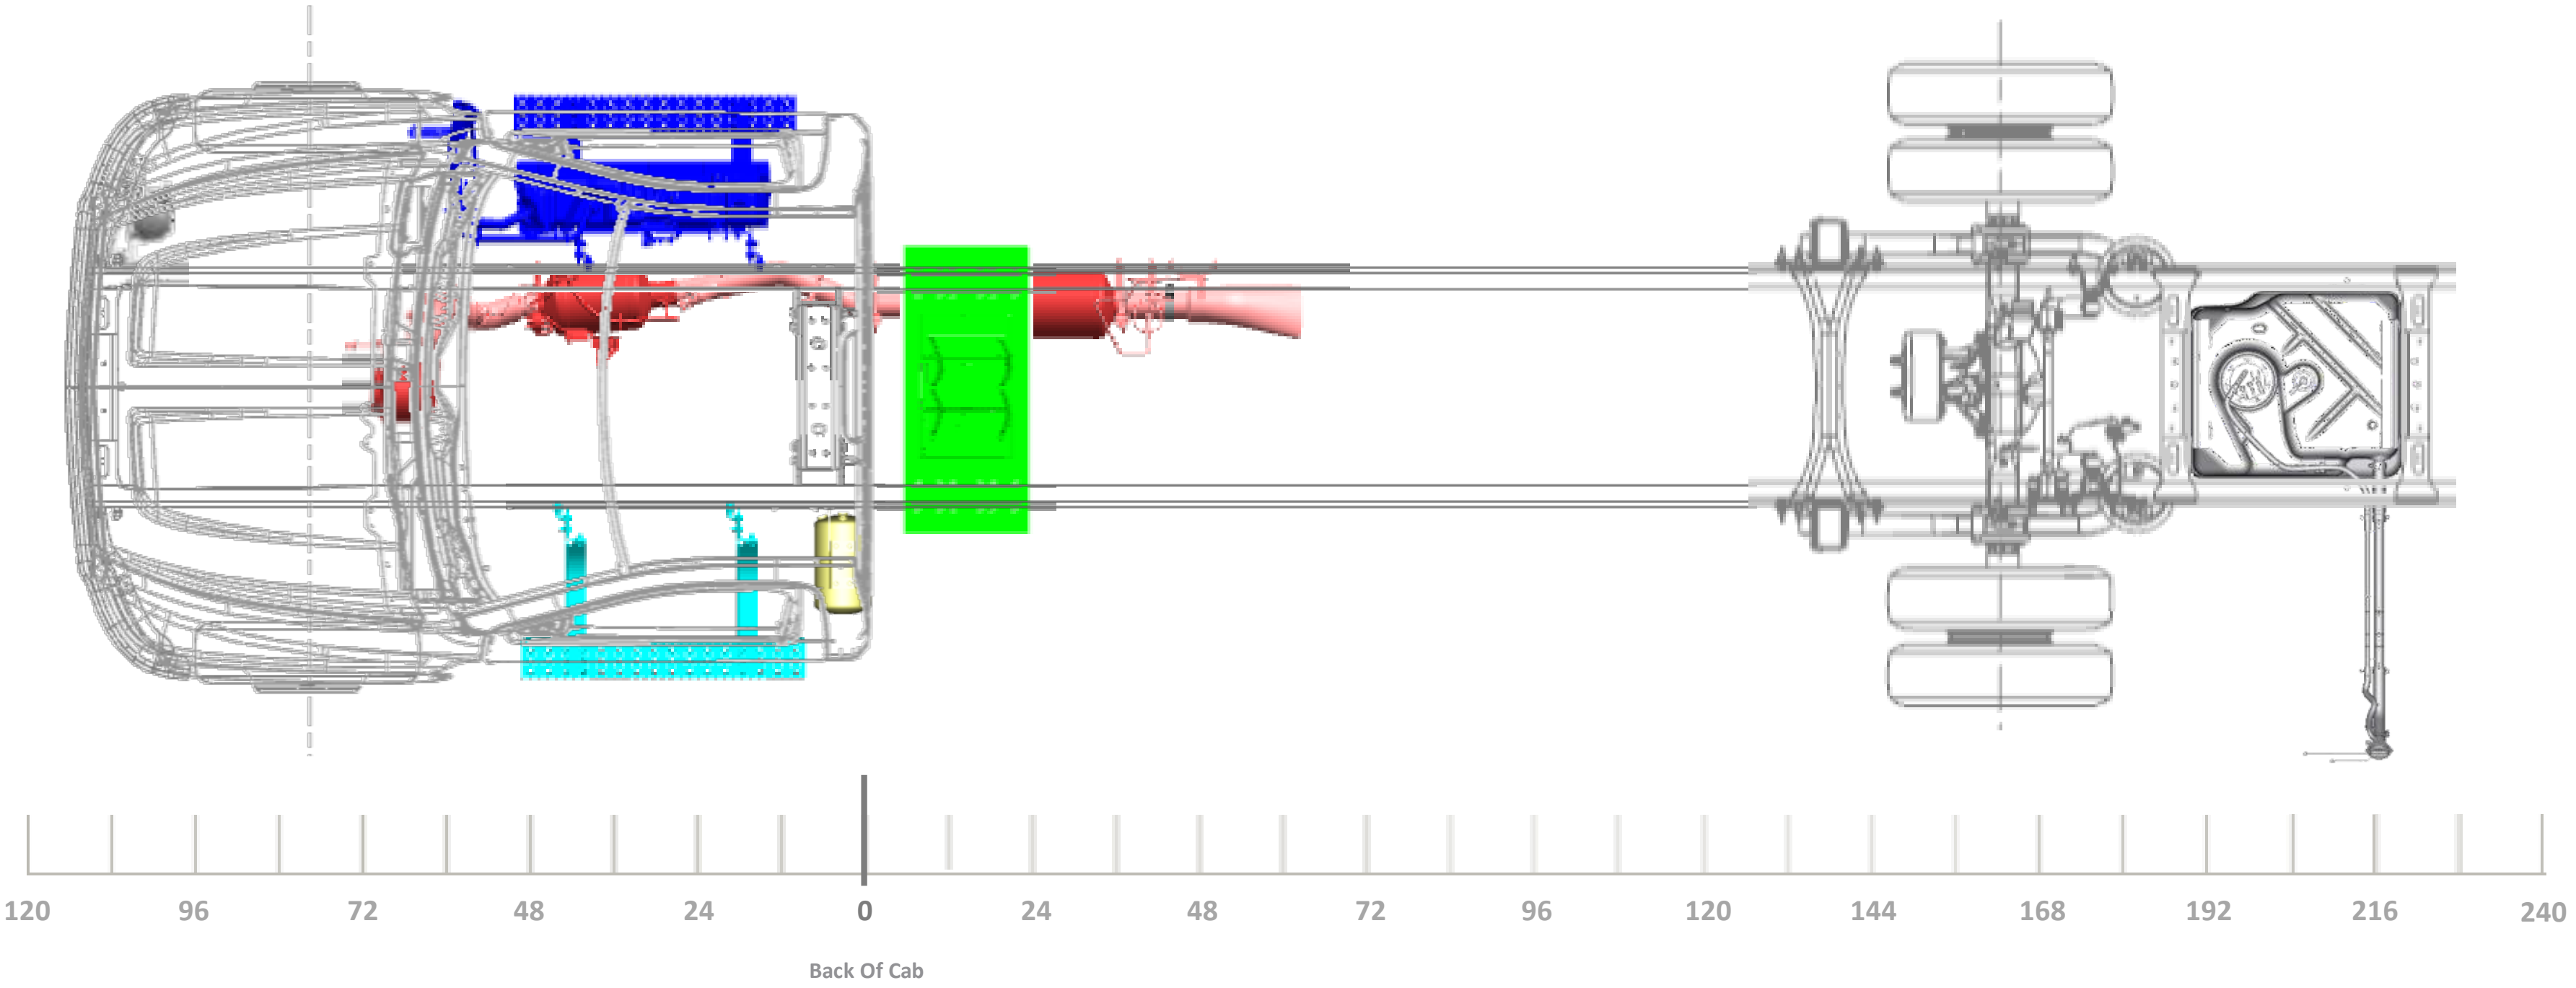

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

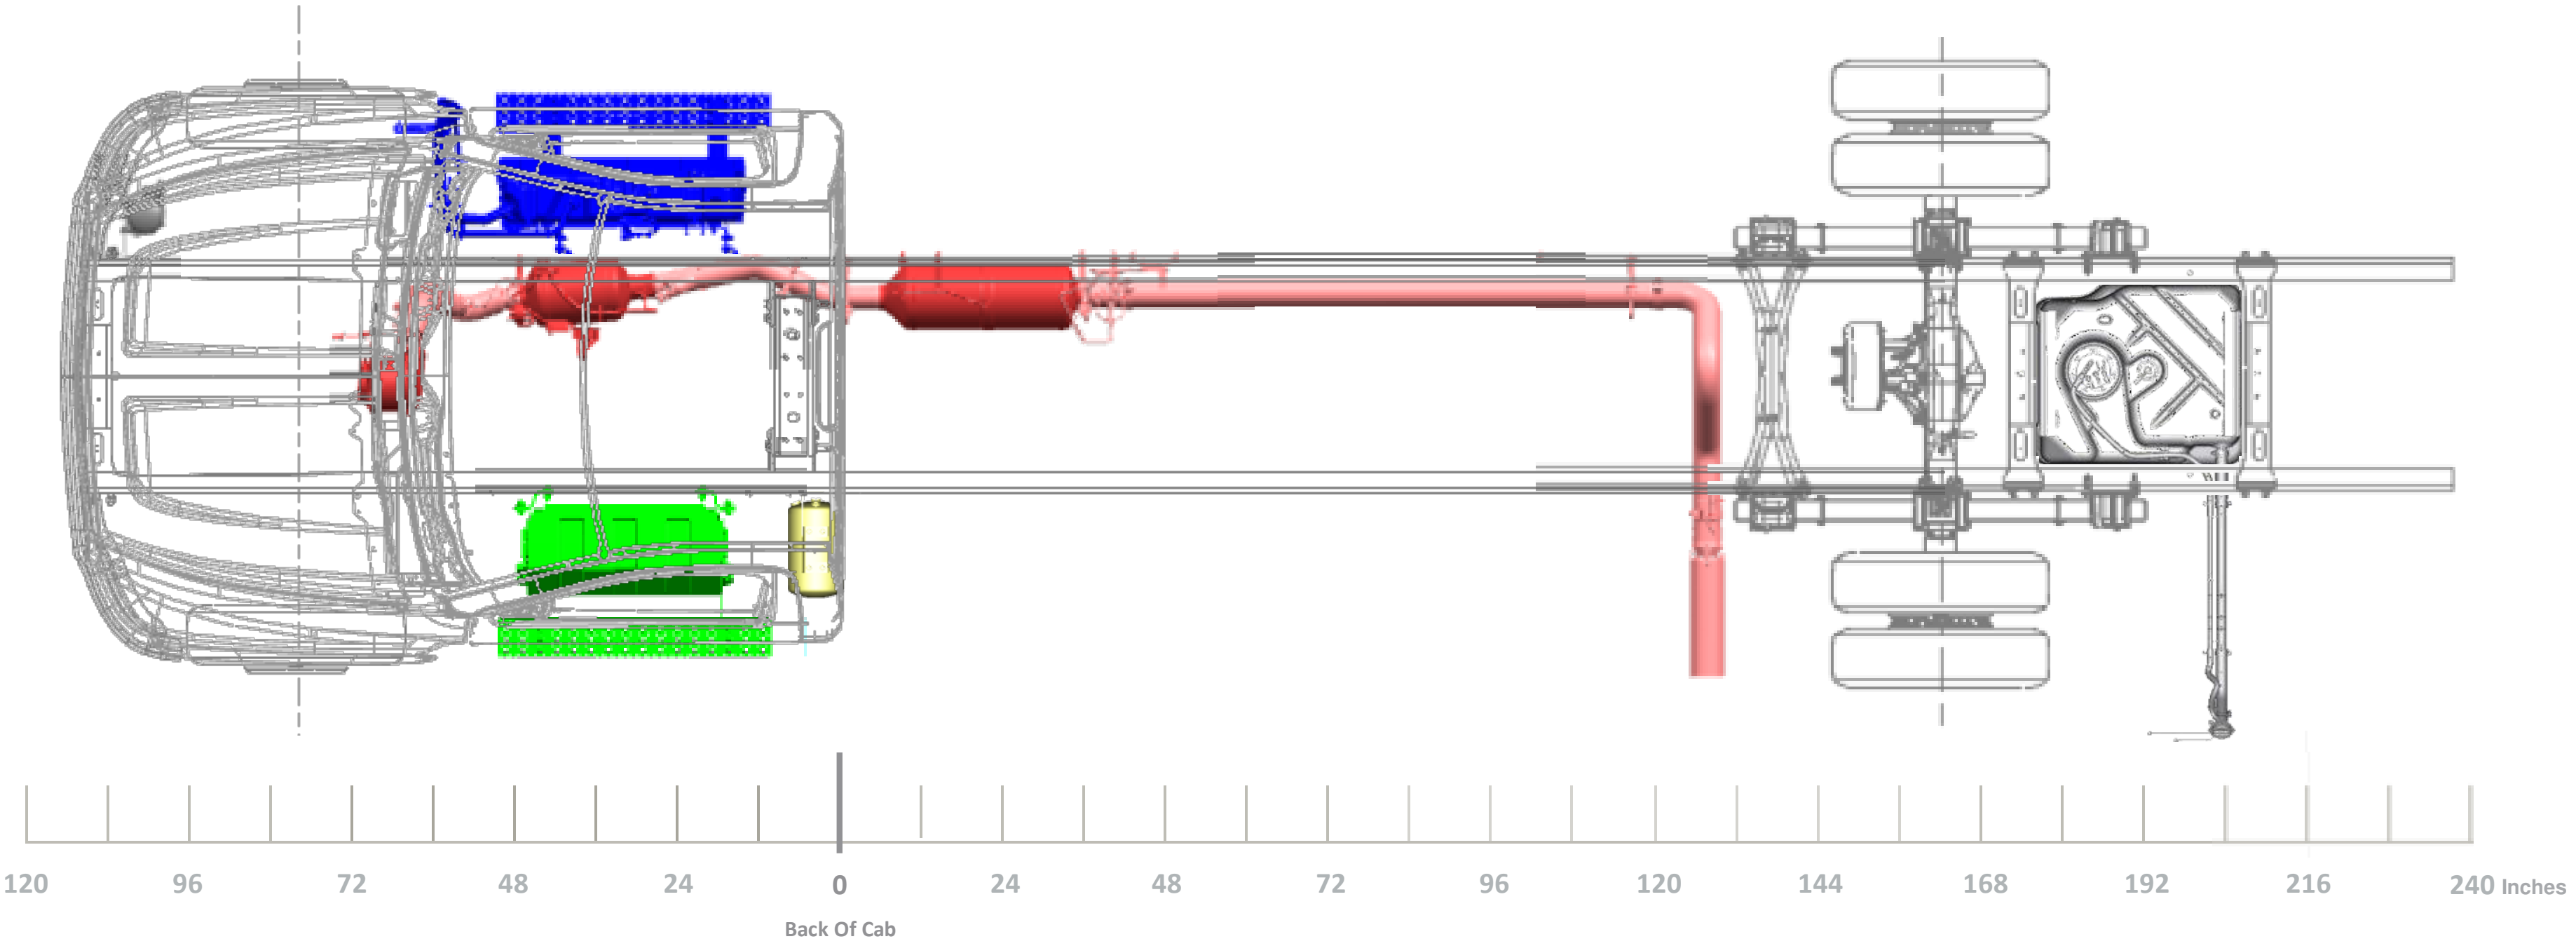
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

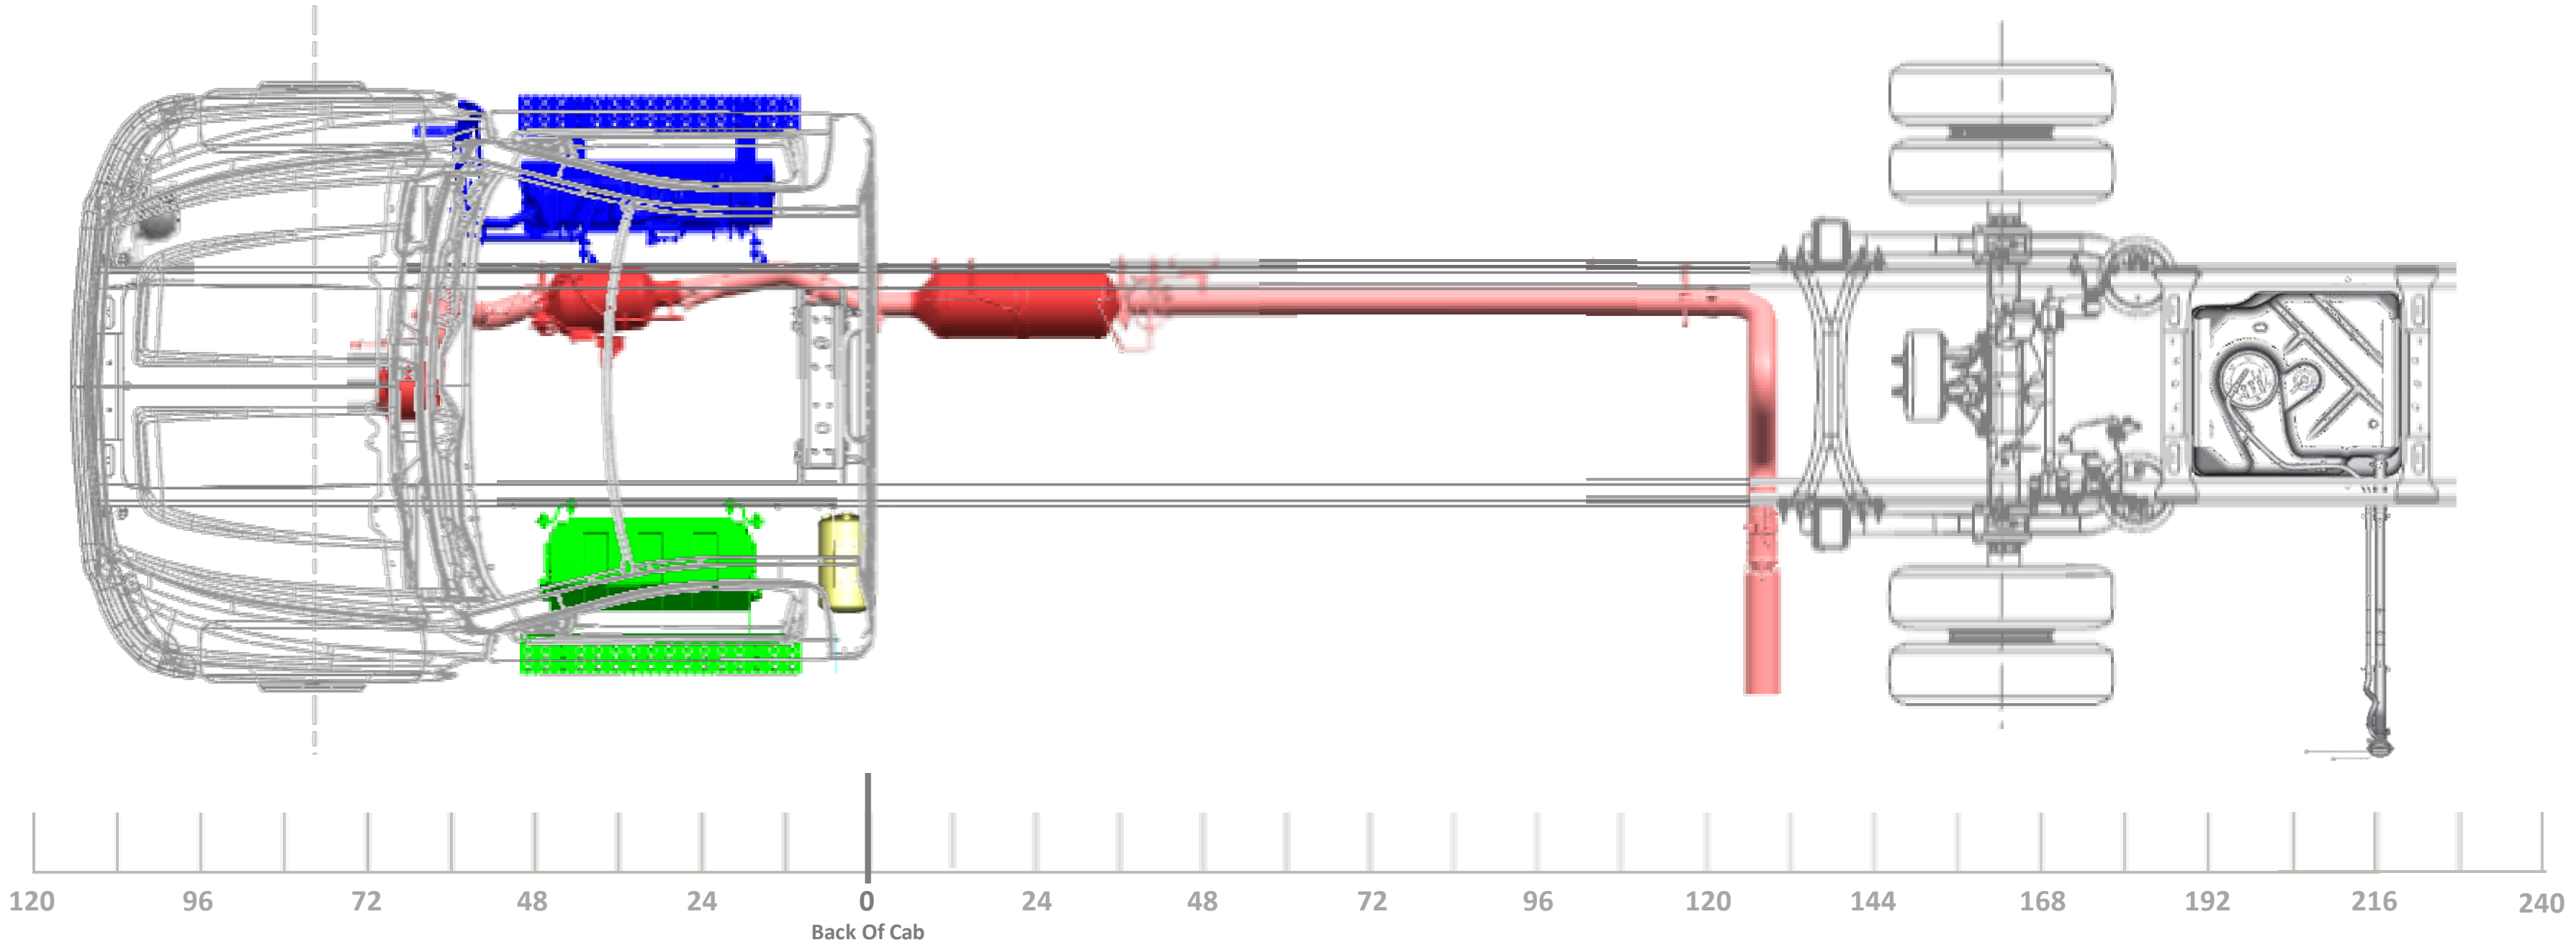

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

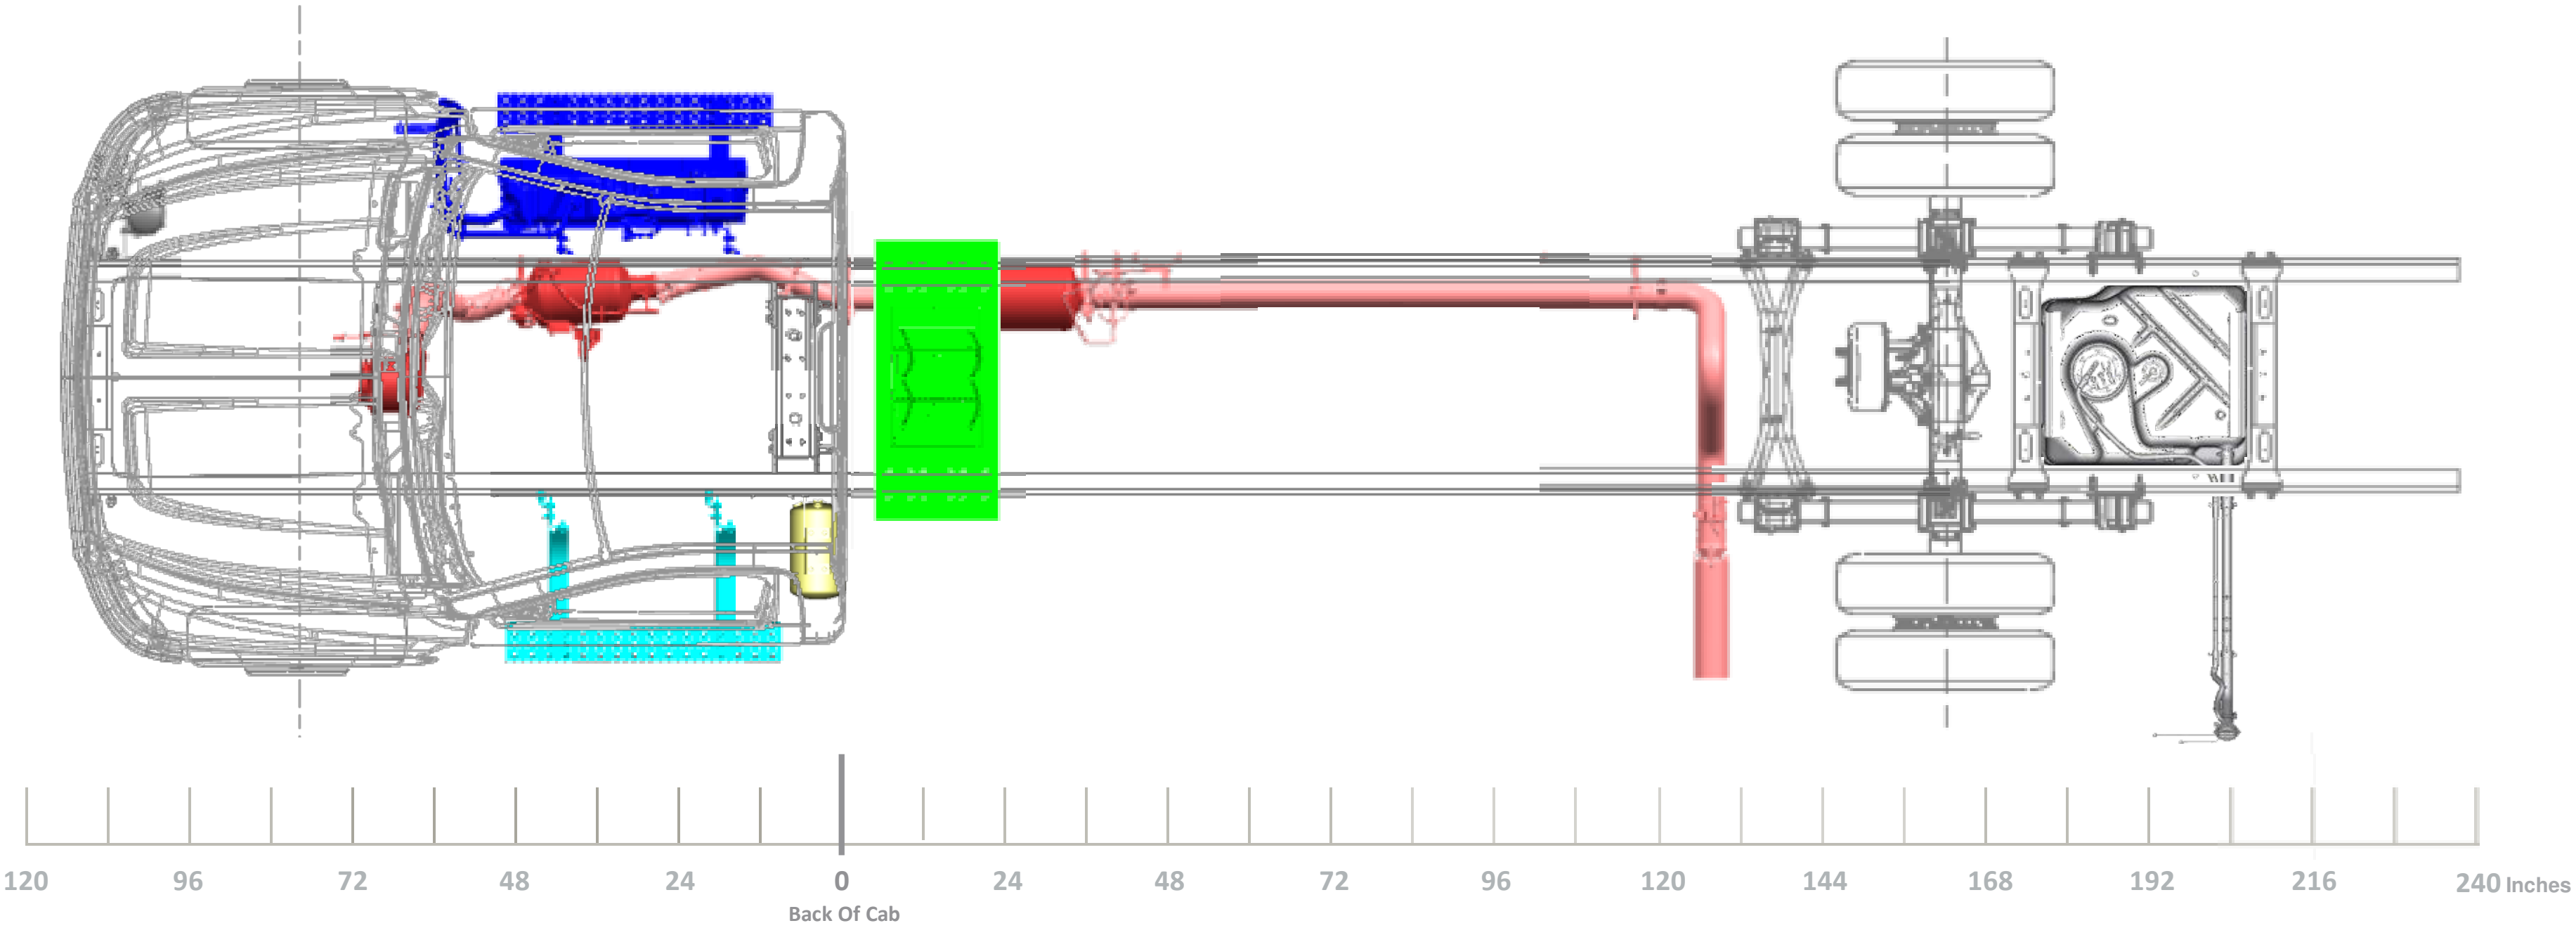
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

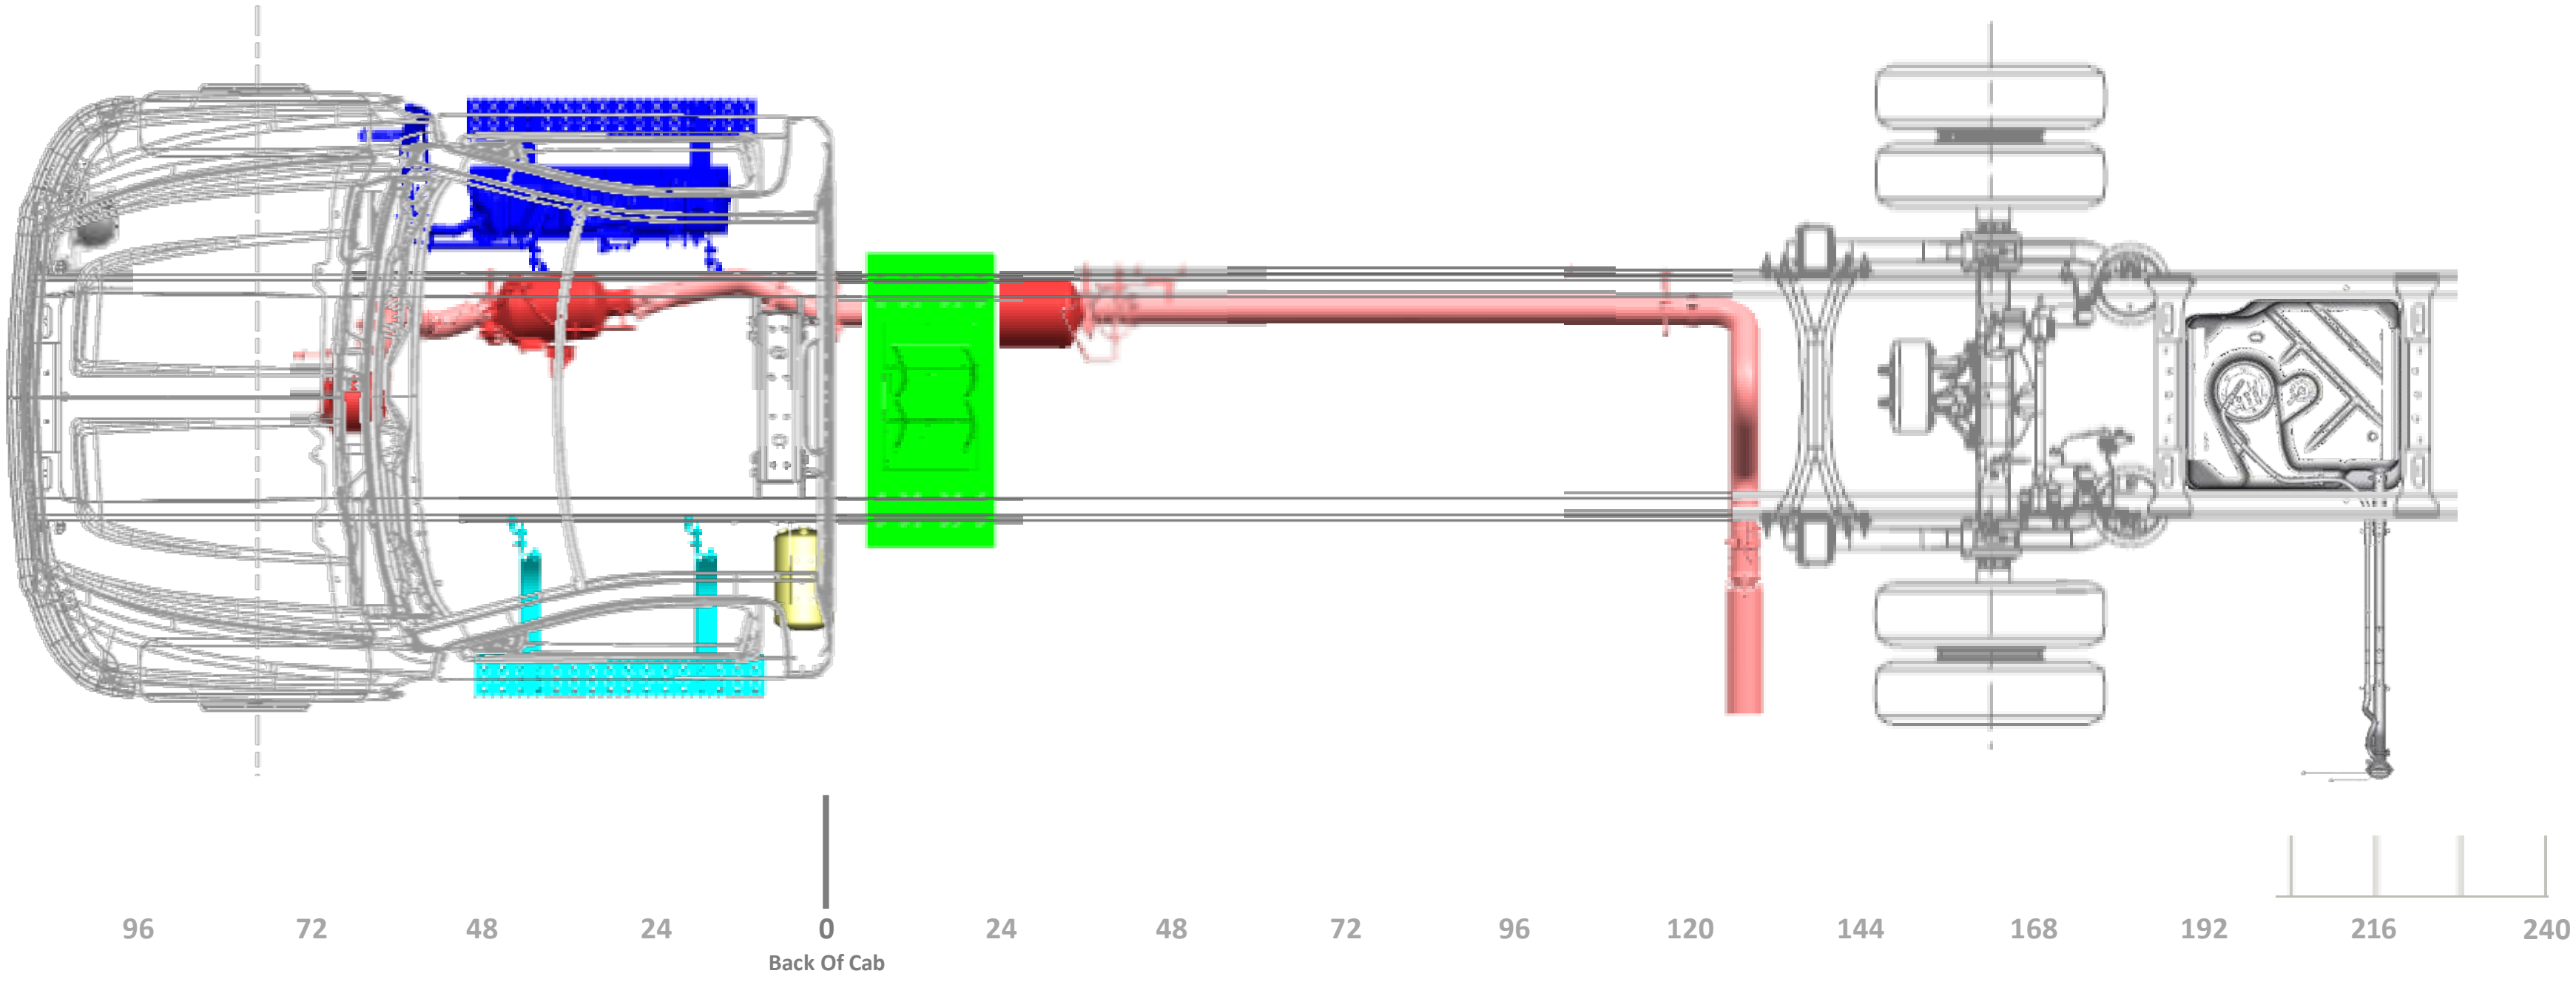

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

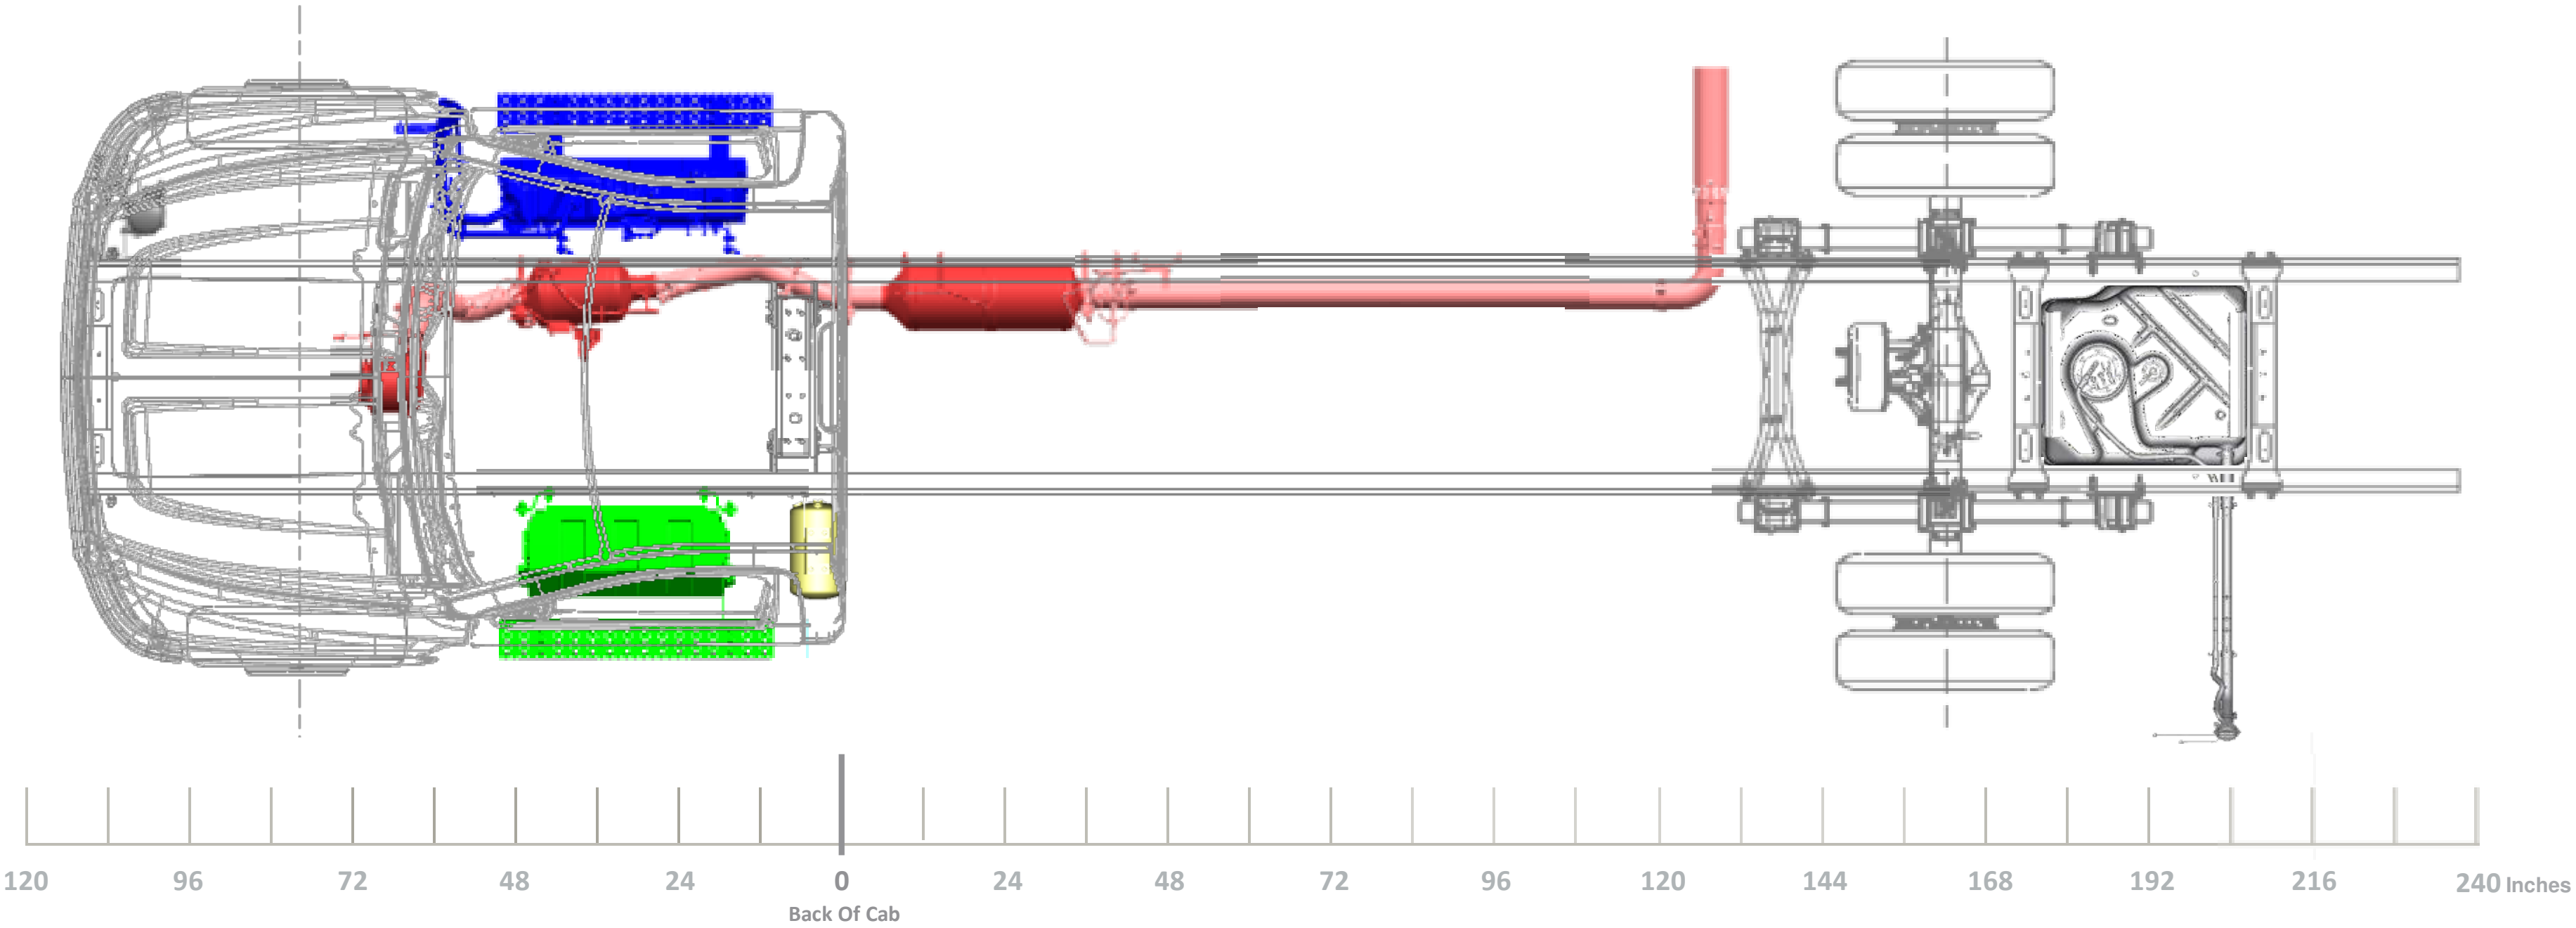
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

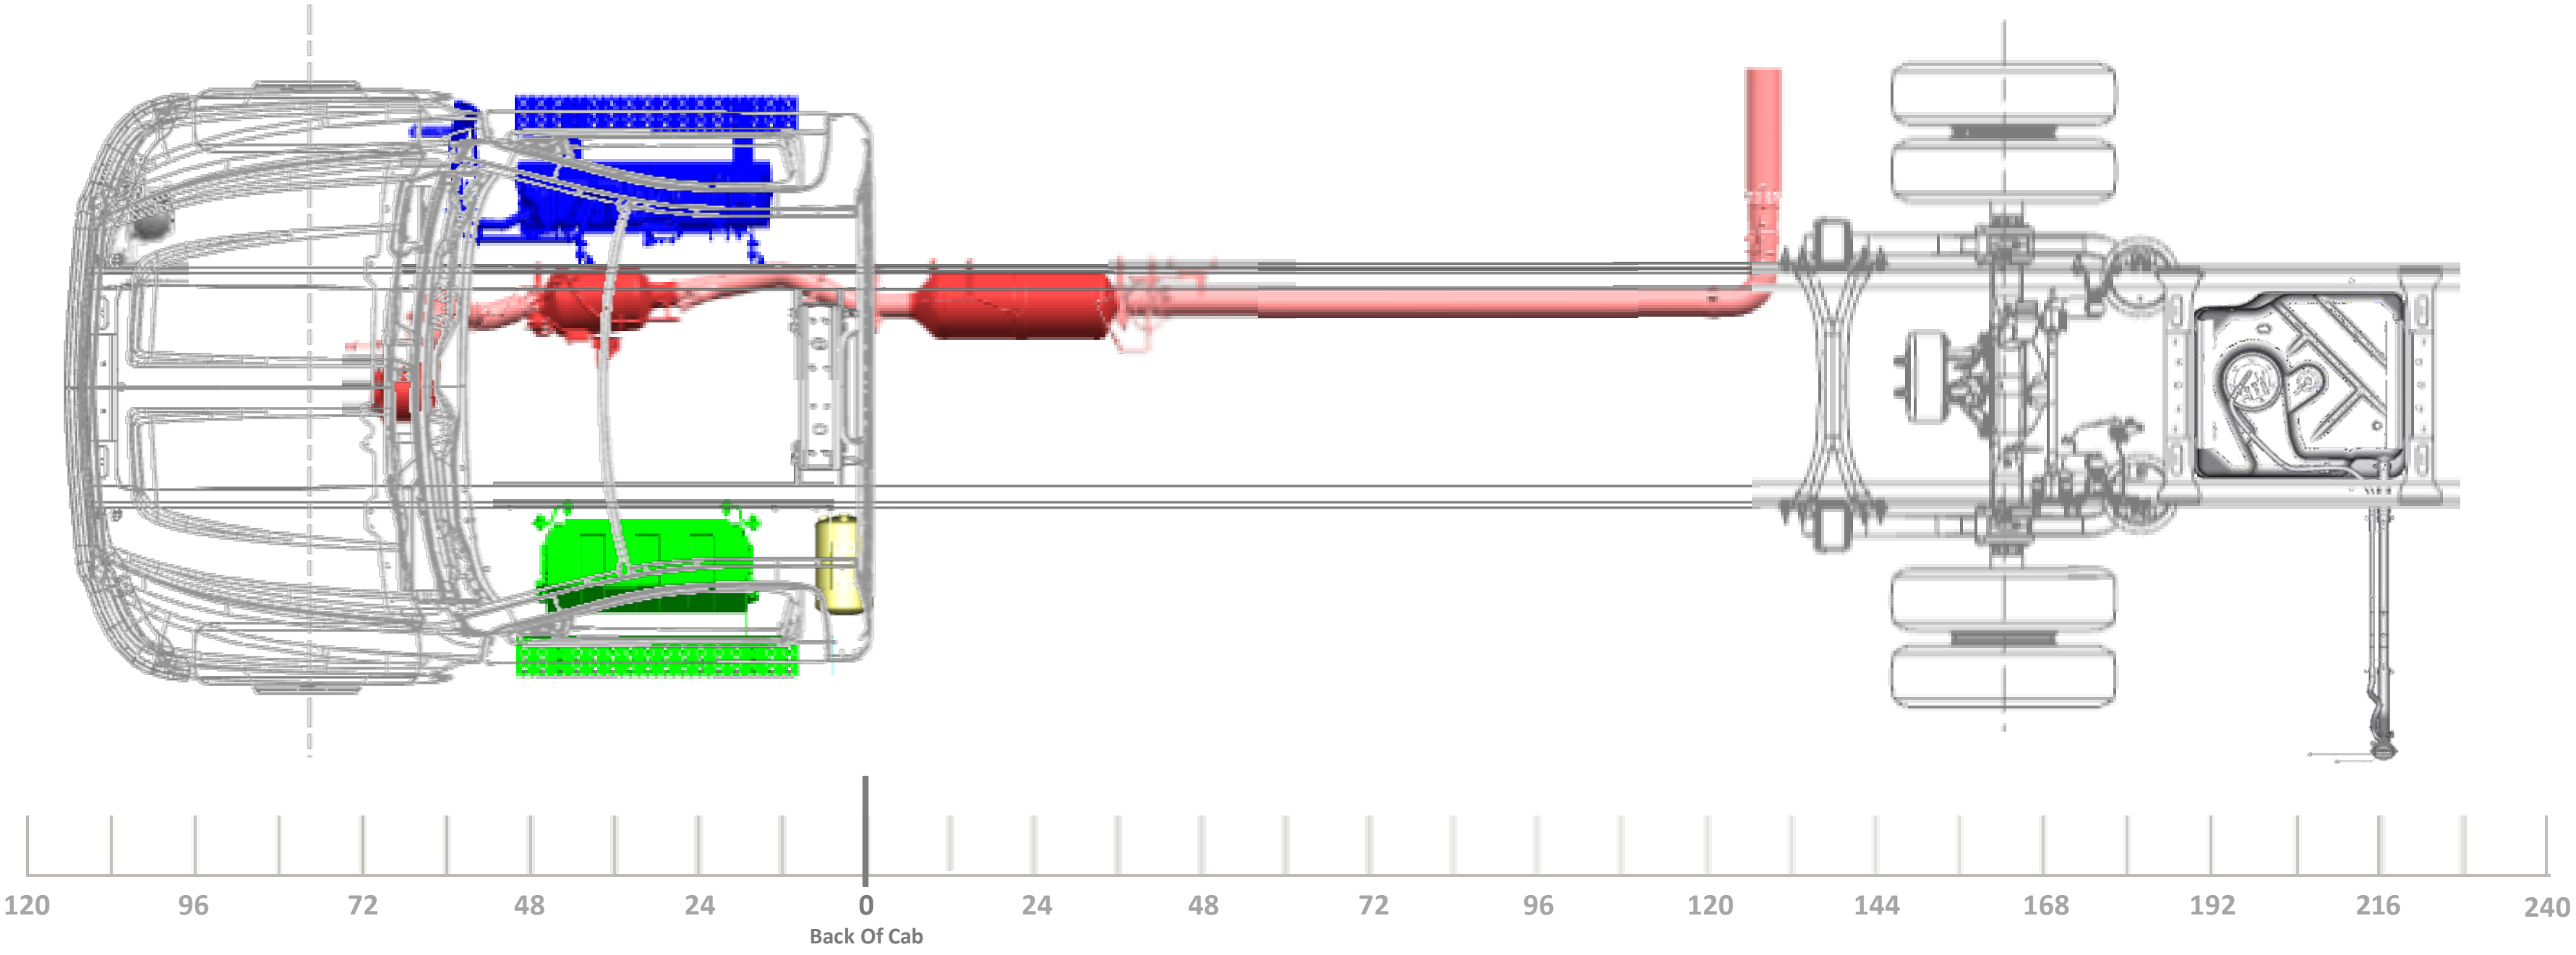

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

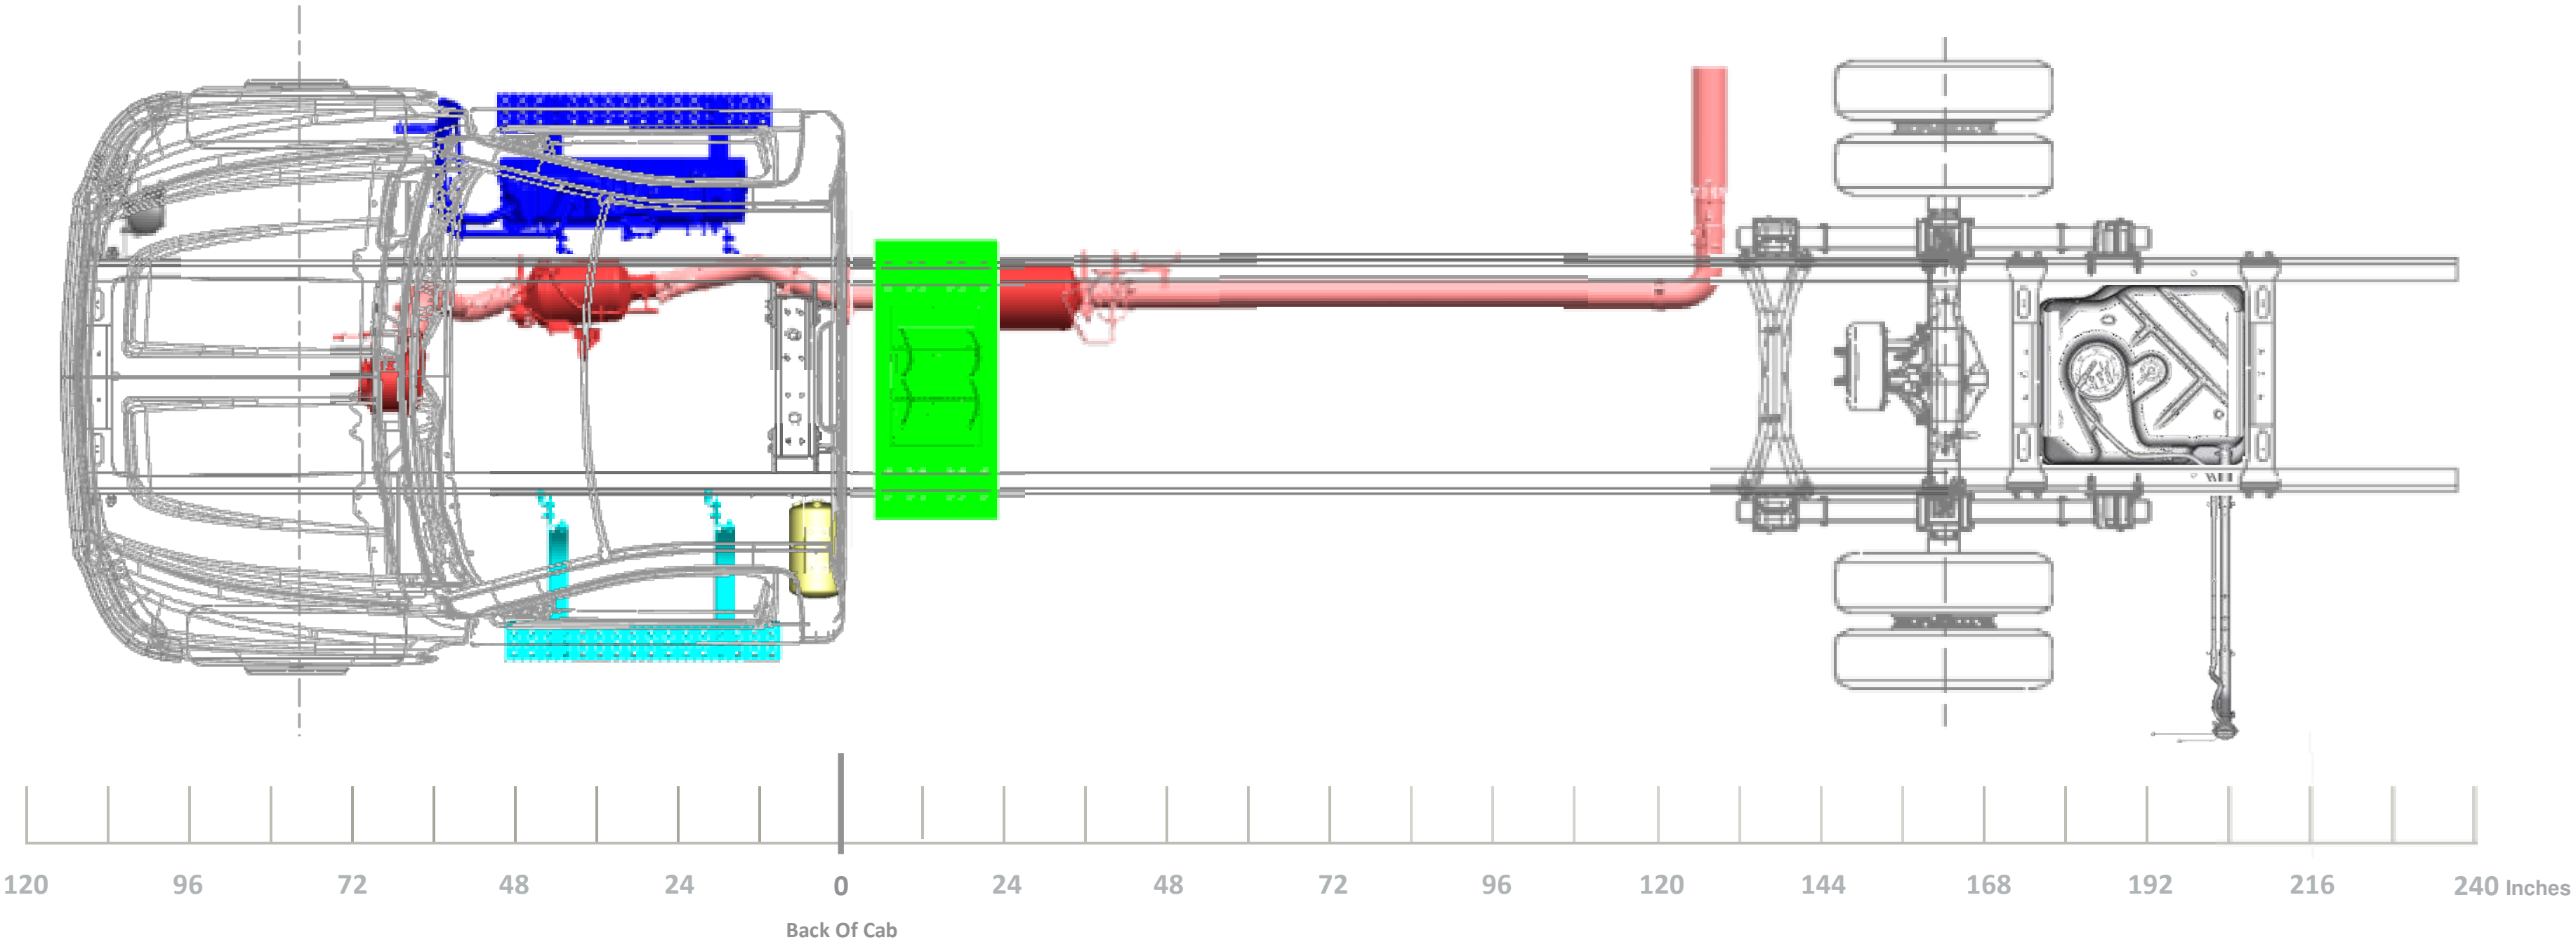
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

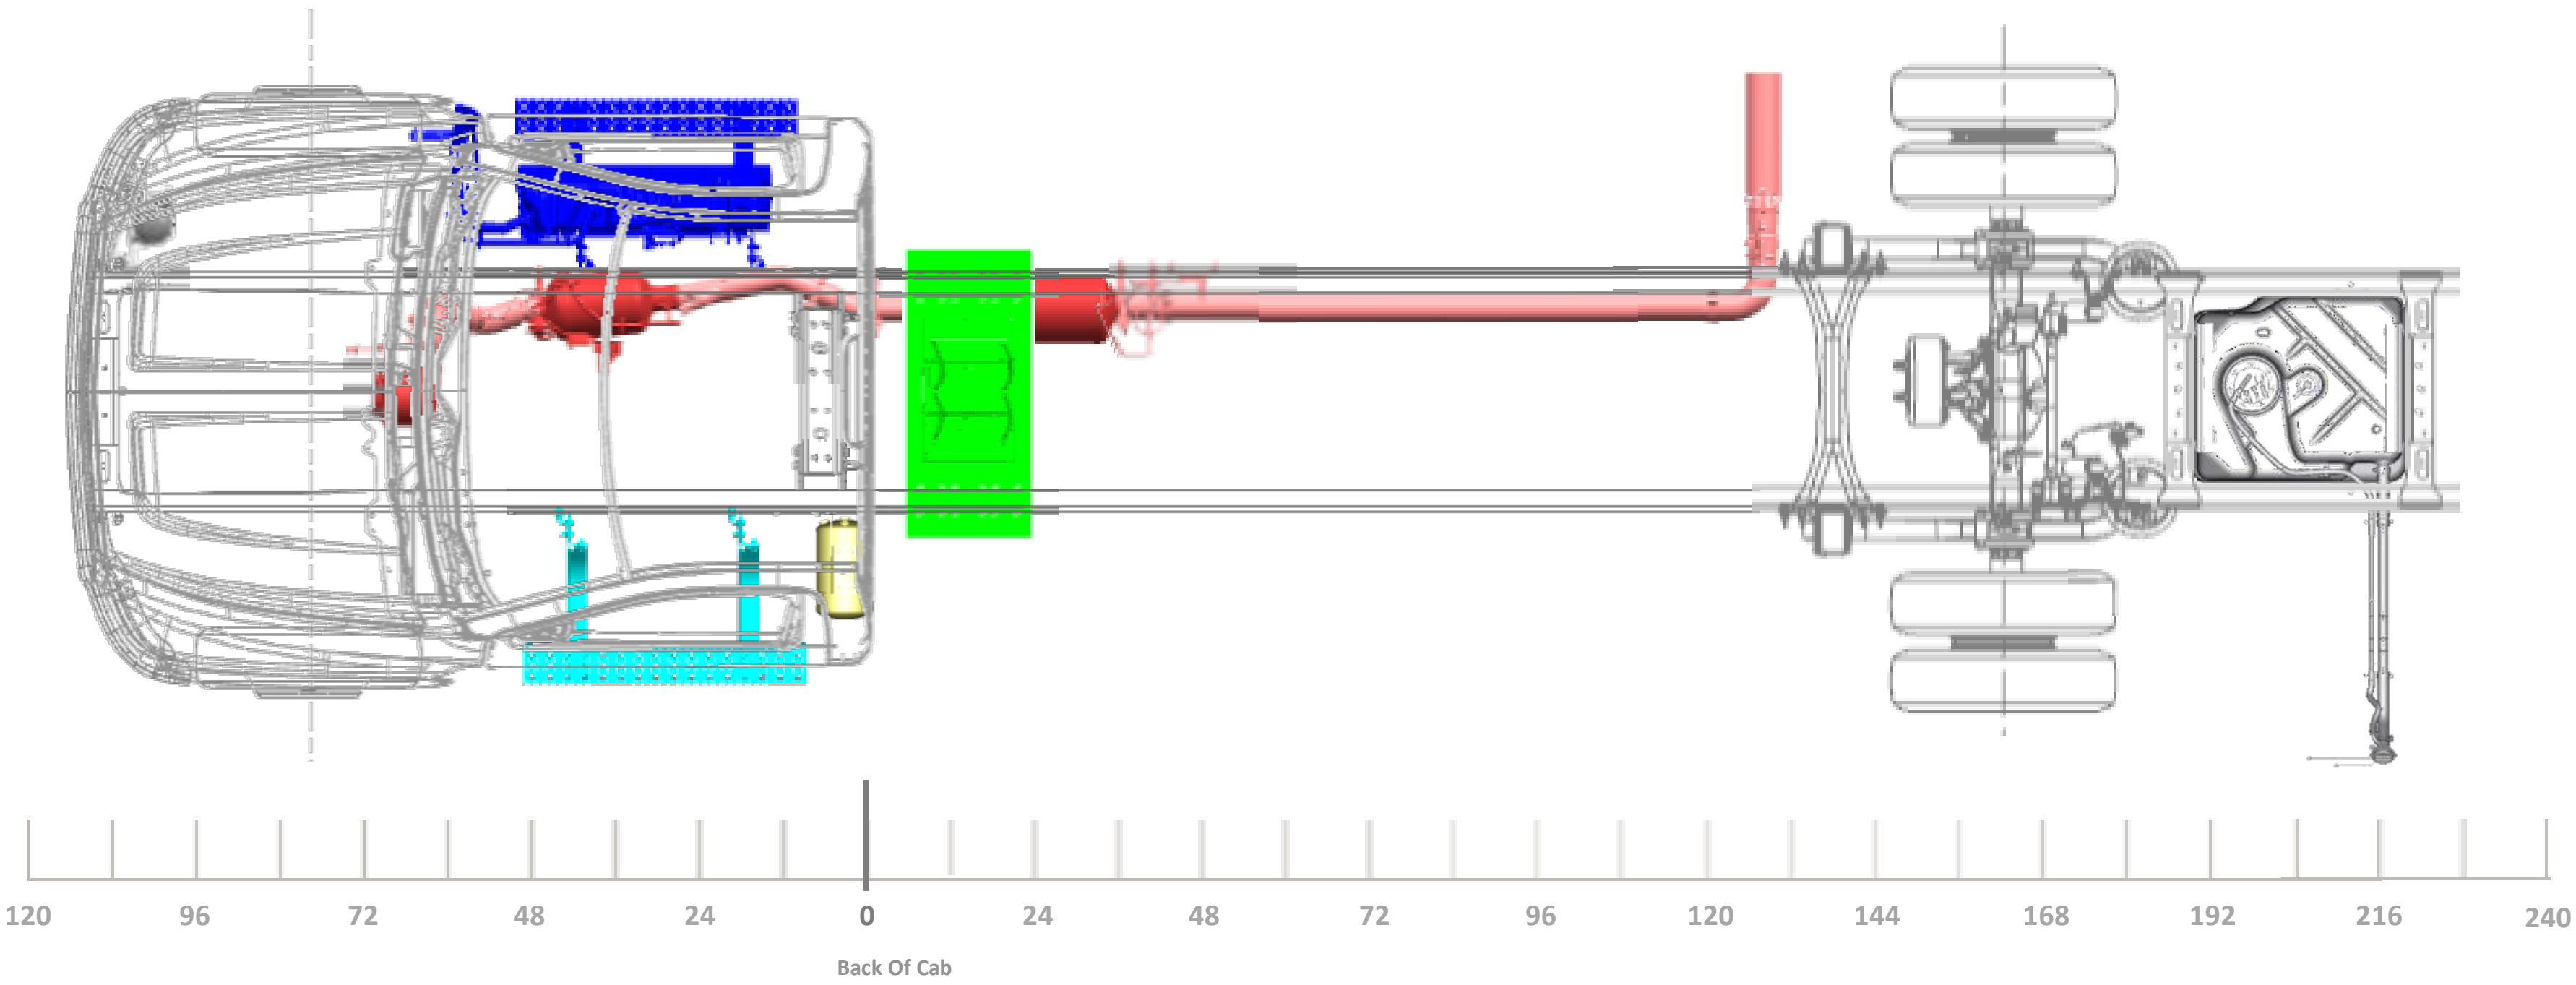

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

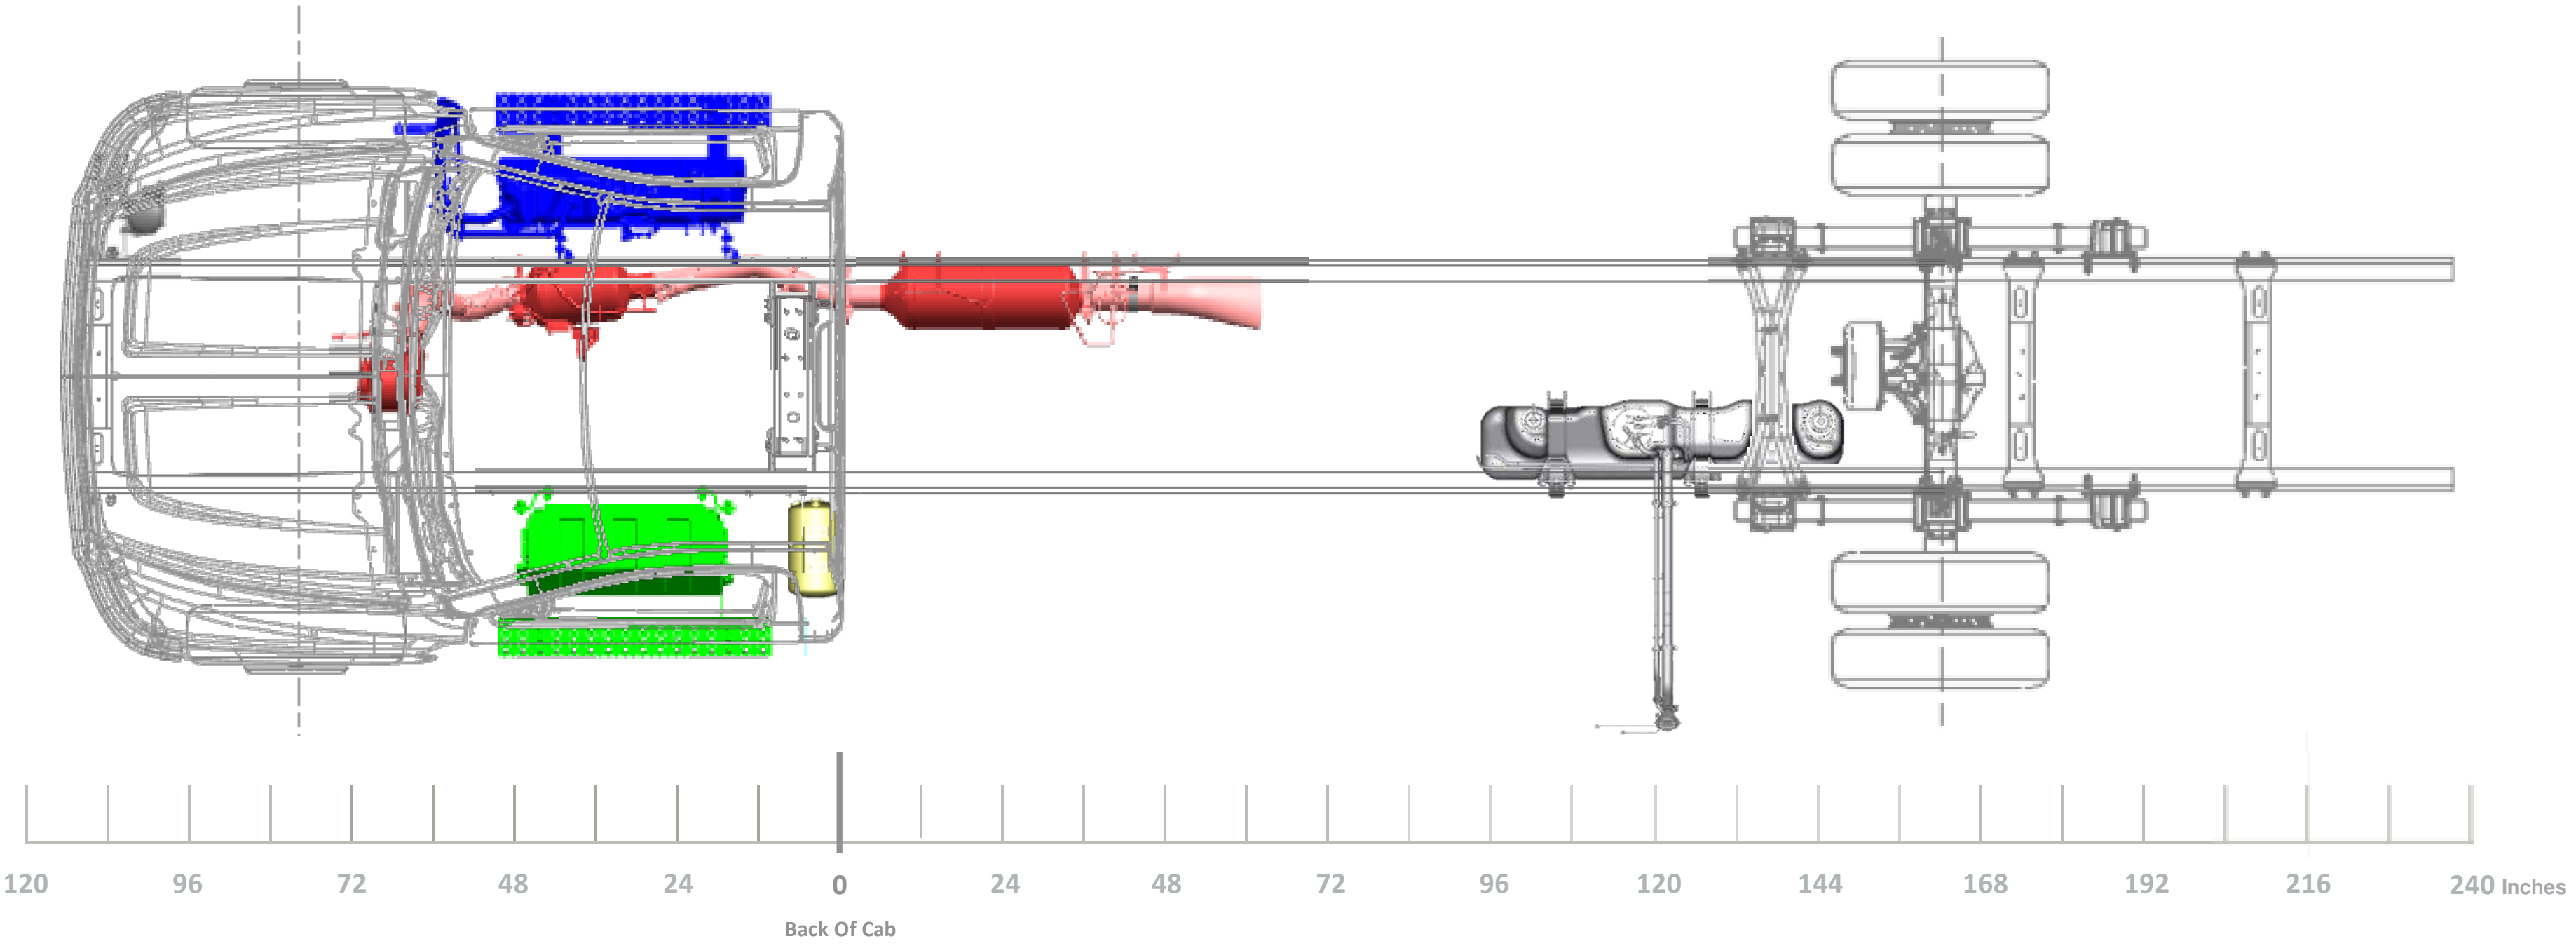
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

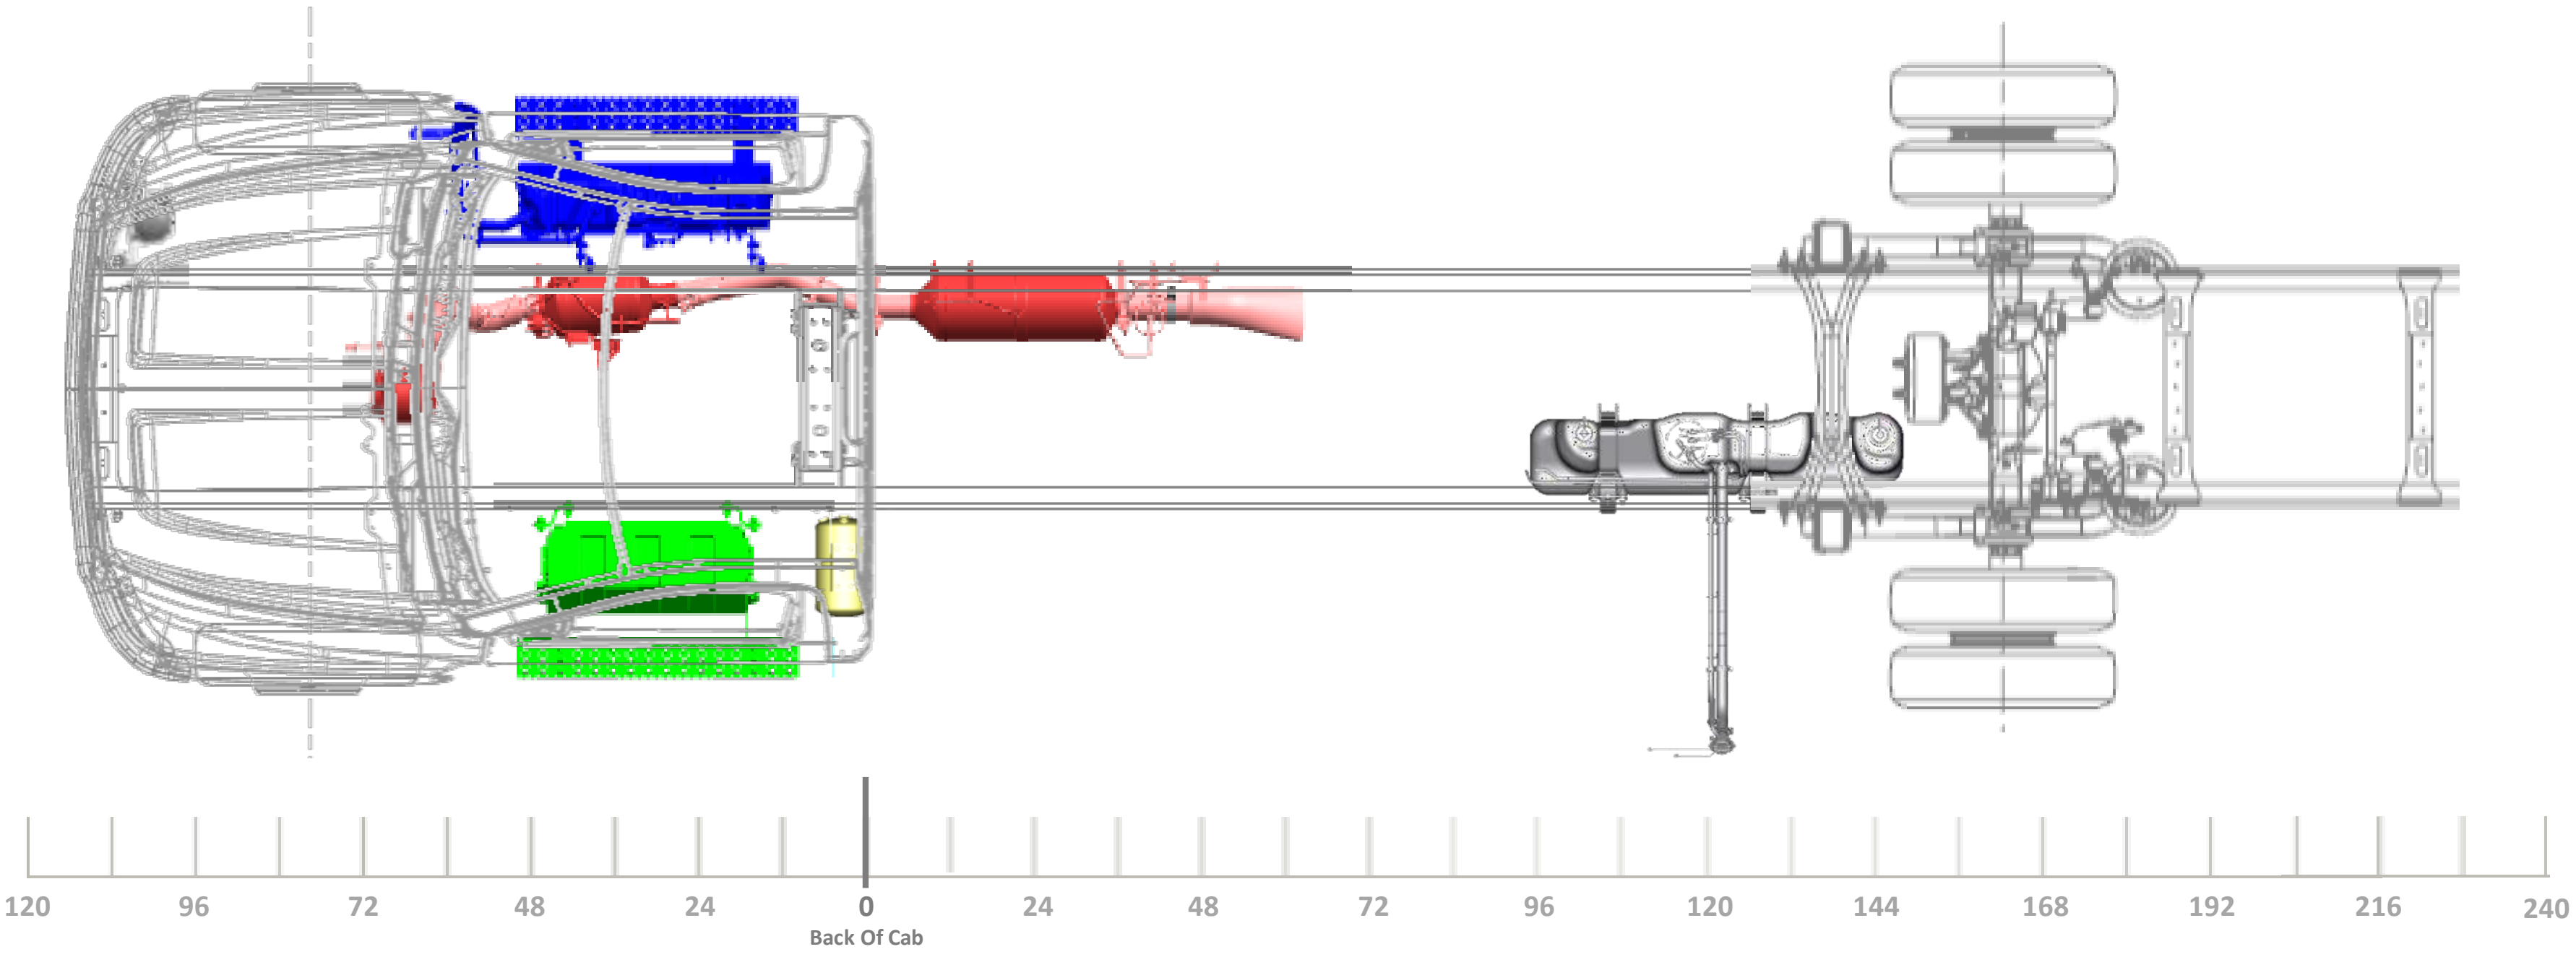

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

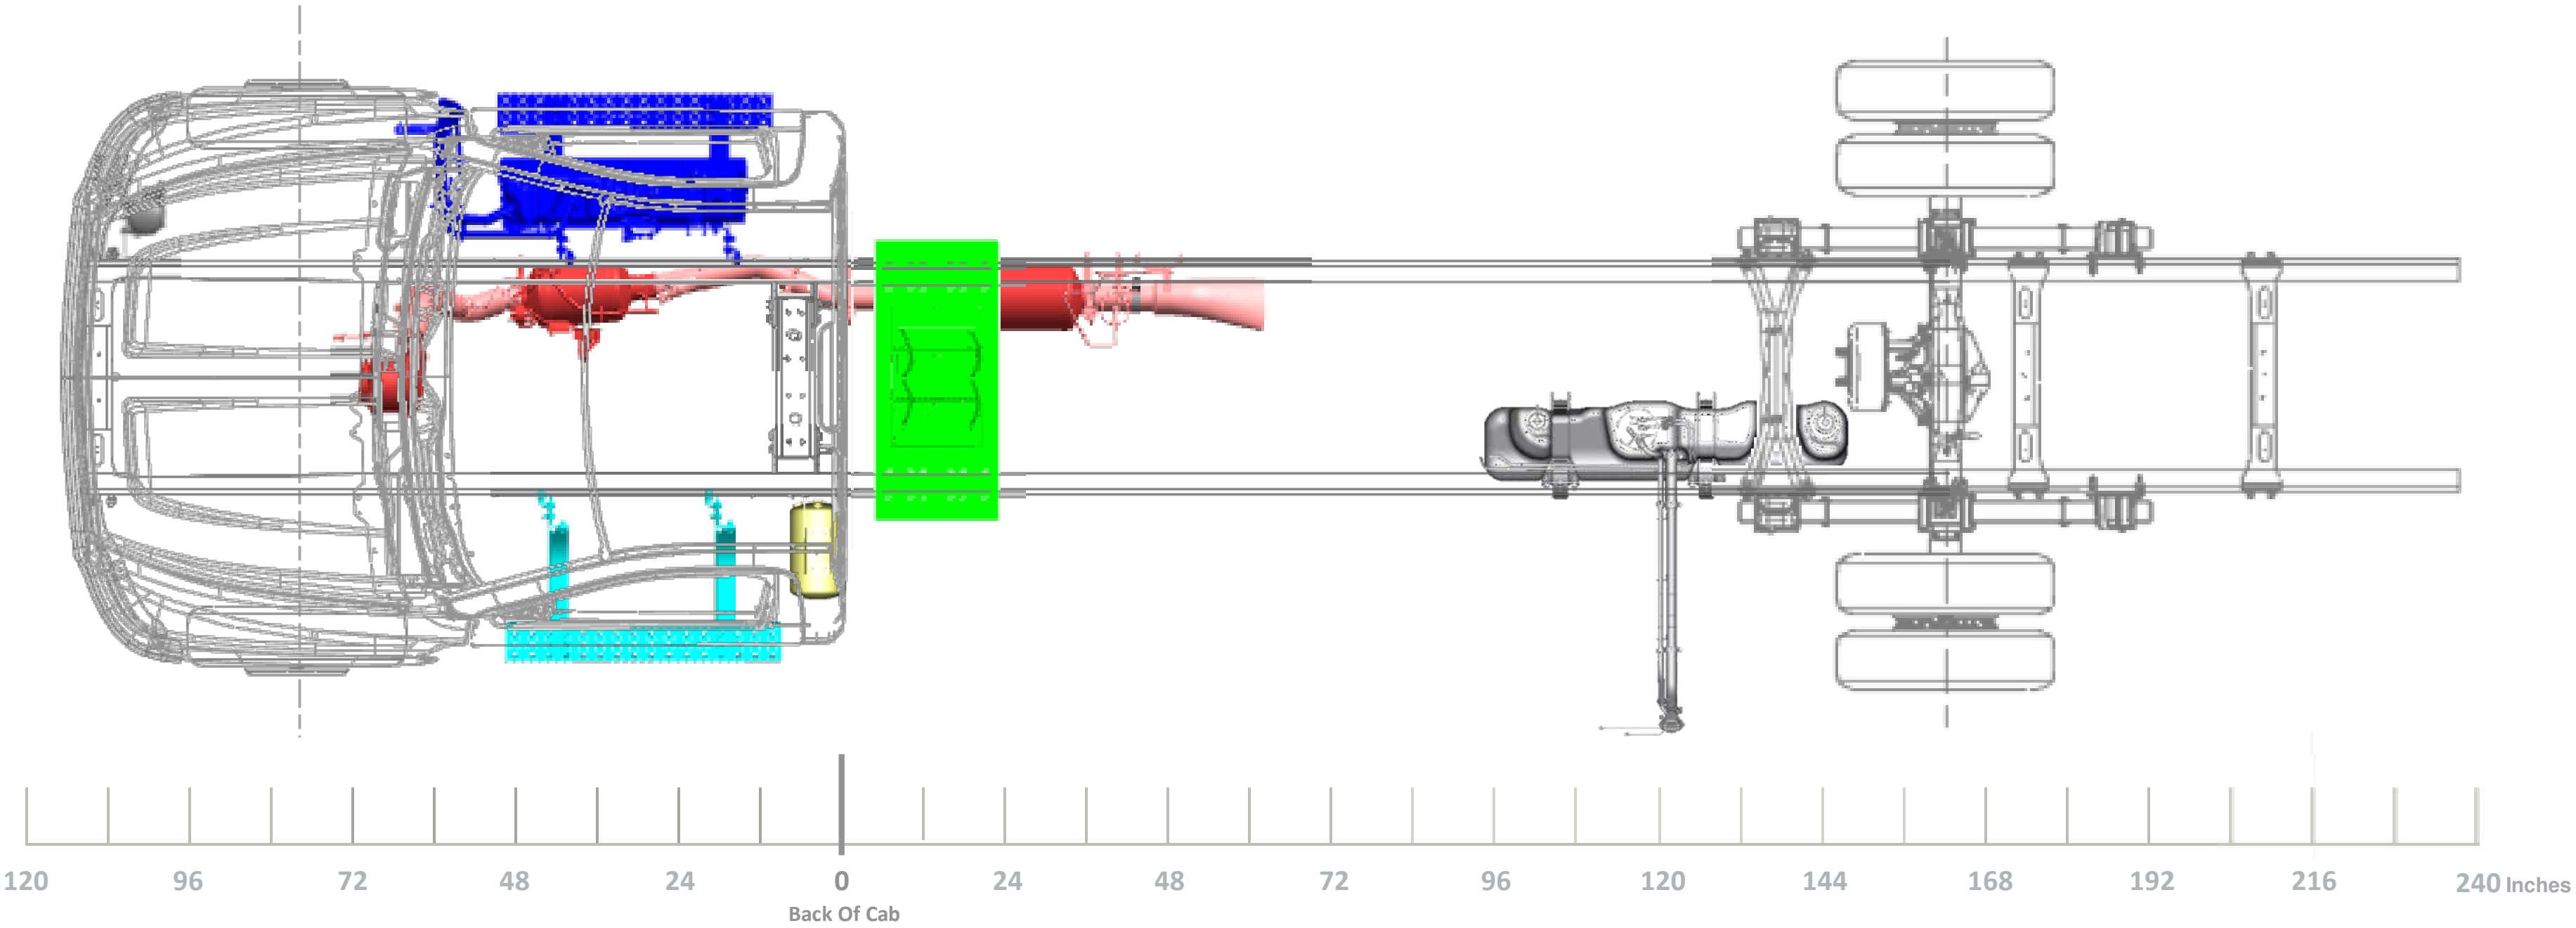
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

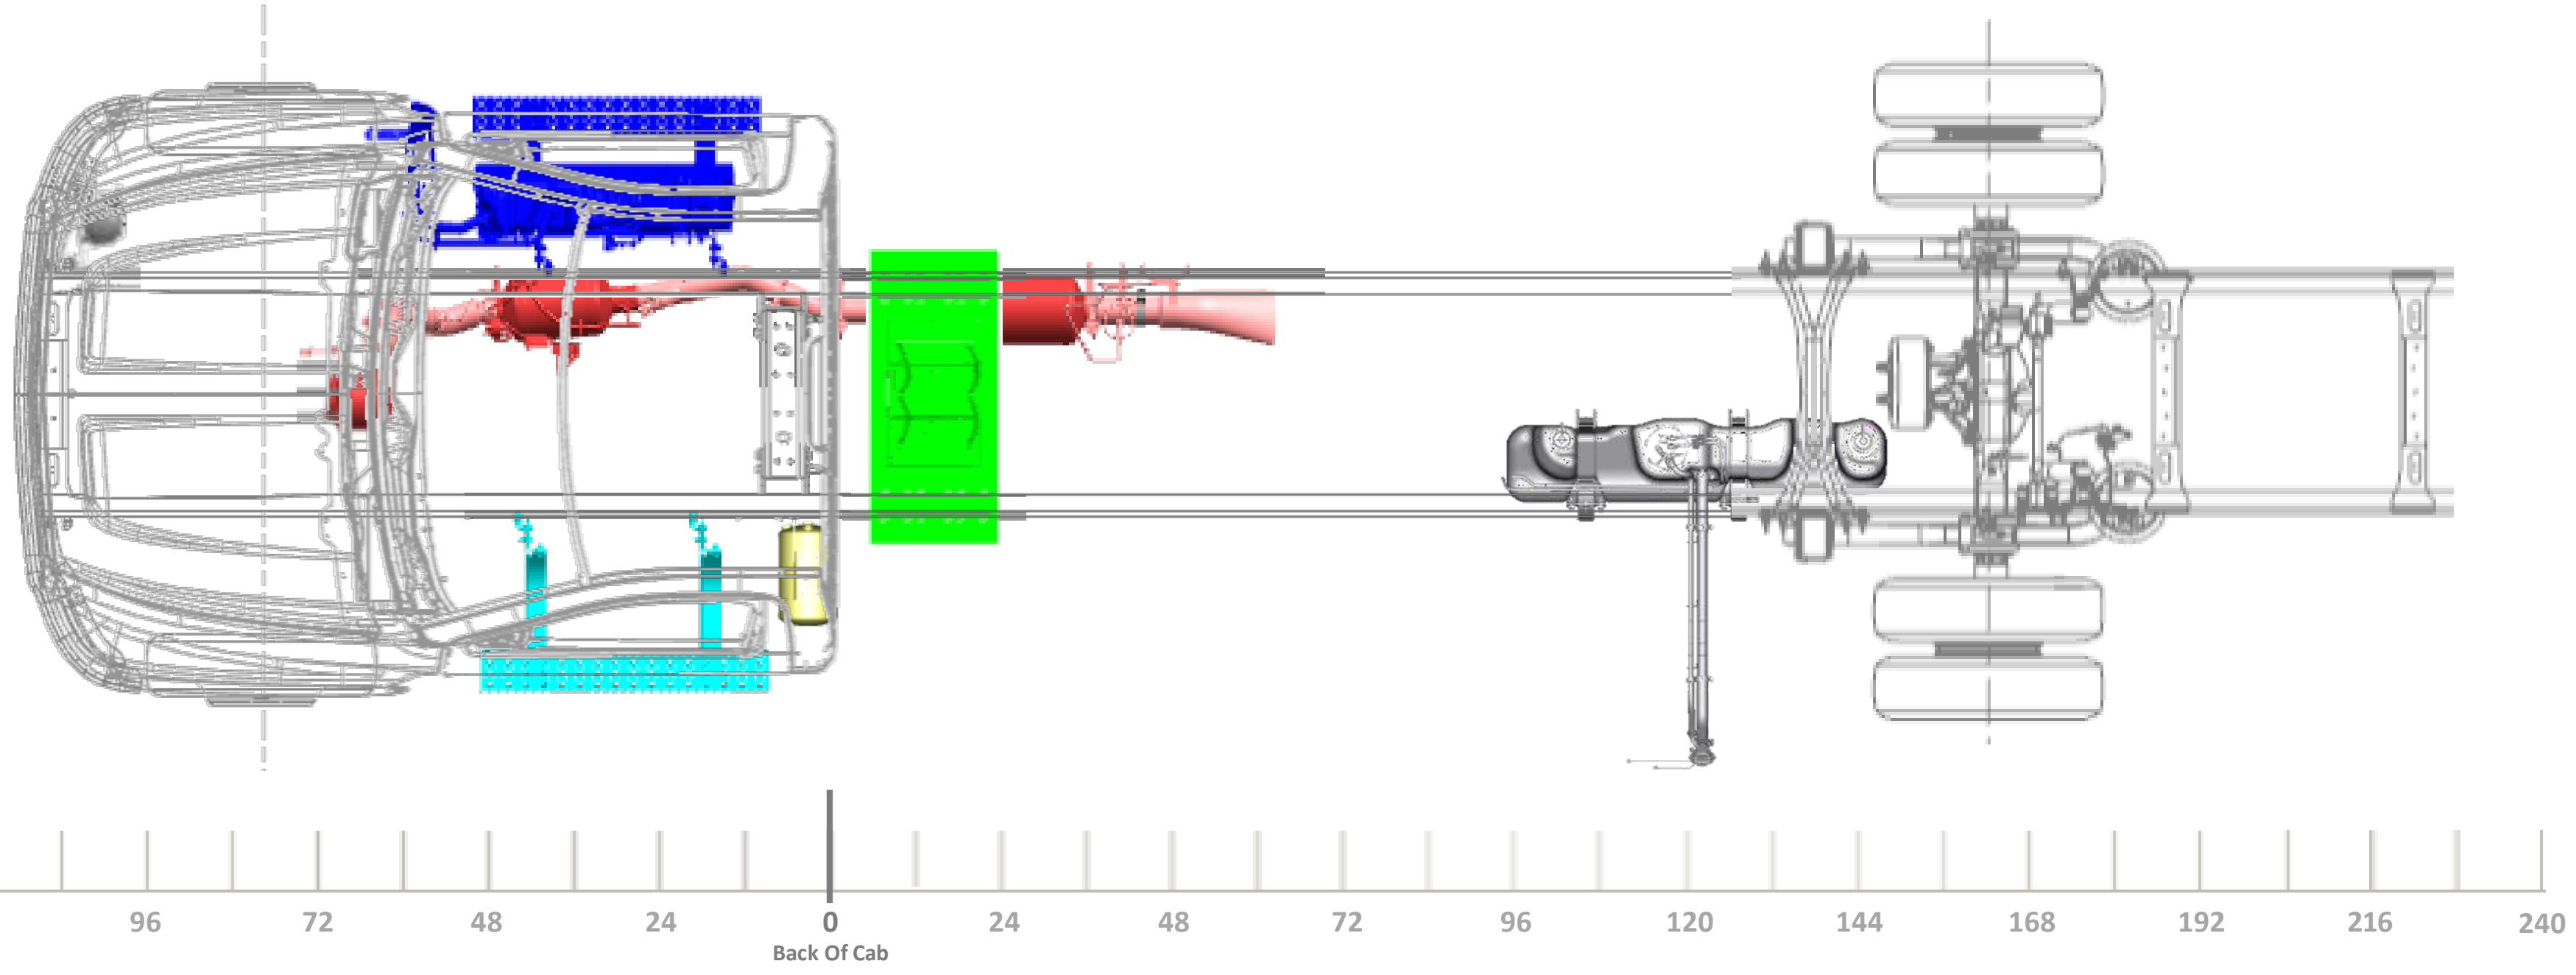

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243" WB (162" CA) 83"AF

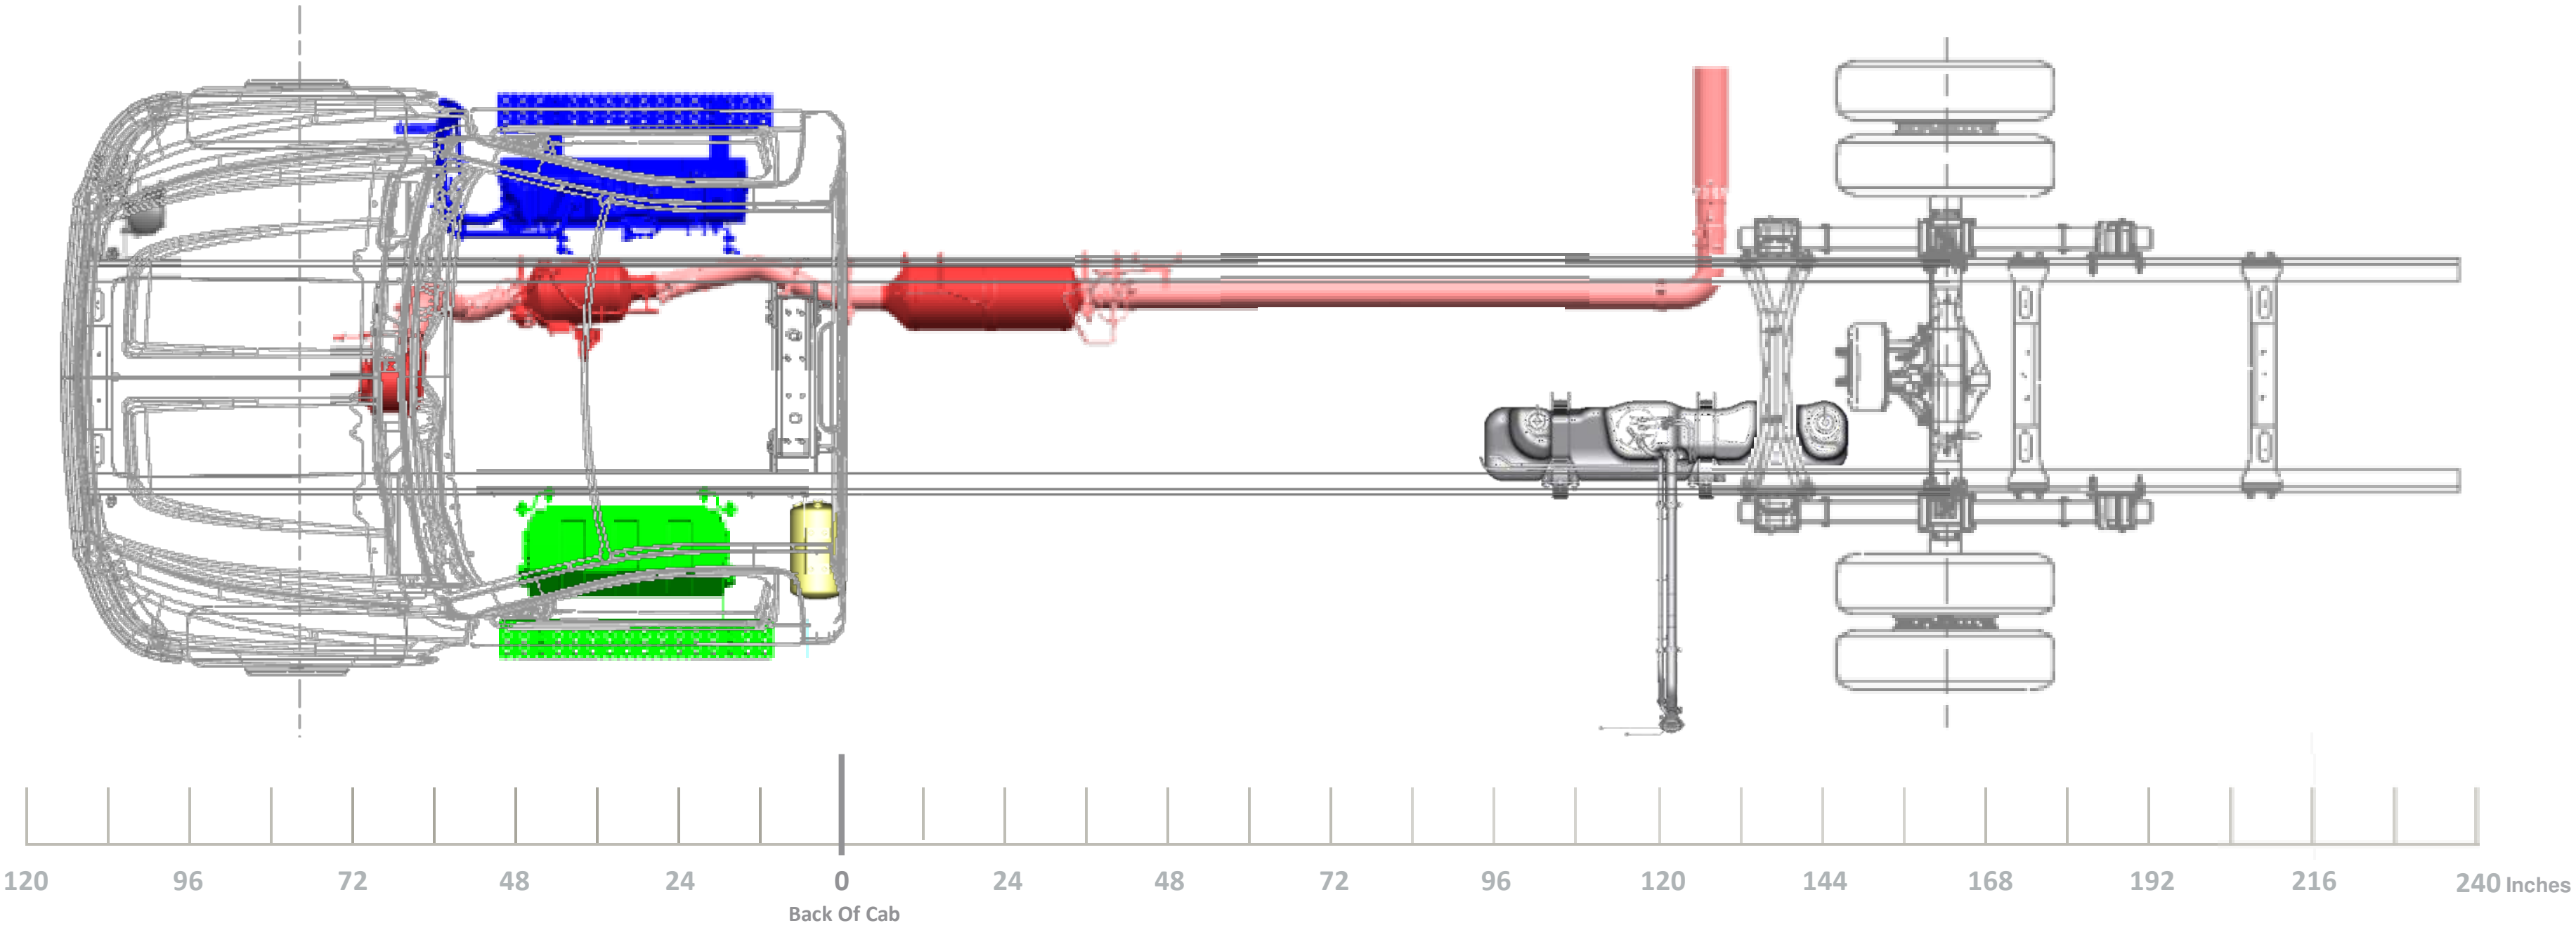
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243" WB (162" CA) 83"AF

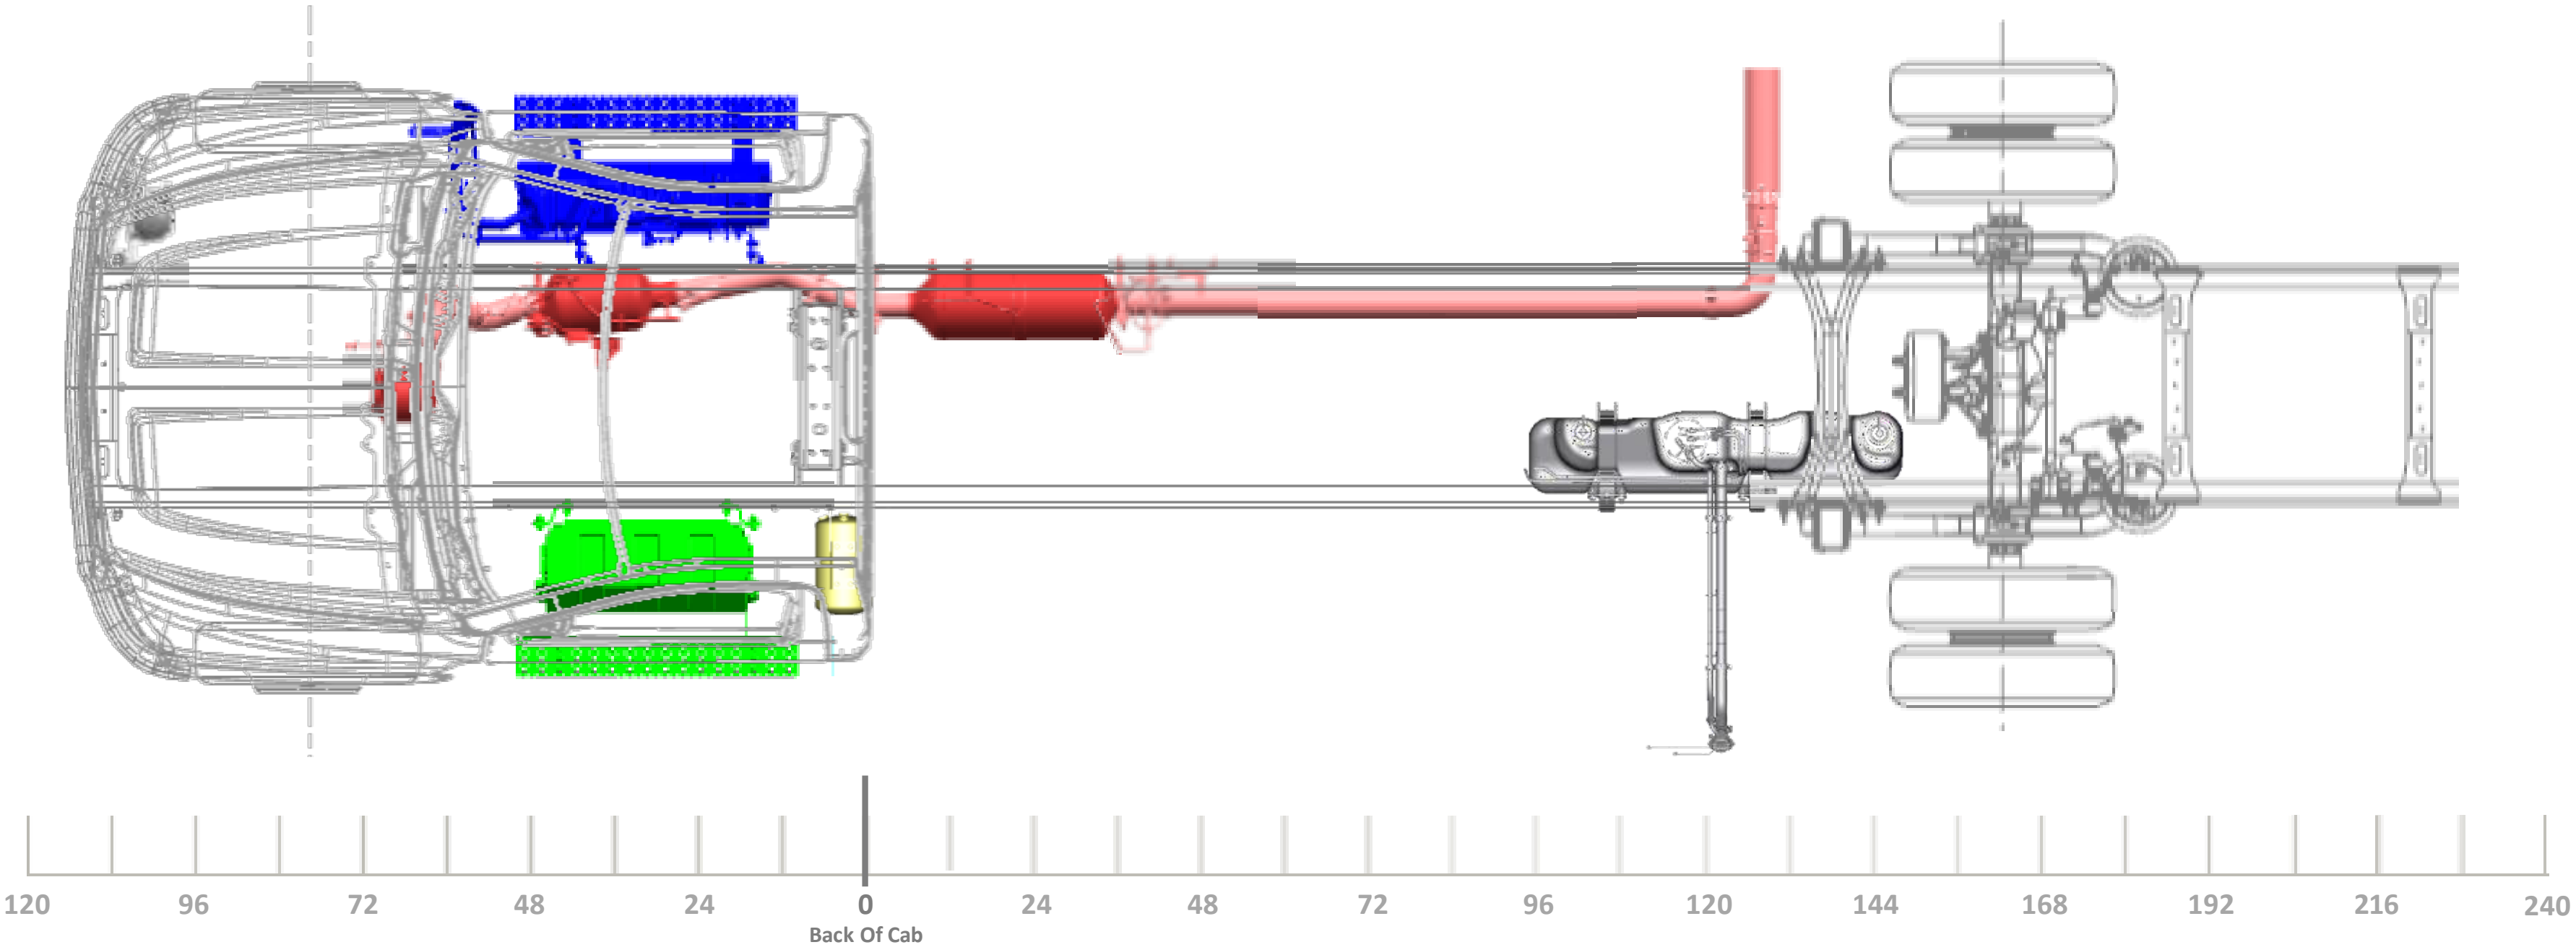

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

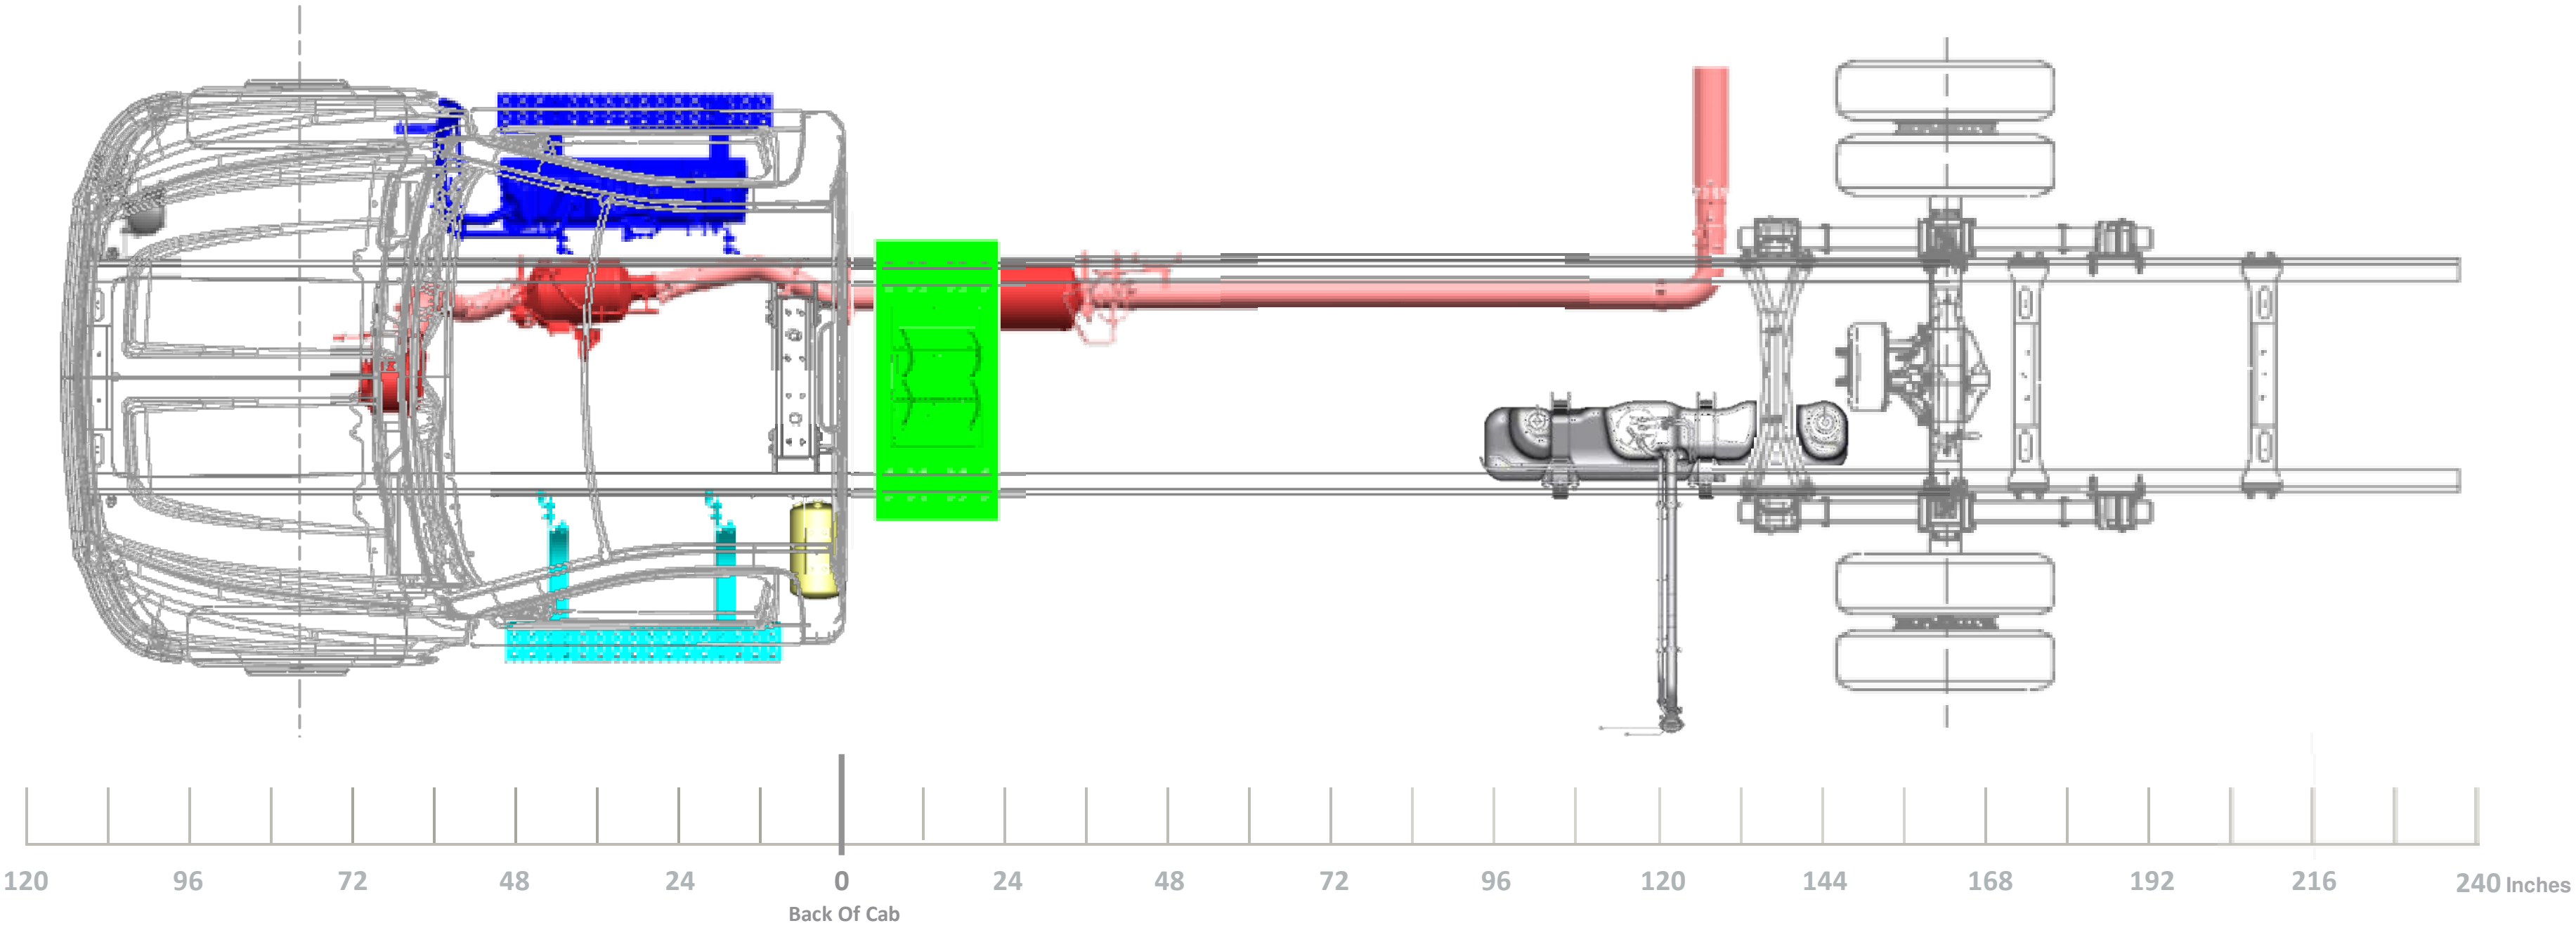
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

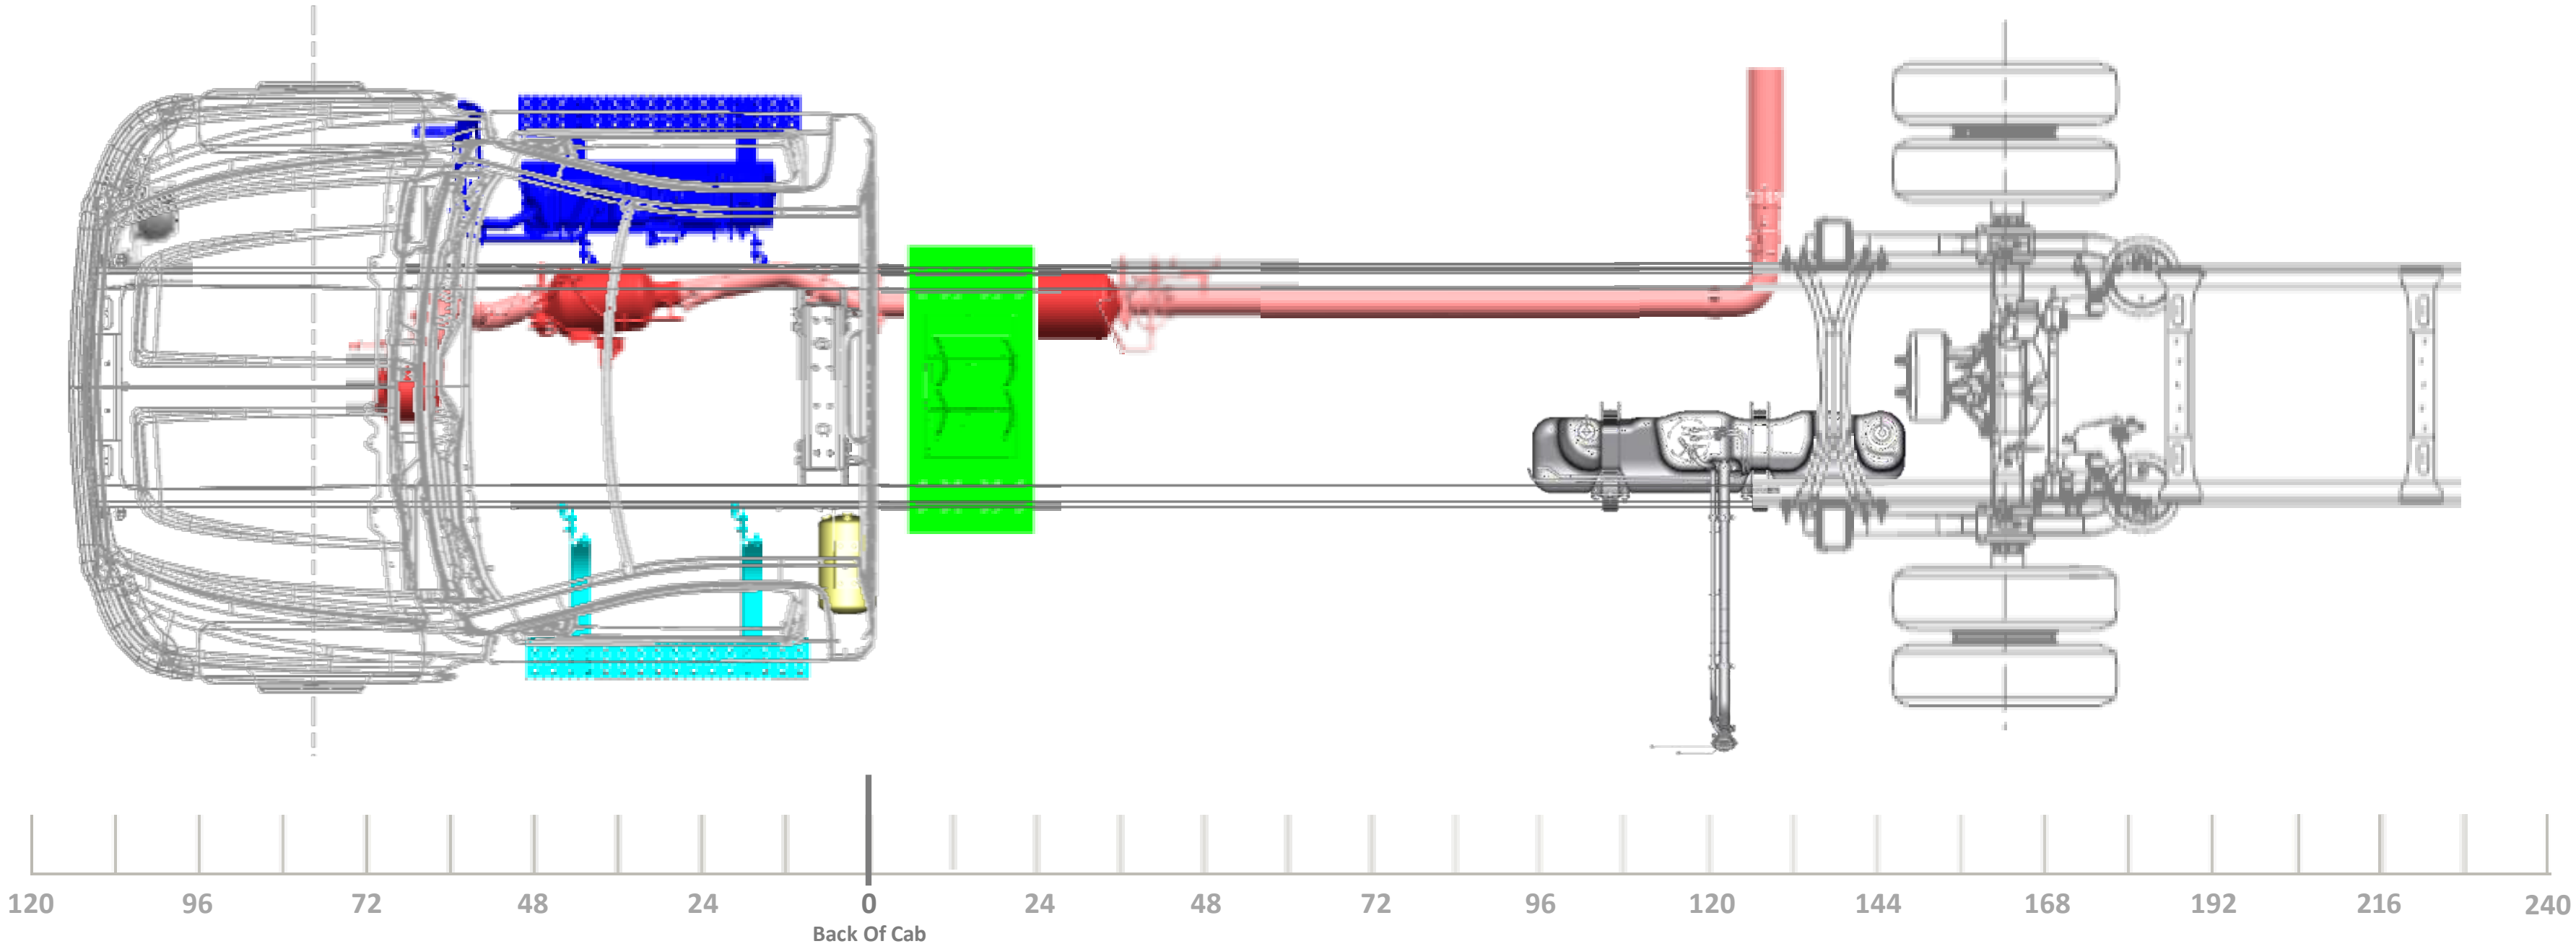

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

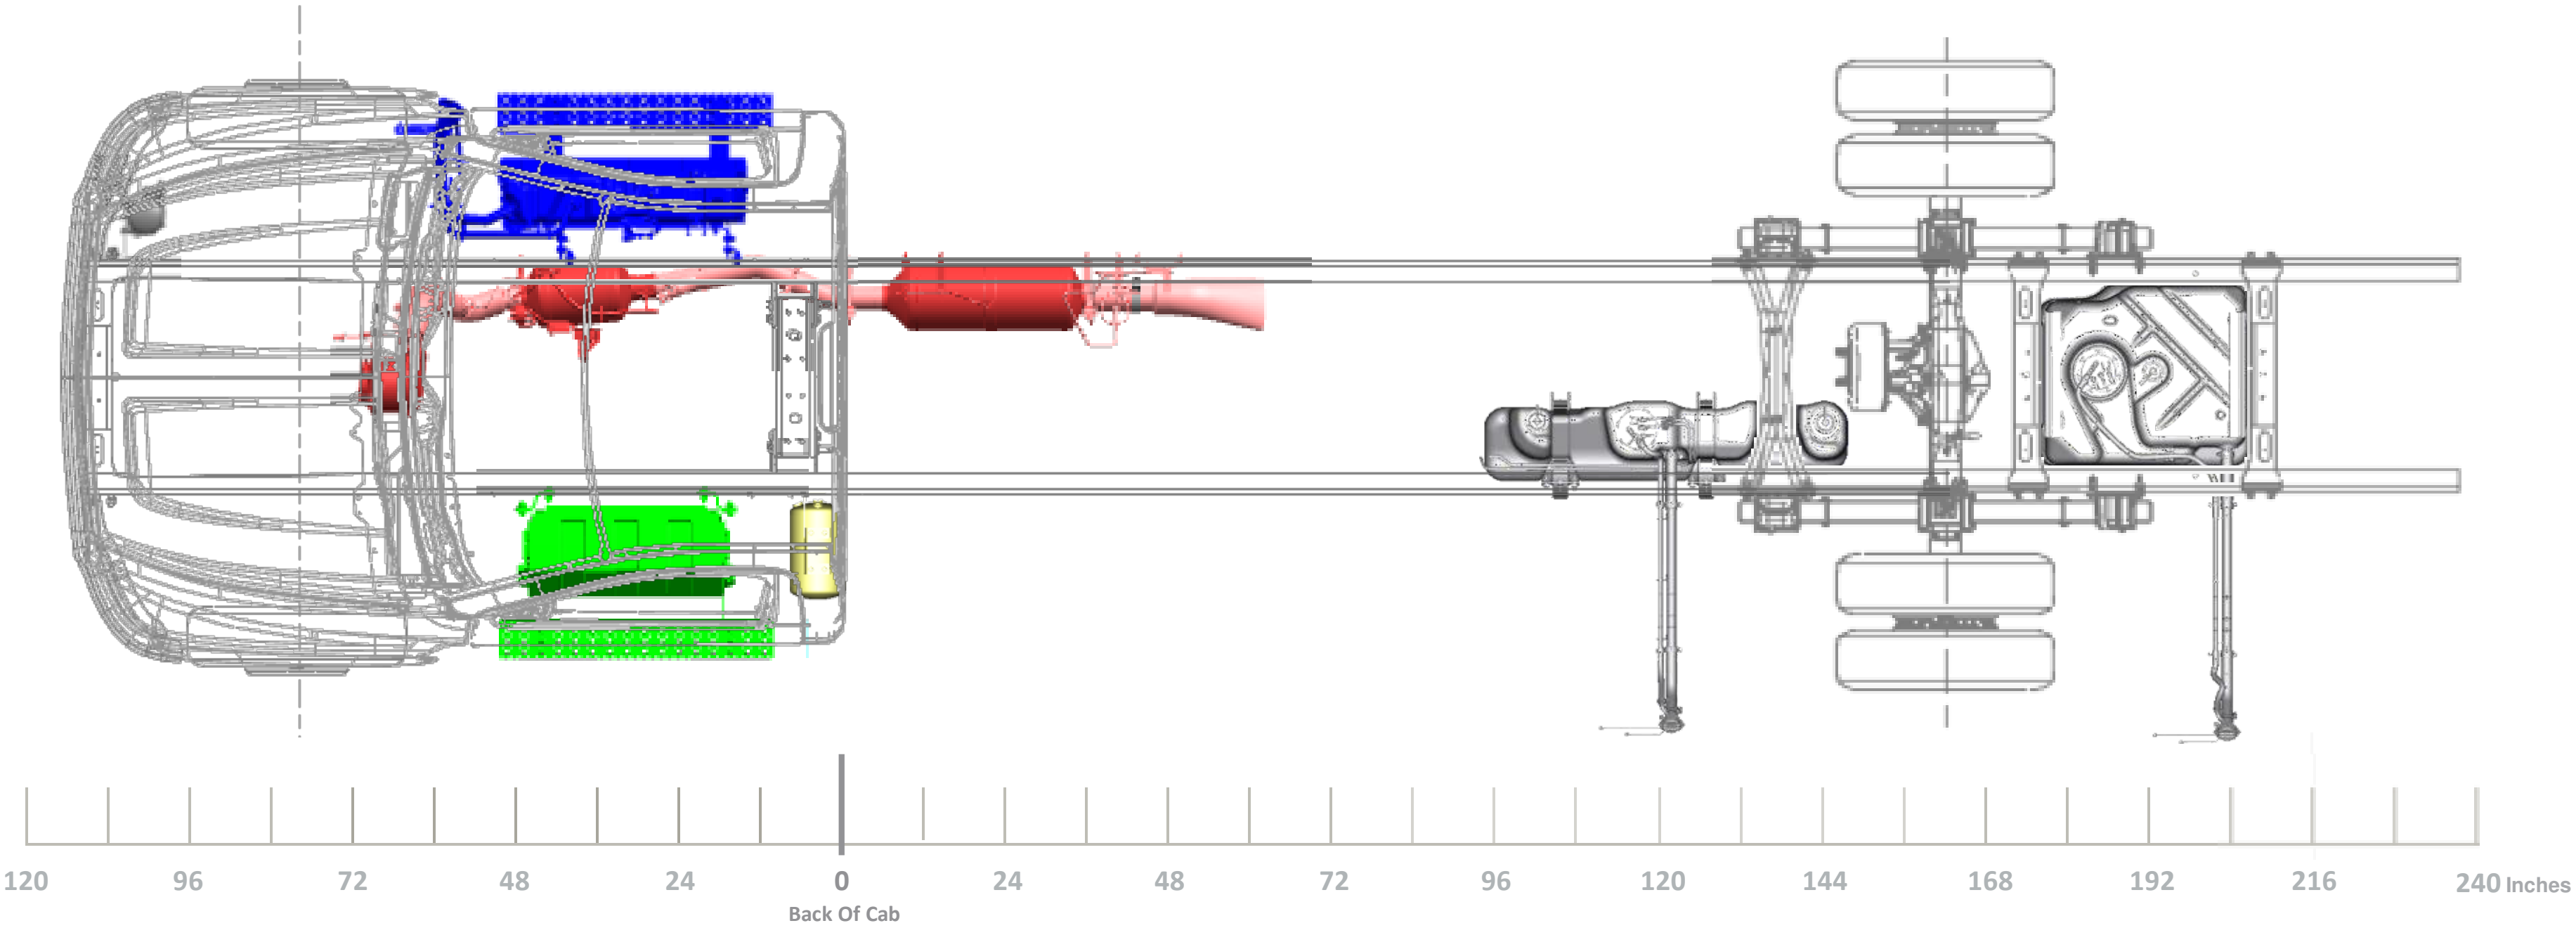
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

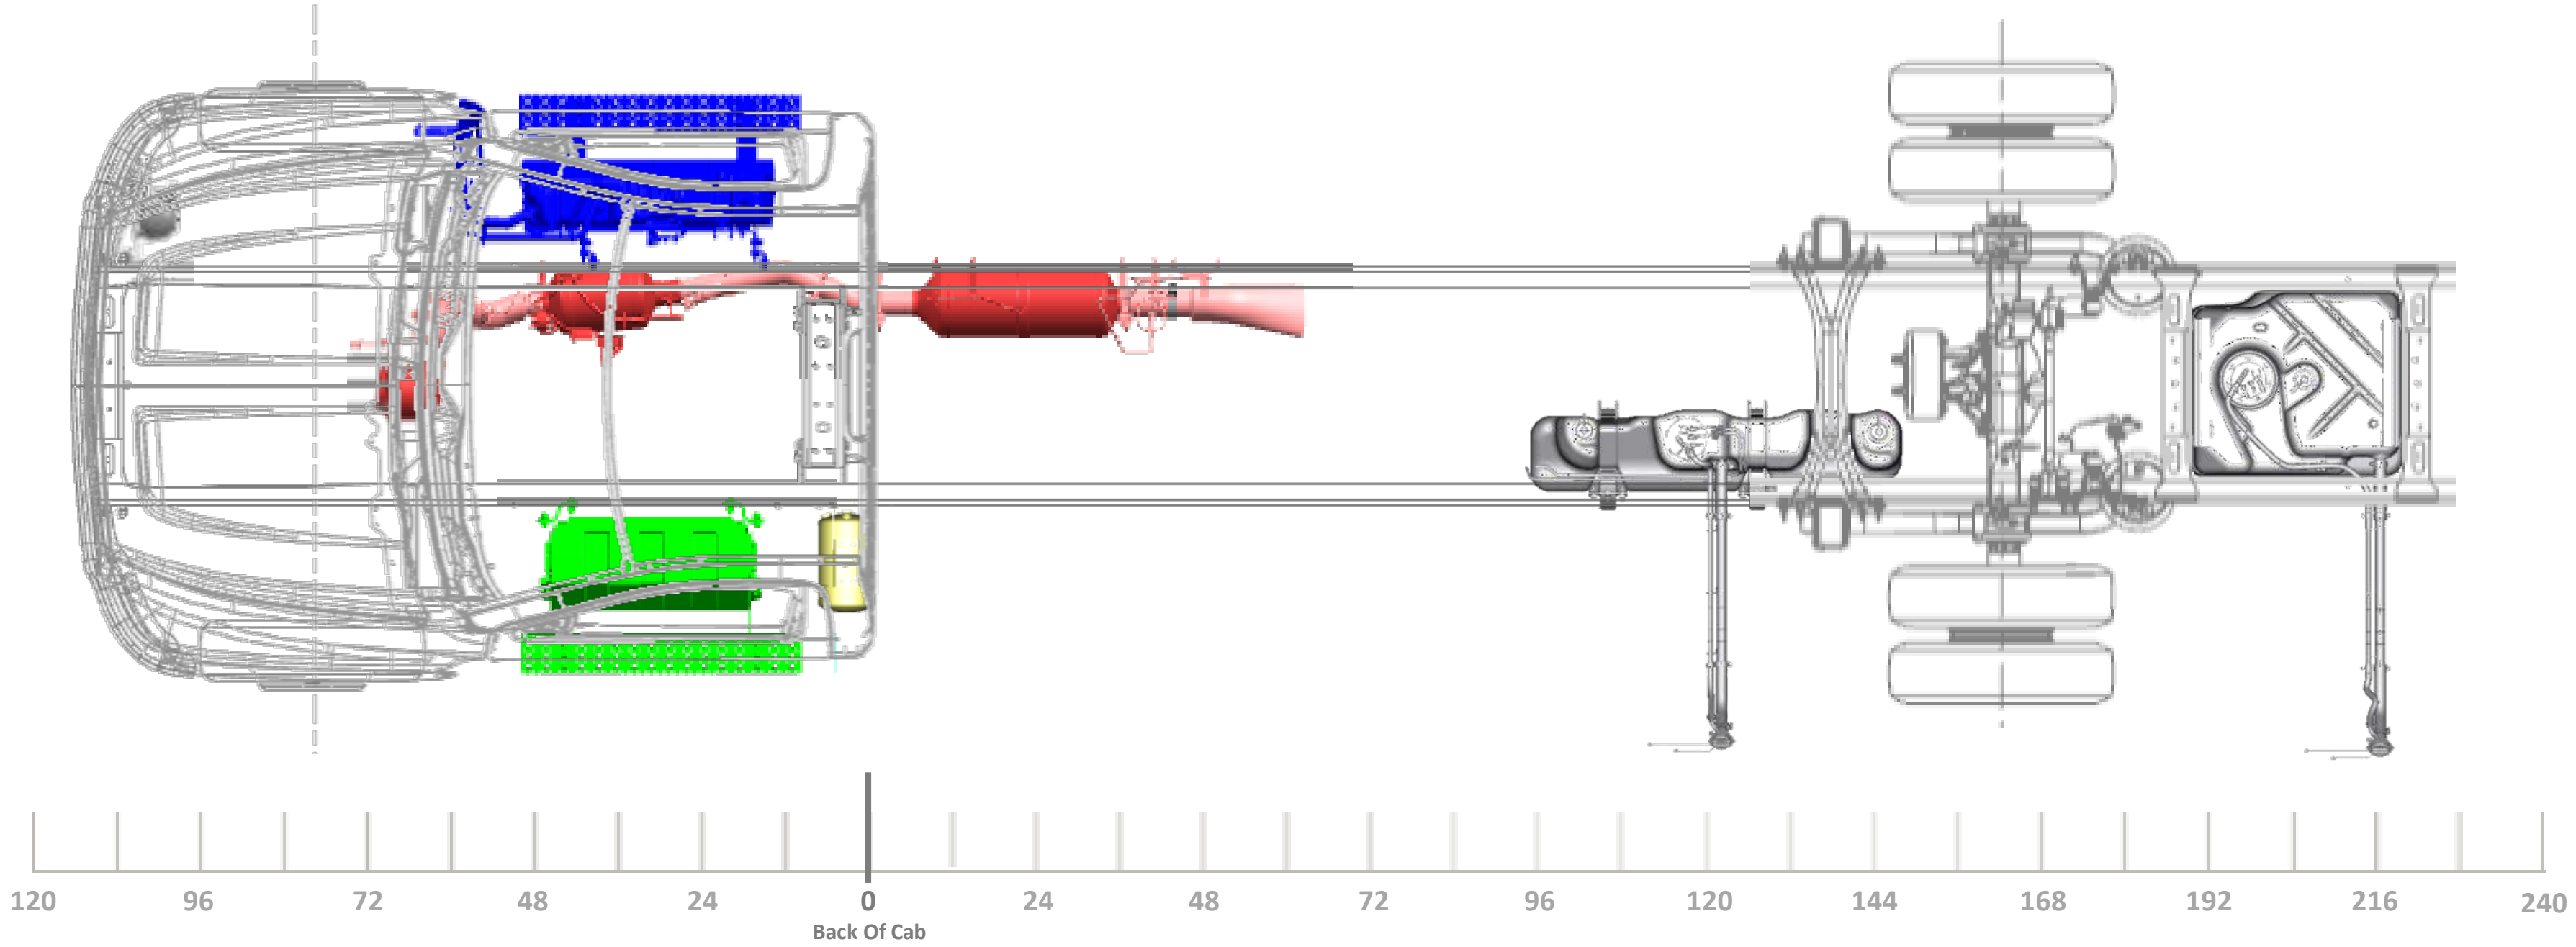

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

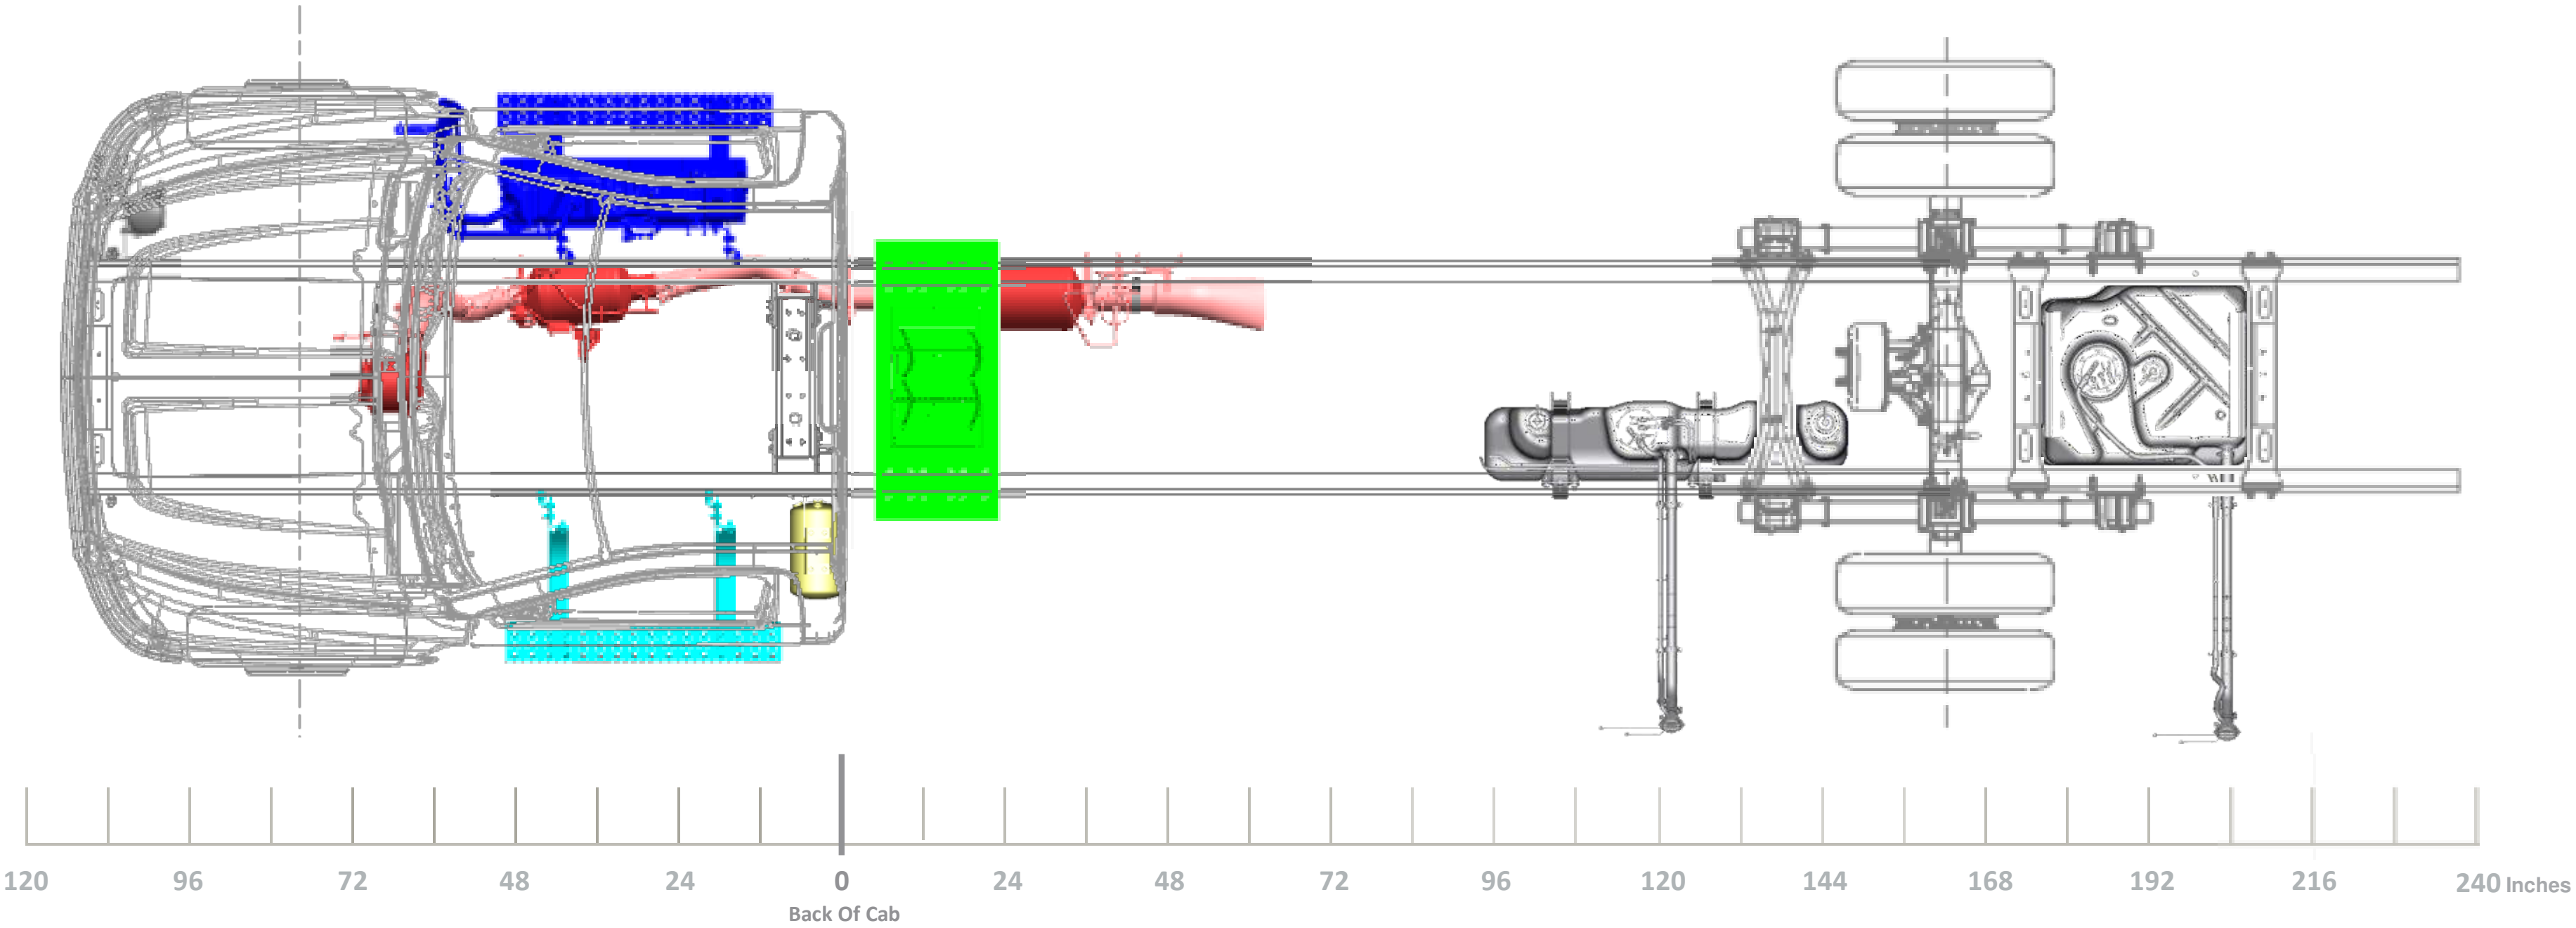
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

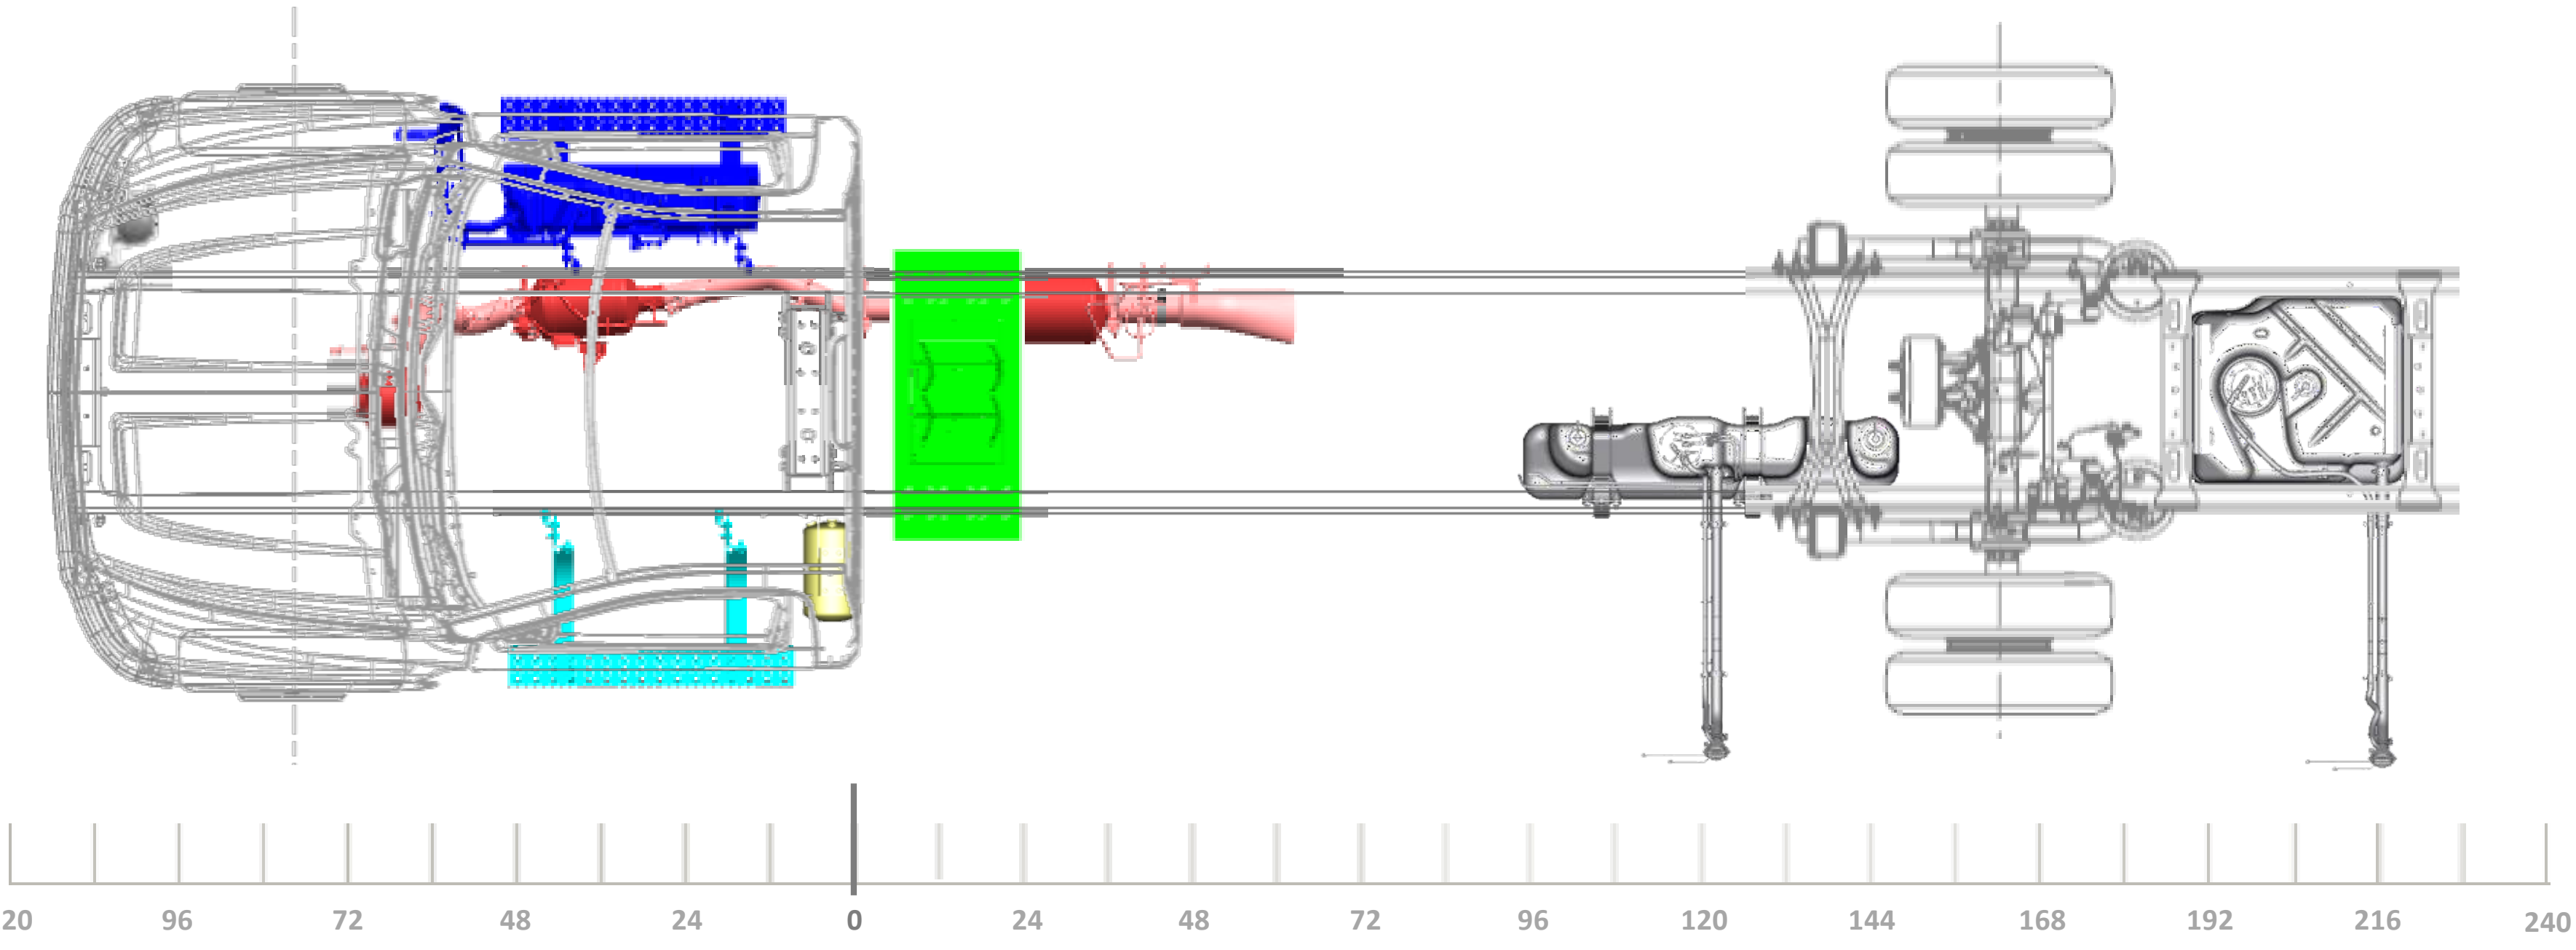

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

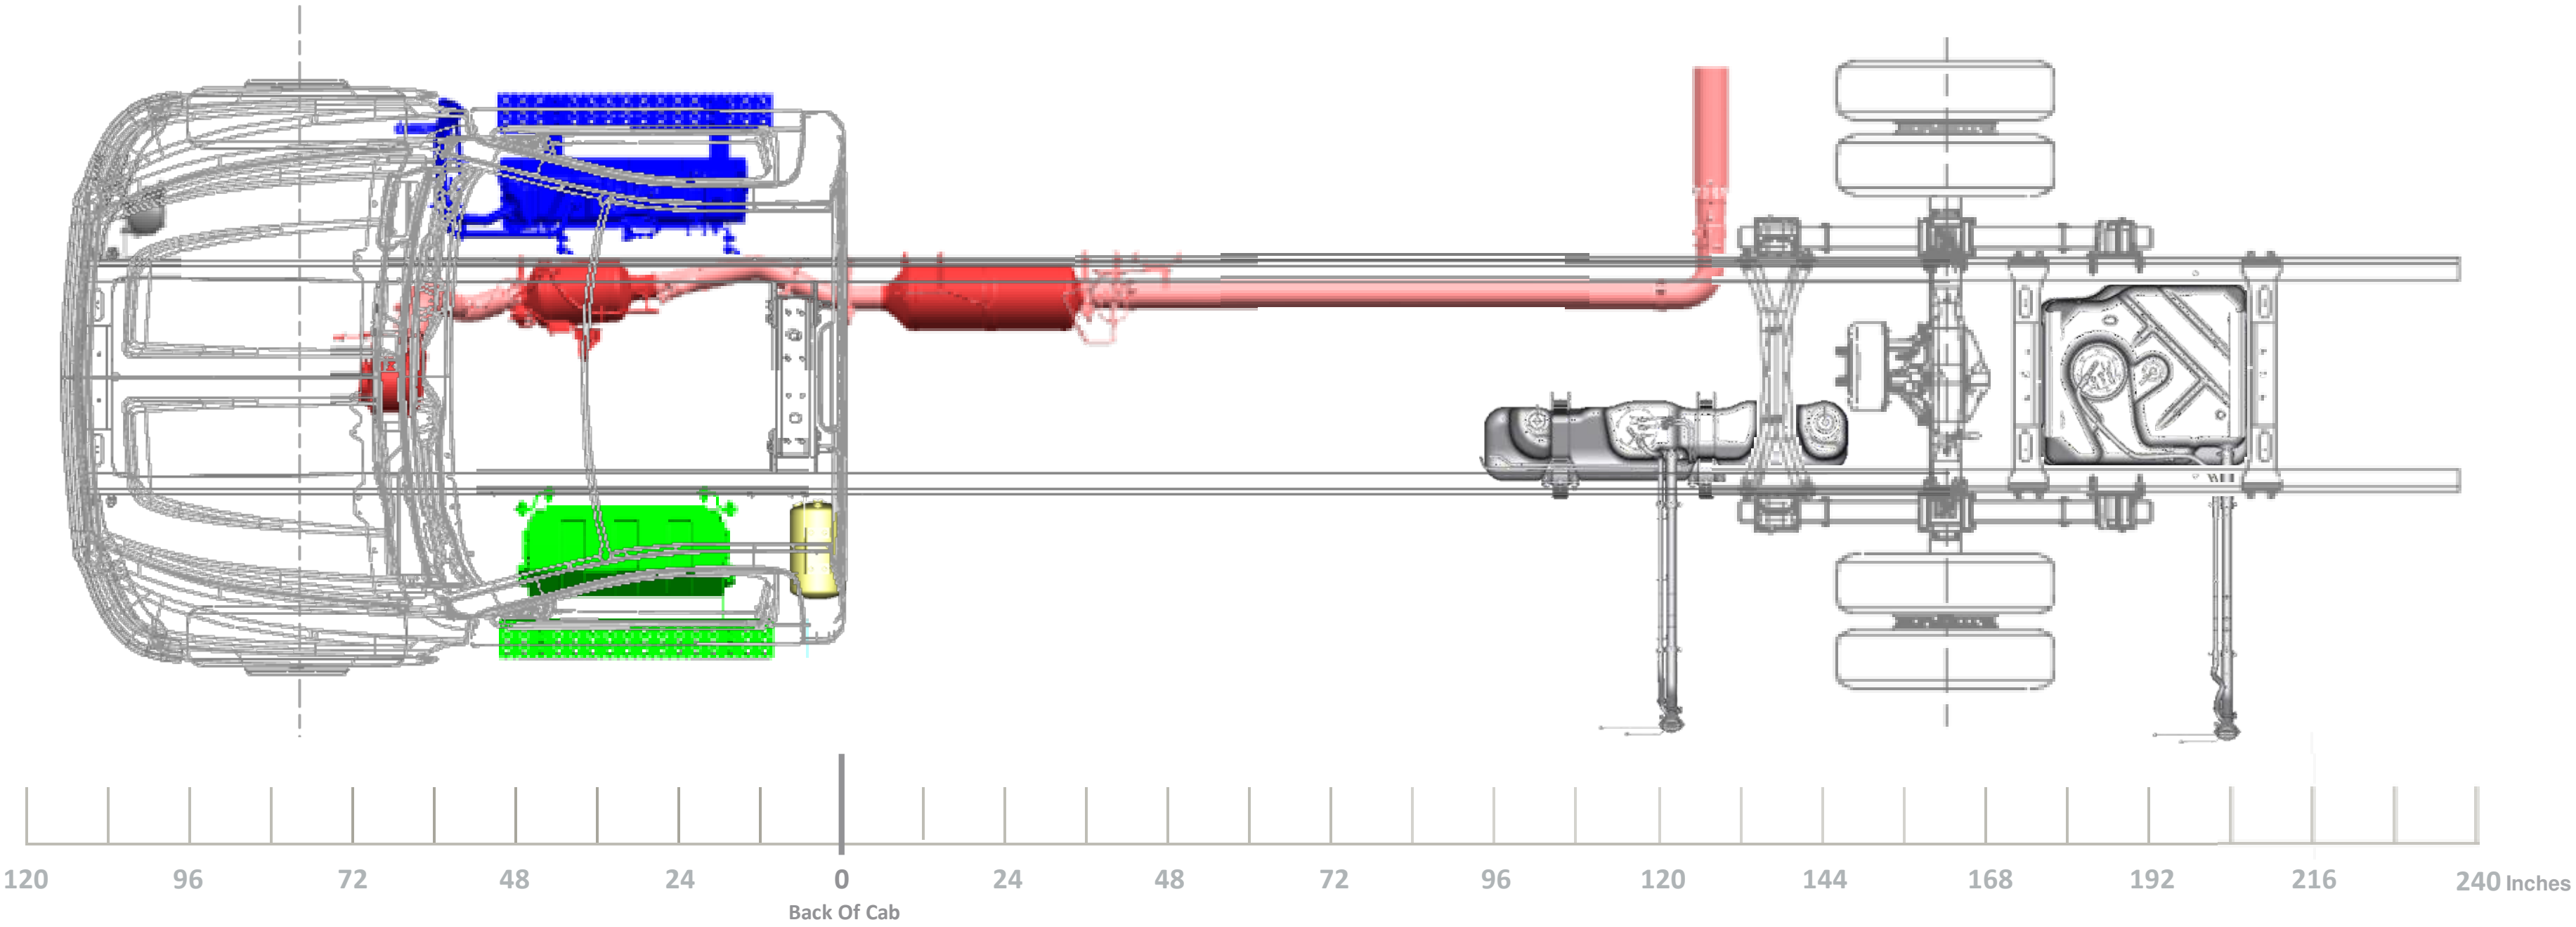
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243" WB (162" CA) 83"AF

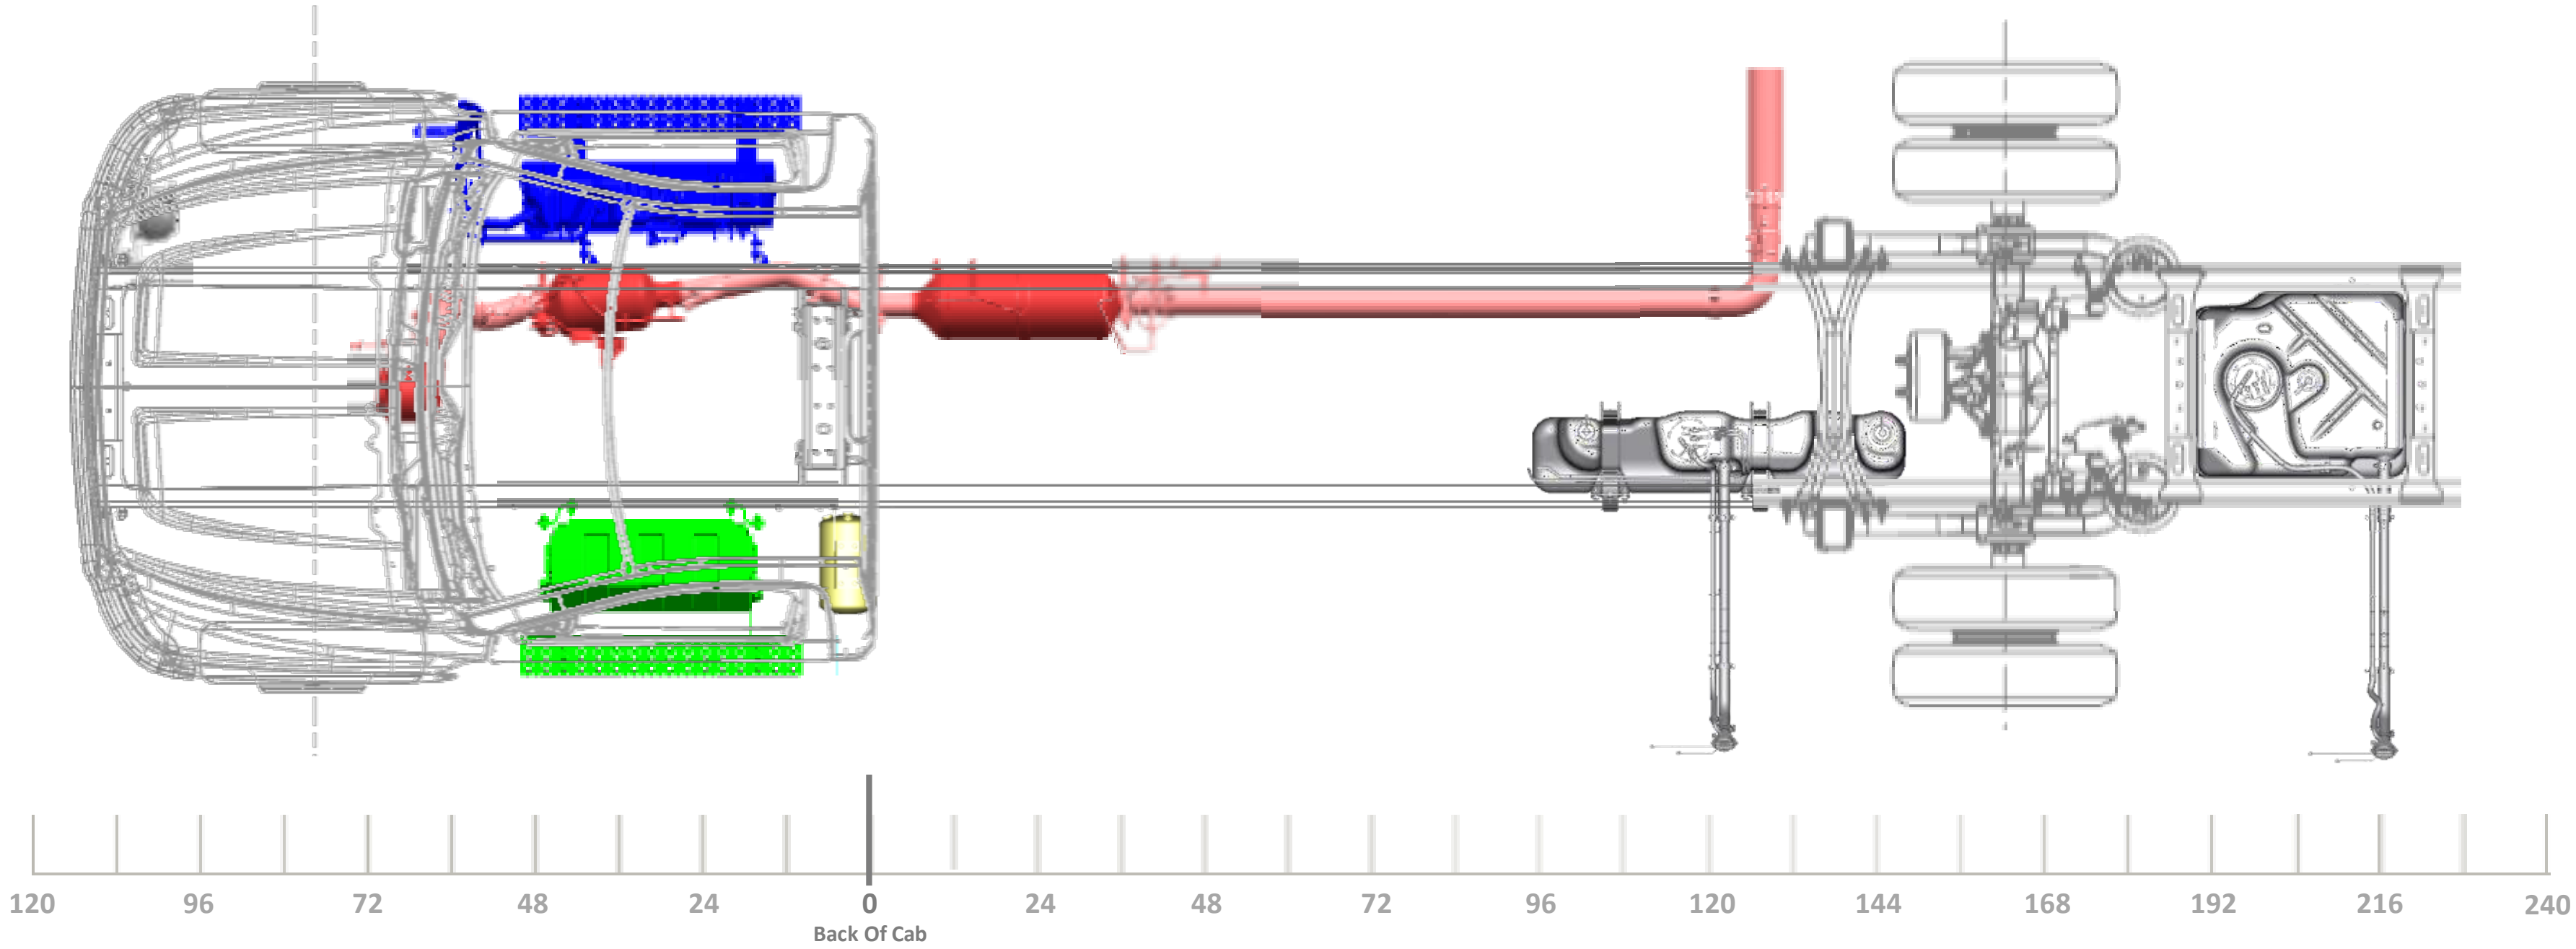

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

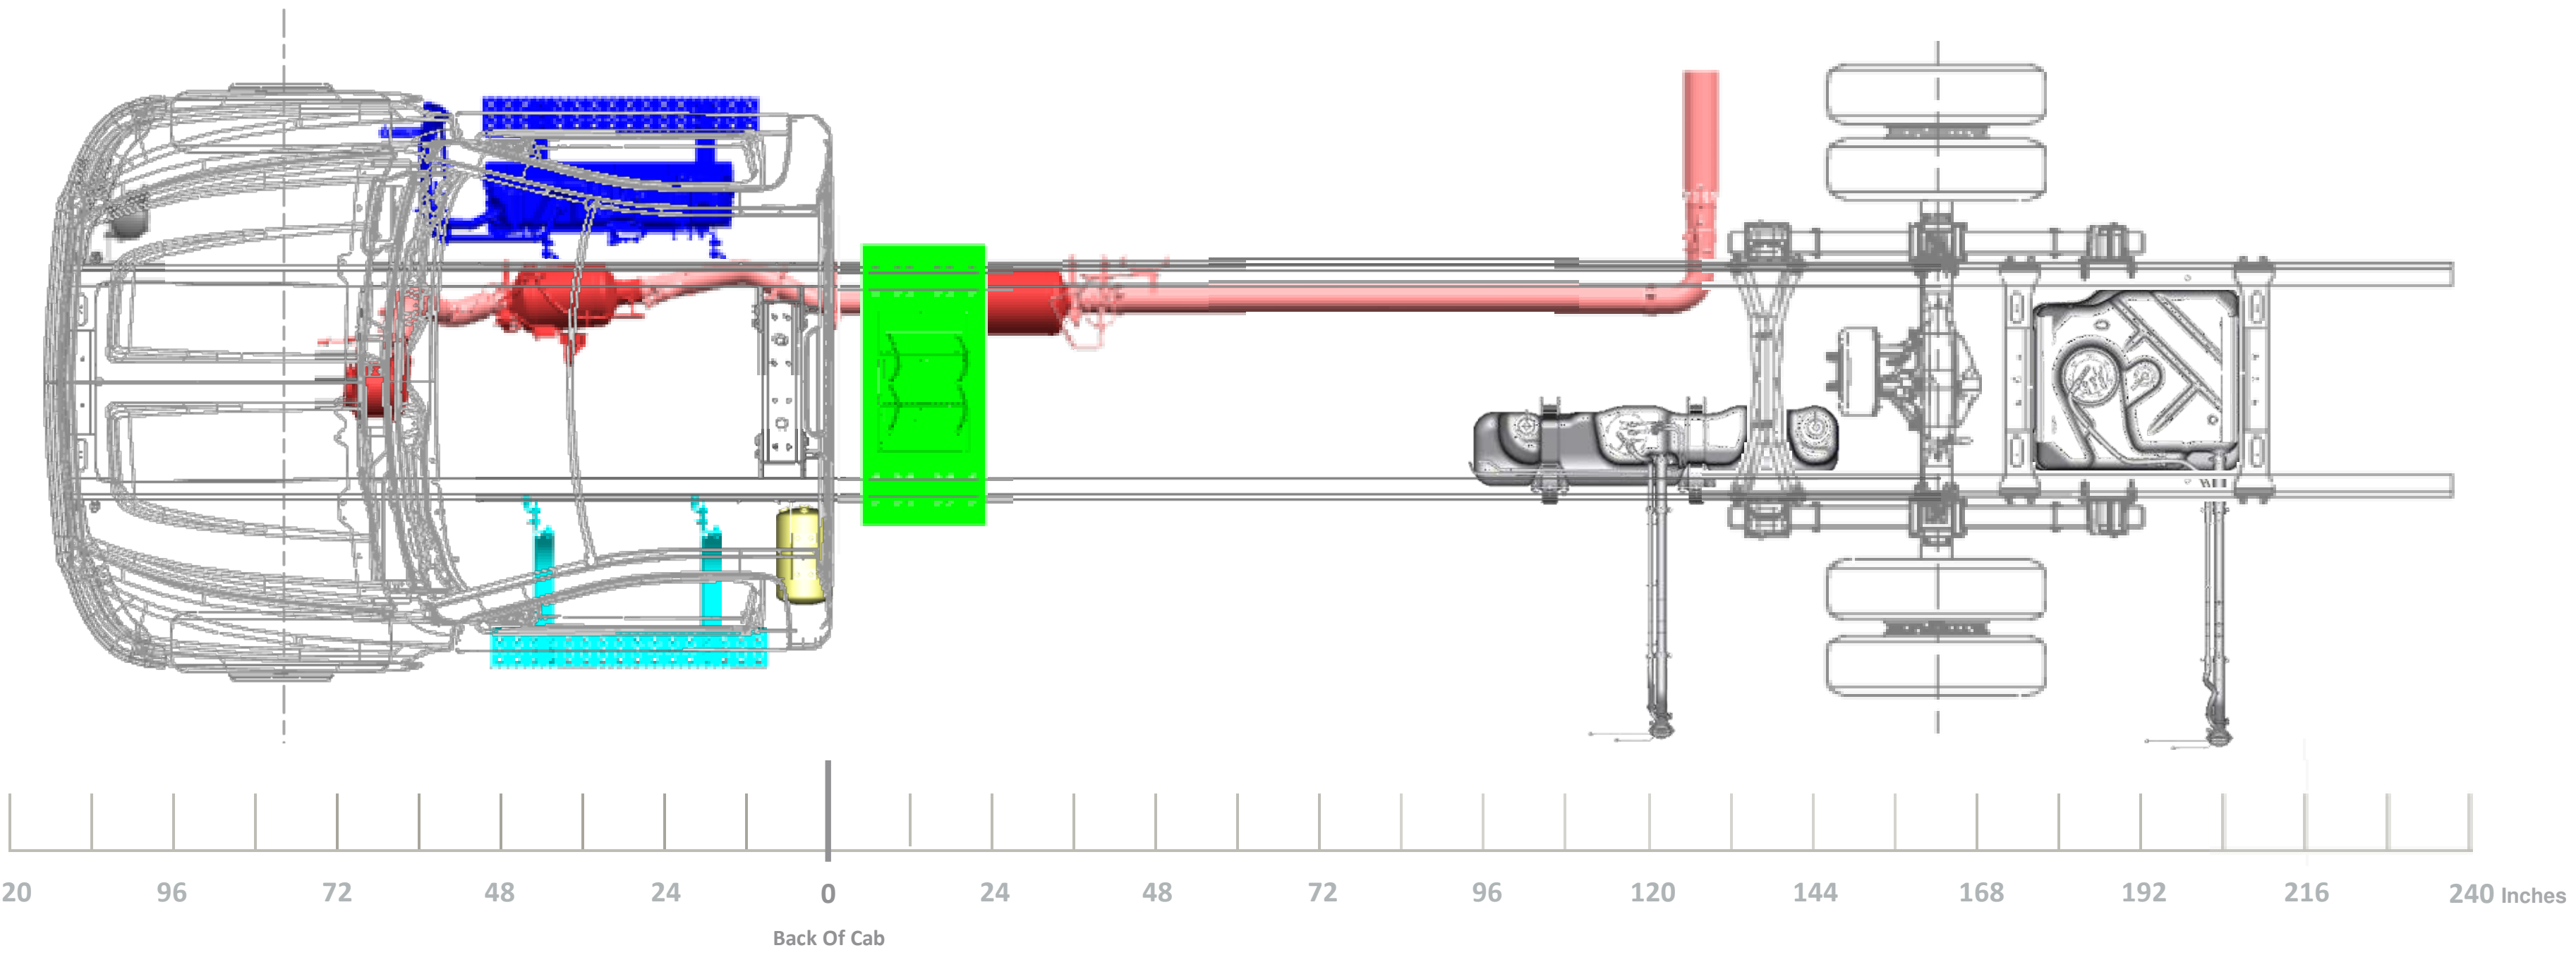
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216
240 Inches

Model/Feature Information		
Model:		C56403 K56403
Cab:		REGULAR CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION VARI-RATE REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
243” WB (162” CA) 83”AF

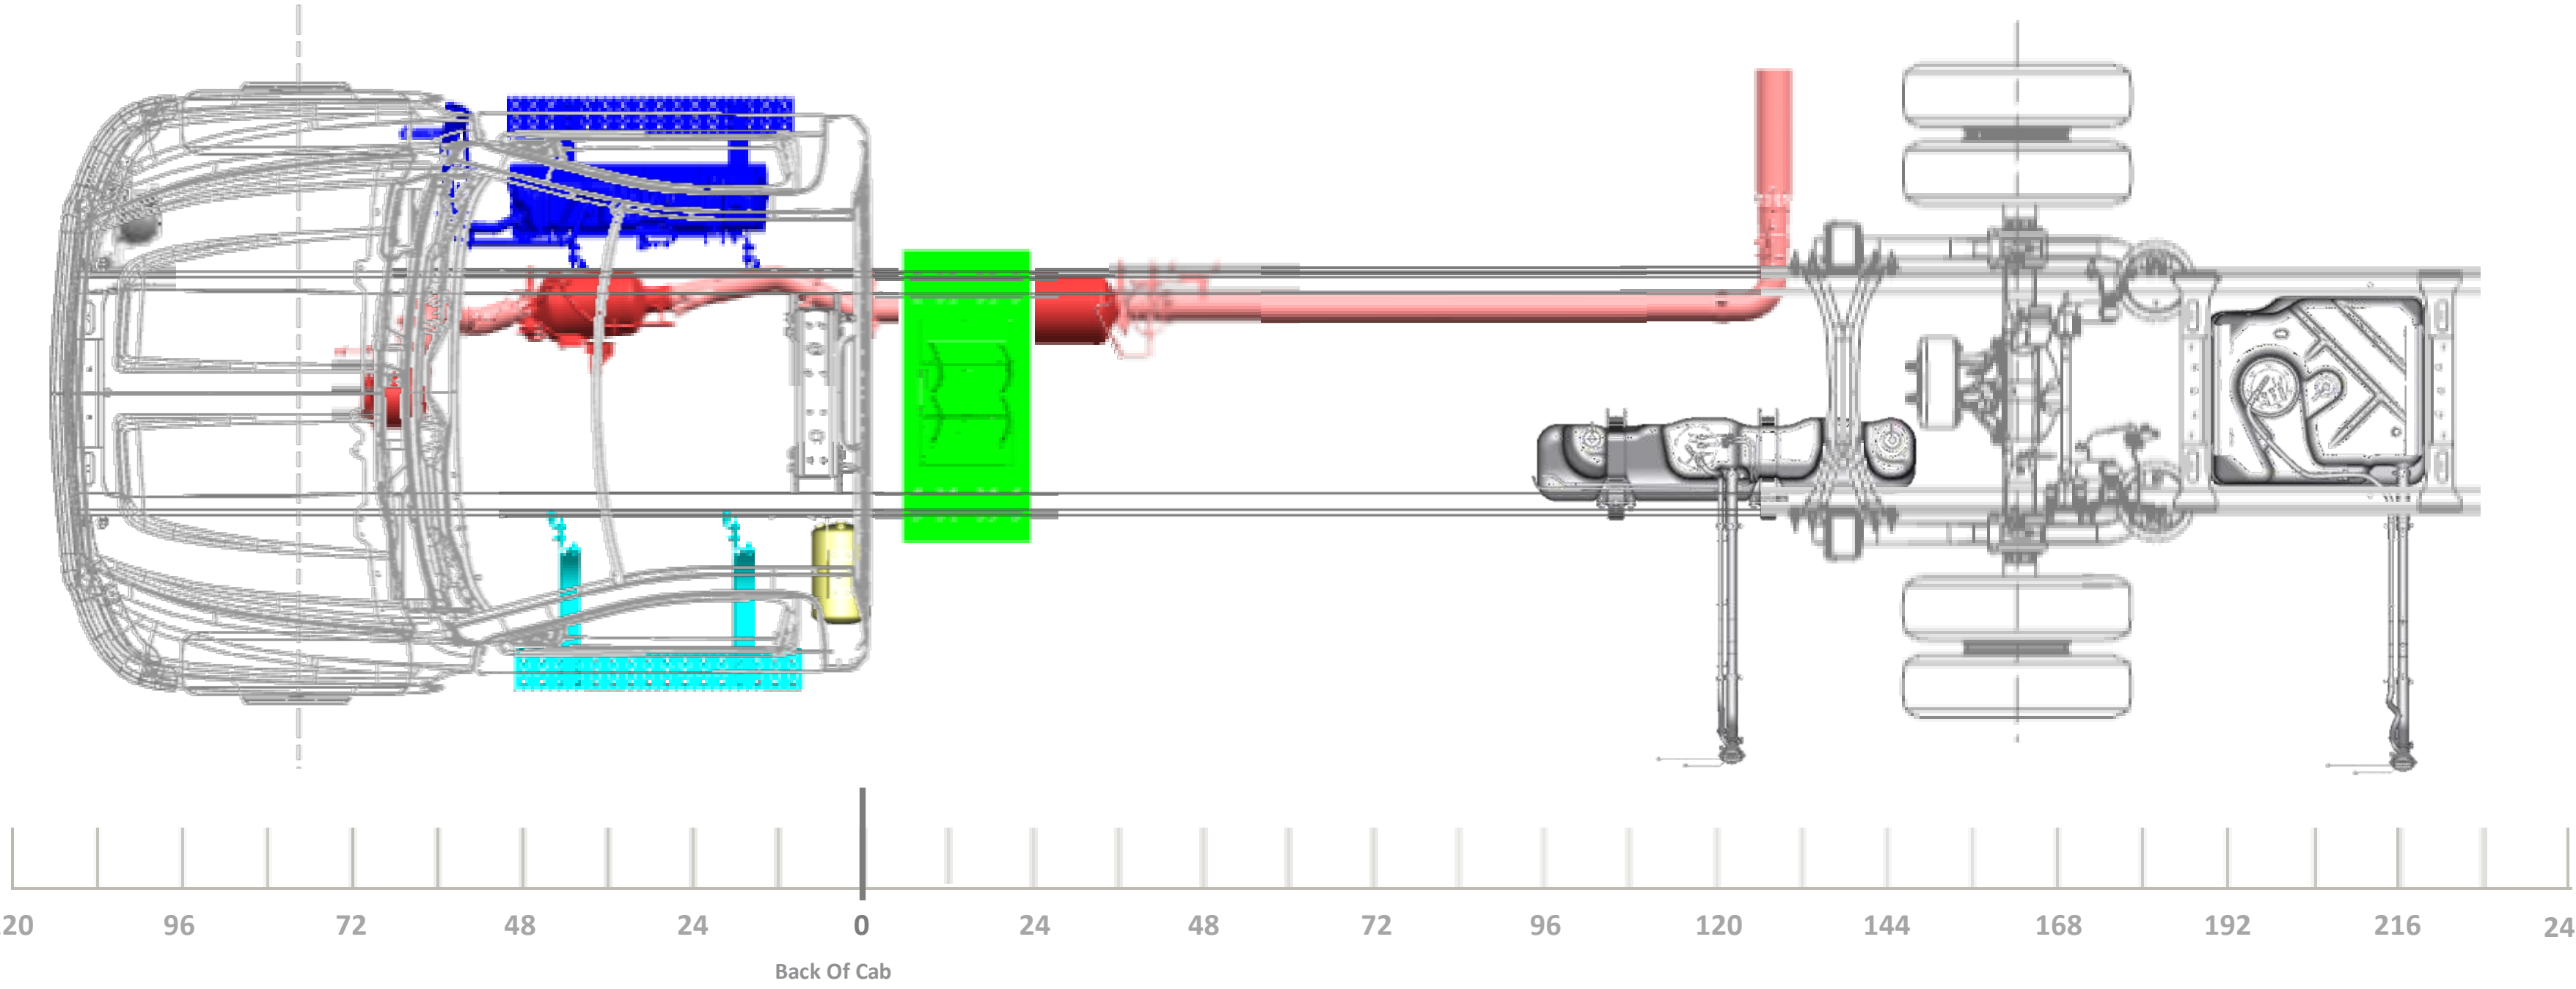

Crew Cab – 175” WB

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

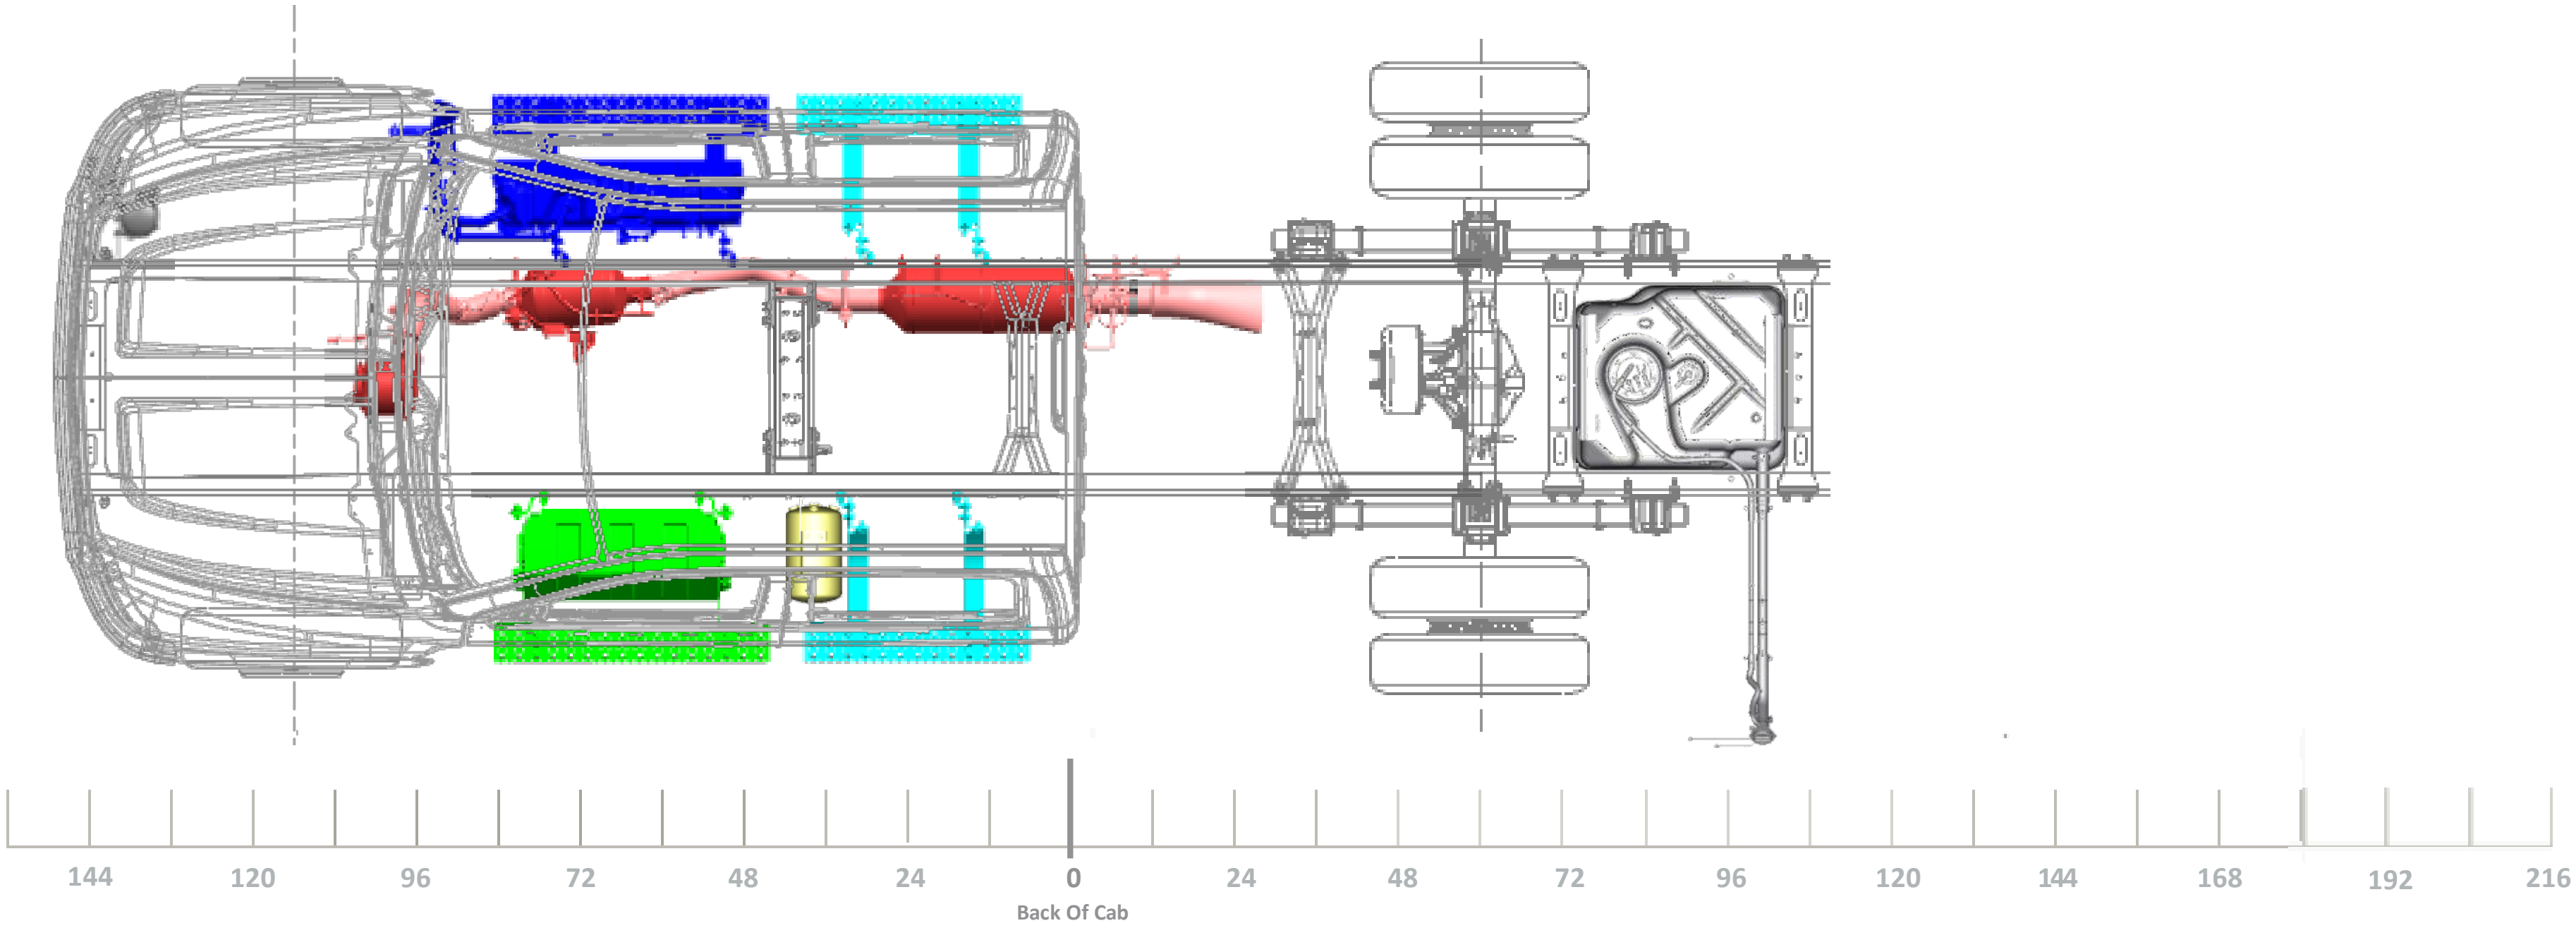

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

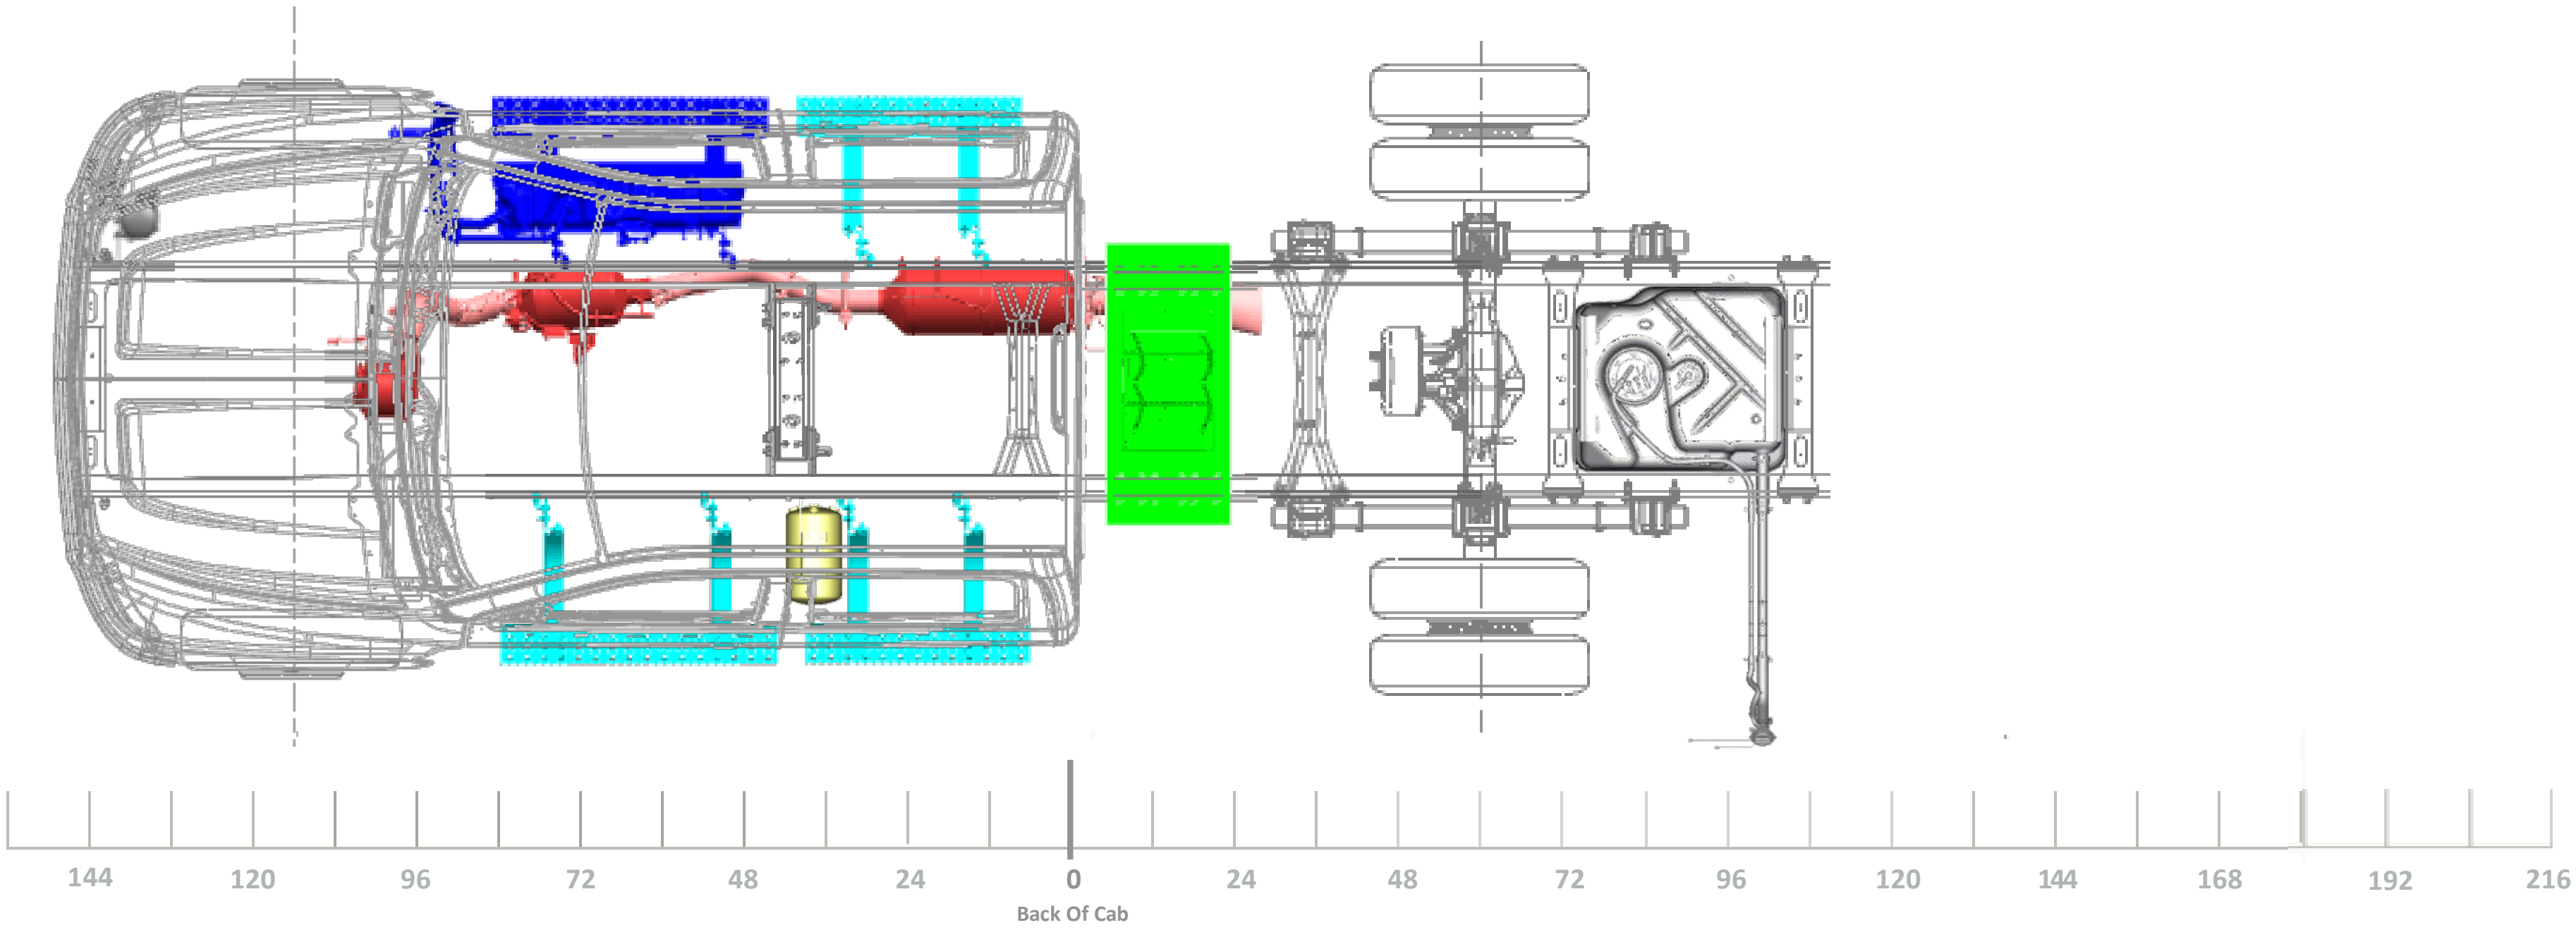
144
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

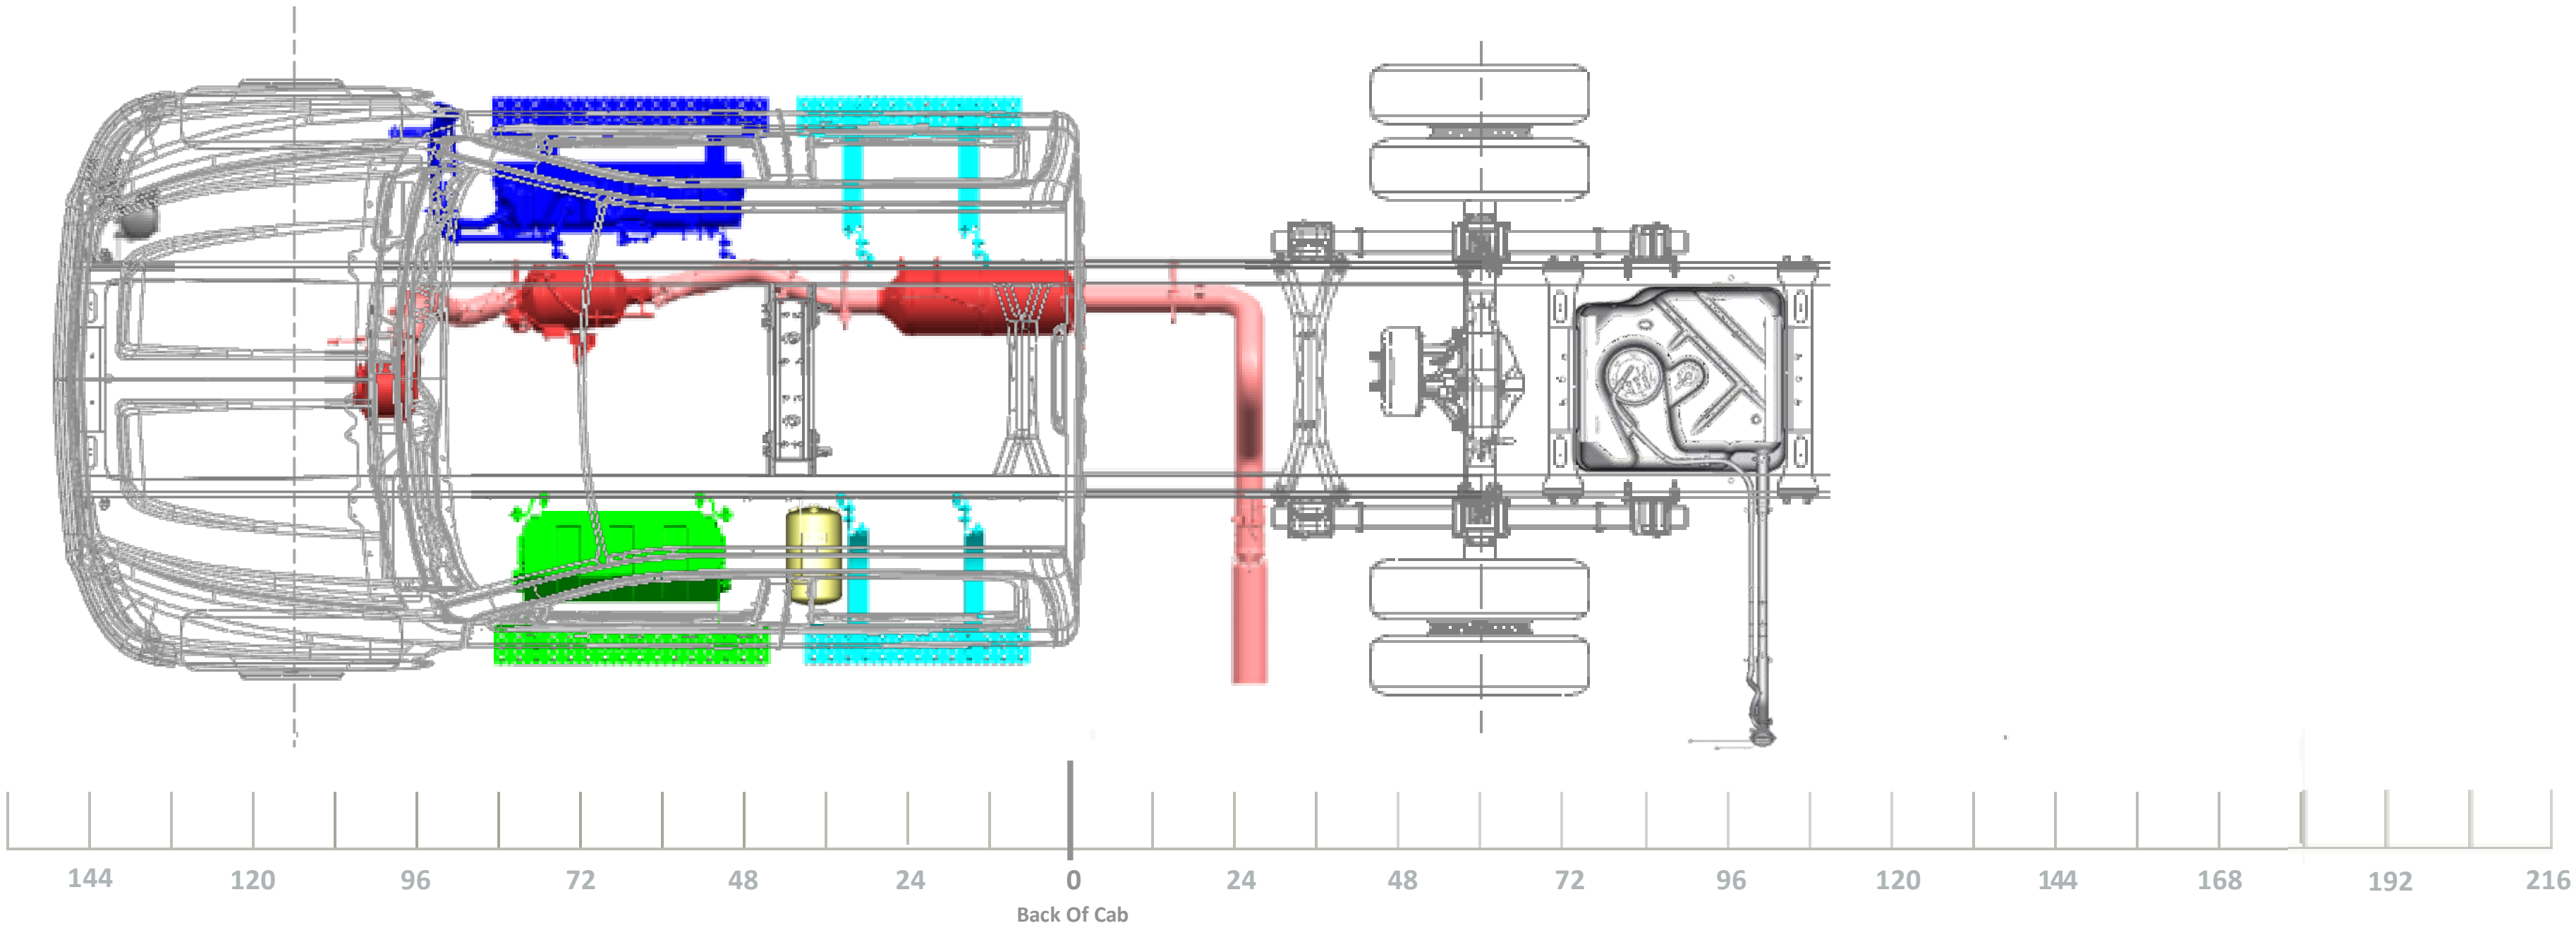

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

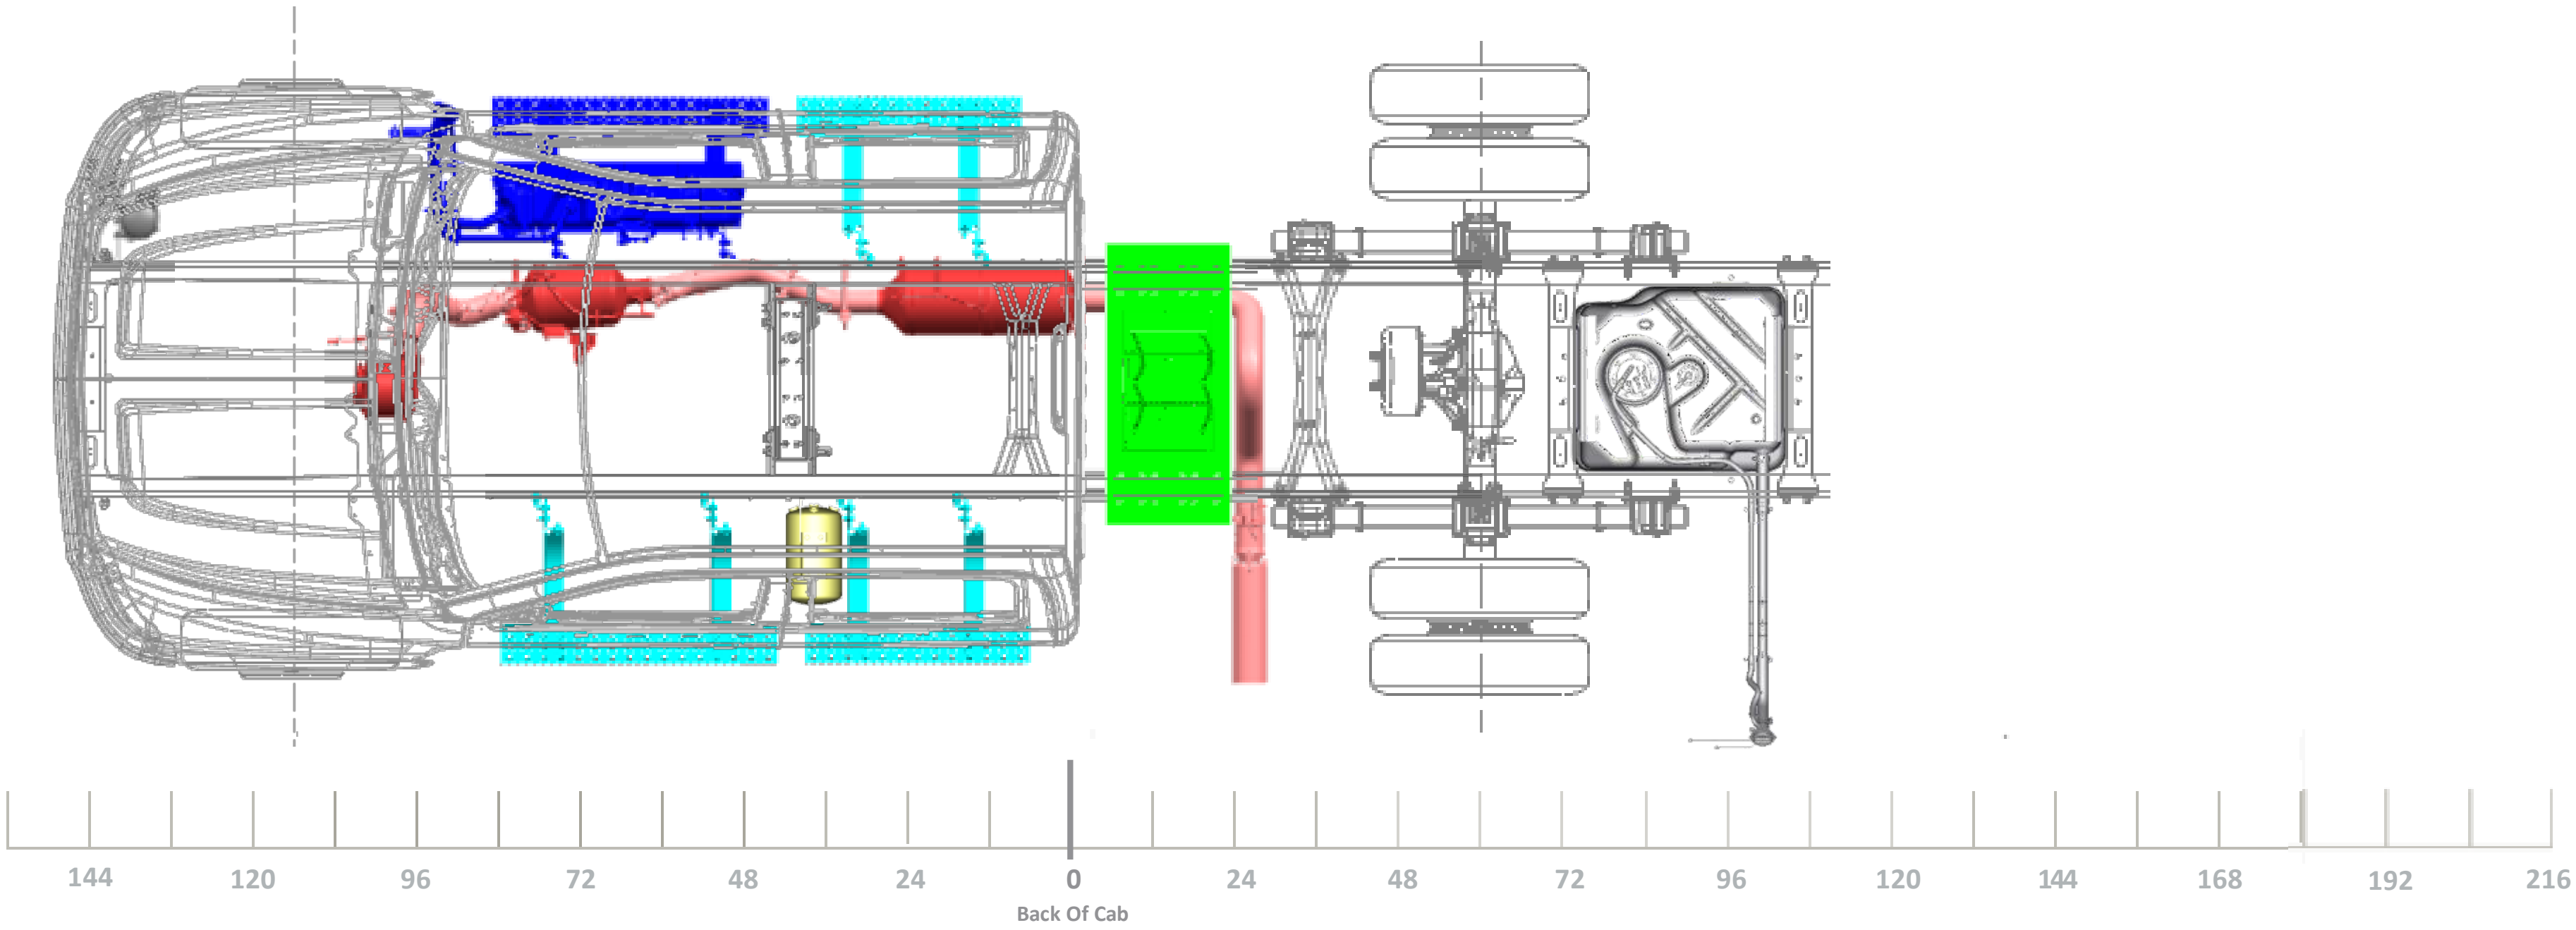

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (07WDU)
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

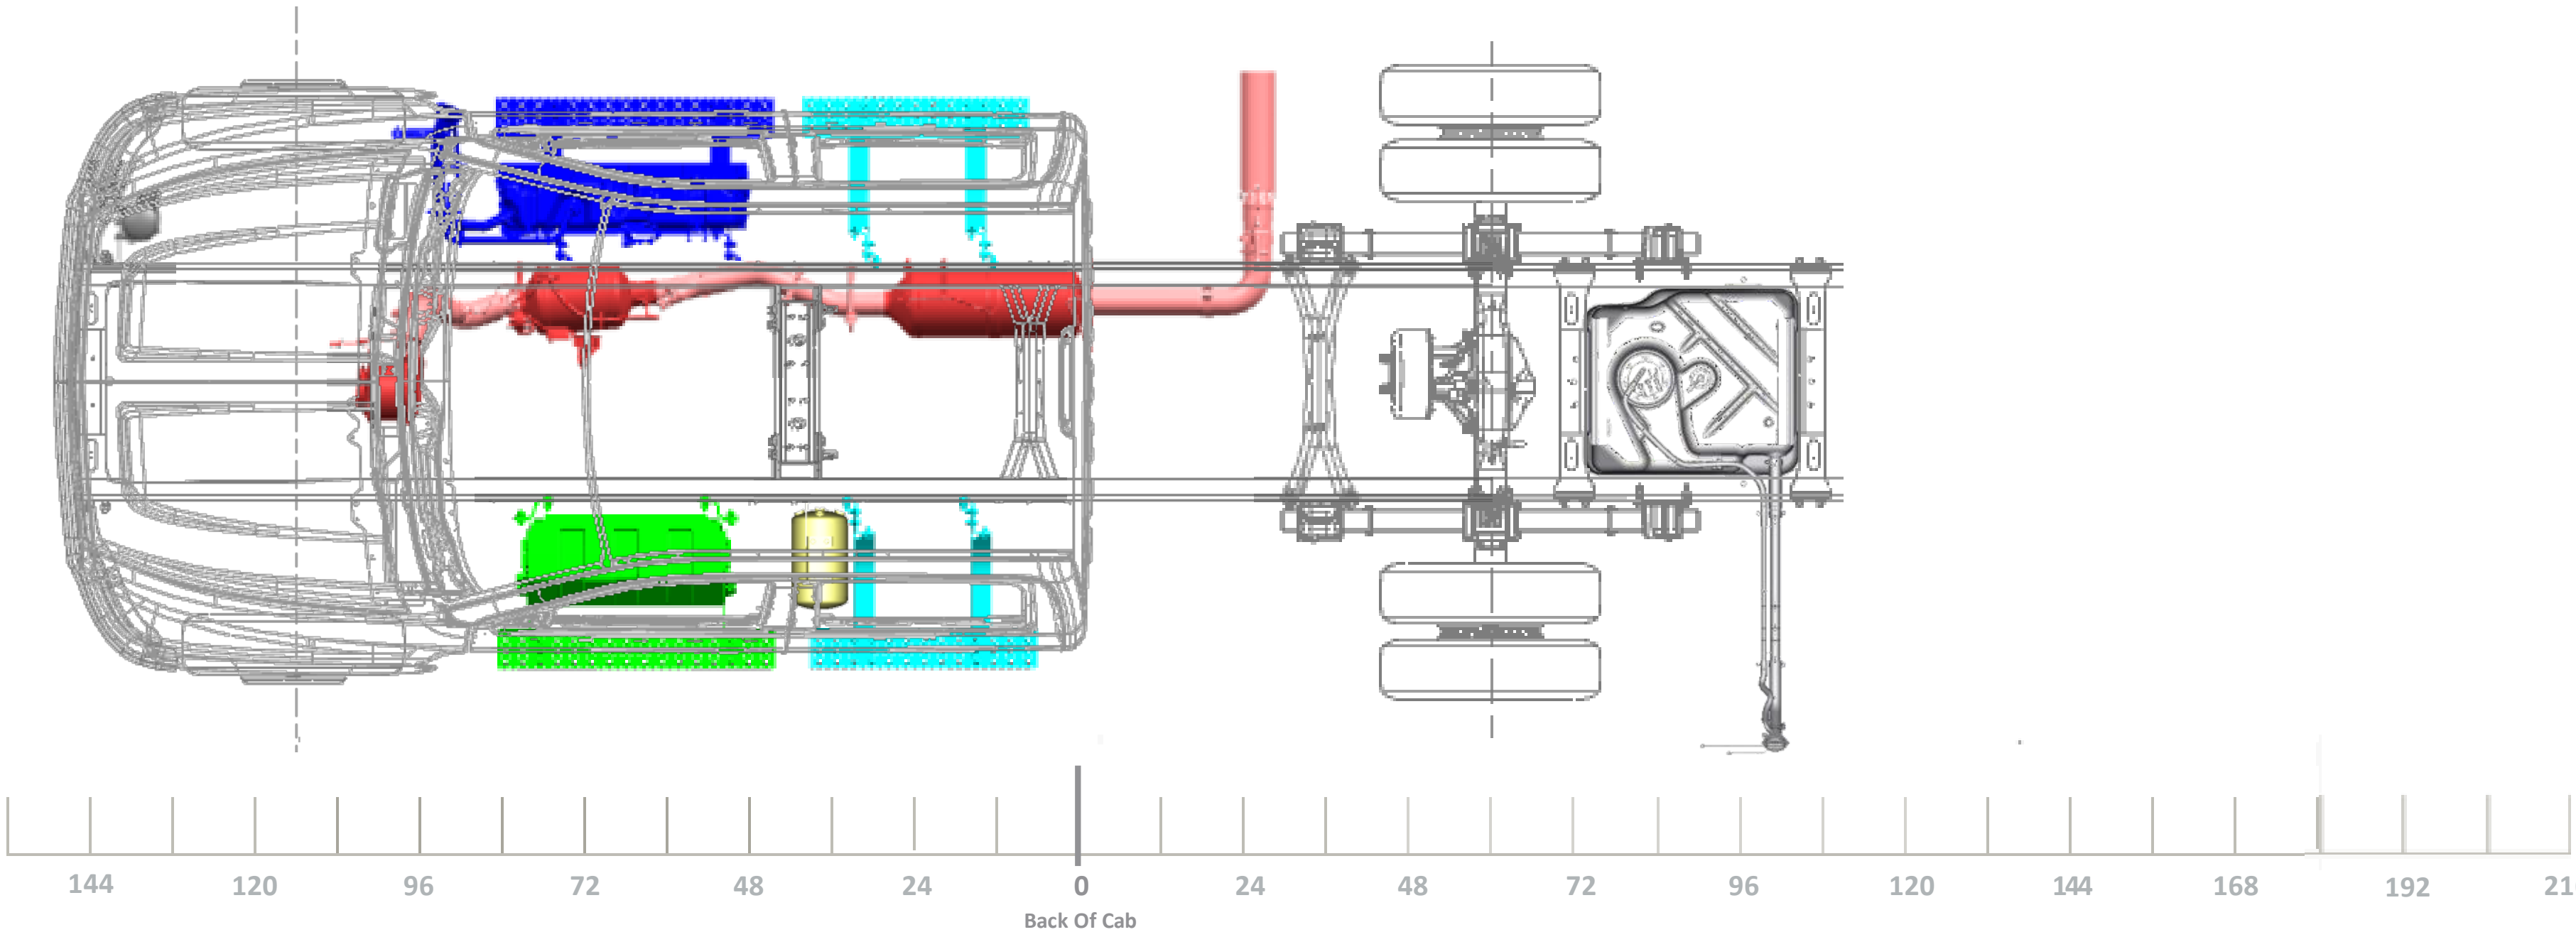

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (07WDU)
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

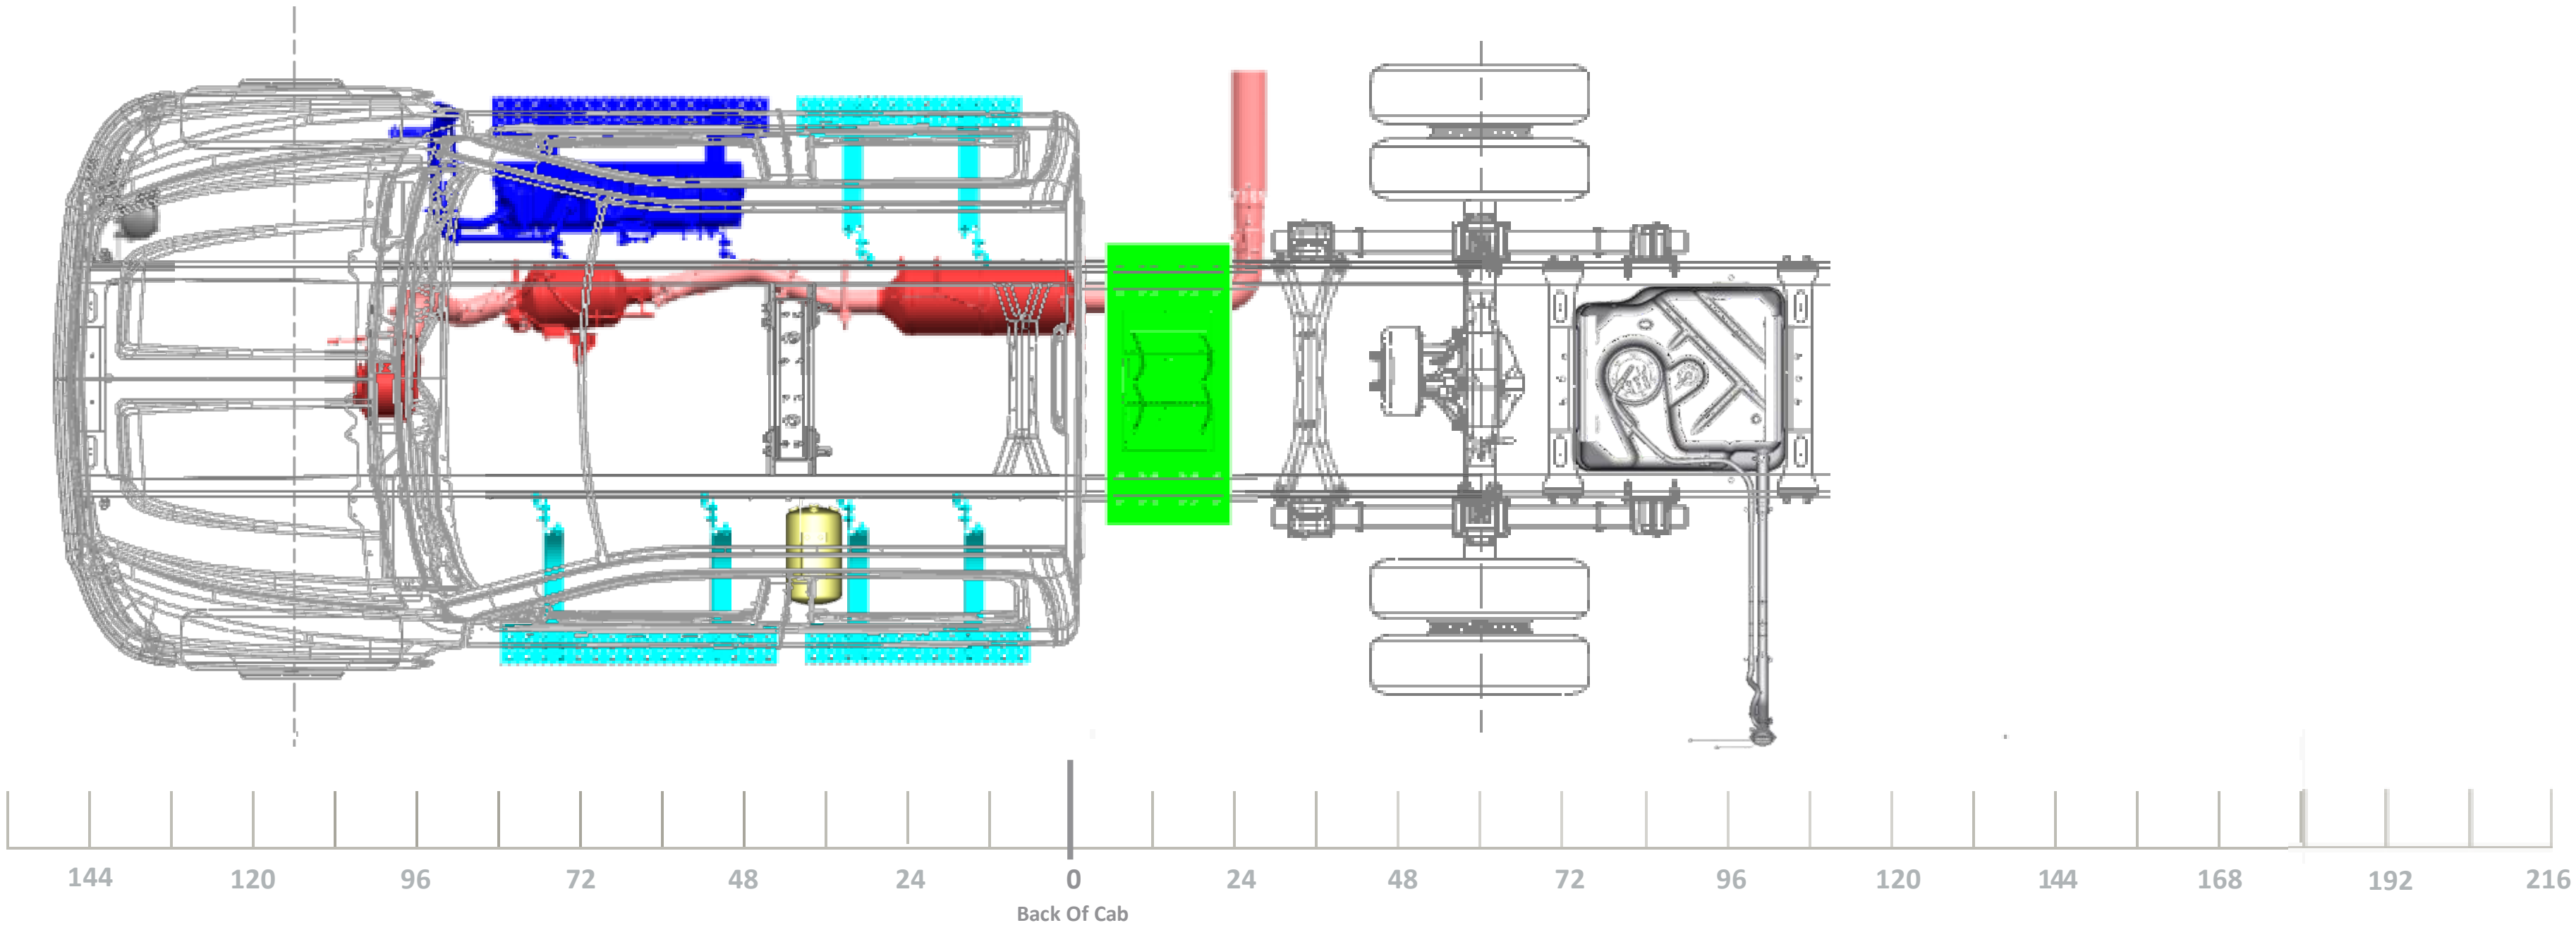

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

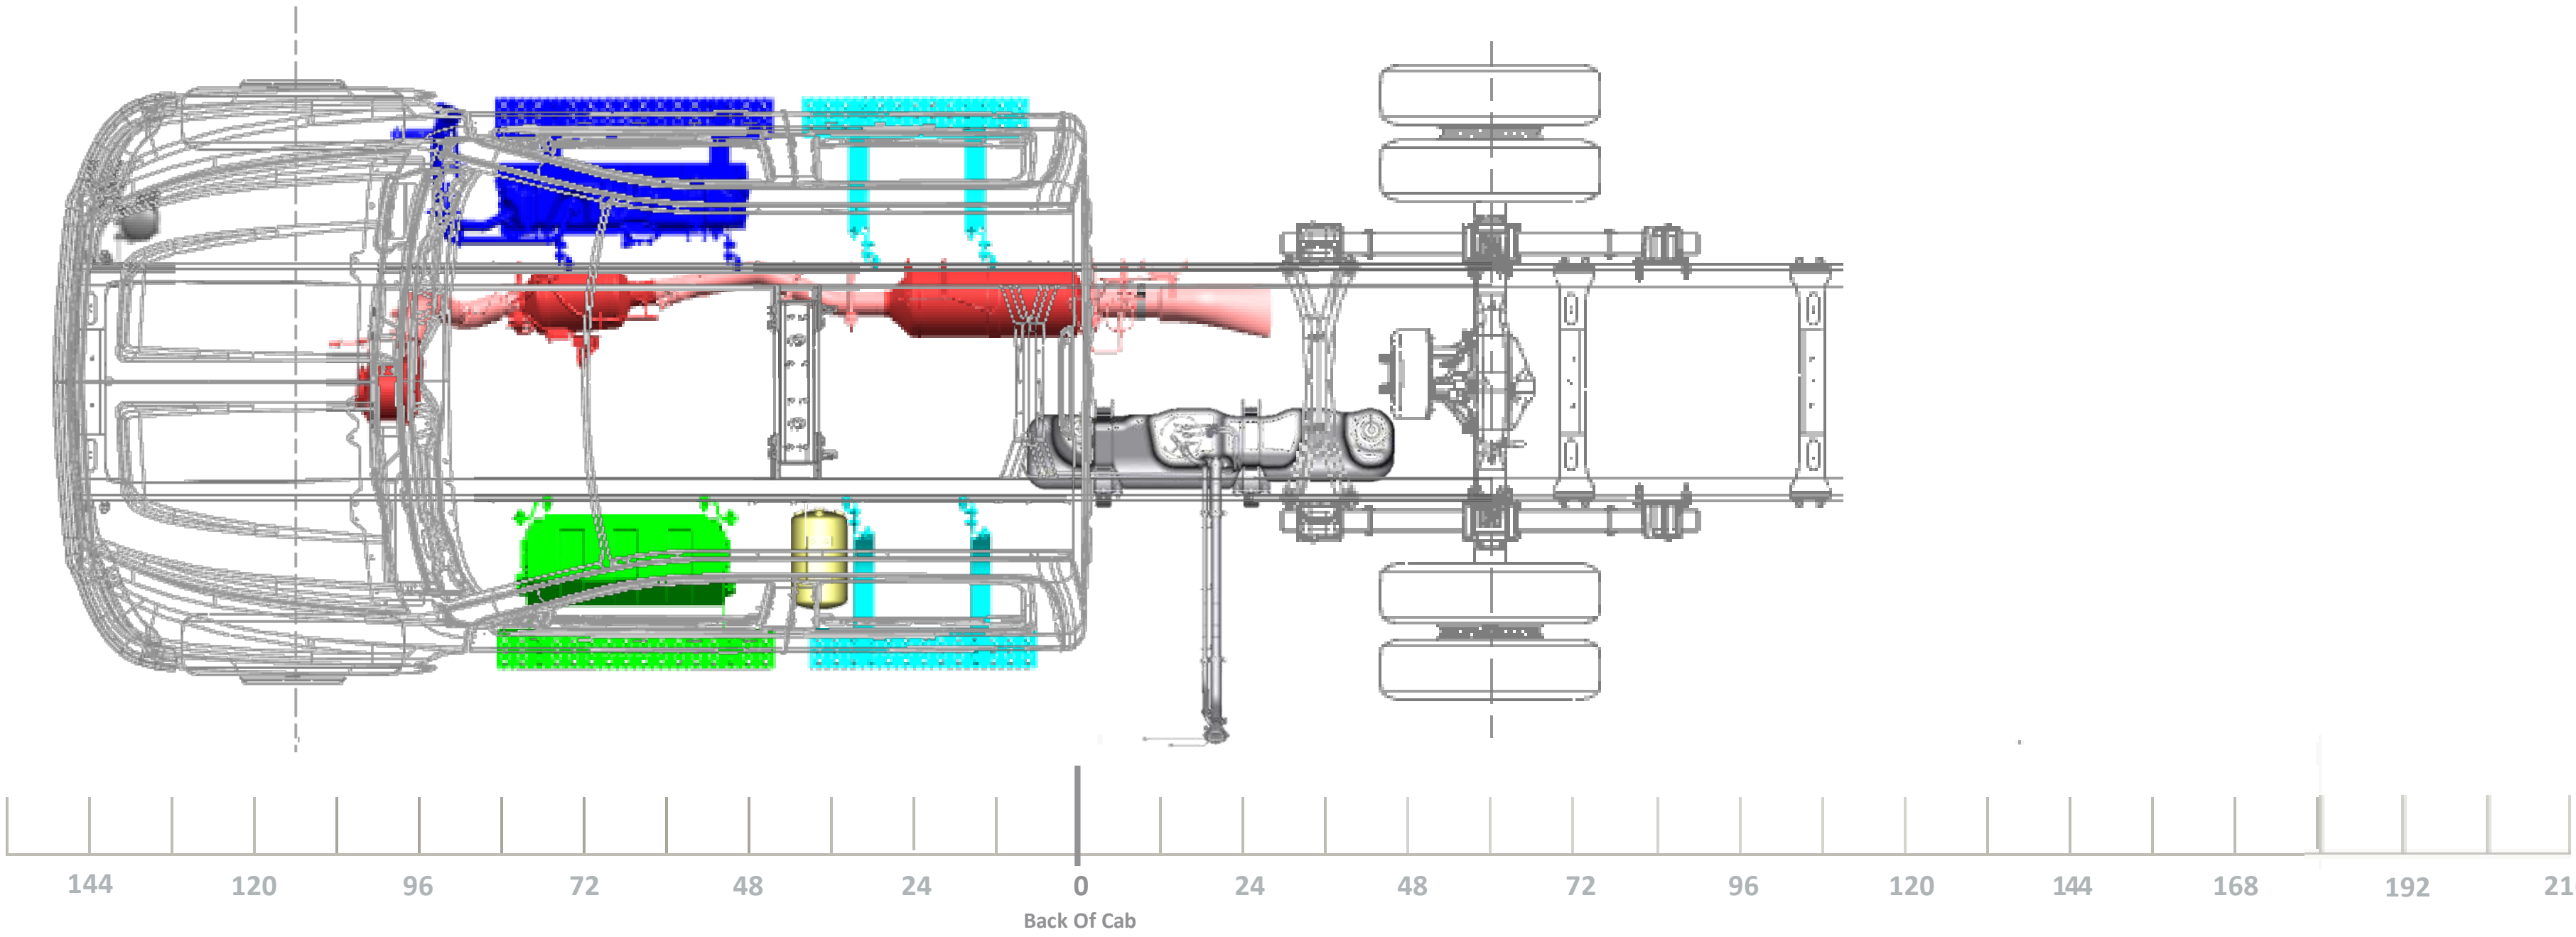

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (07WDU)
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

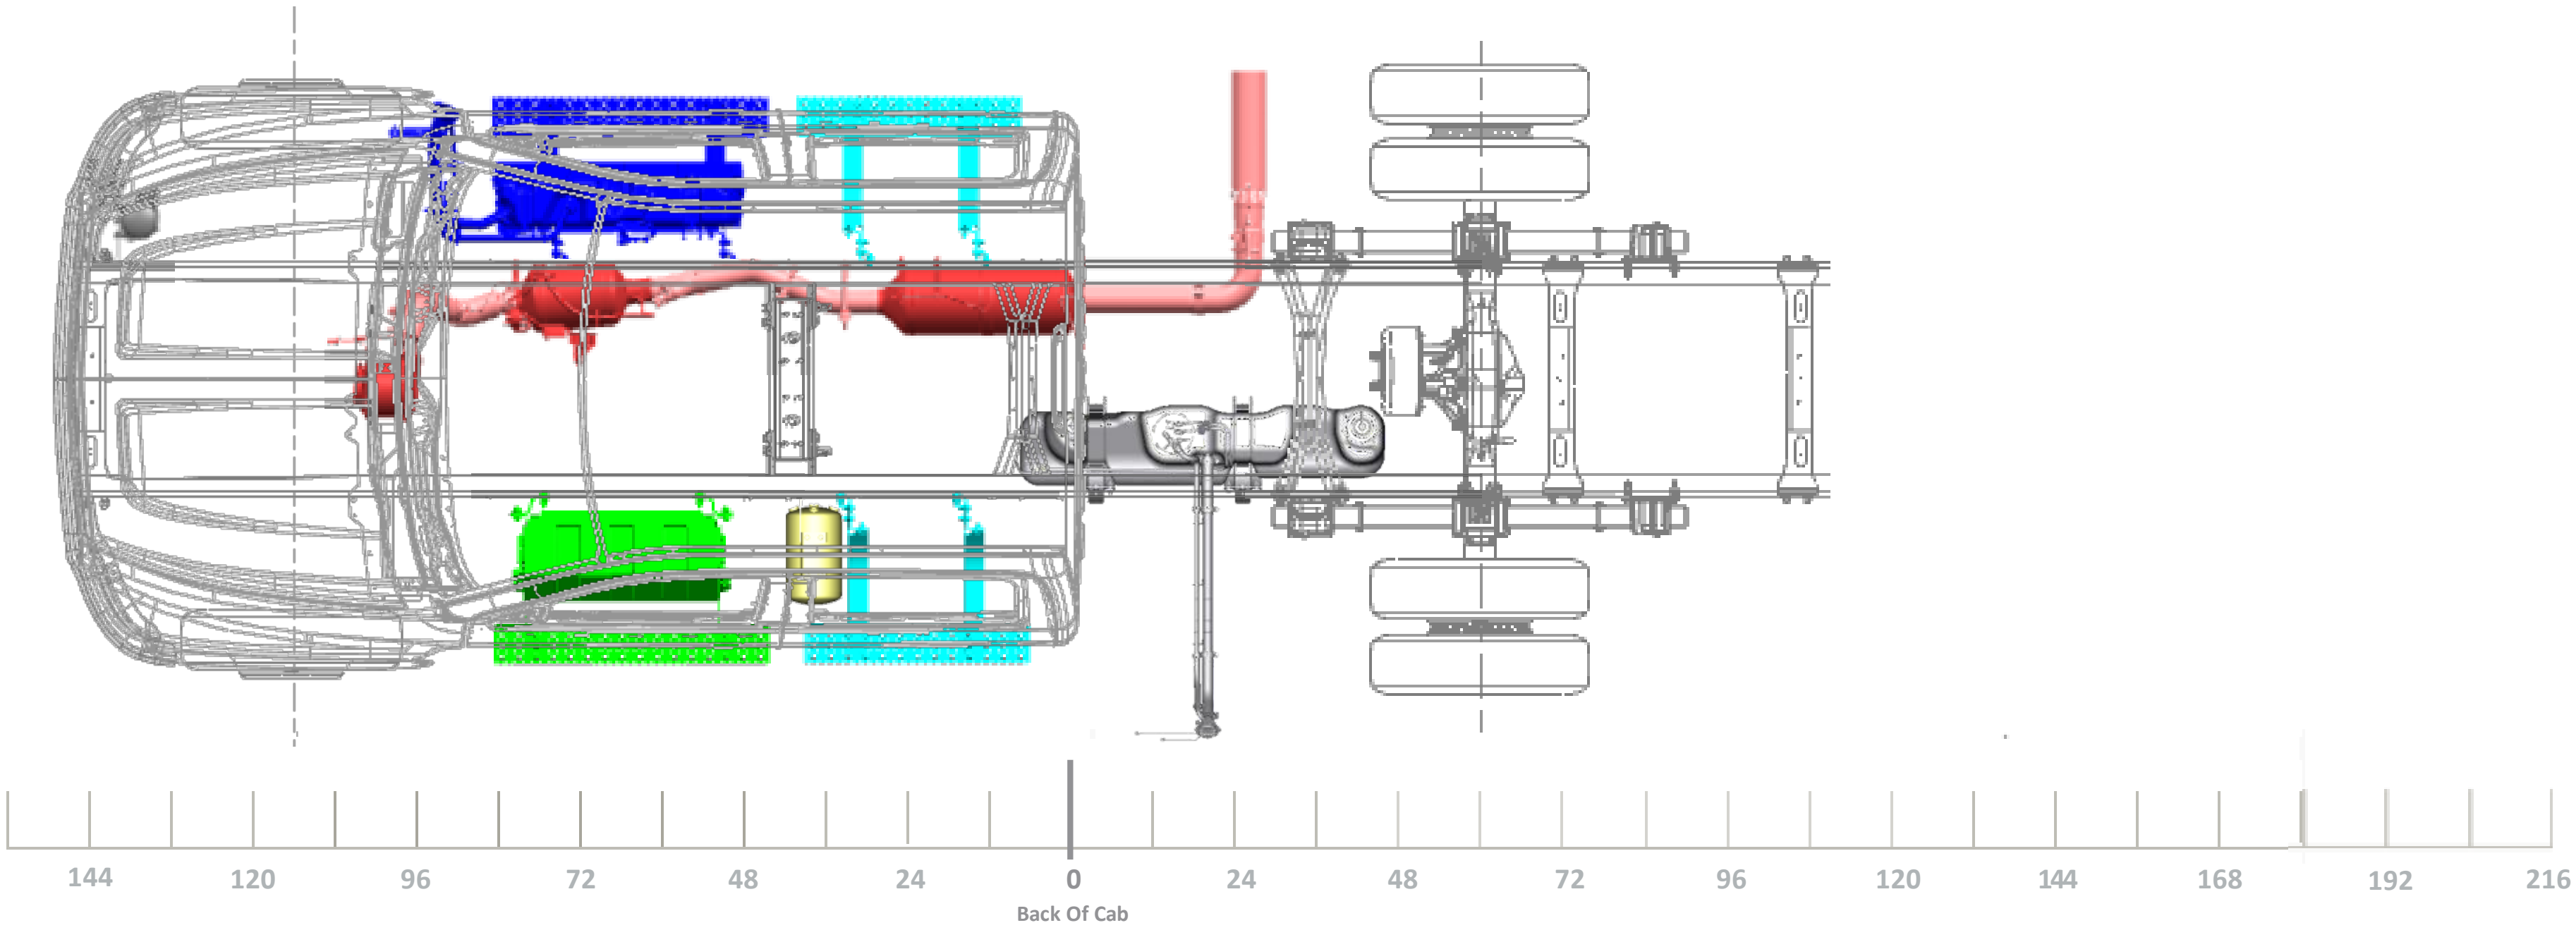

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175” WB (60” CA) 49” AF

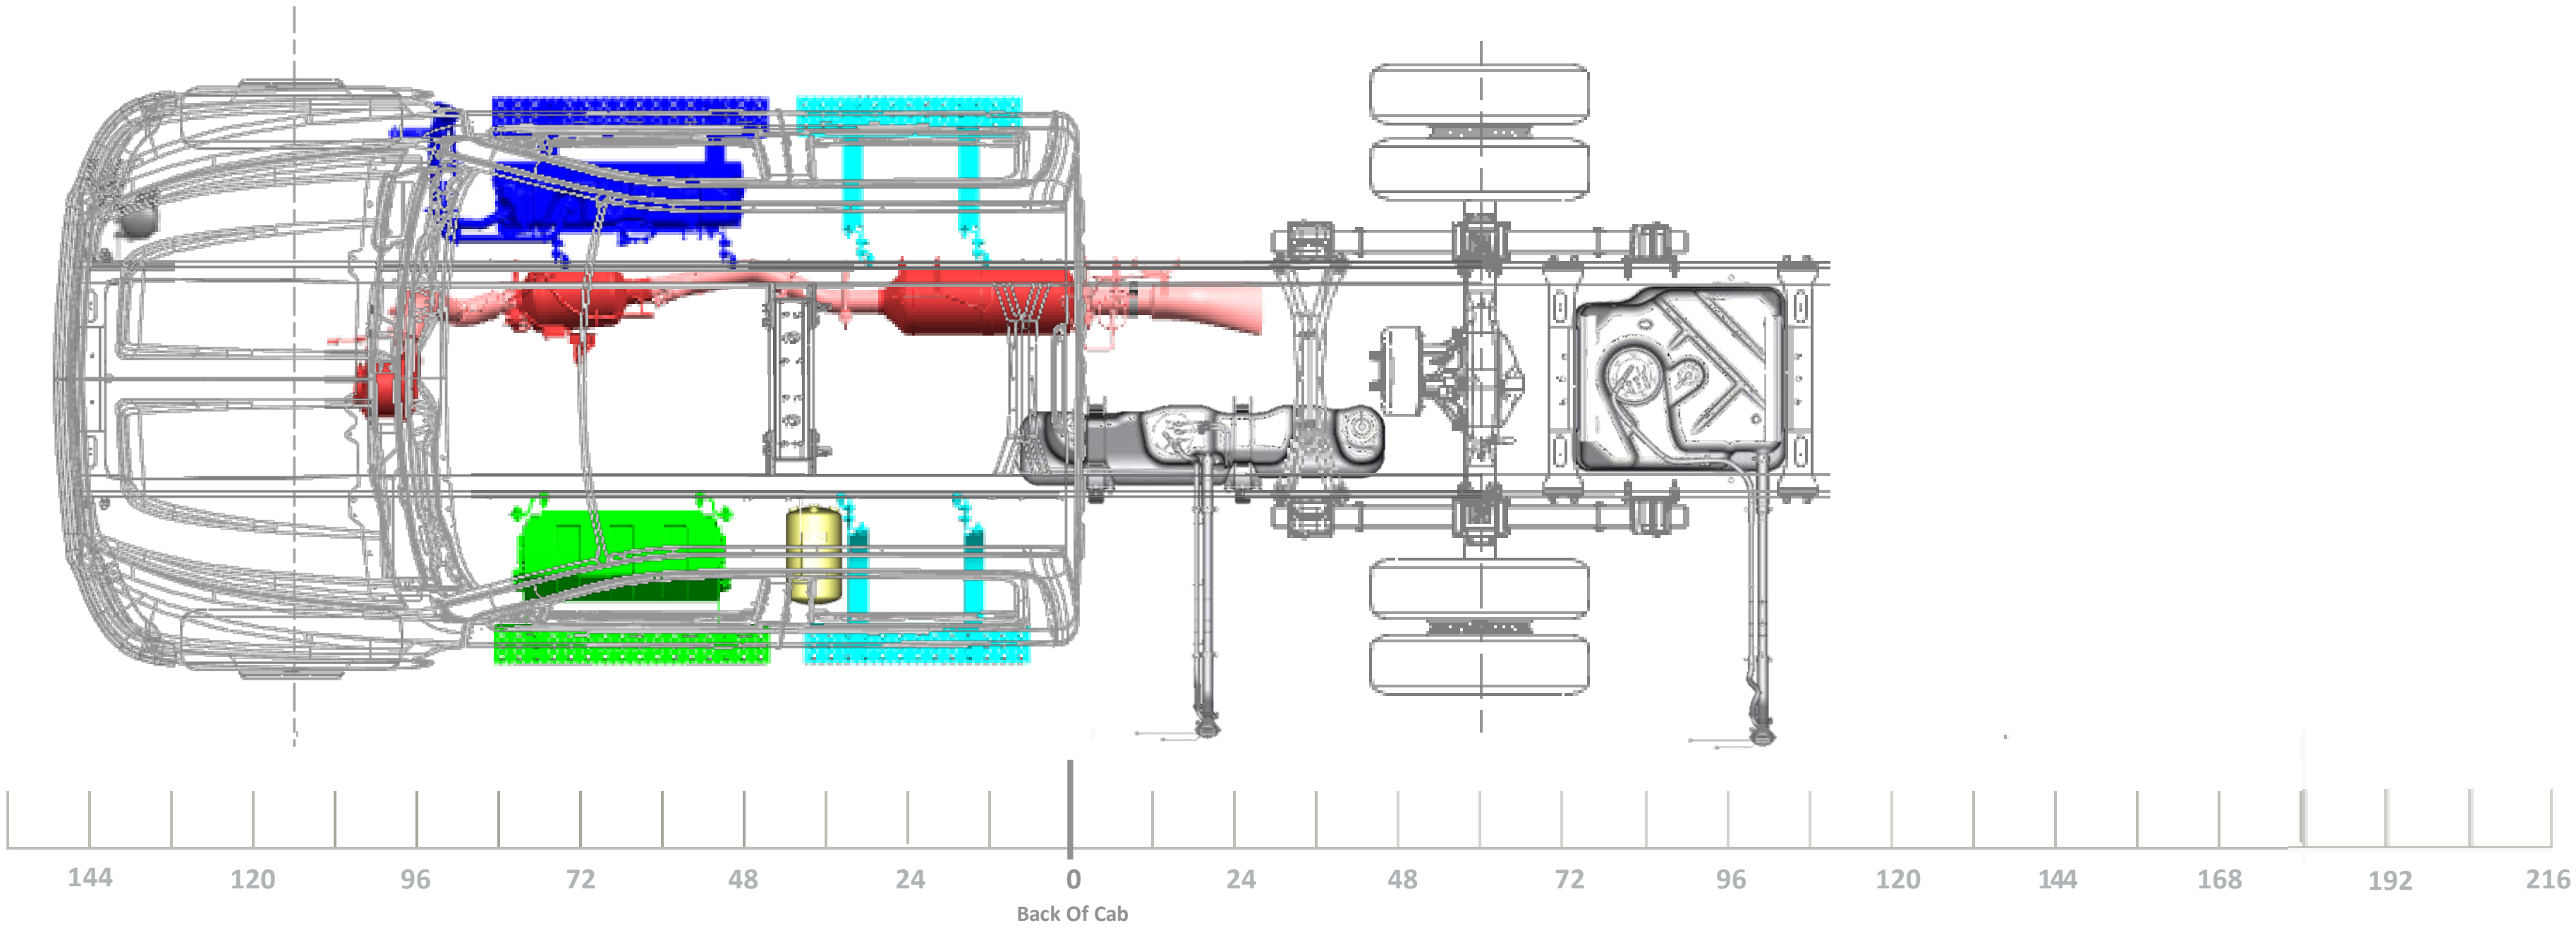

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (07WDU)
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
175" WB (60" CA) 49" AF

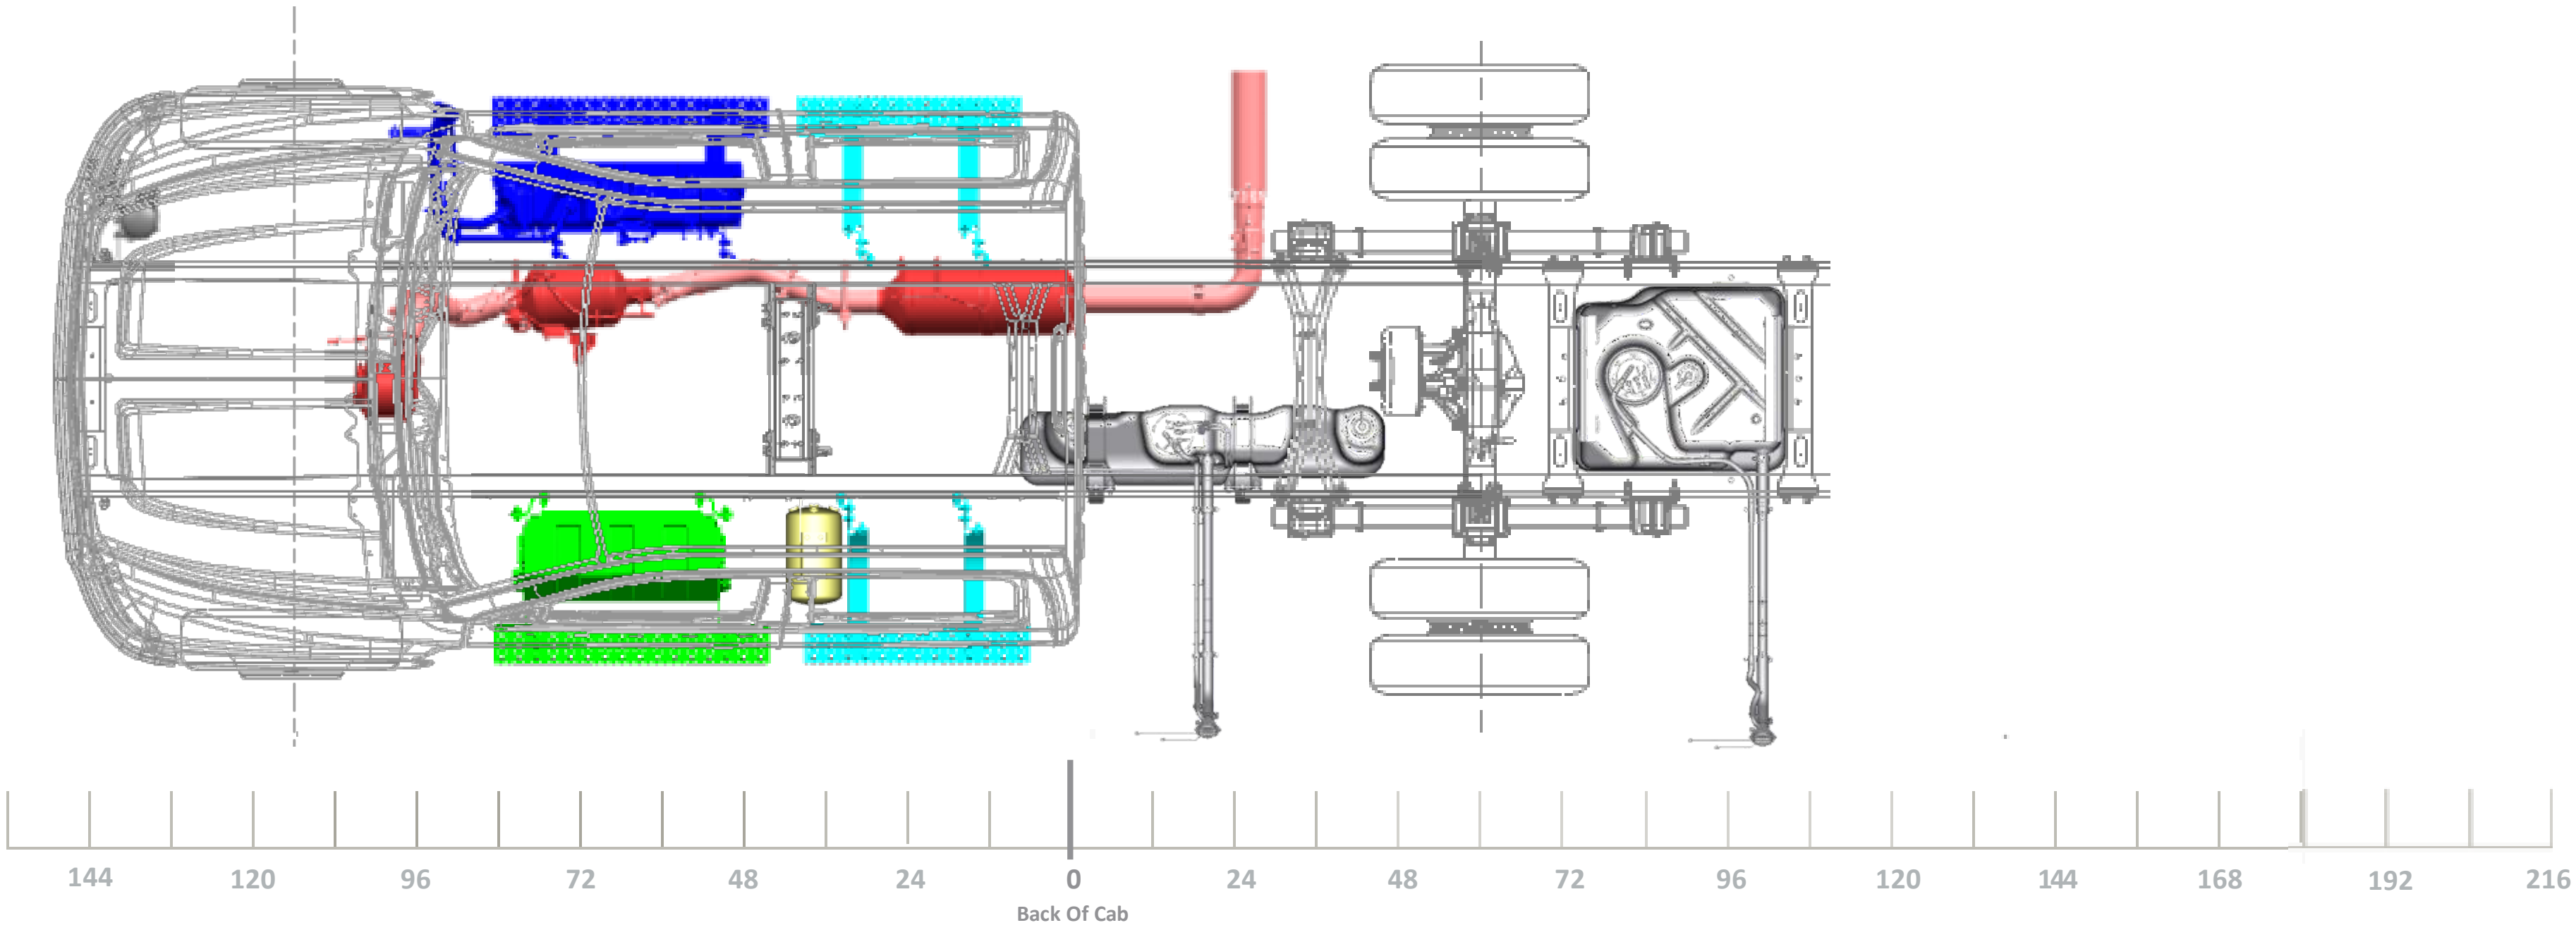

Crew Cab – 199” WB

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

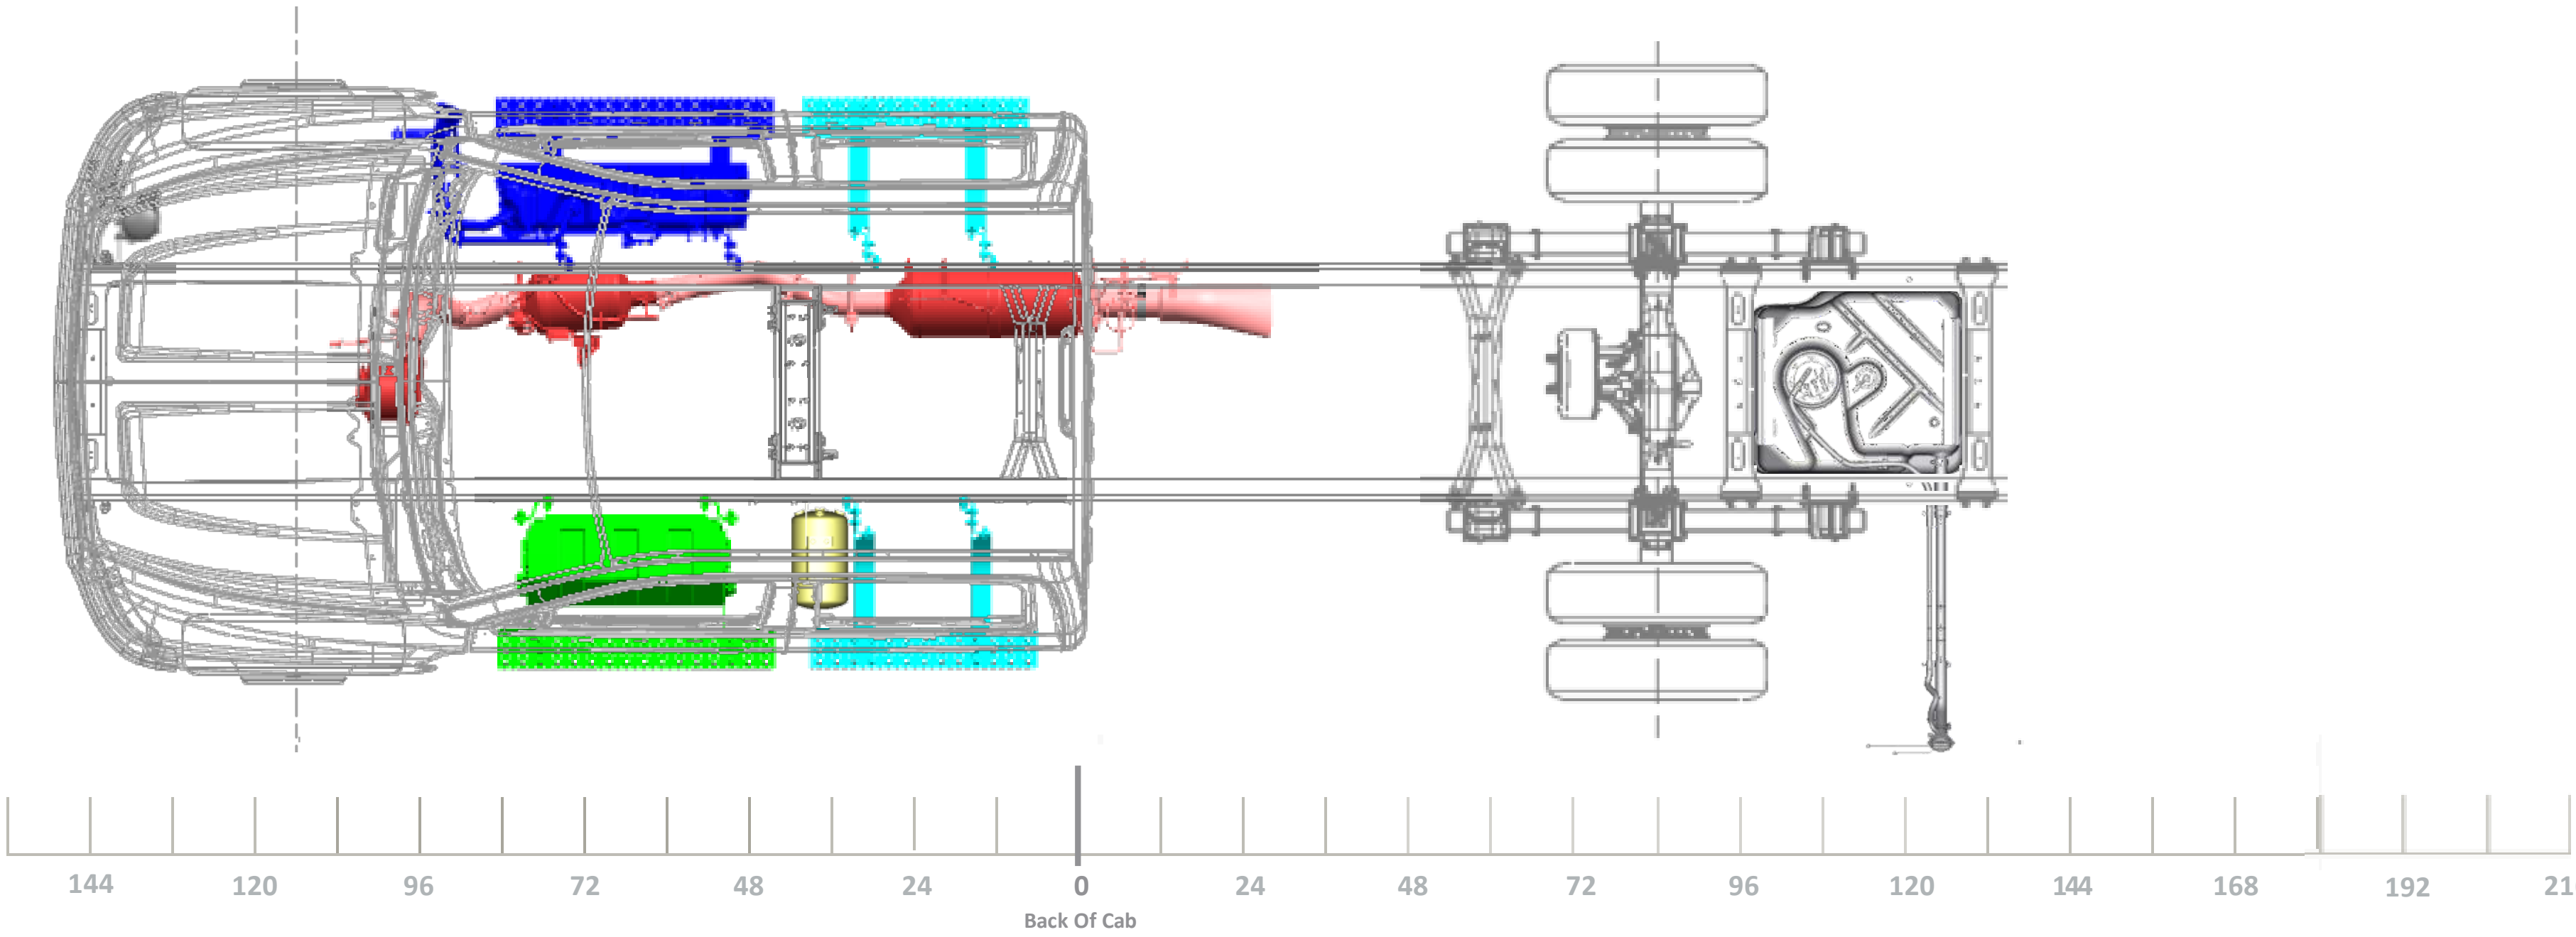

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

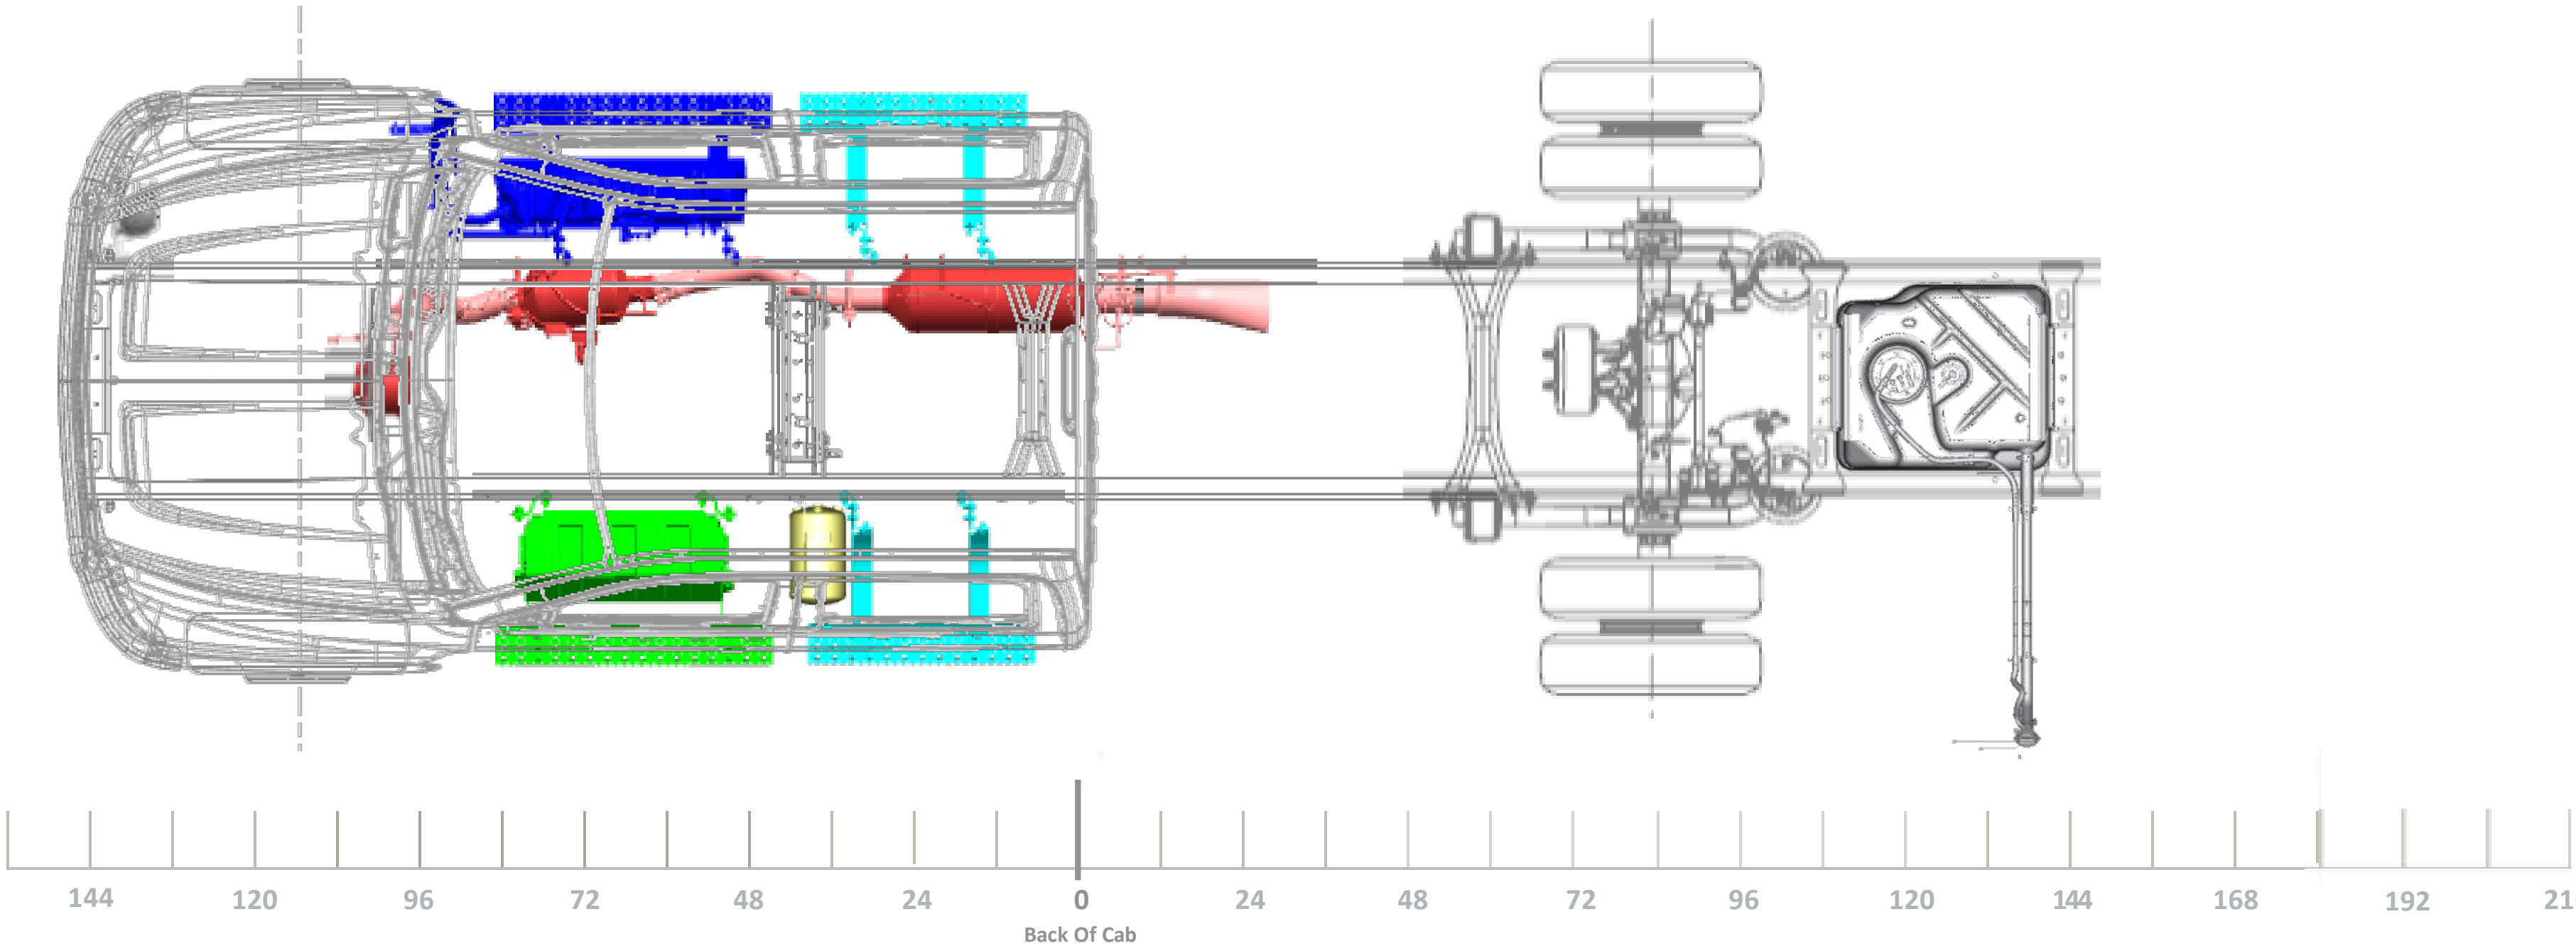

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

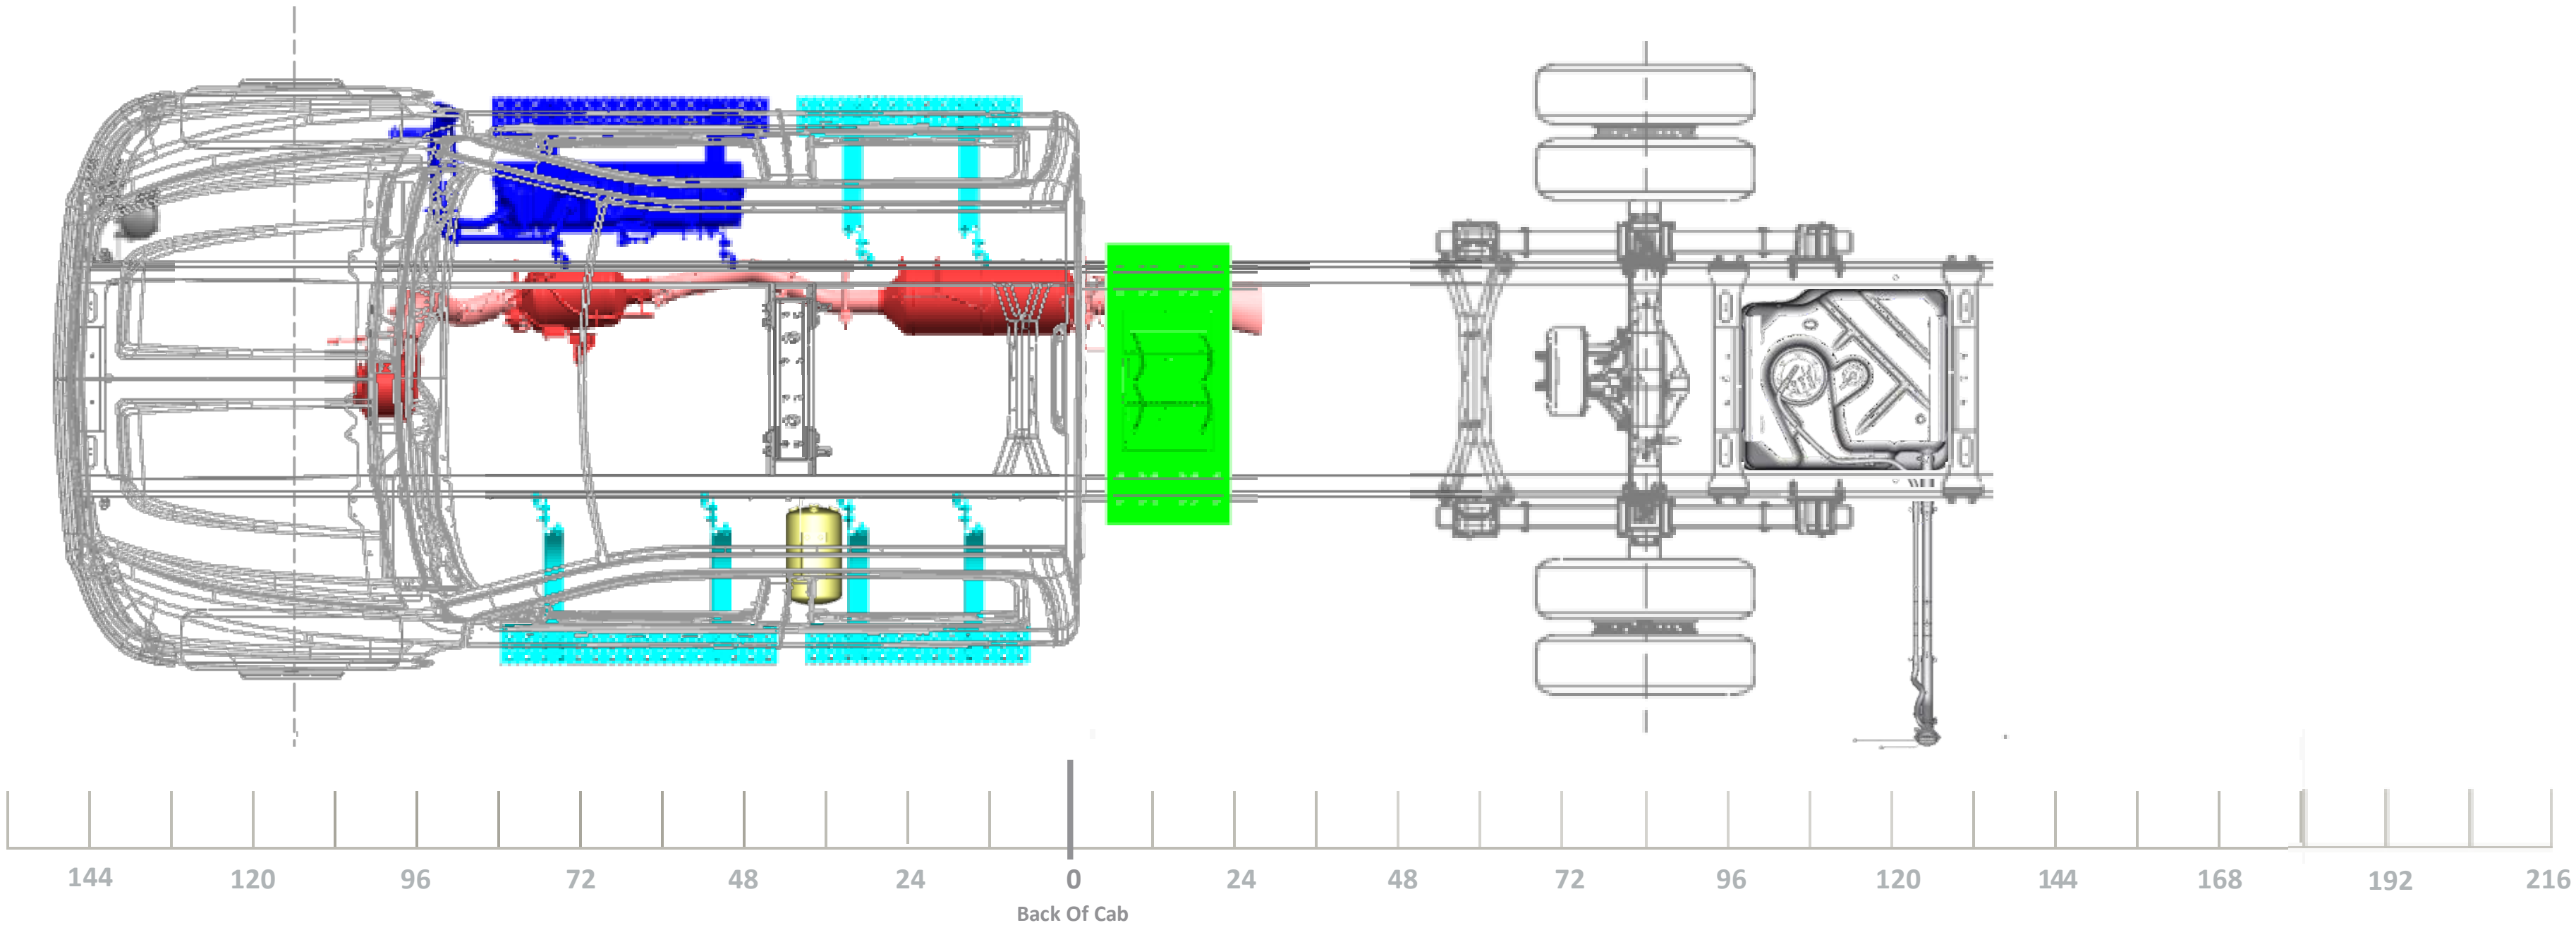
144
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216

2020 Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information

Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
IROS REAR SUSPENSION

STRAIGHT TAILPIPE (RPO N12)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

199” WB (84” CA)
63” AF

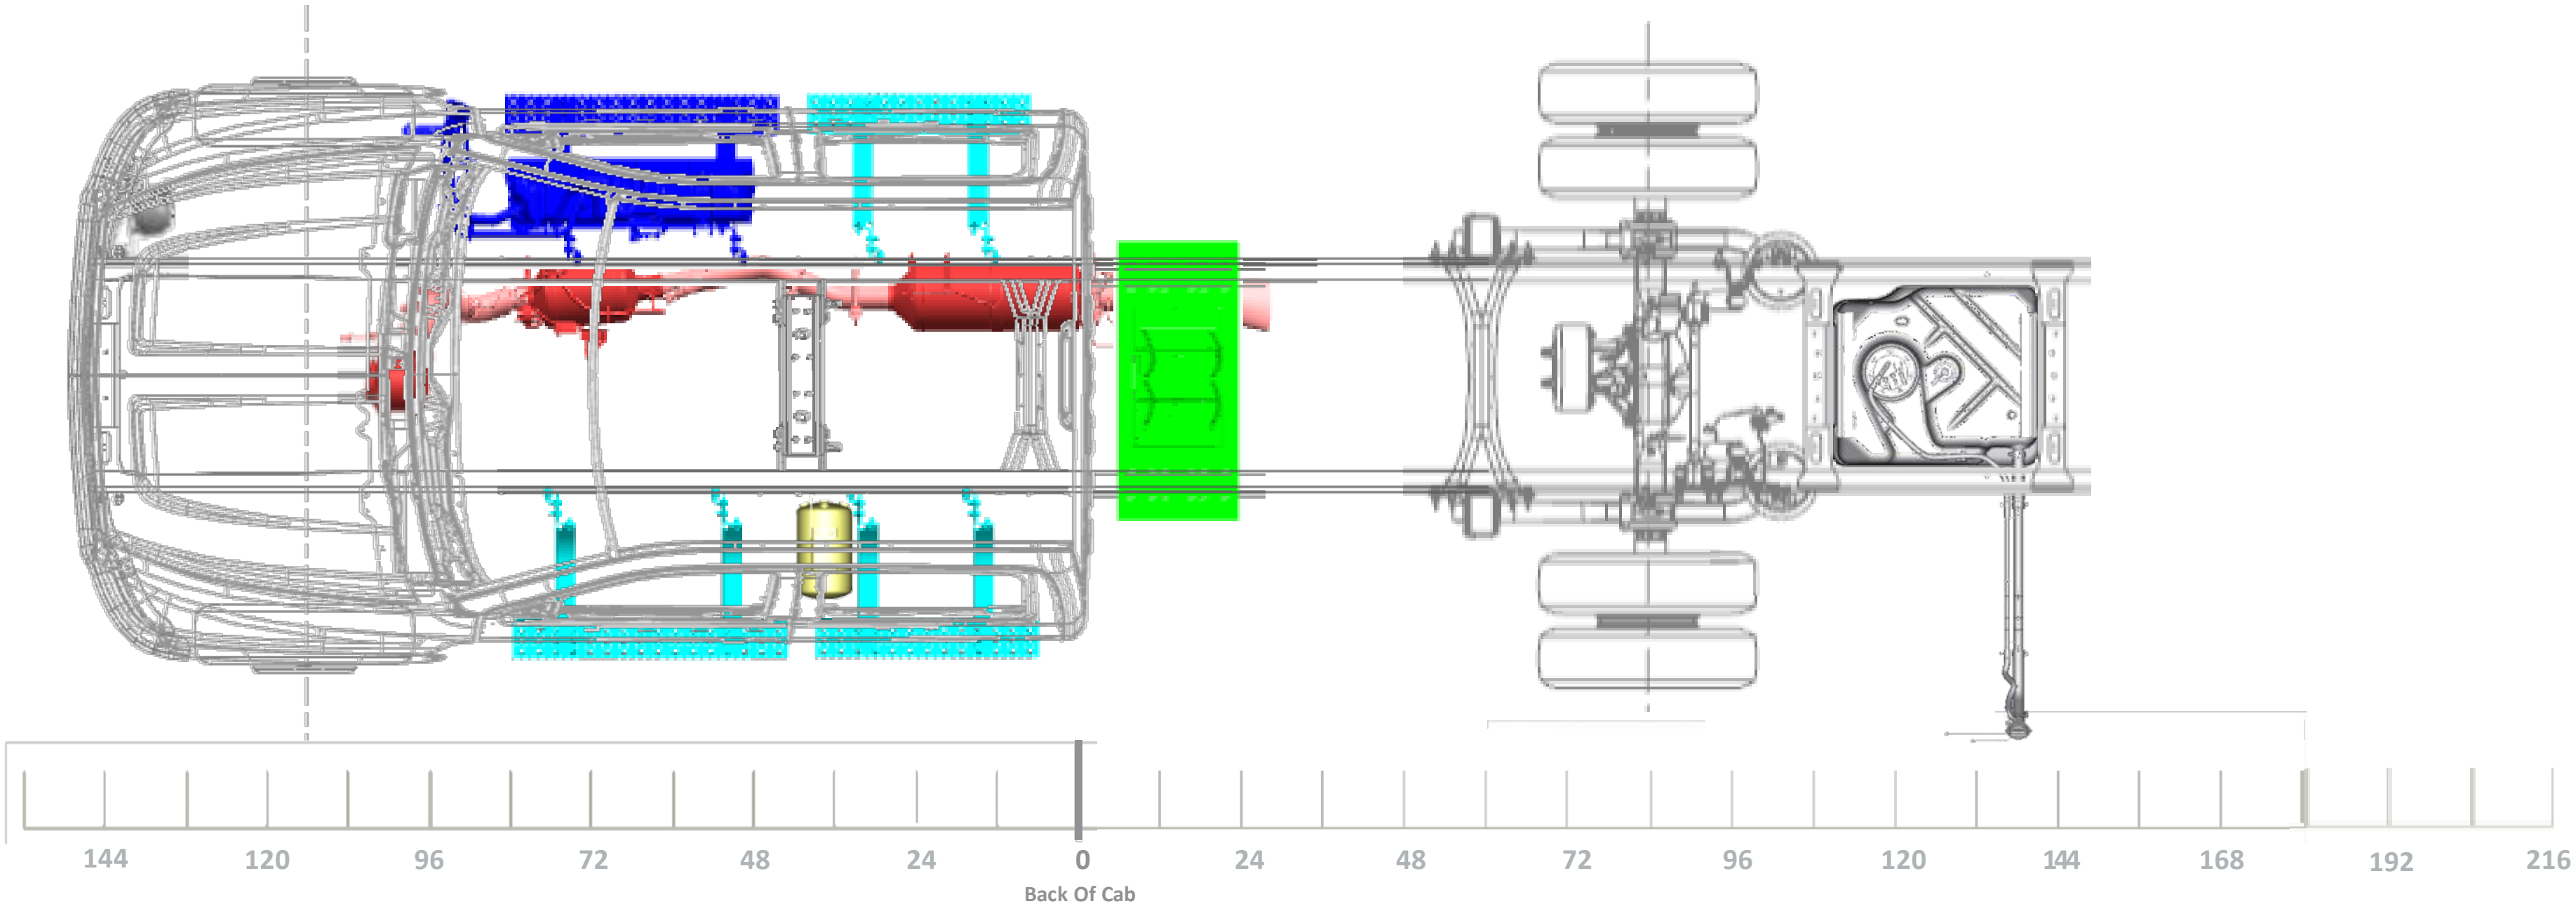

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199" WB (84" CA) 49" OR 63" AF

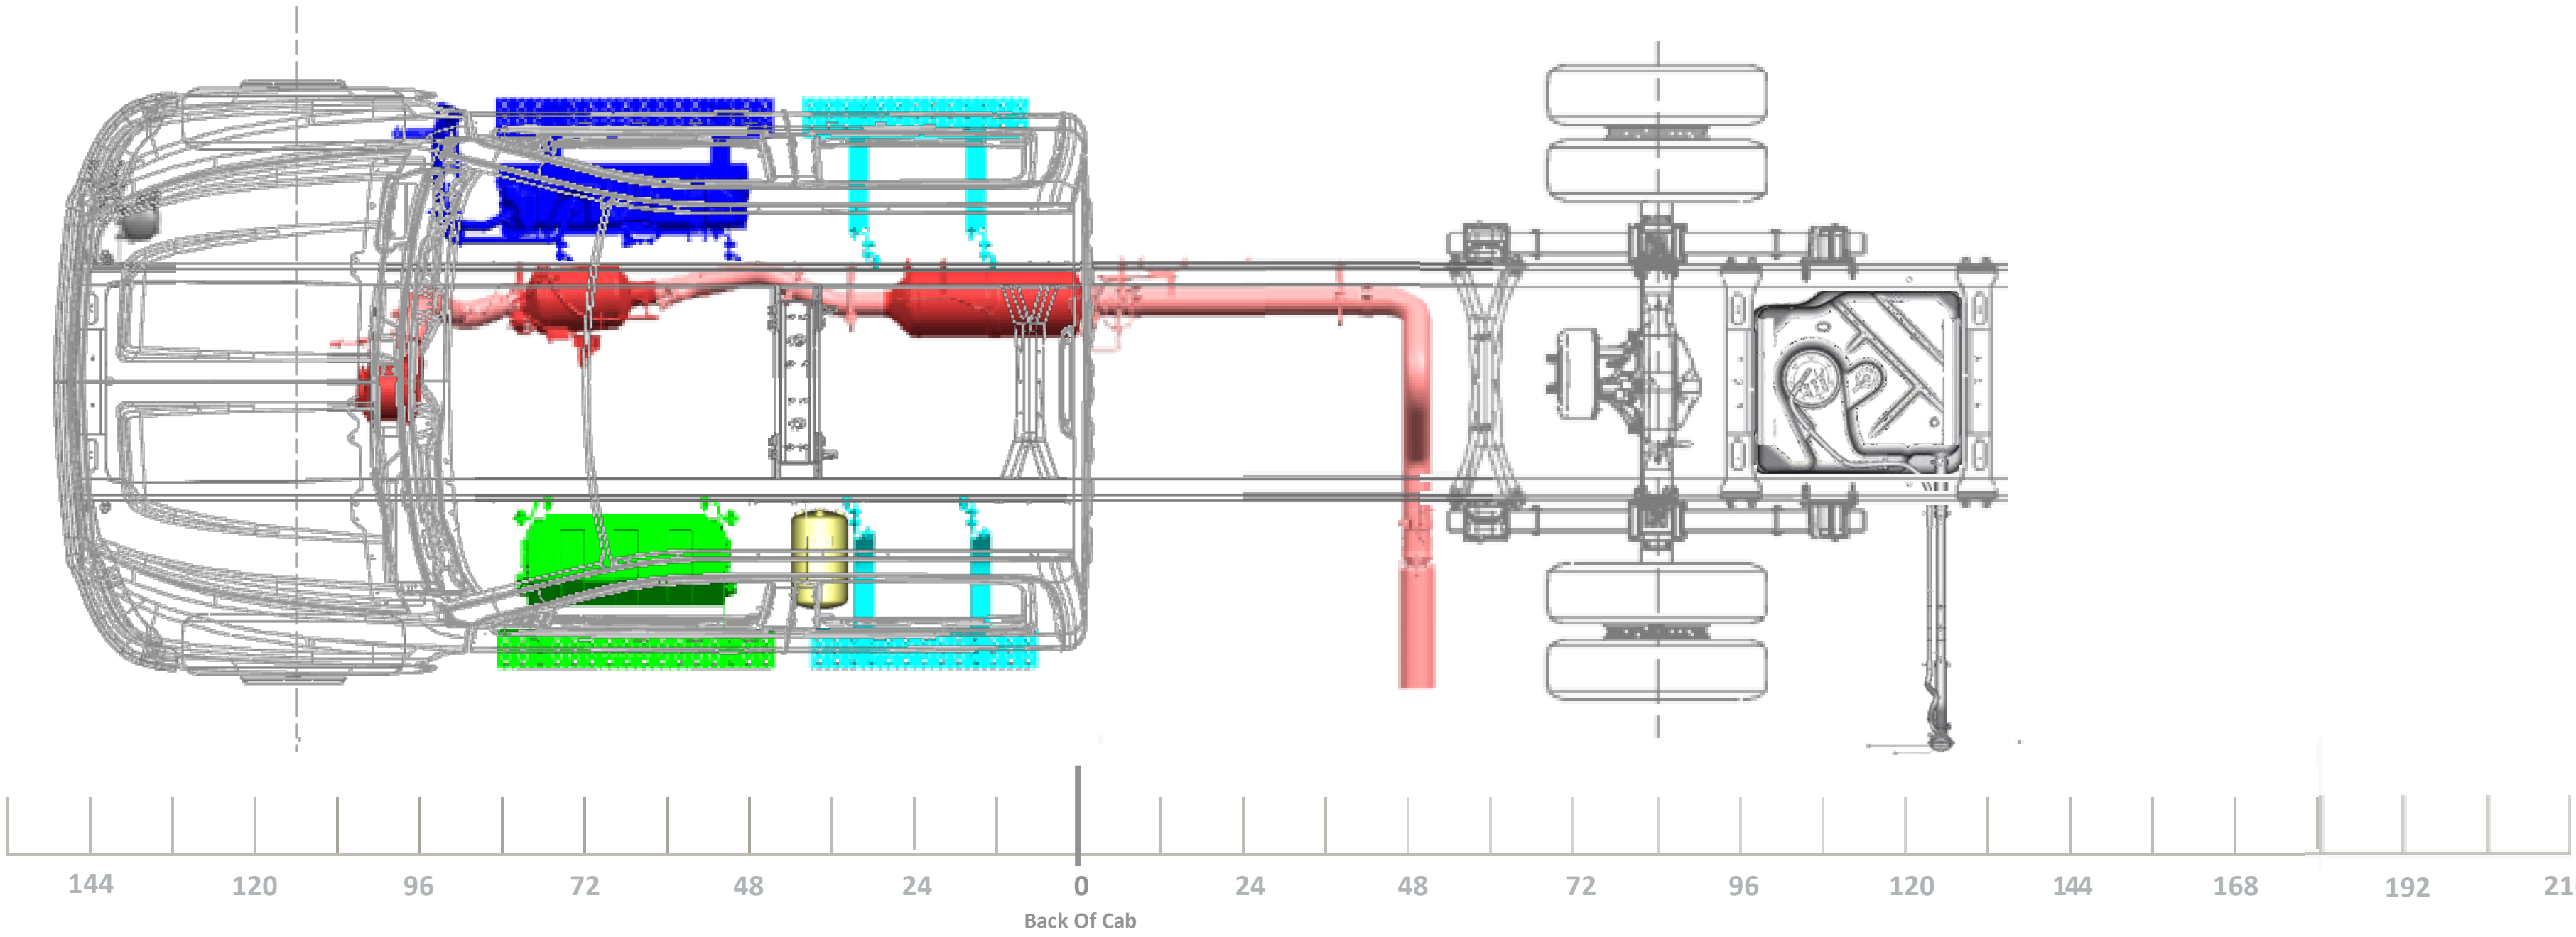

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

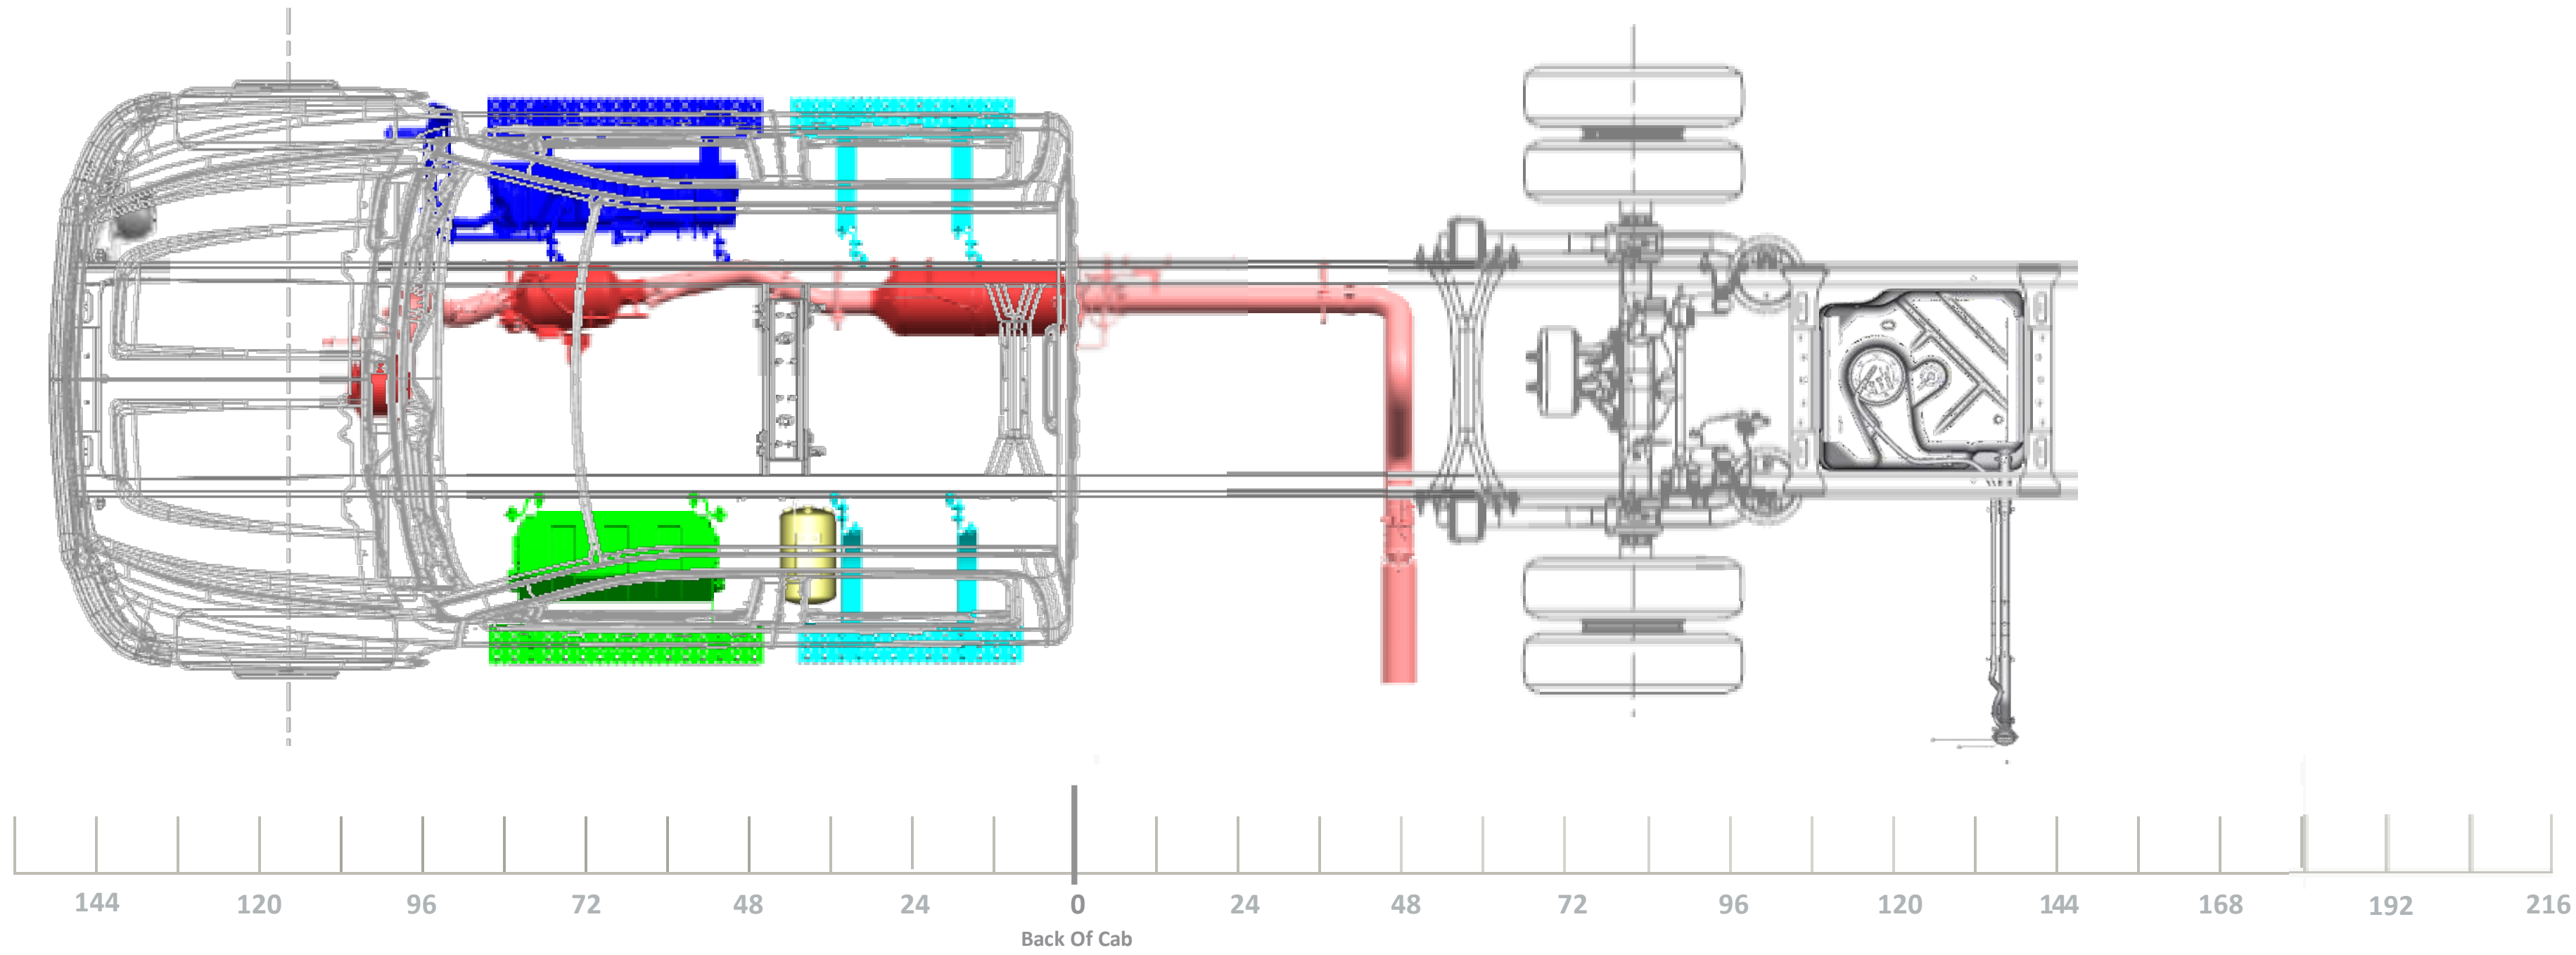

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

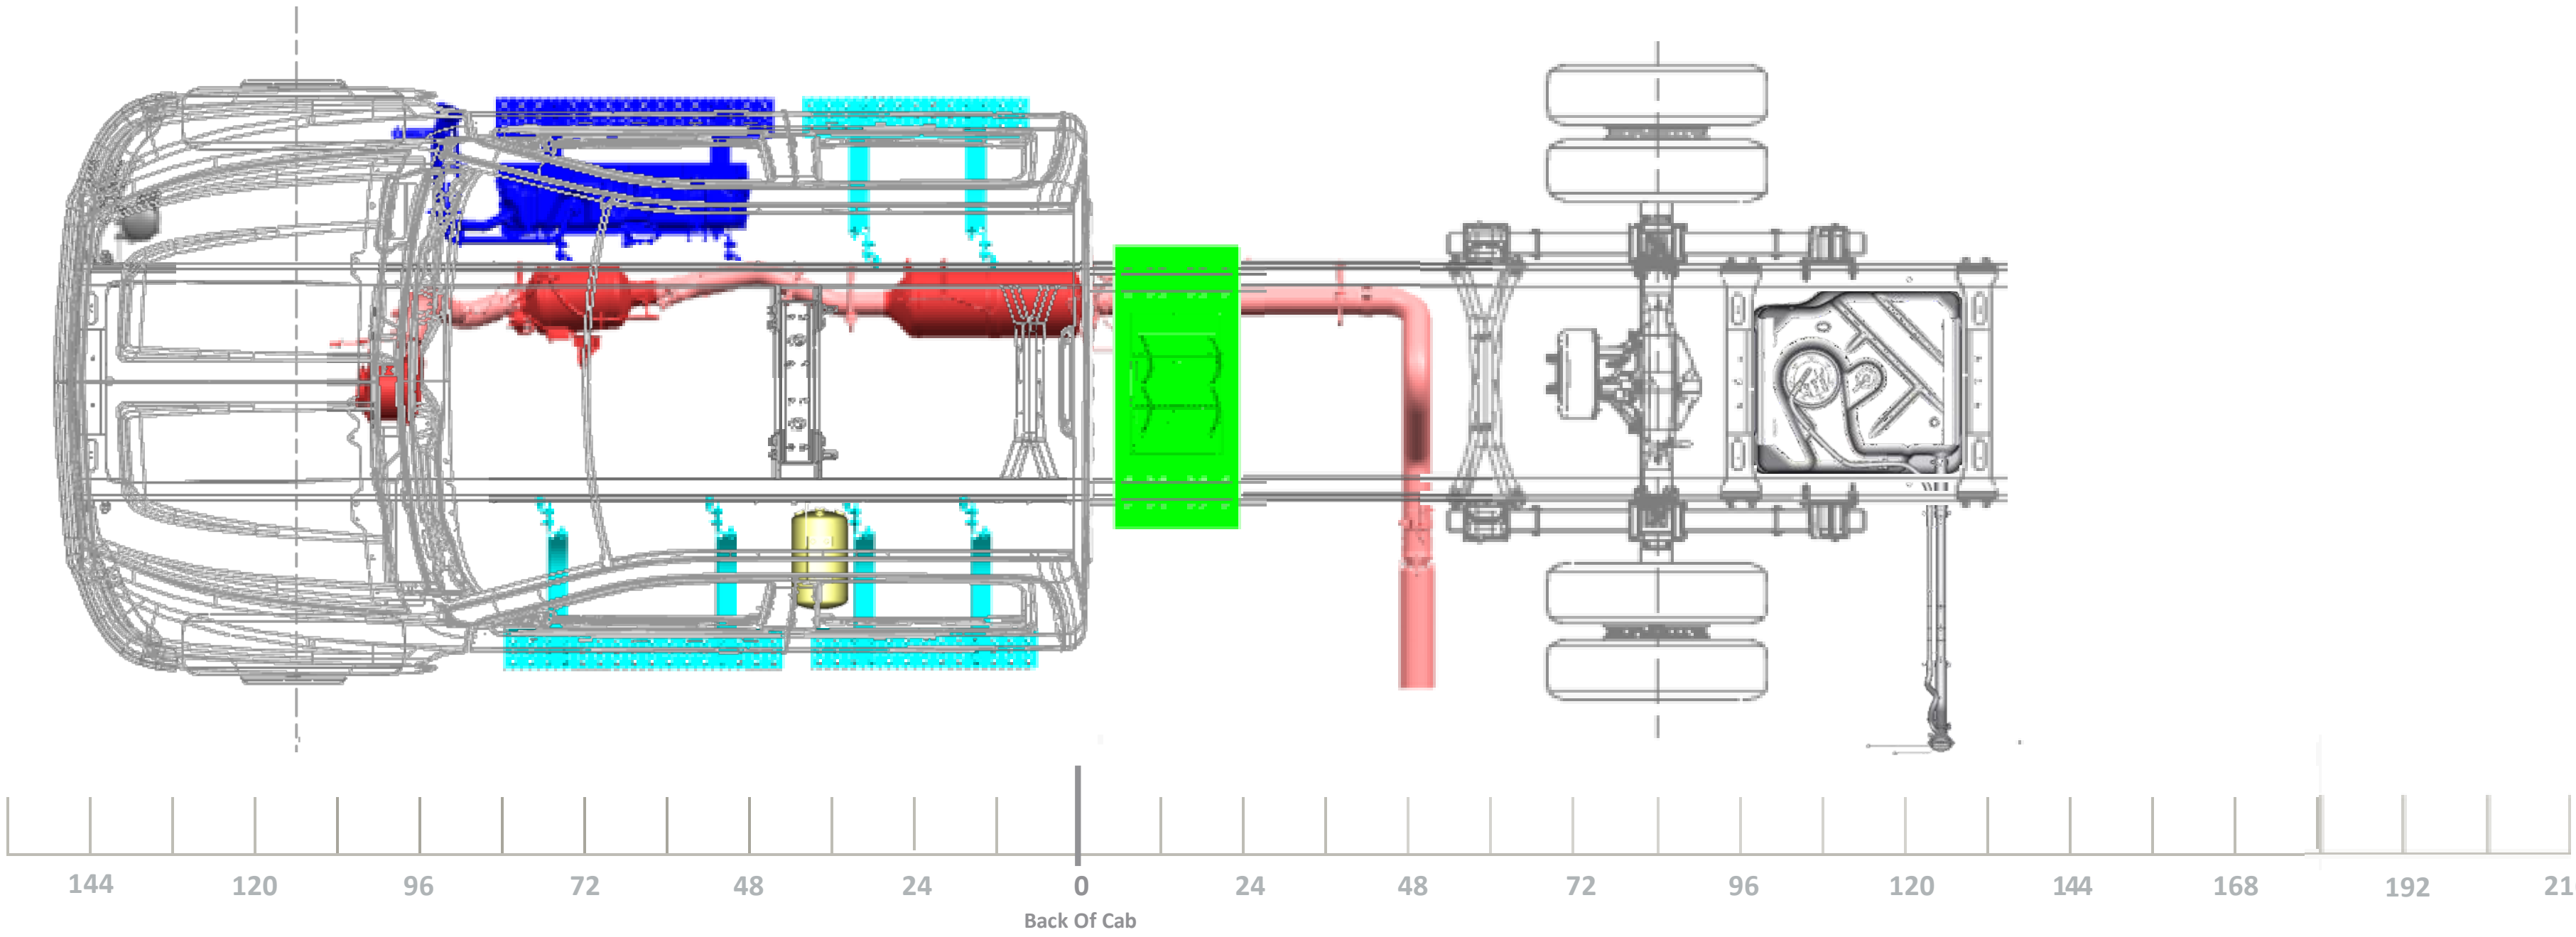

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

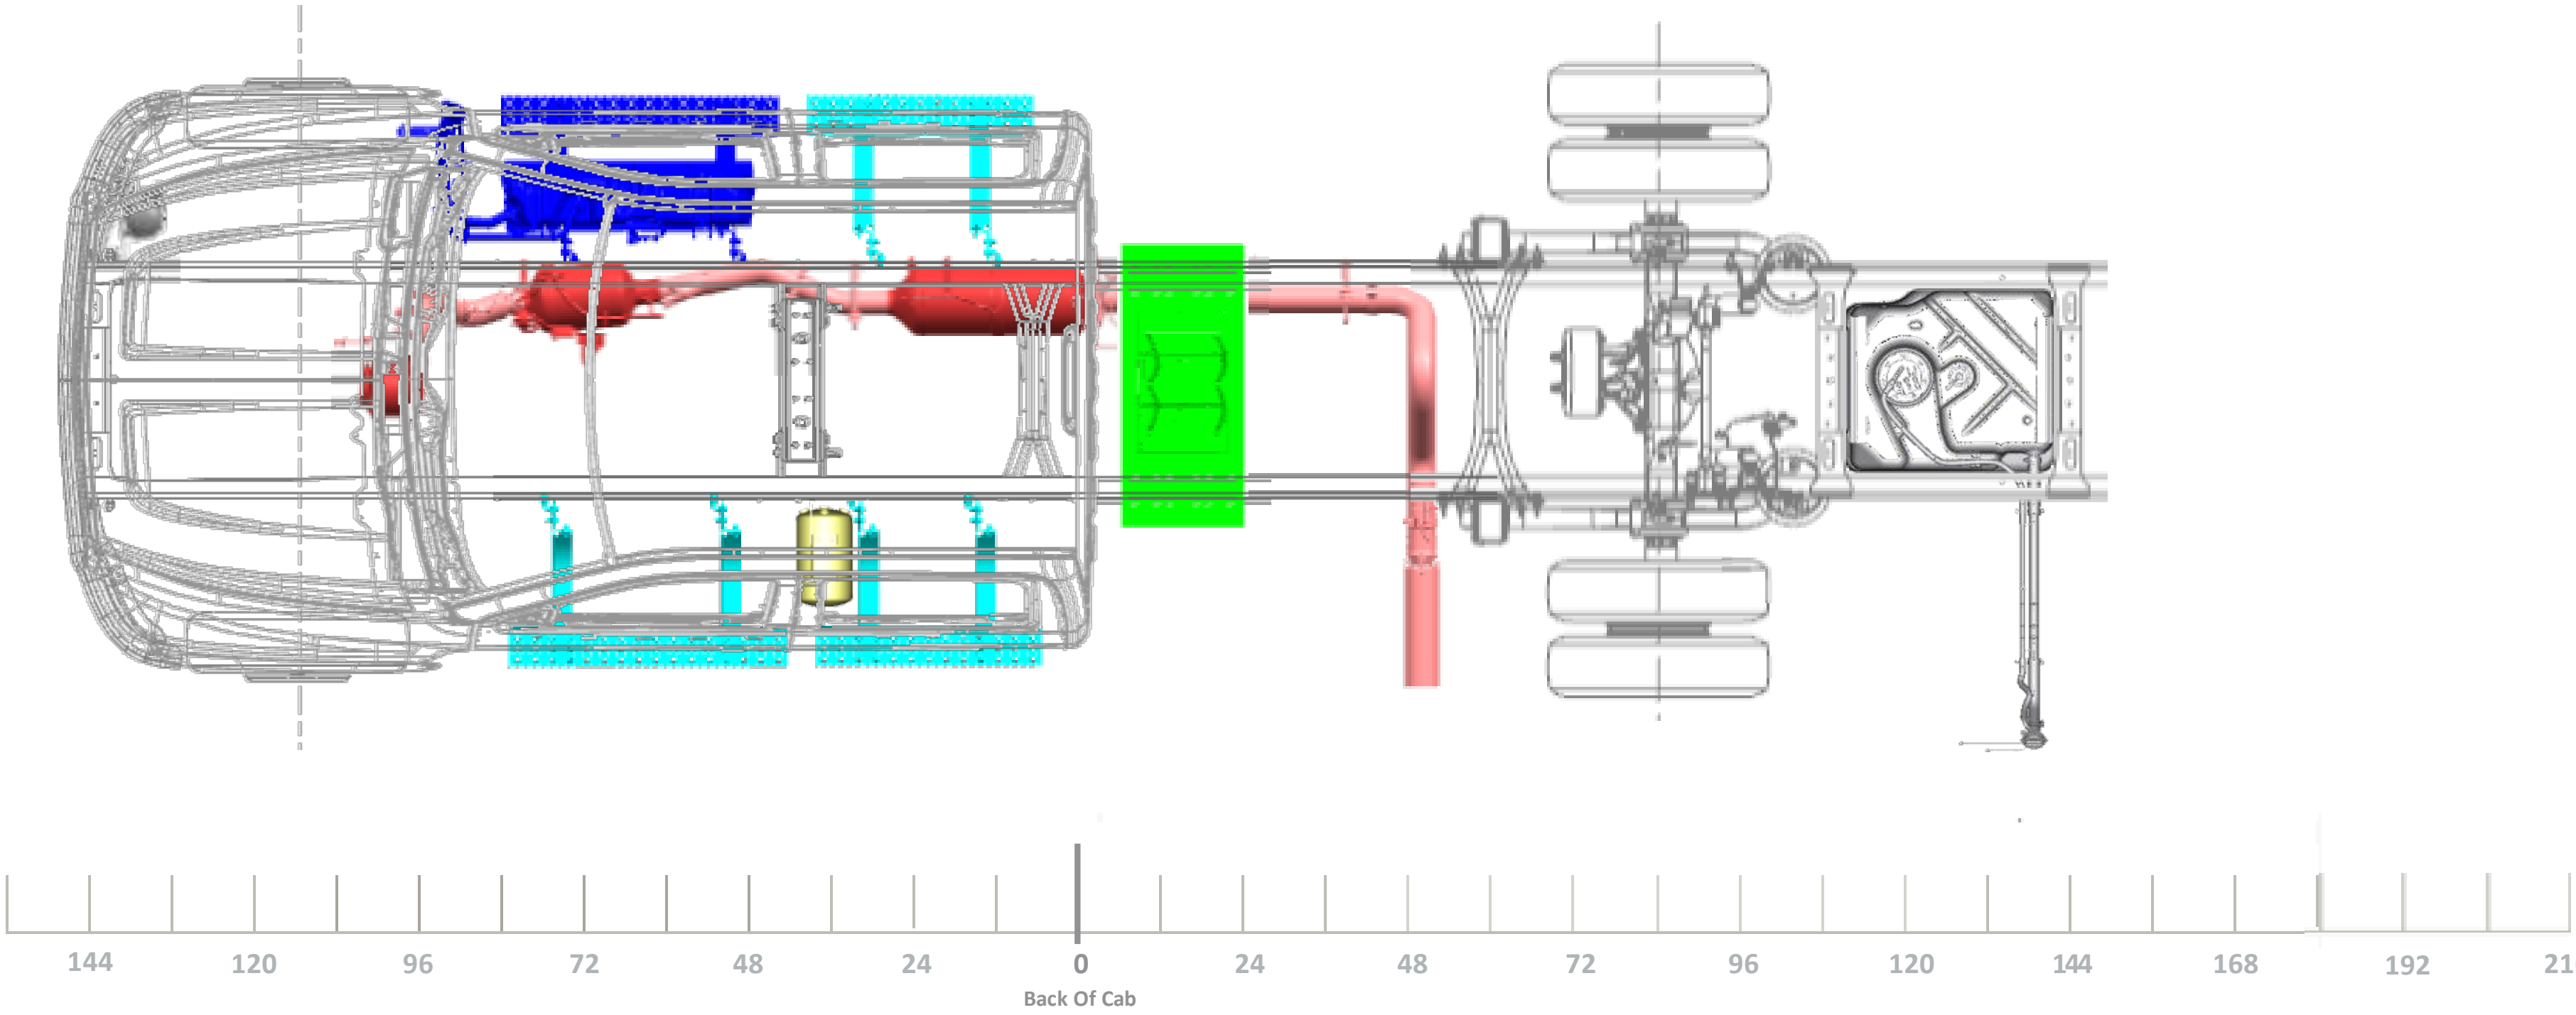

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

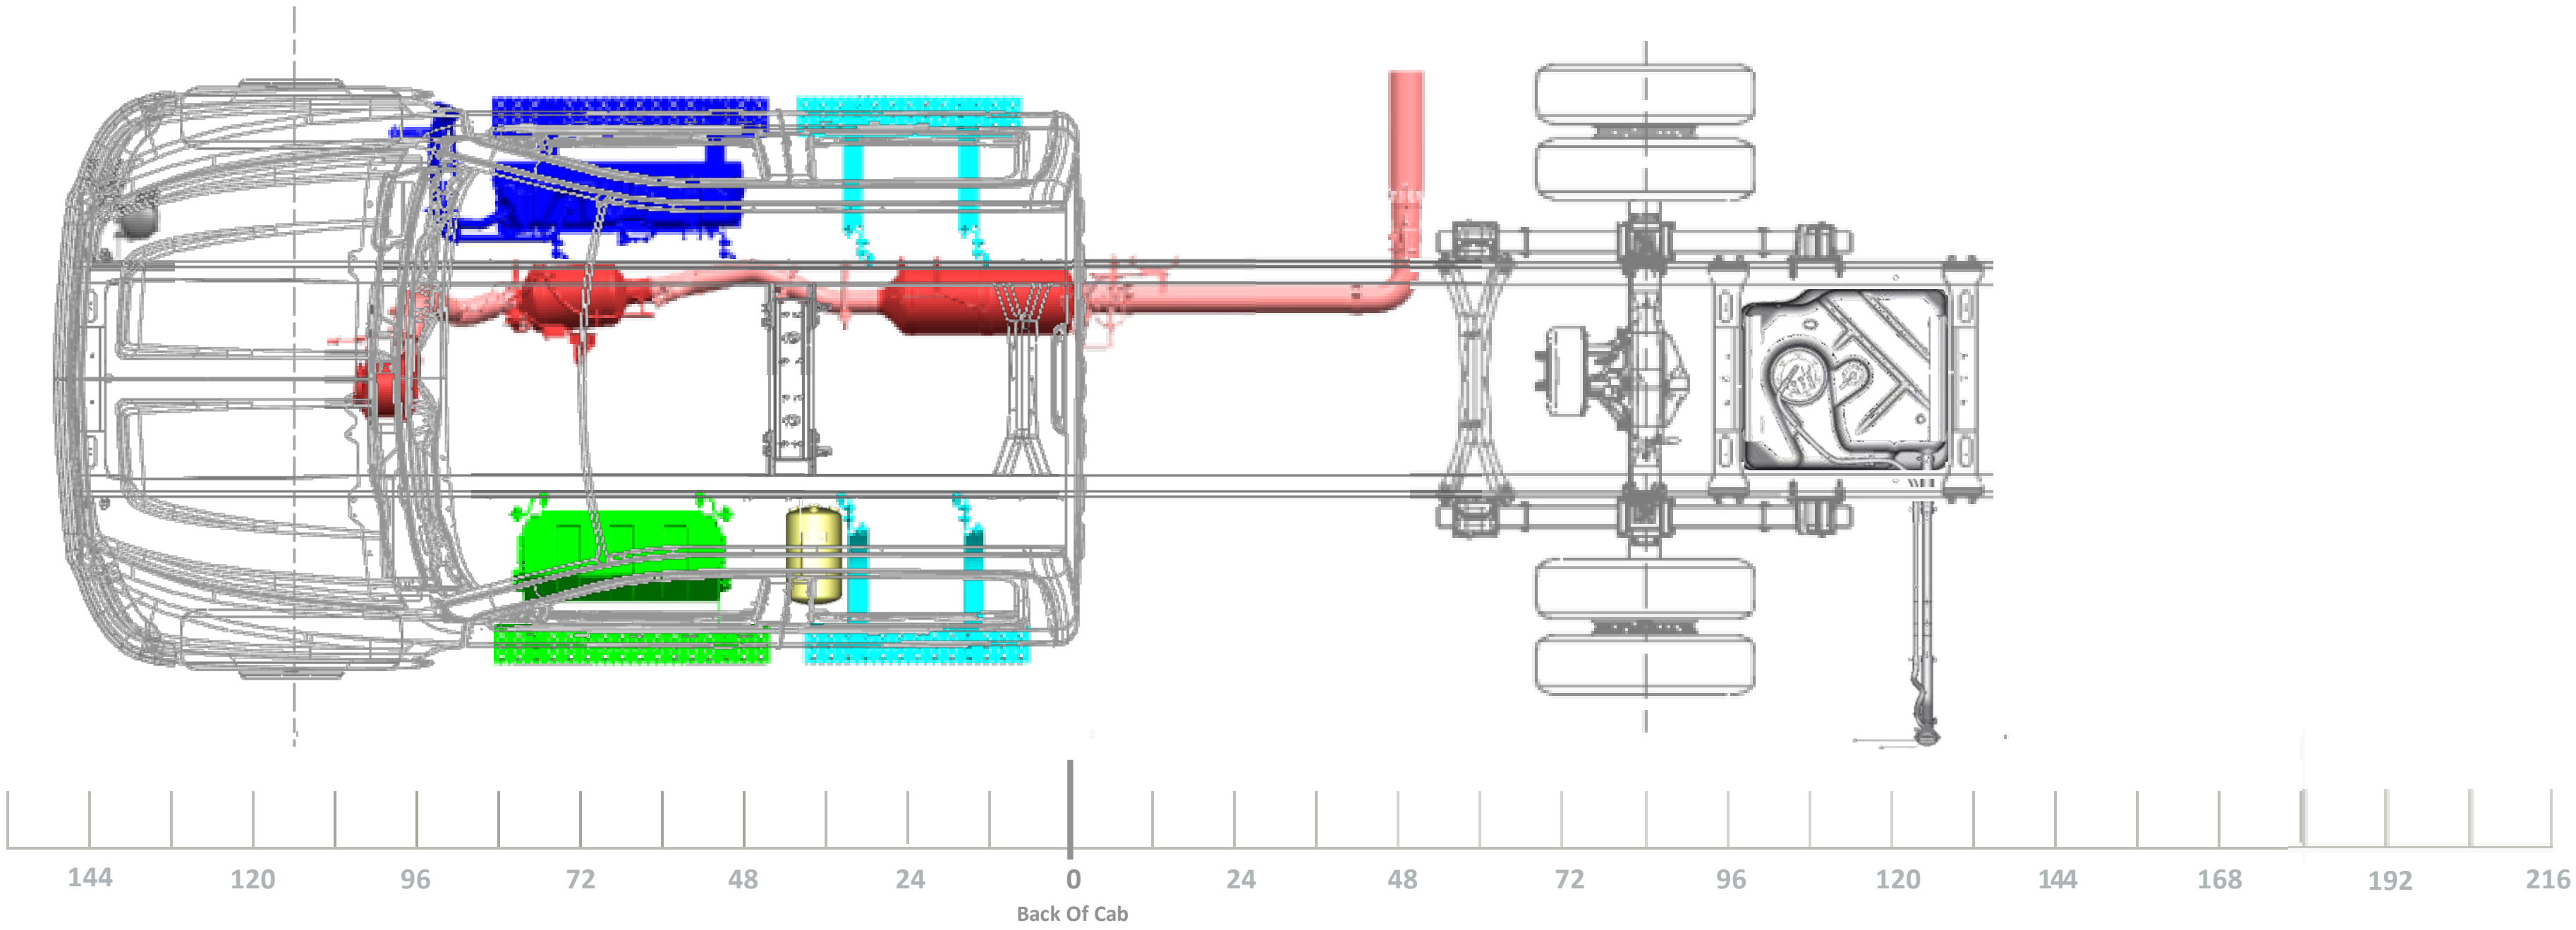

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

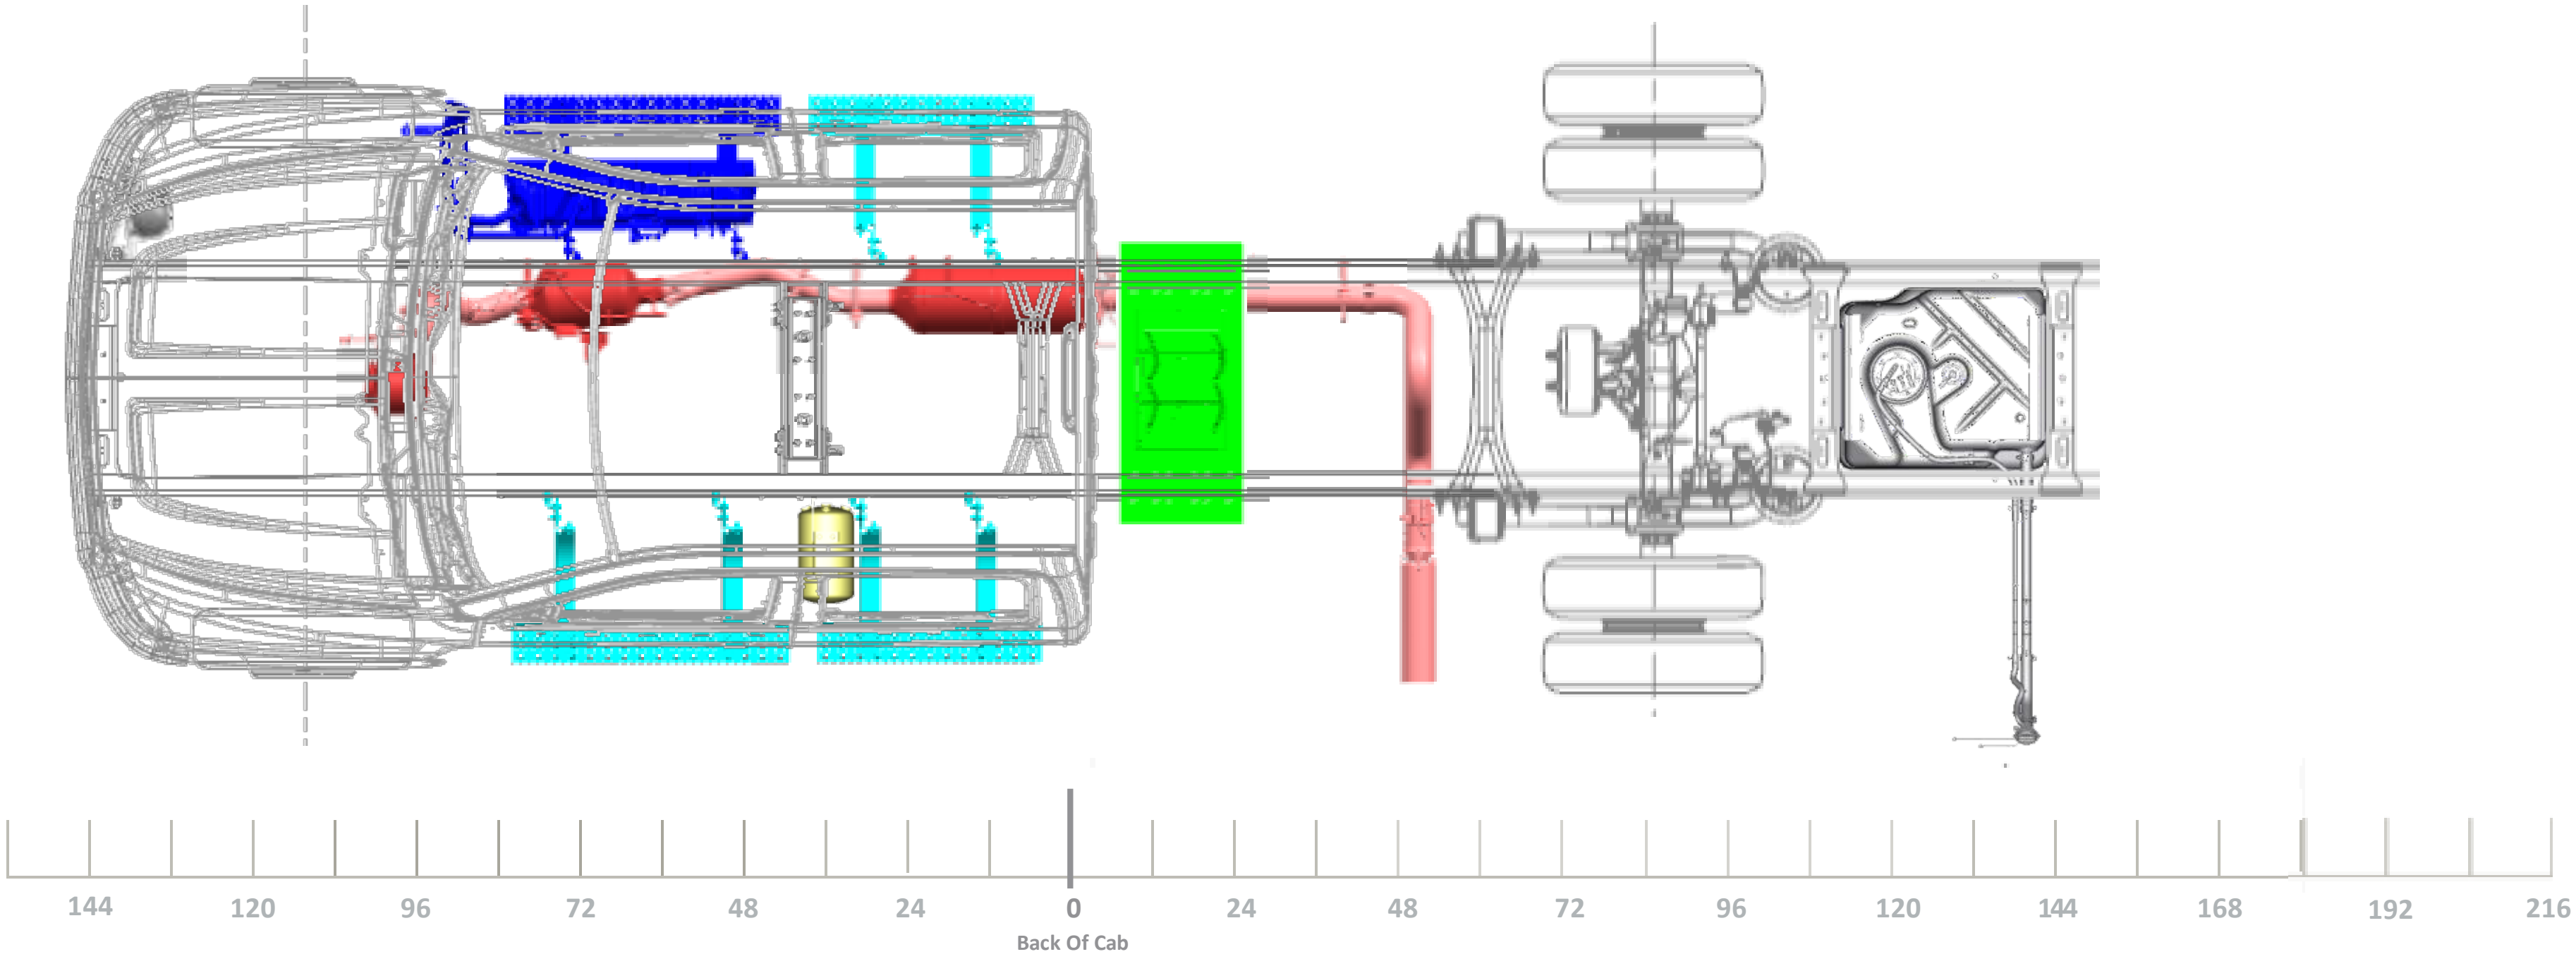

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

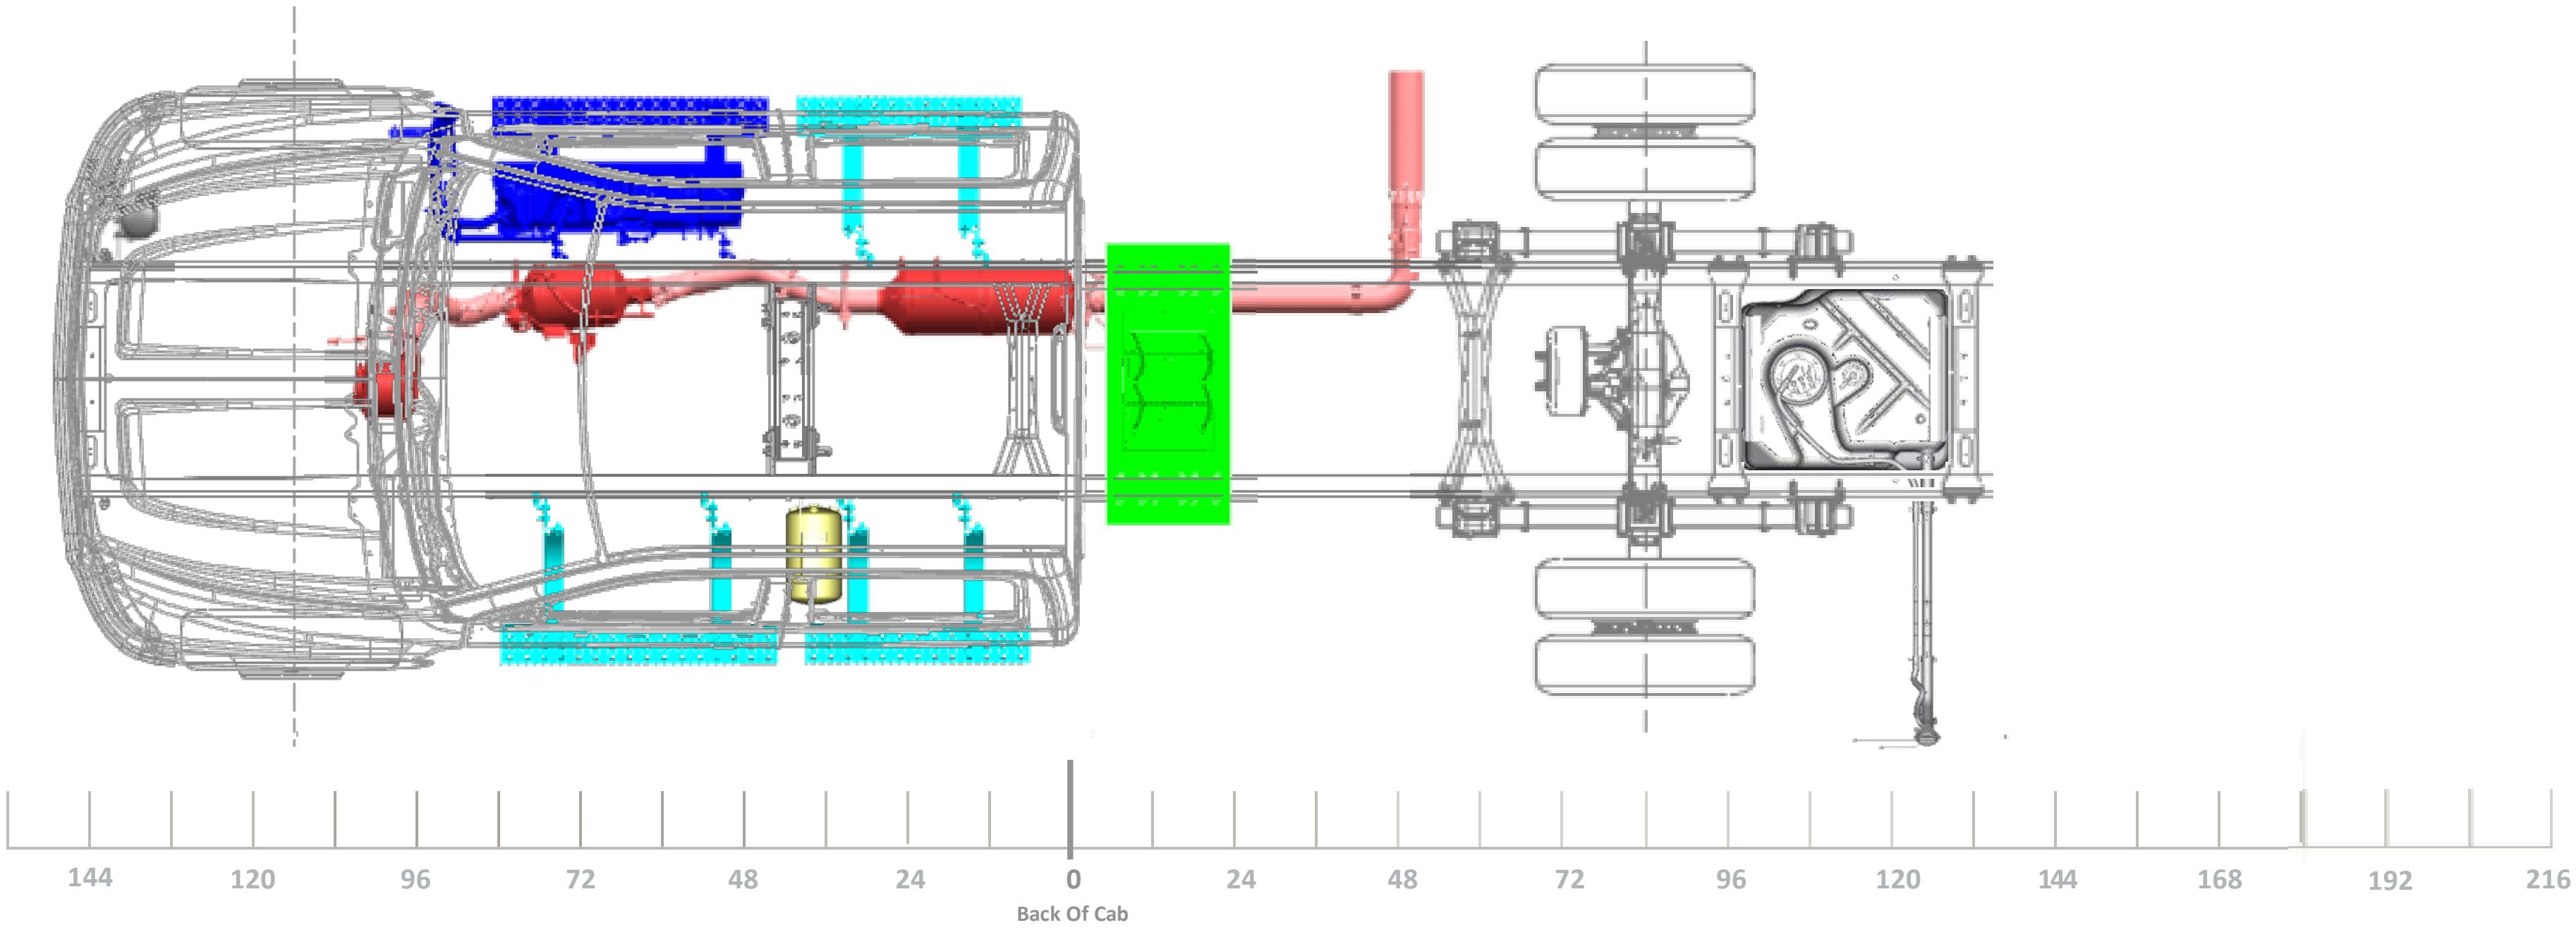

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

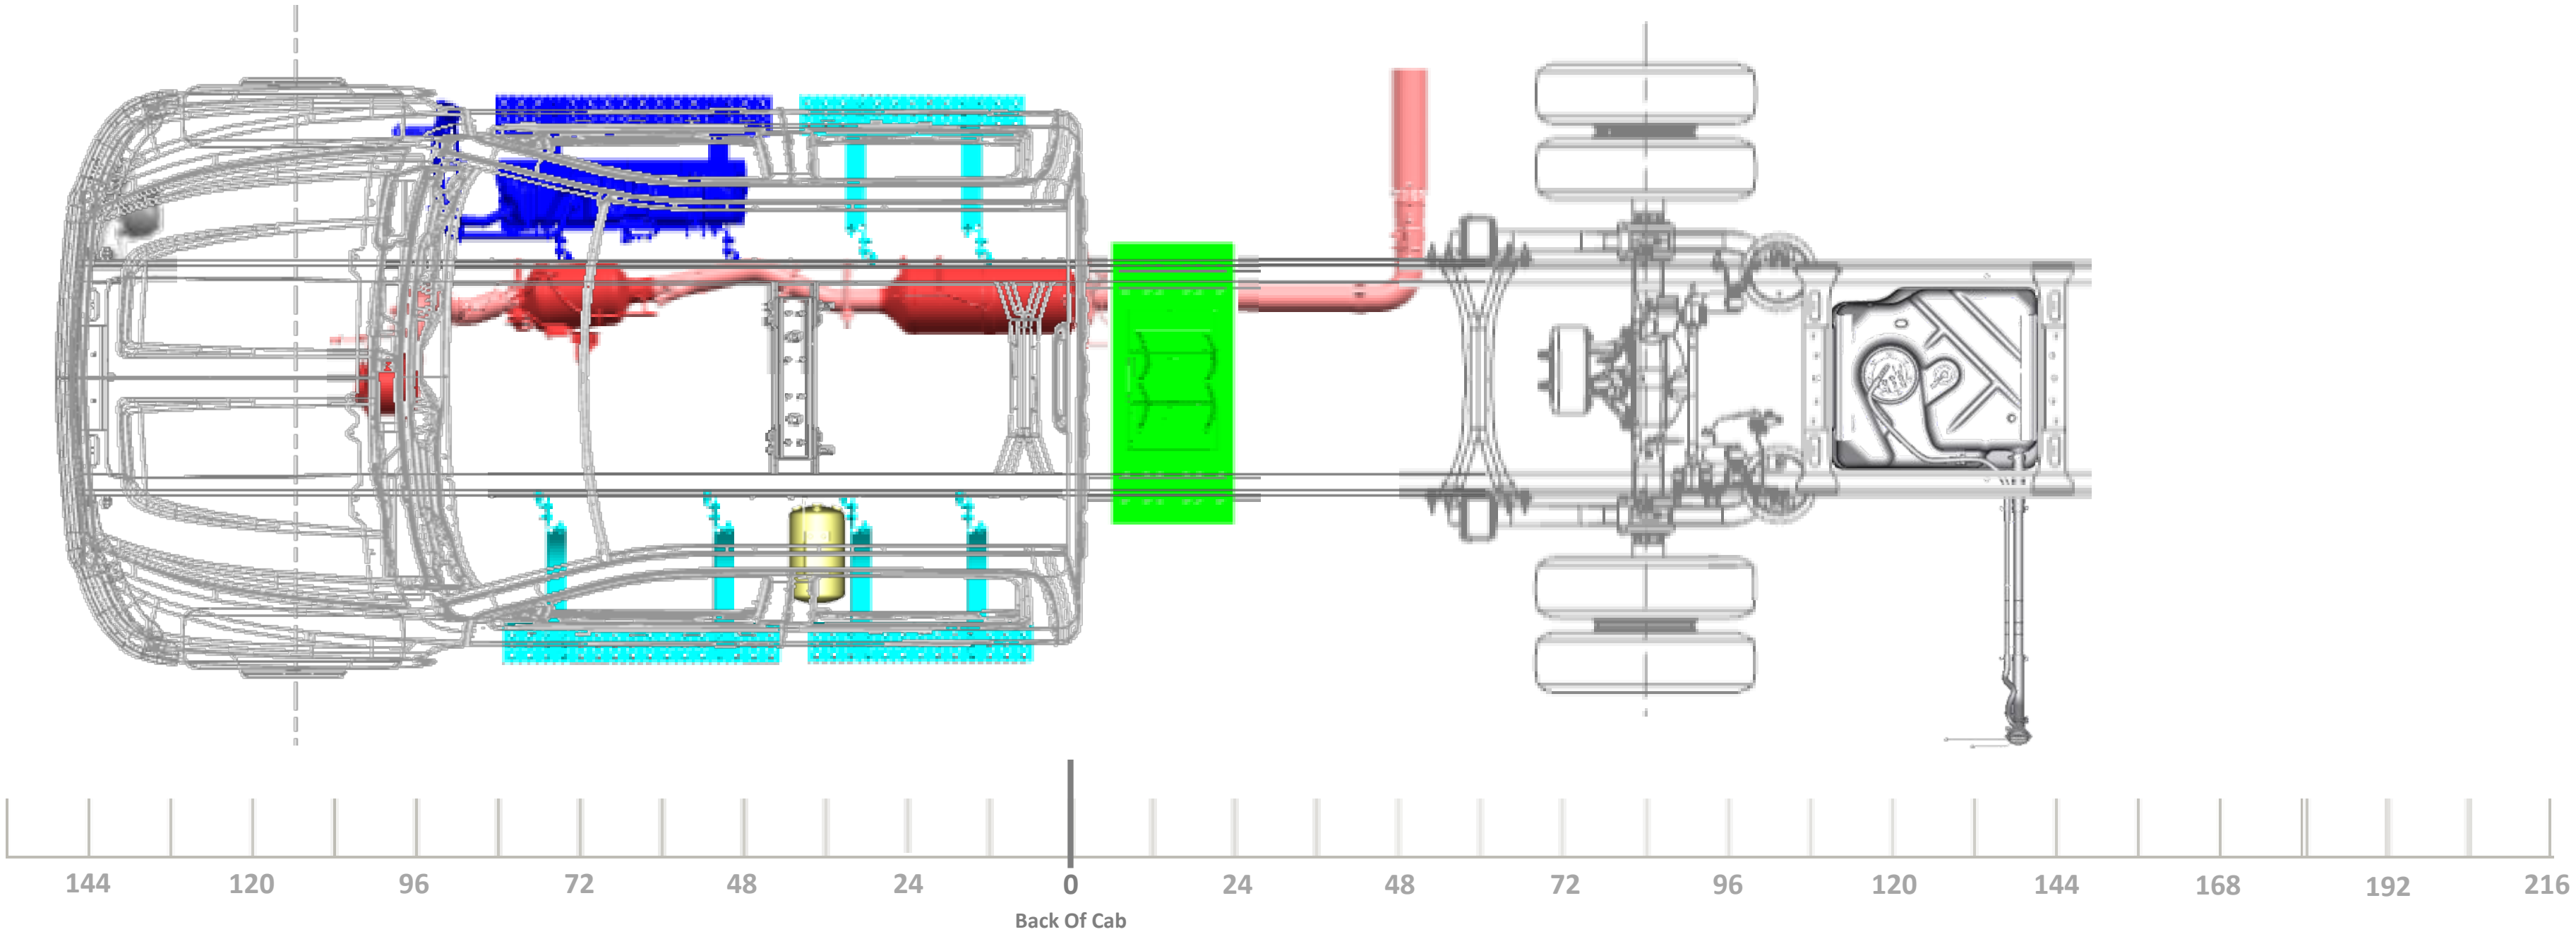

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

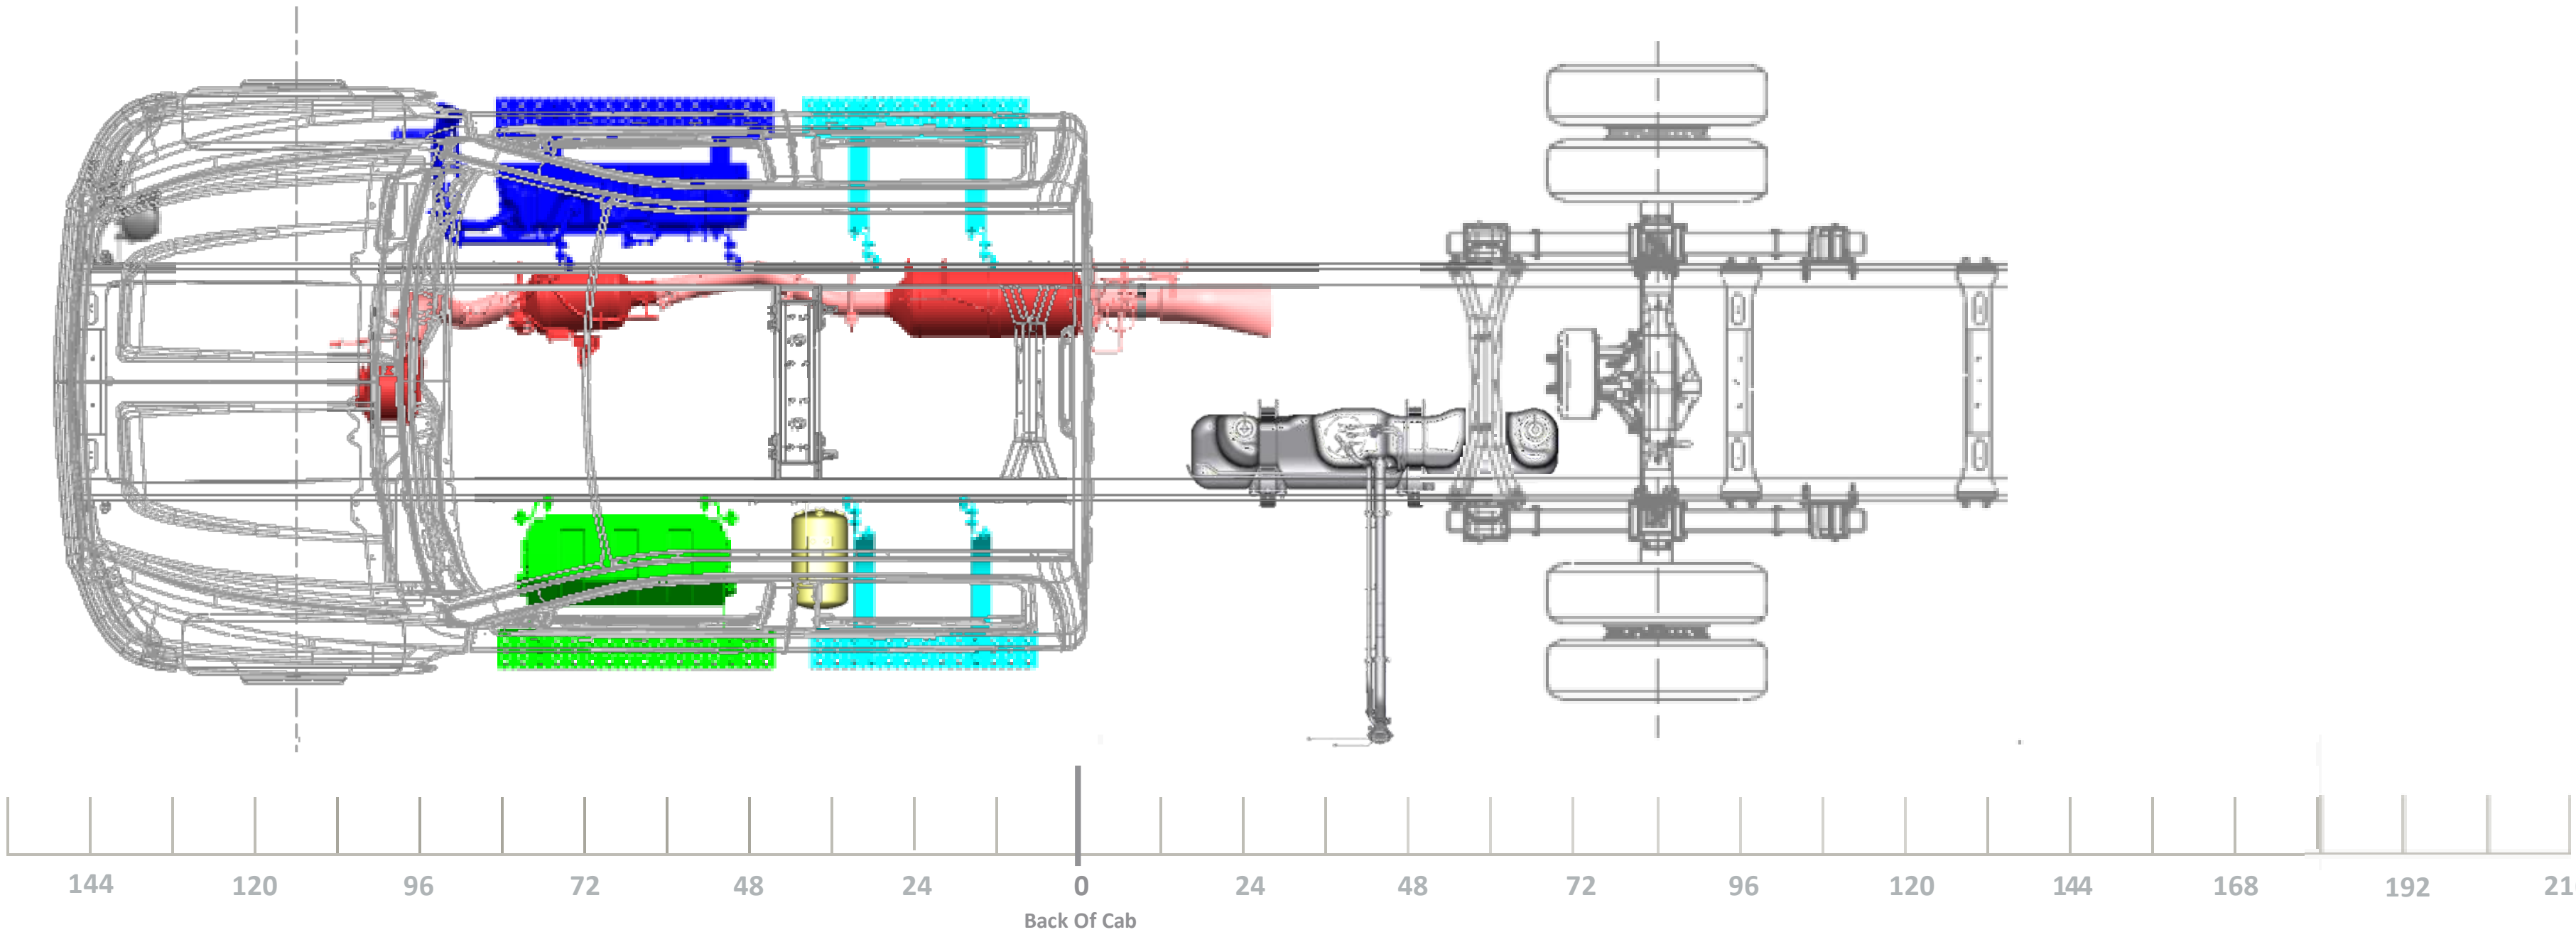

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

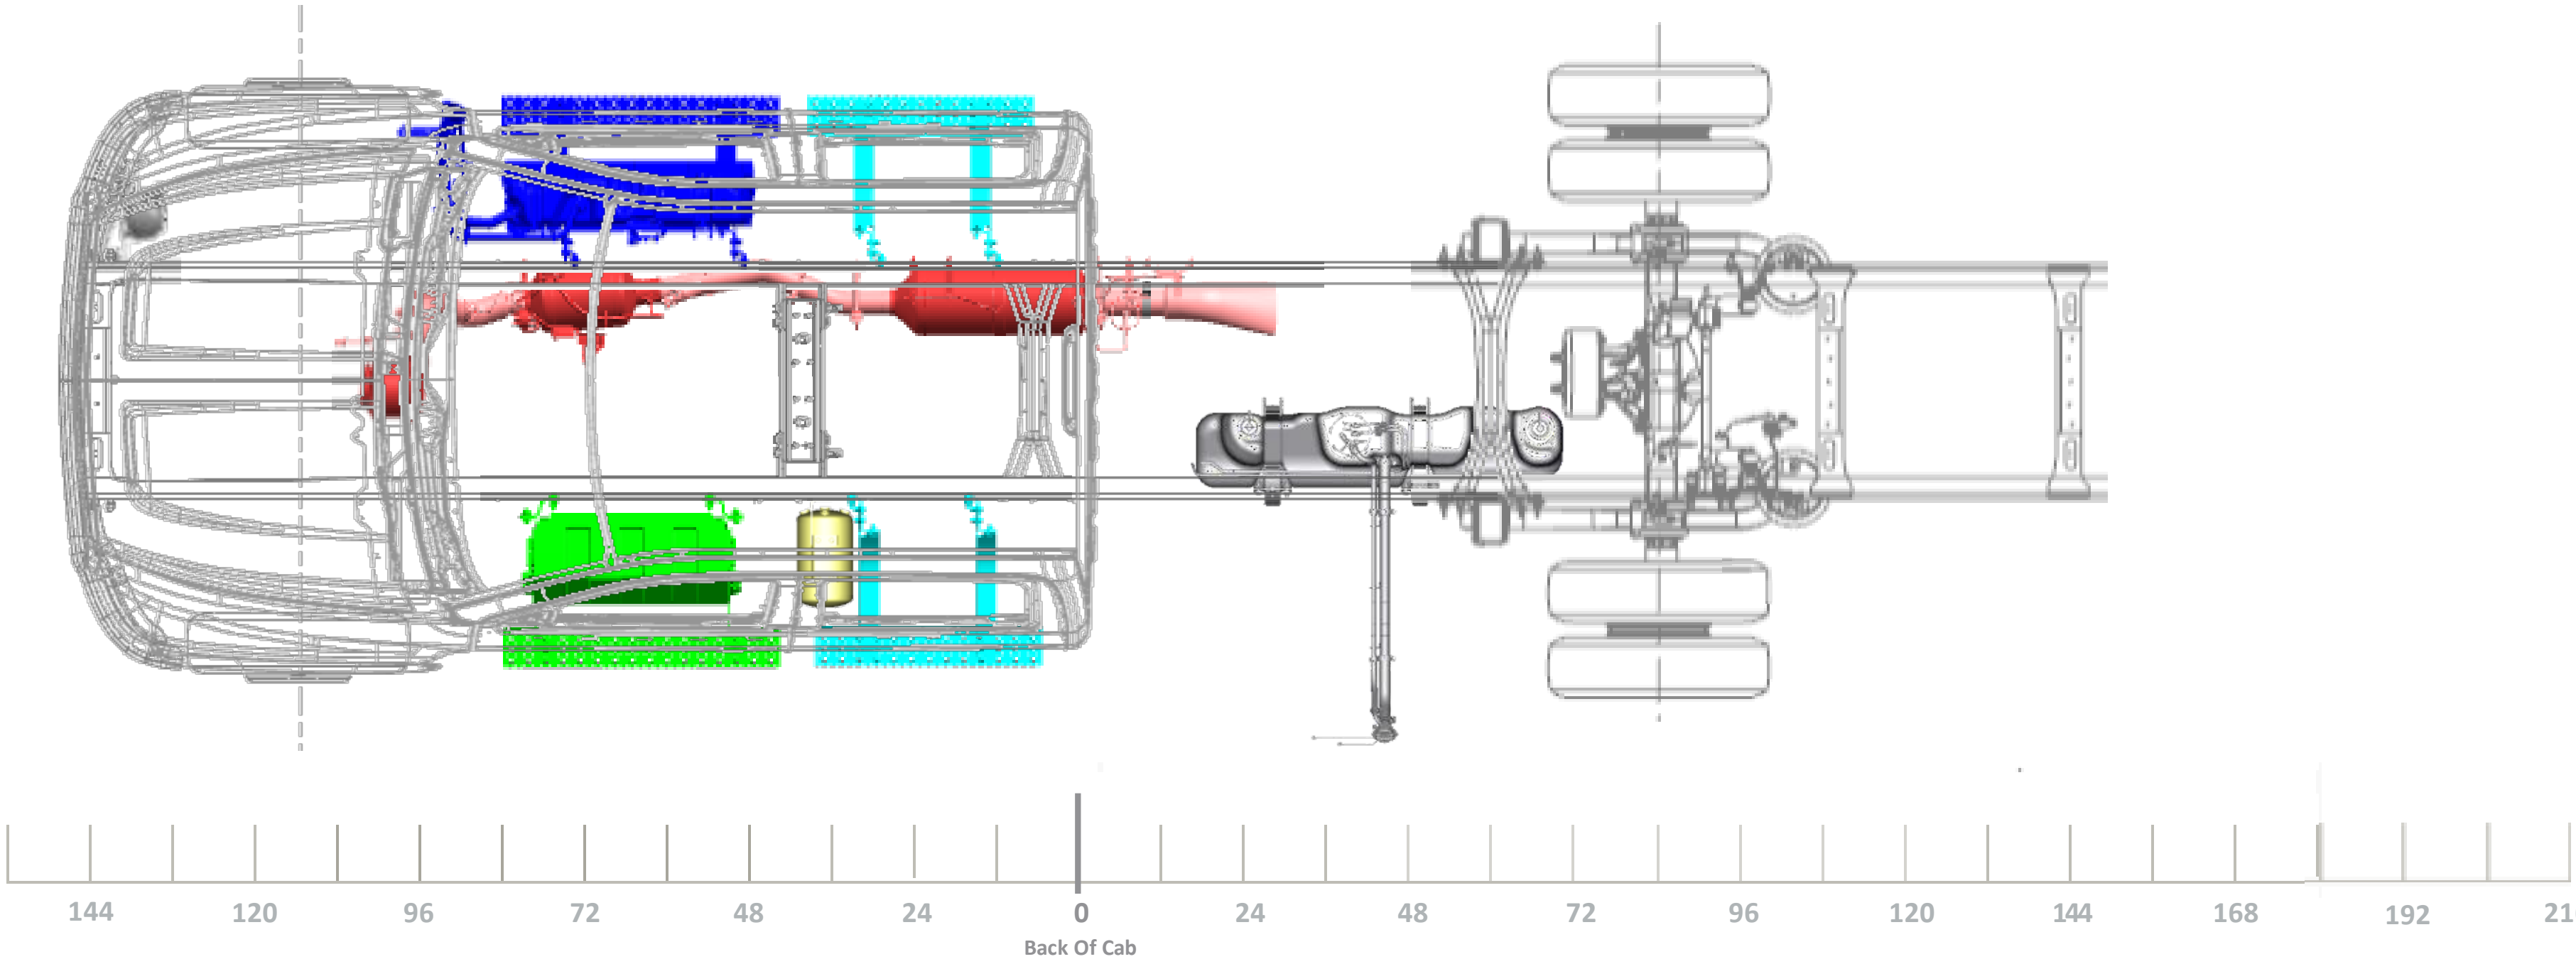

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

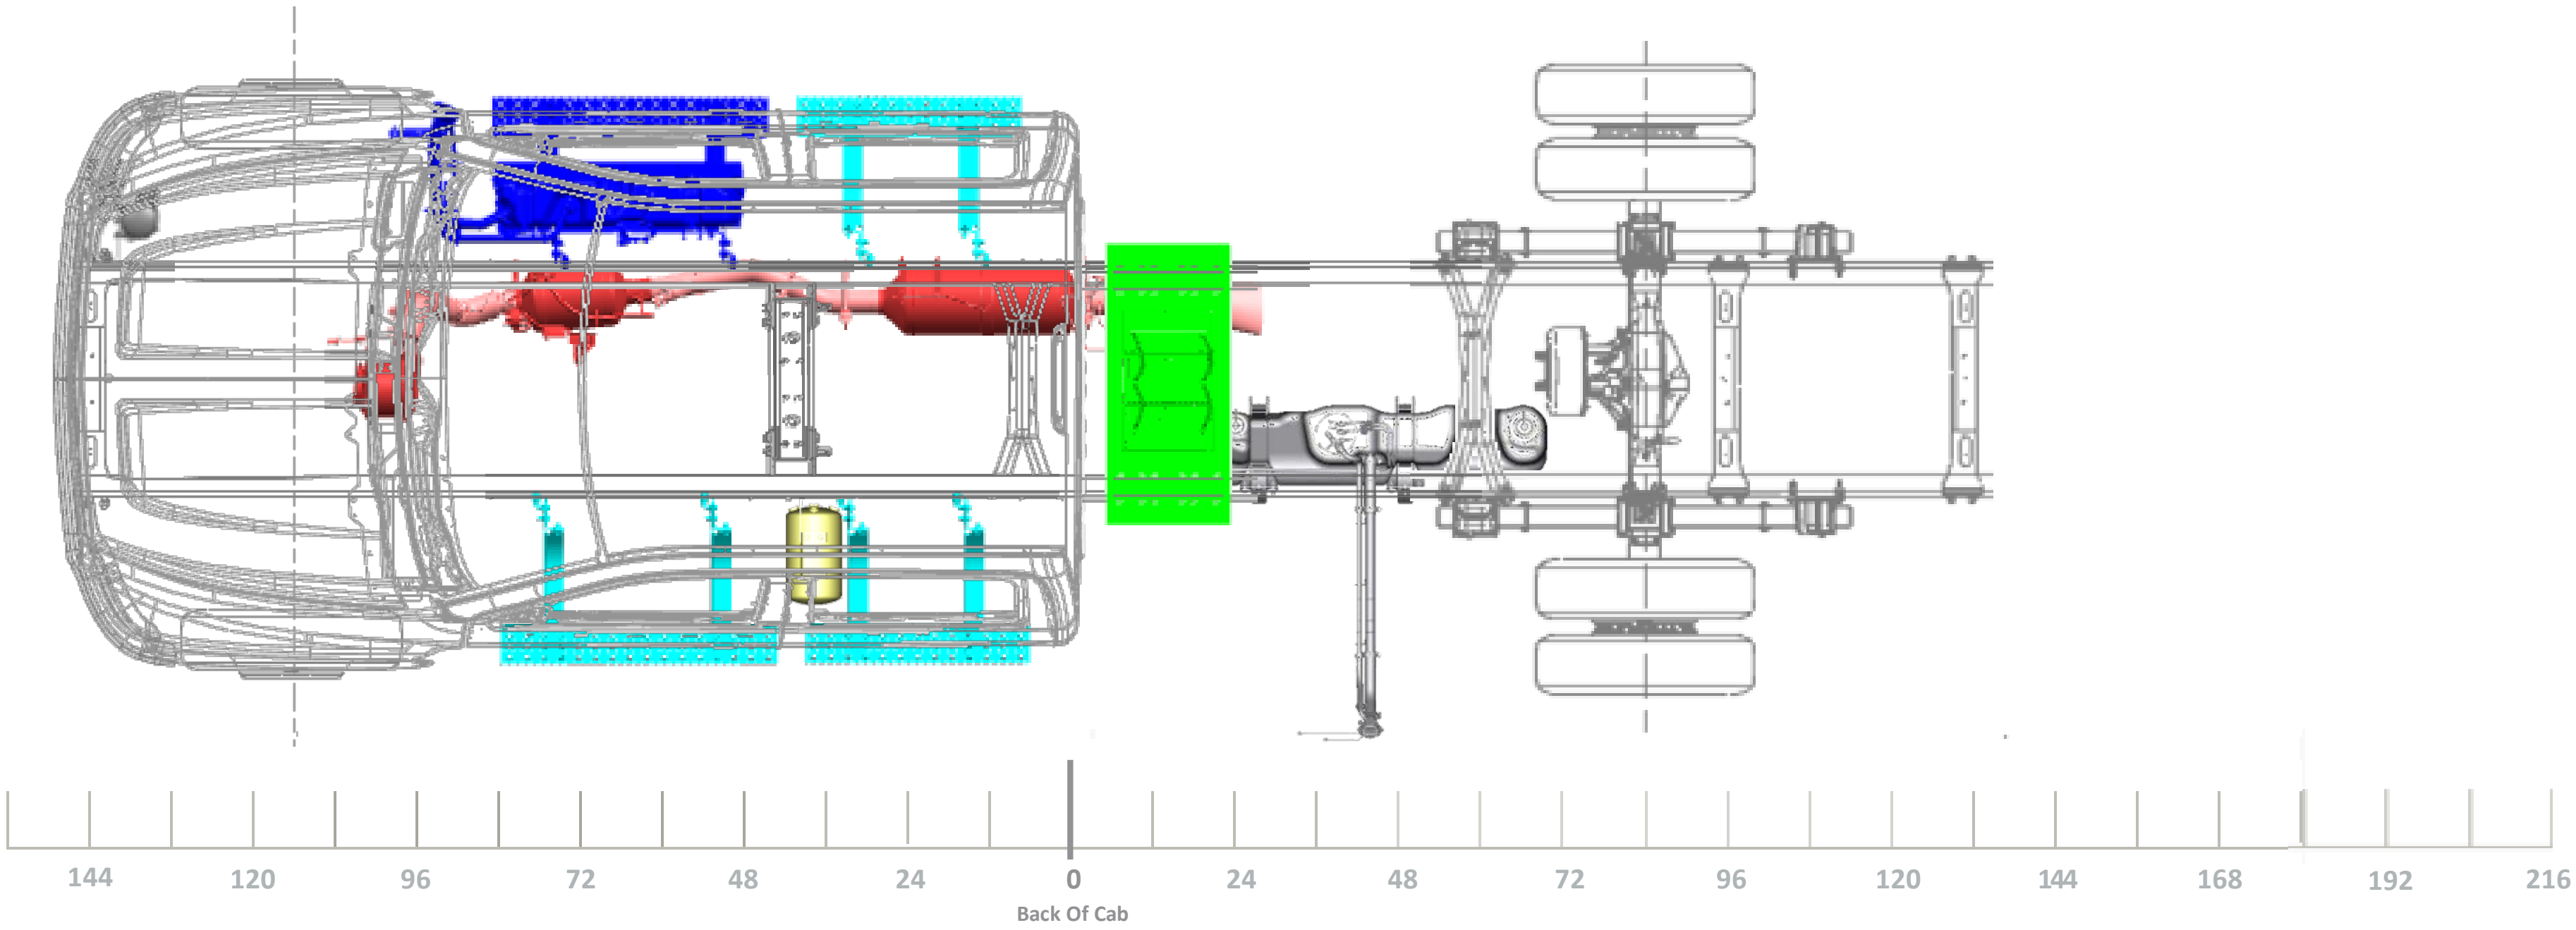
144
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

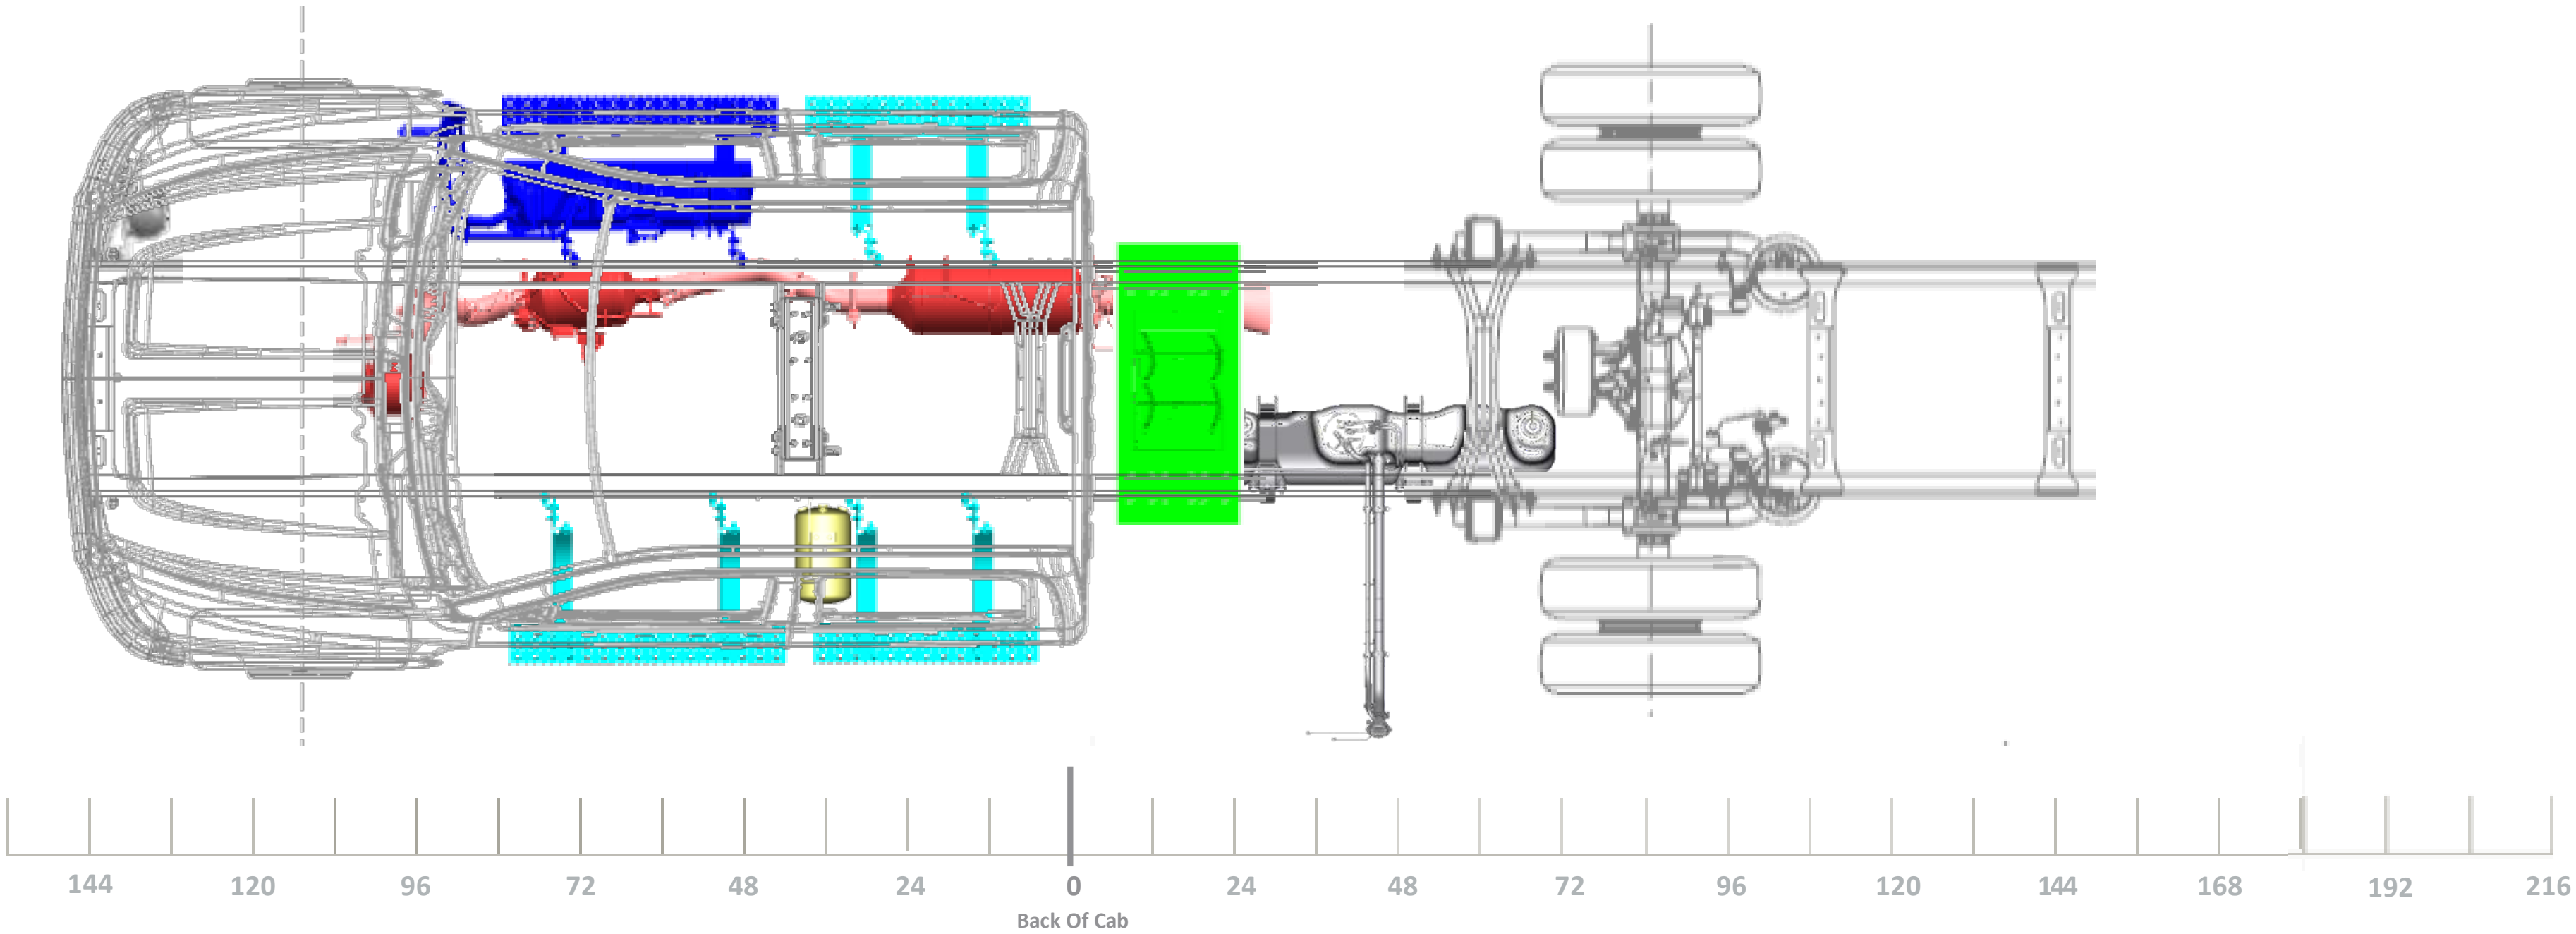

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

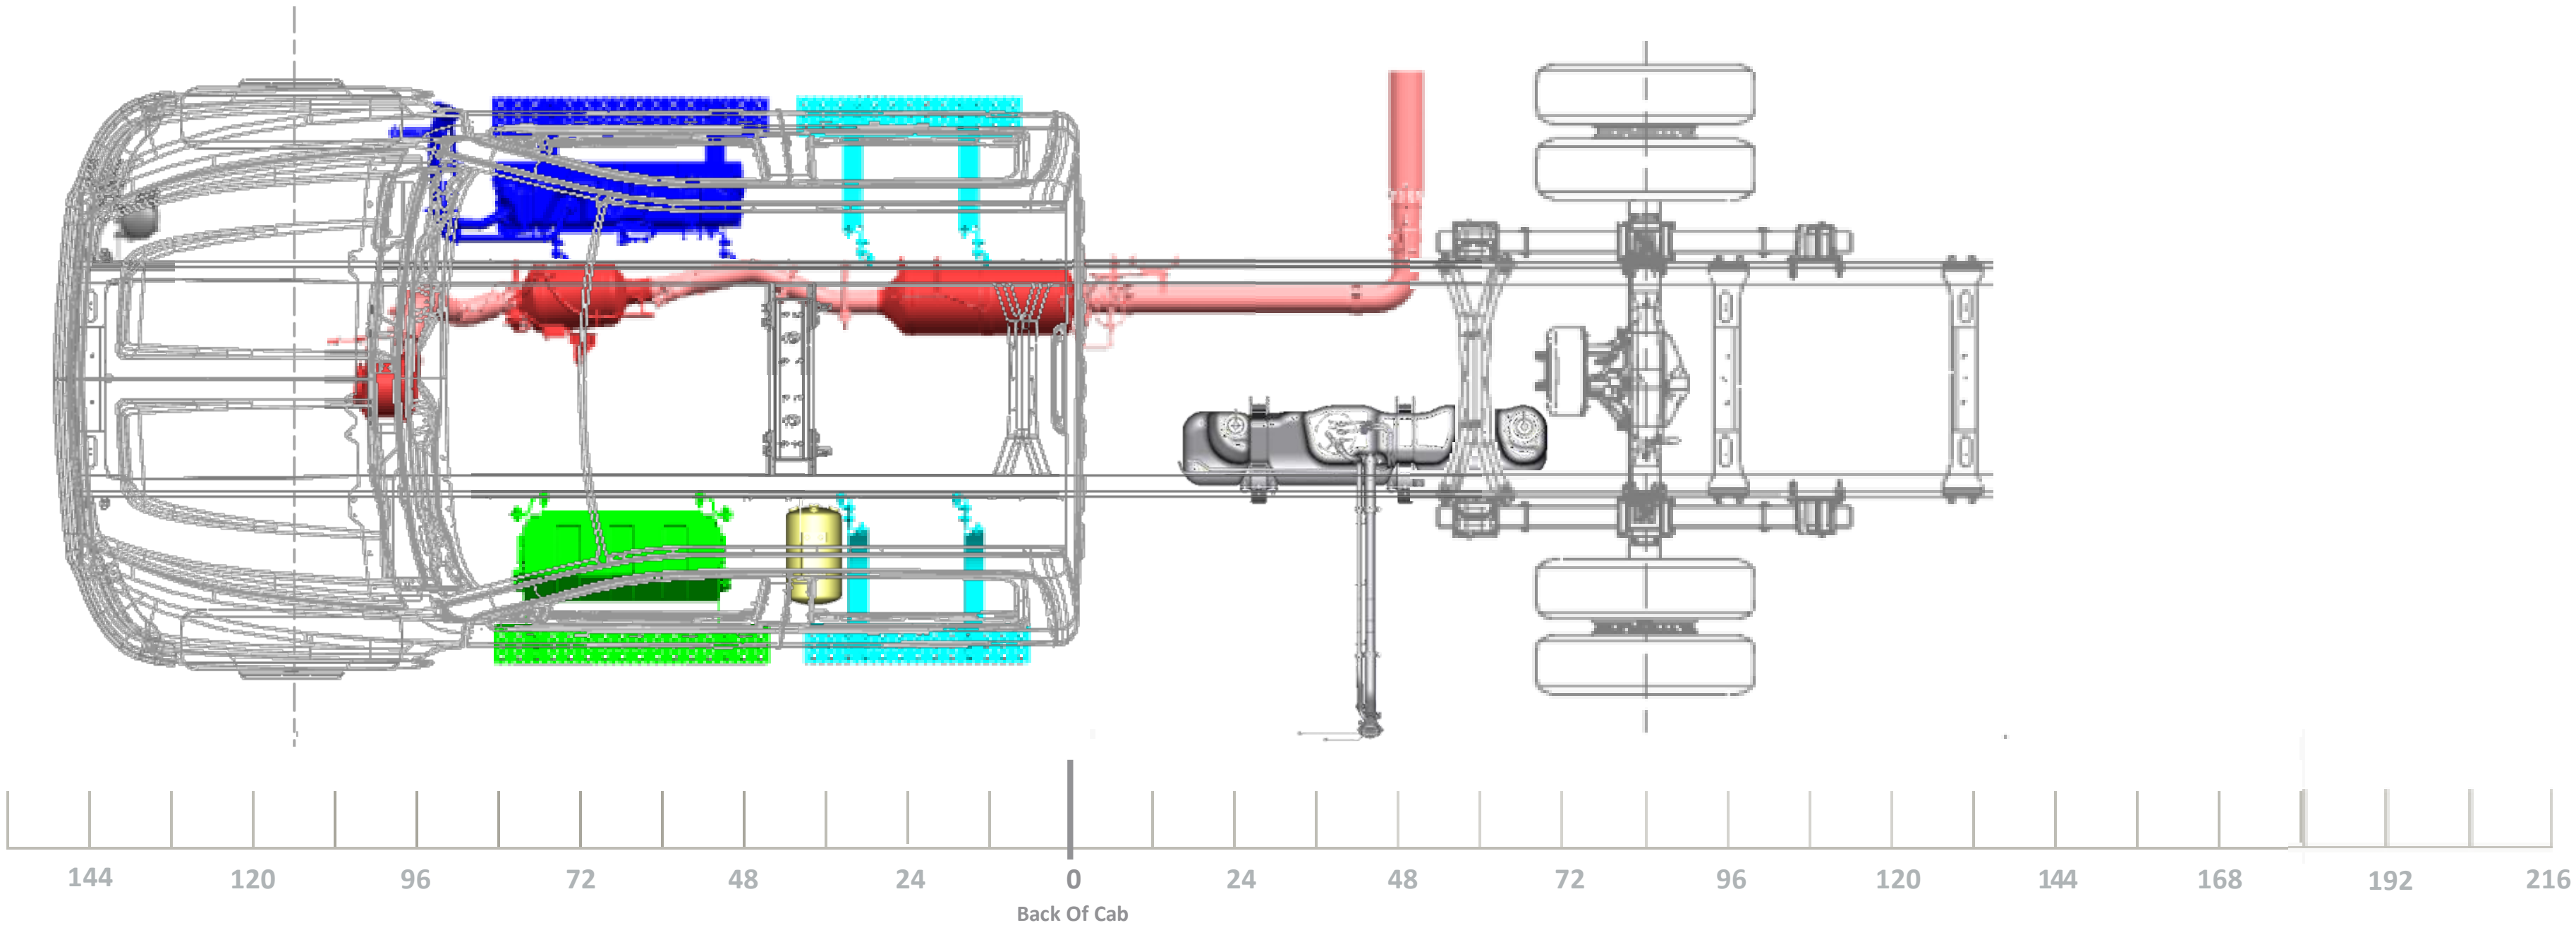

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

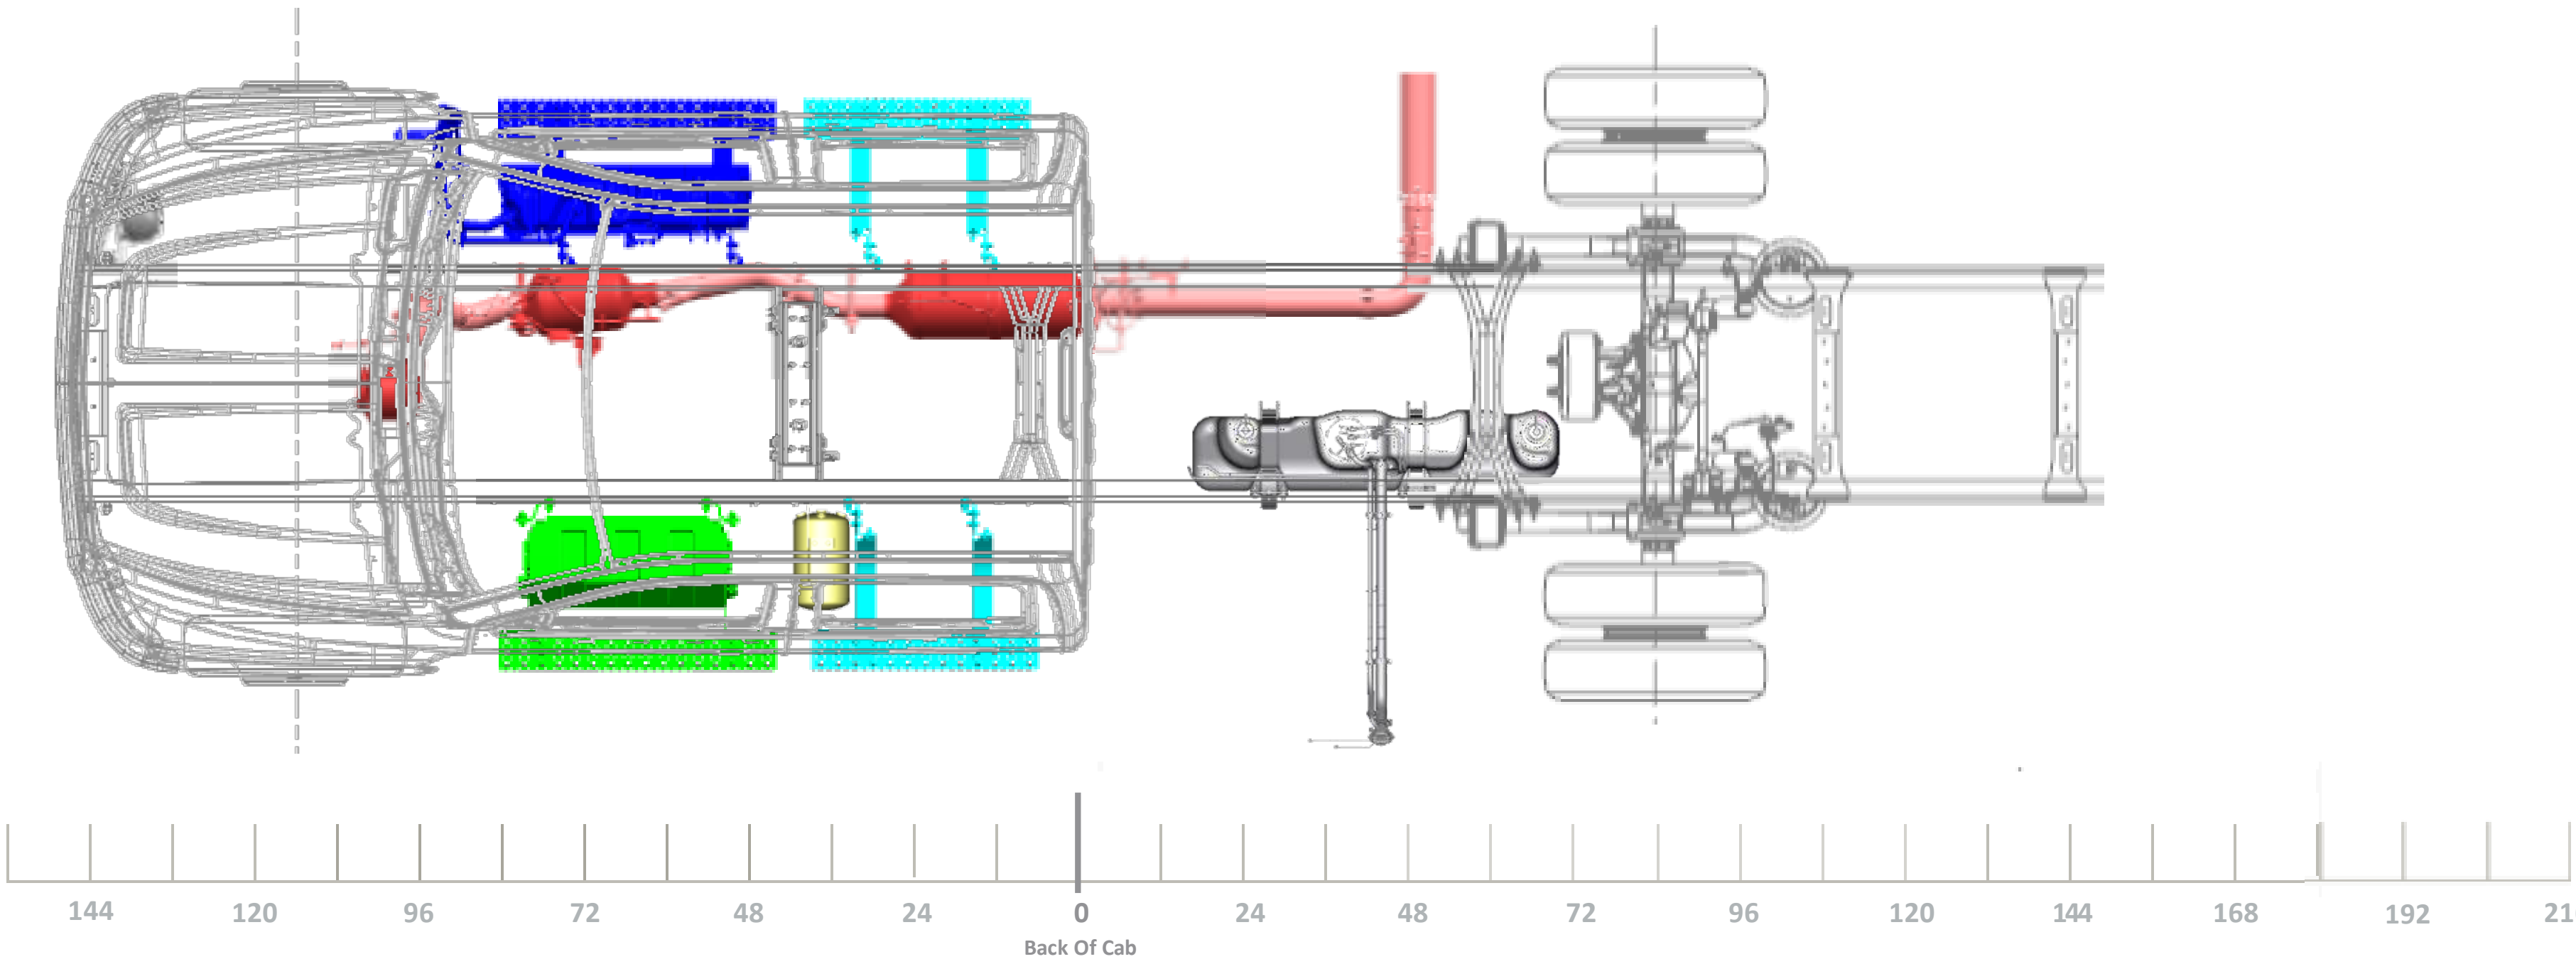

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

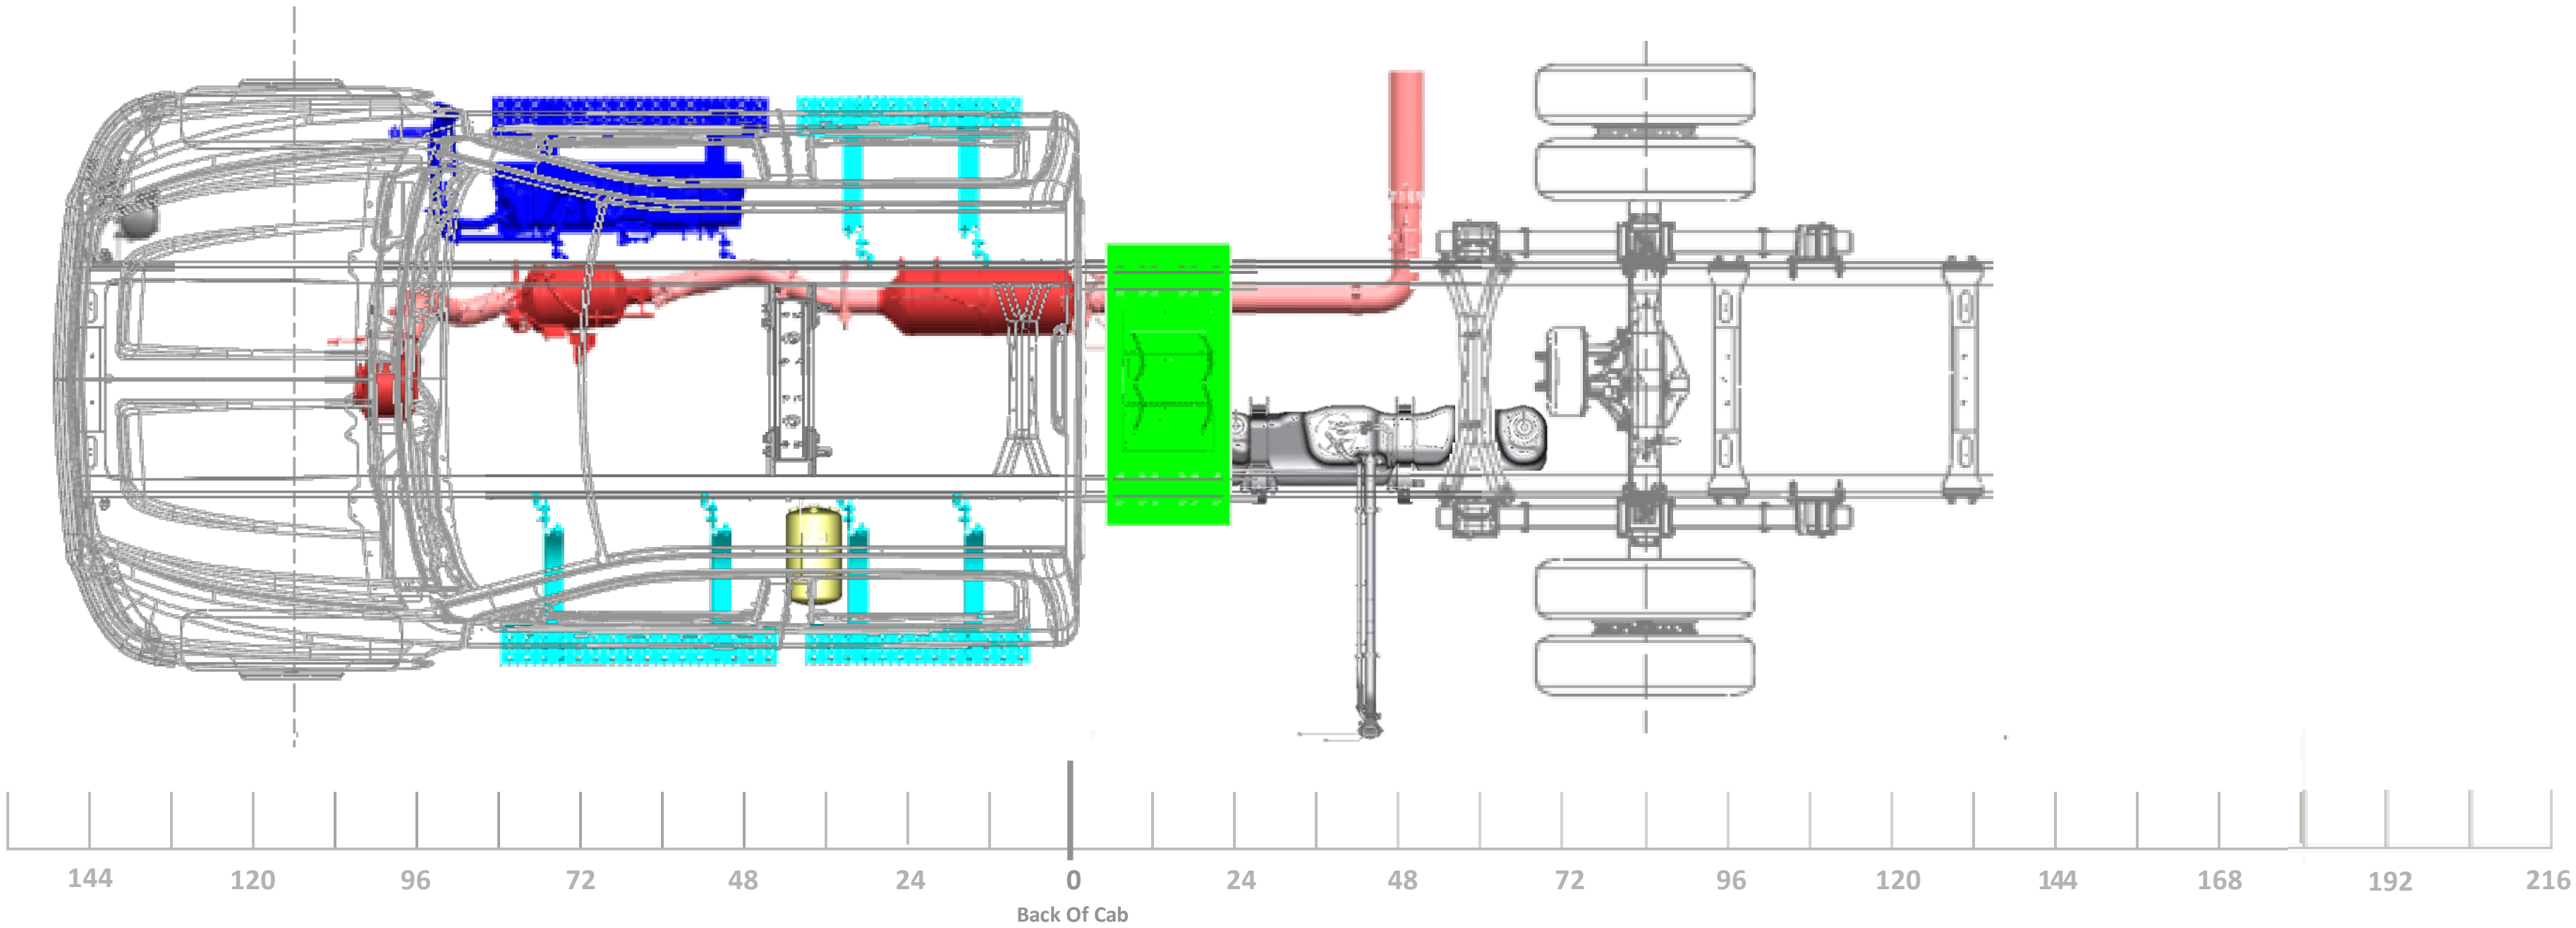

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

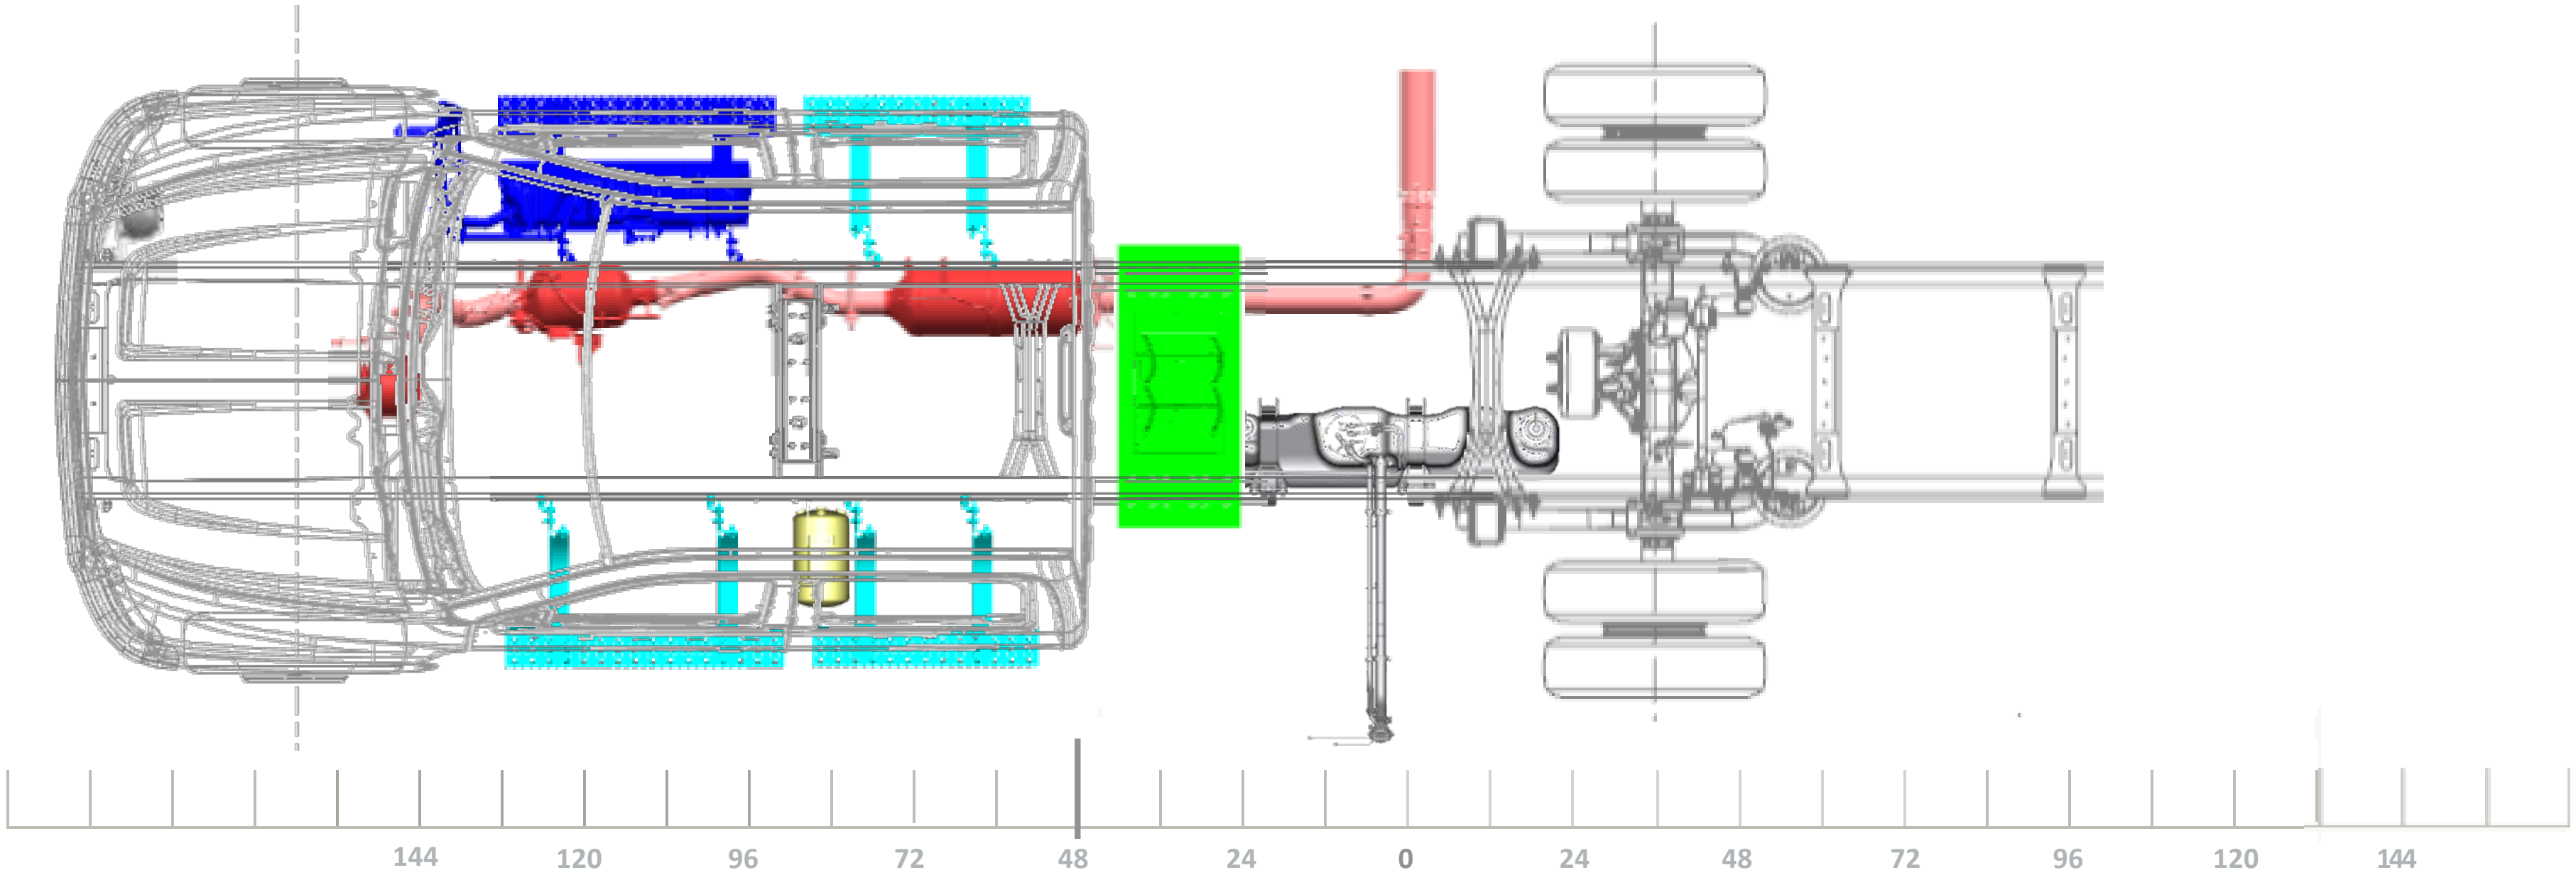

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

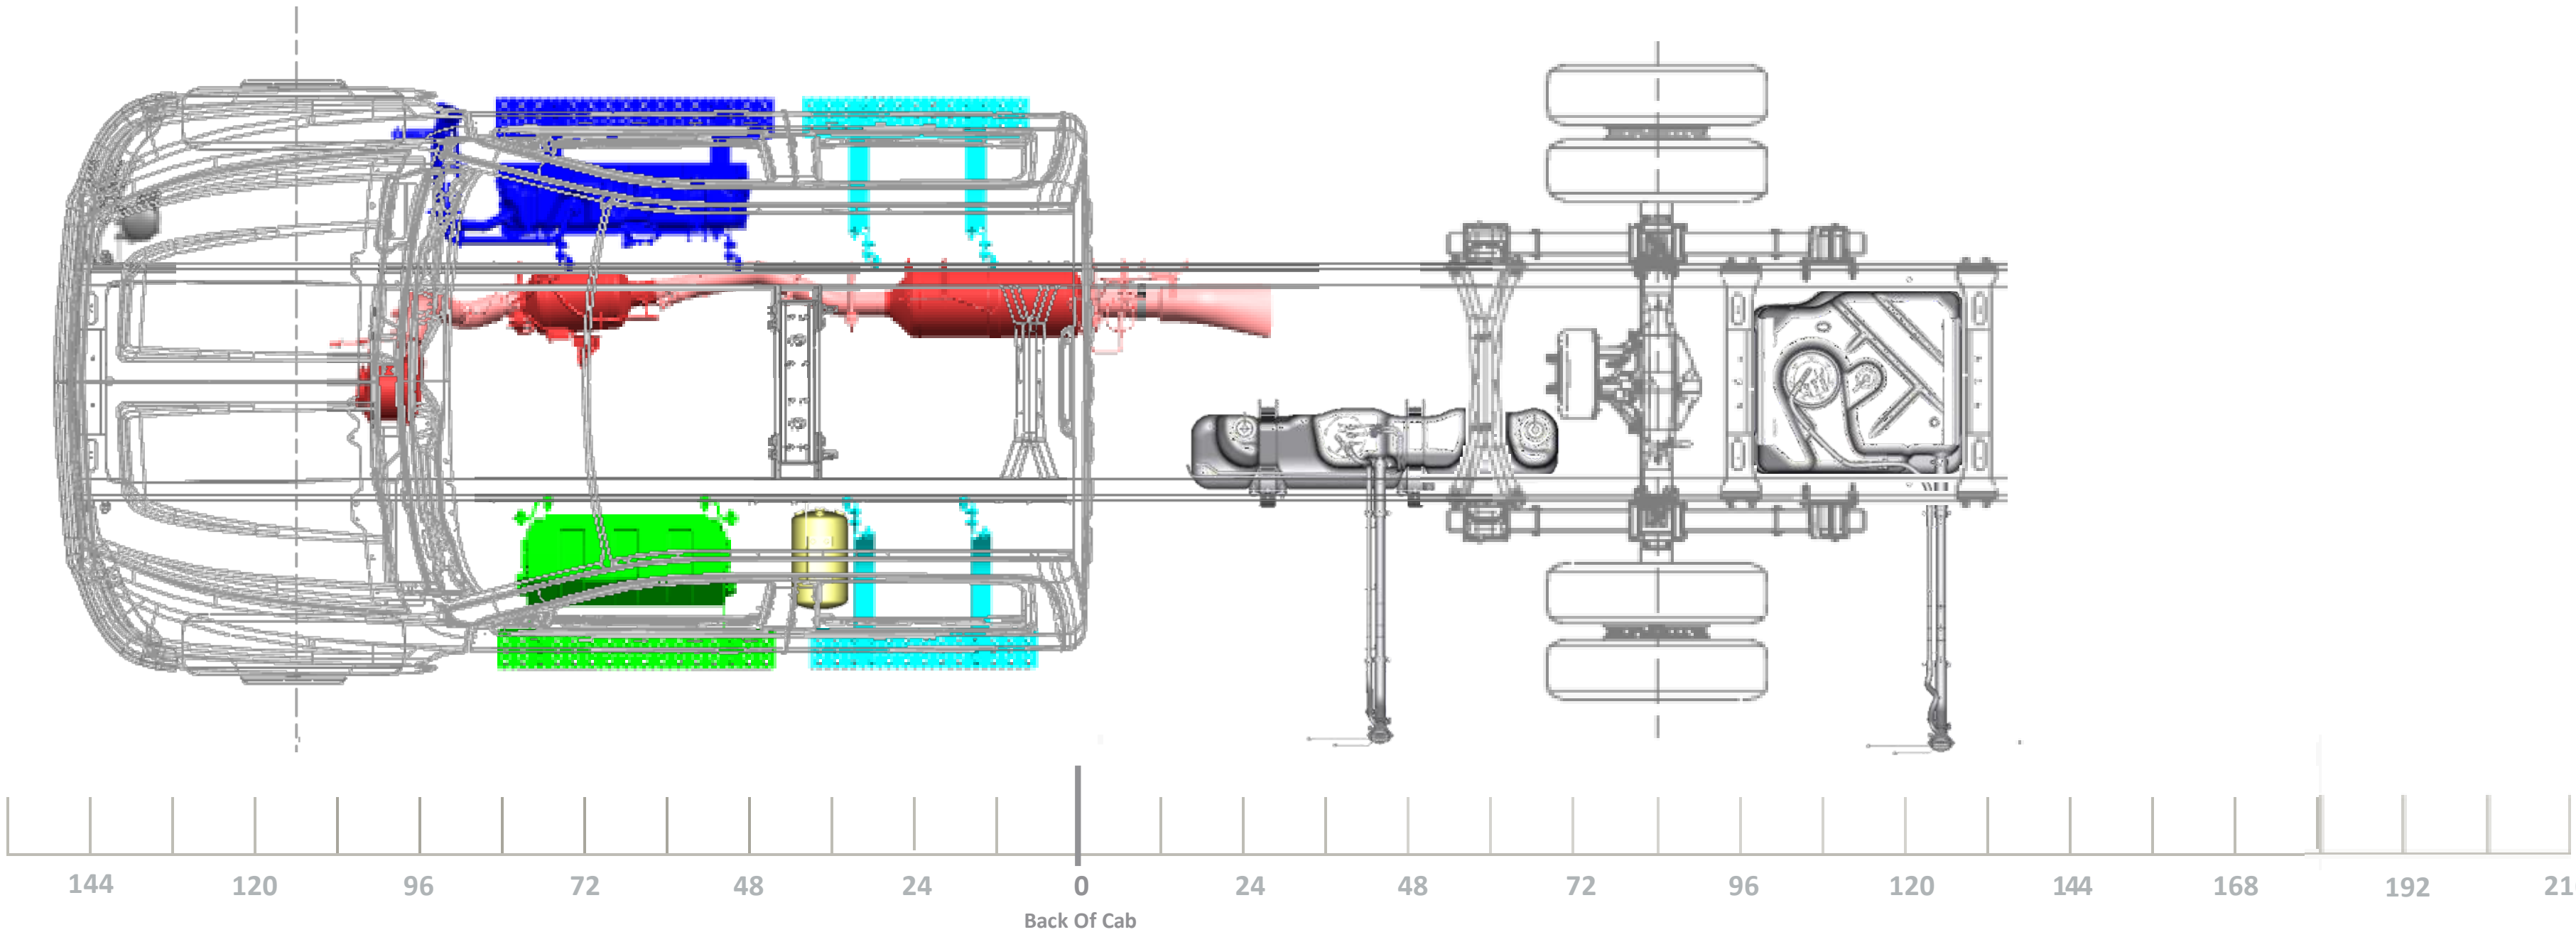

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

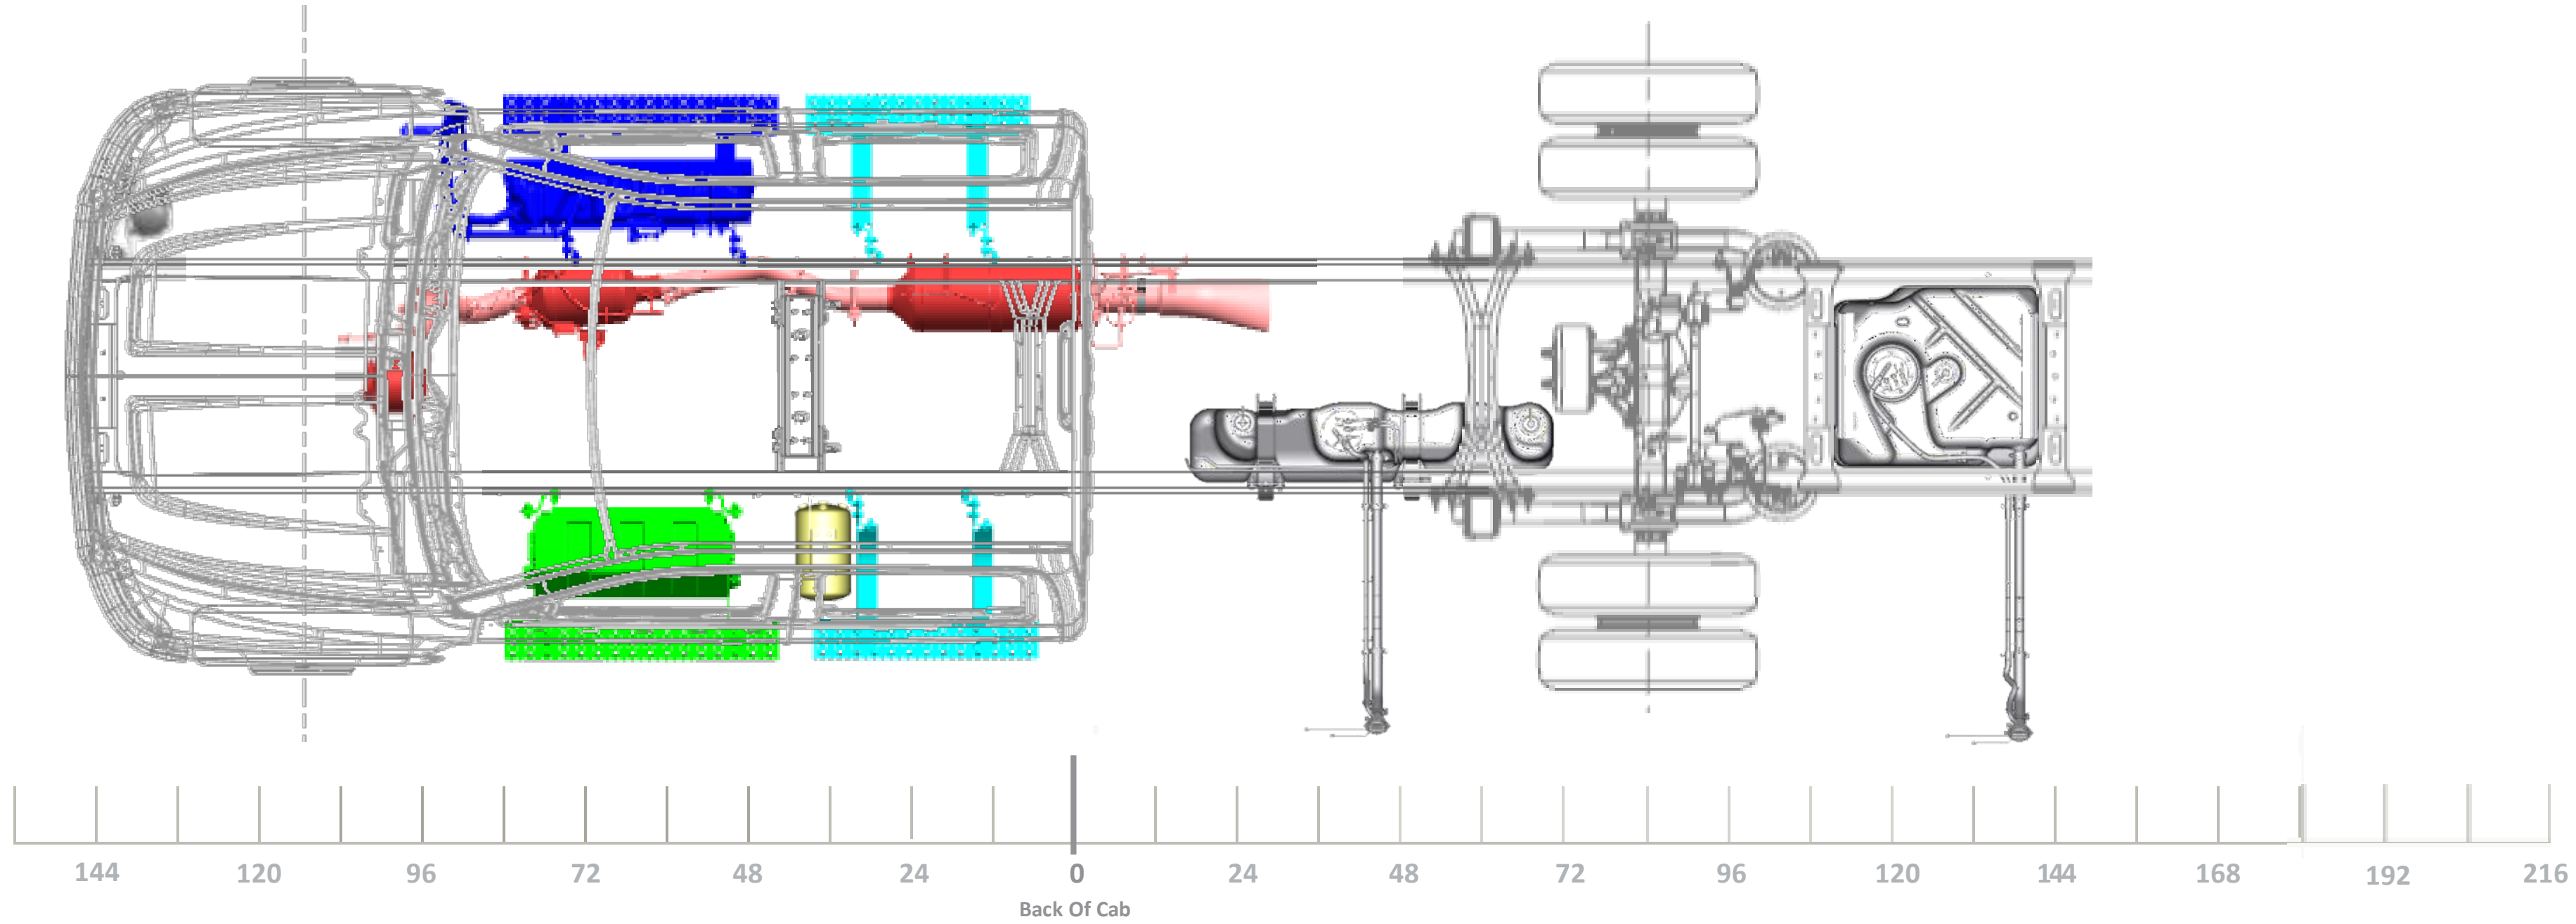

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

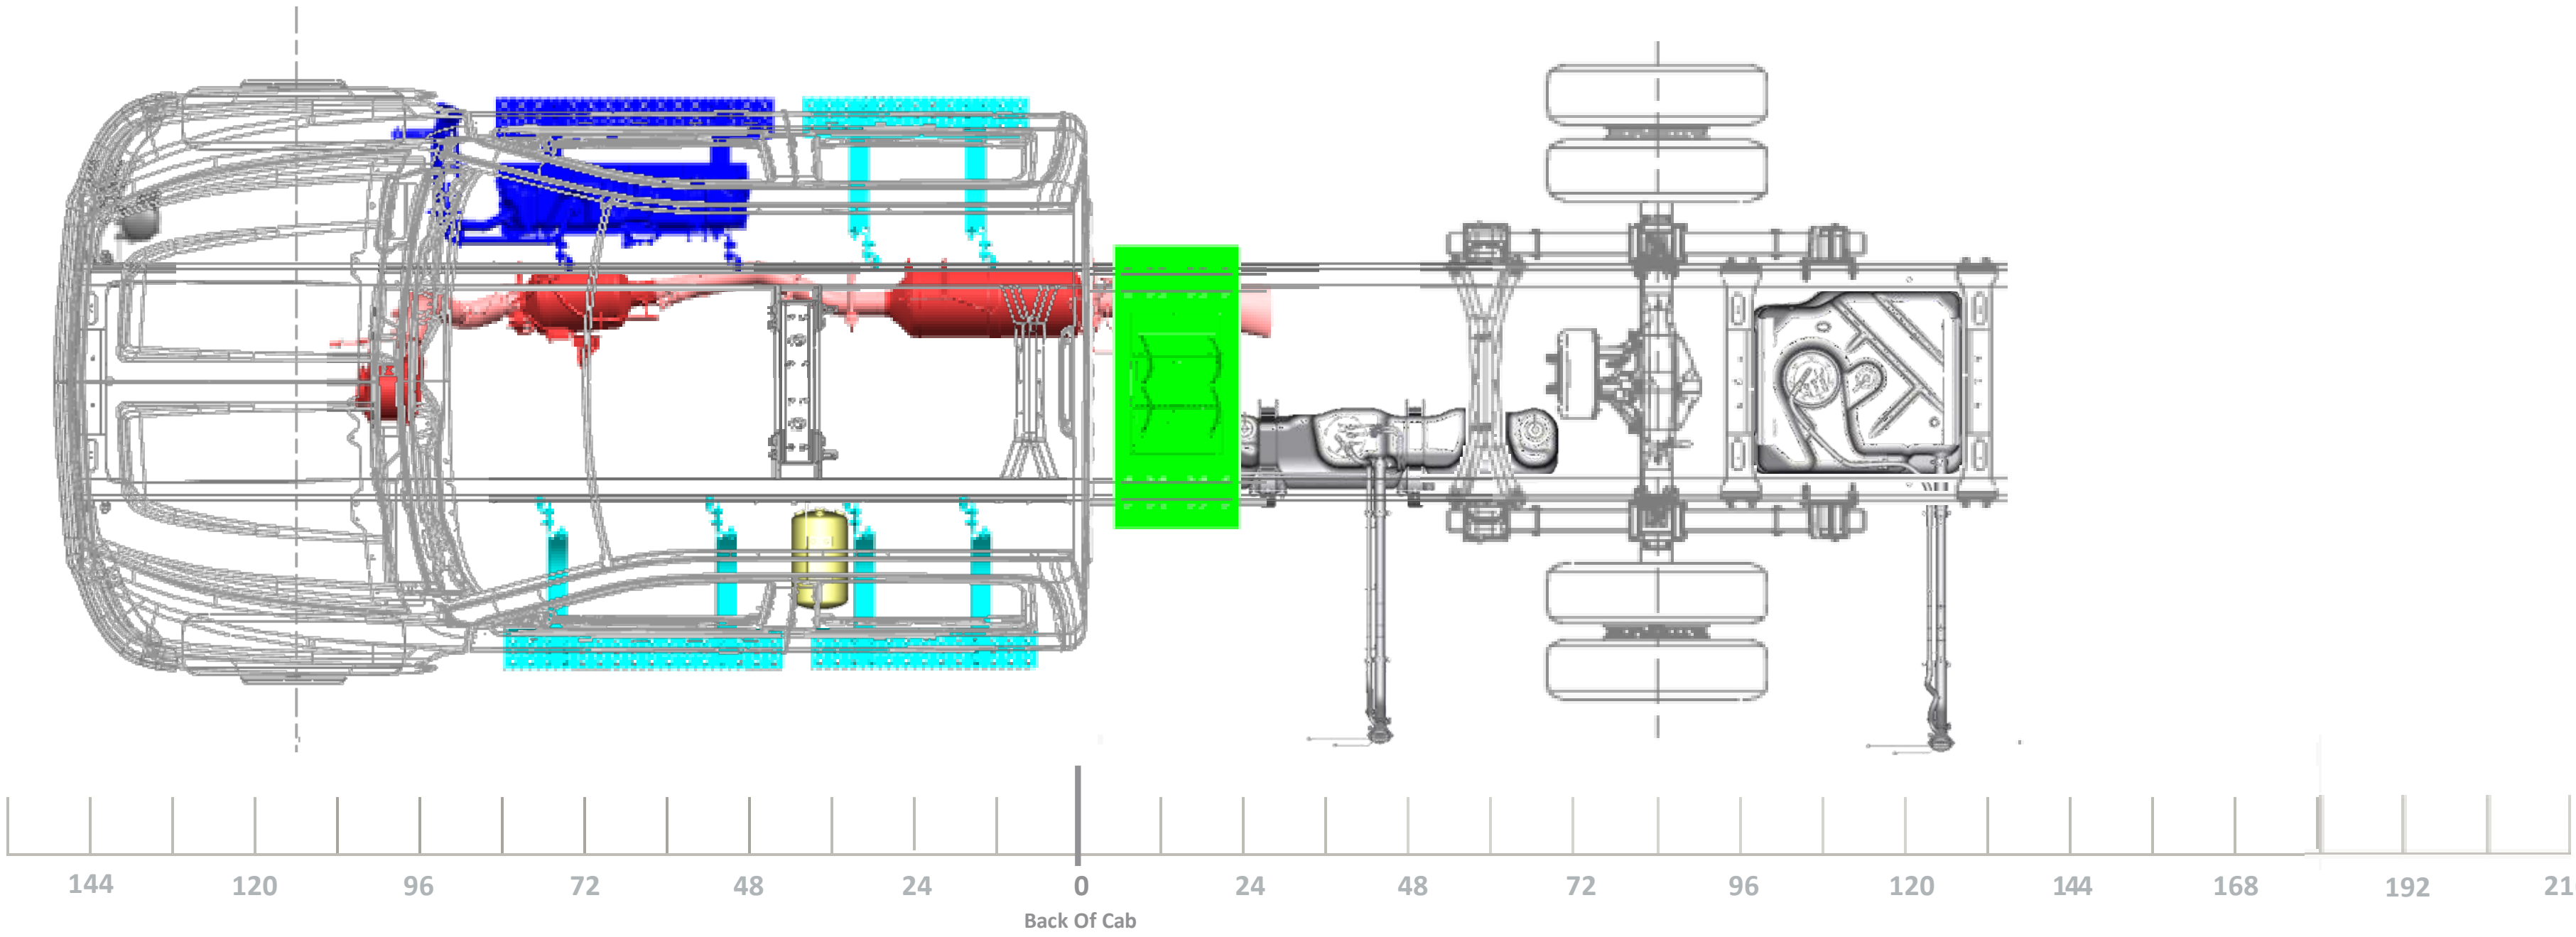

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

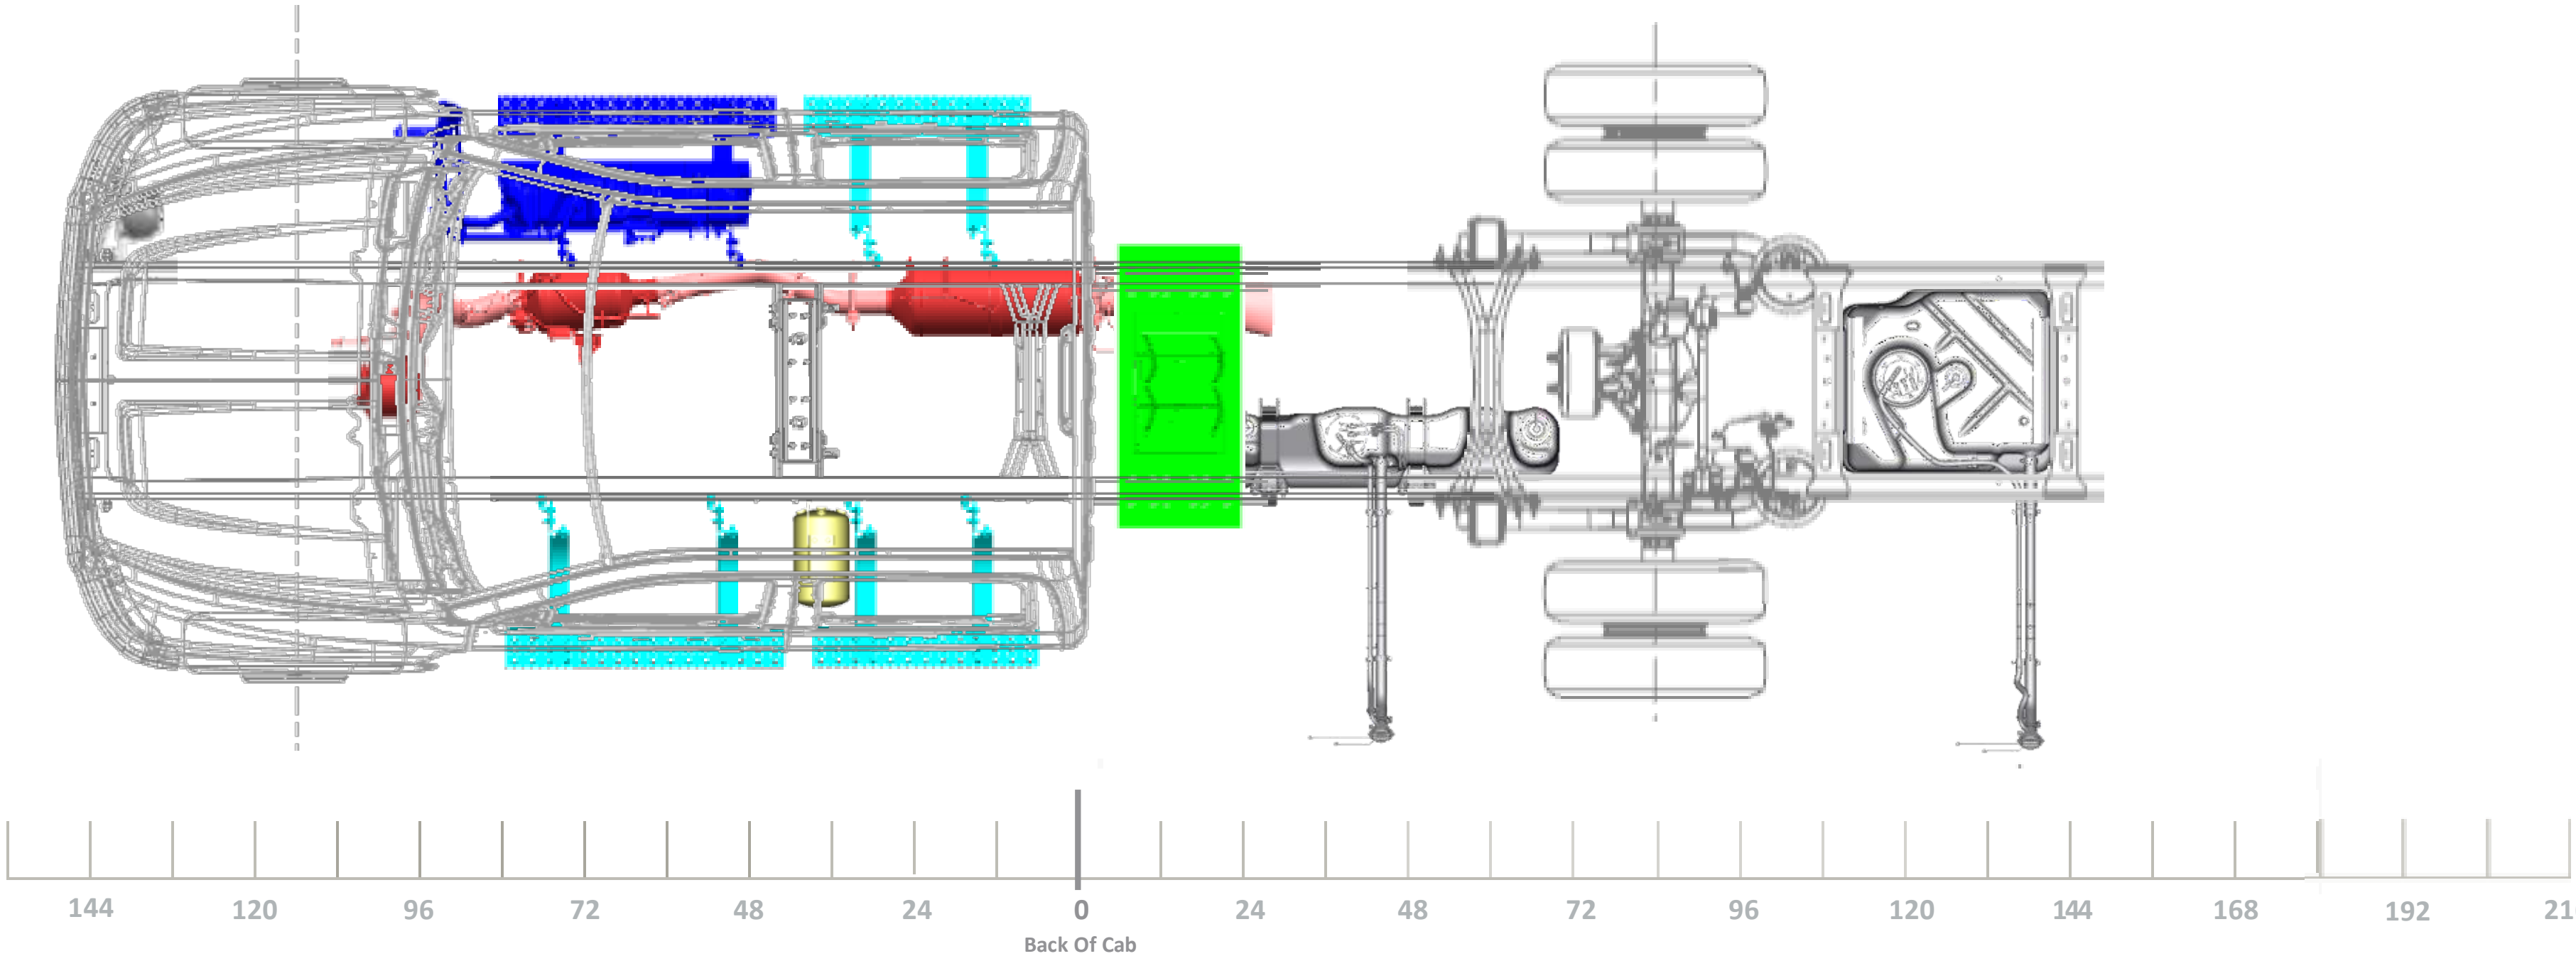

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

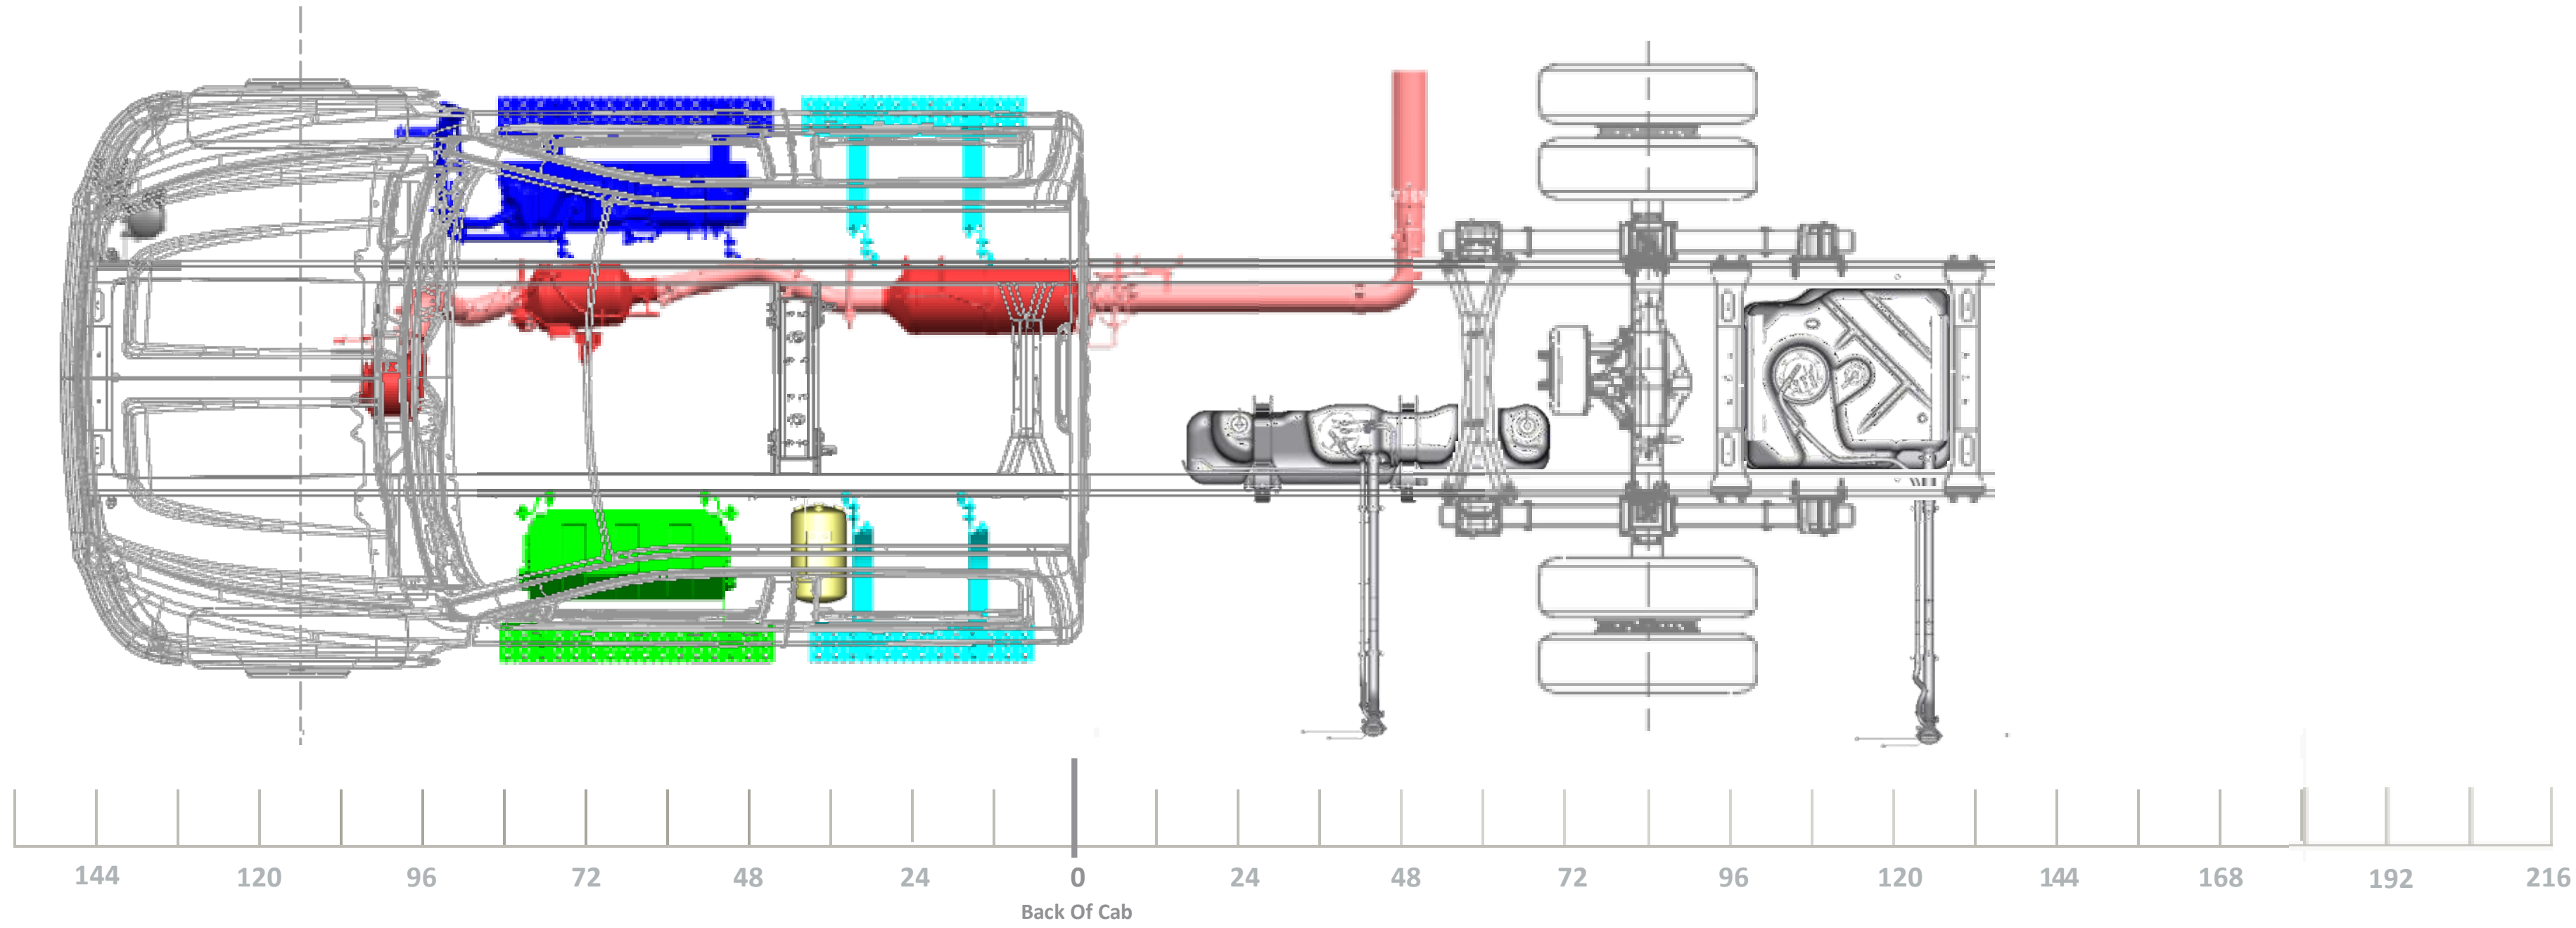

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

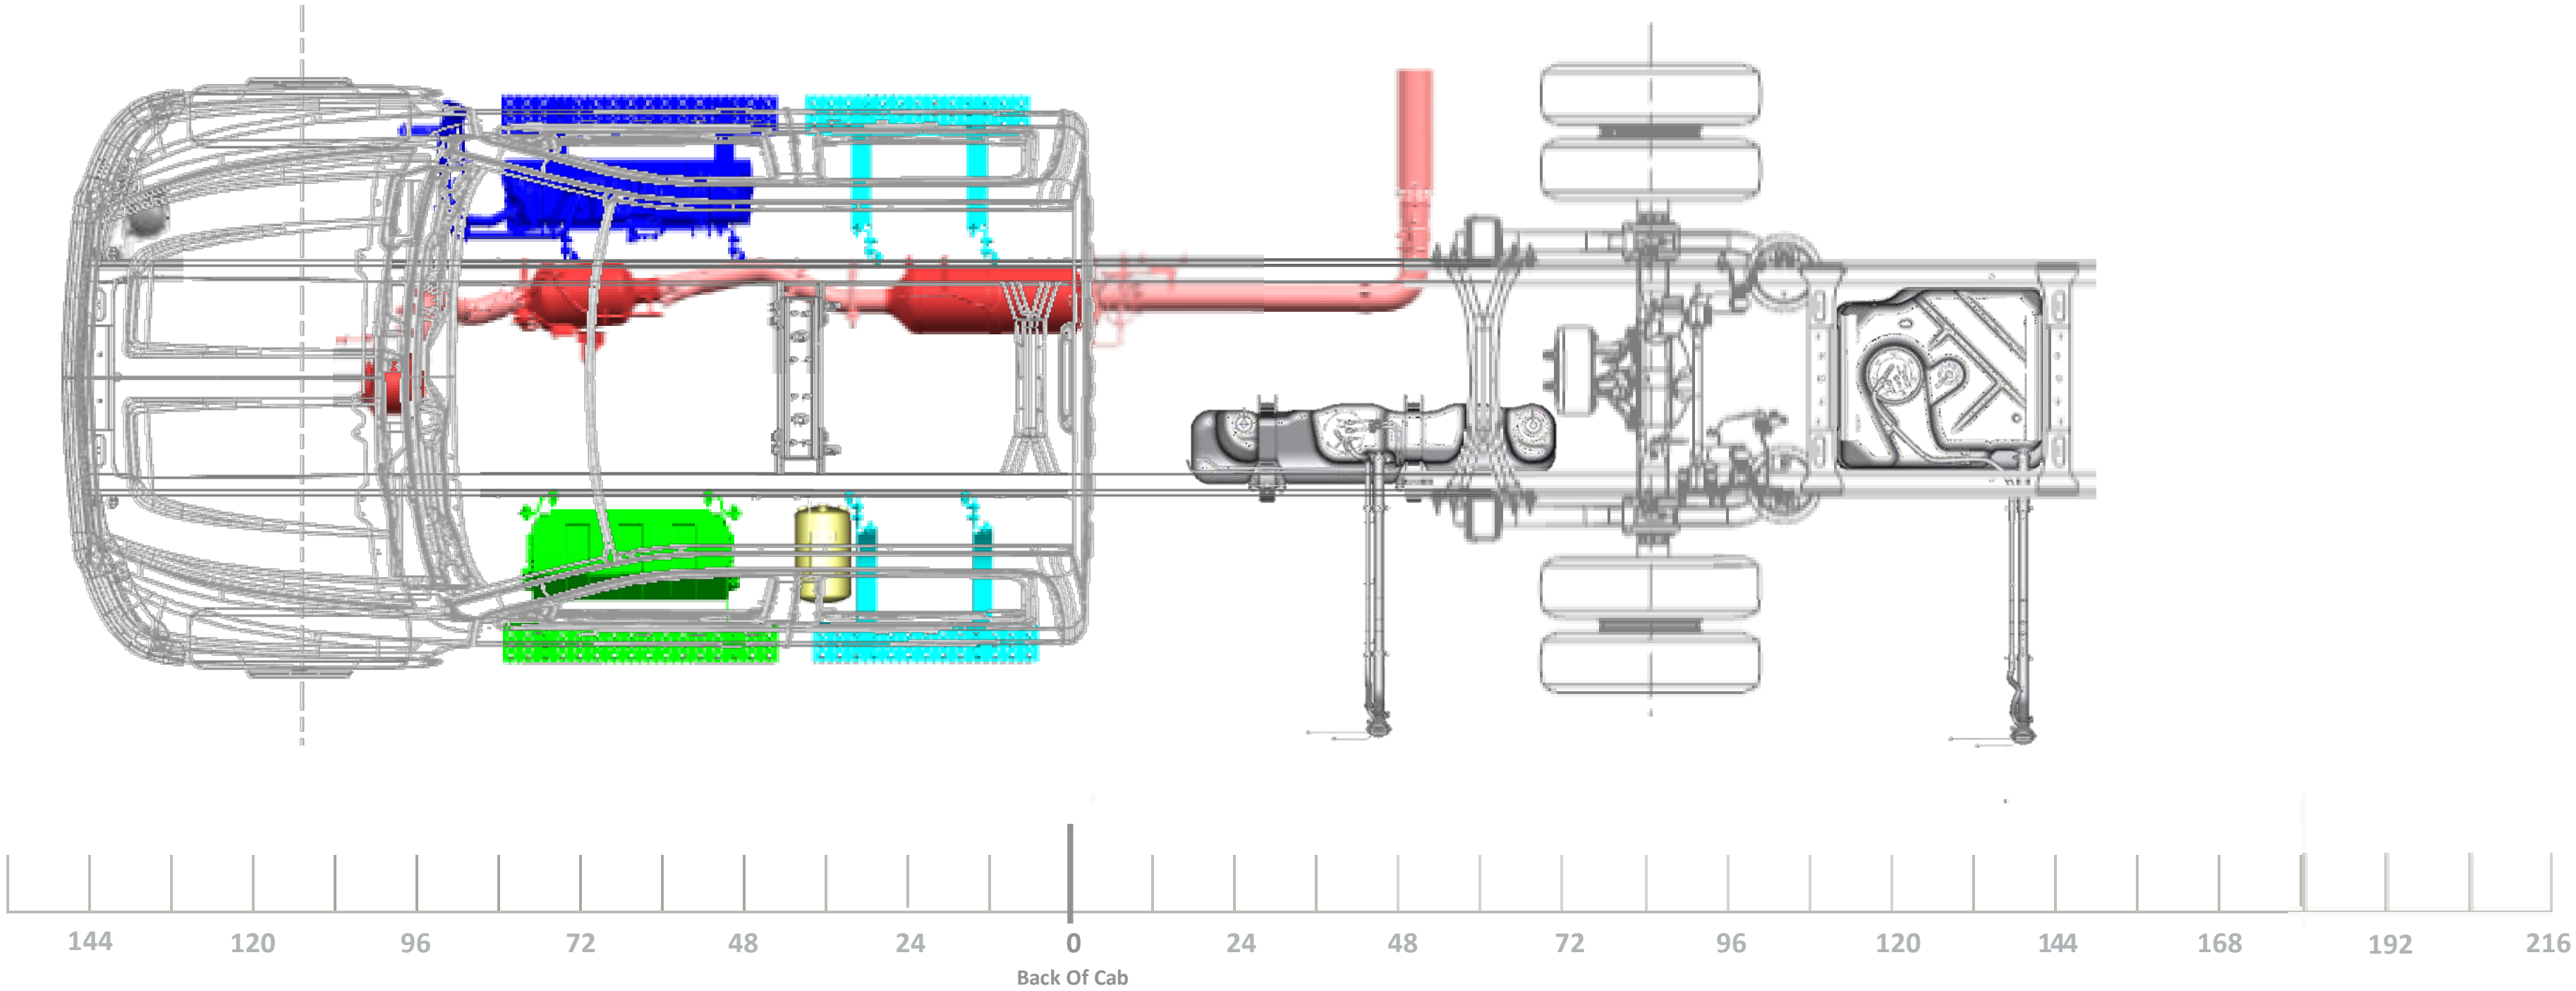

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 49” OR 63” AF

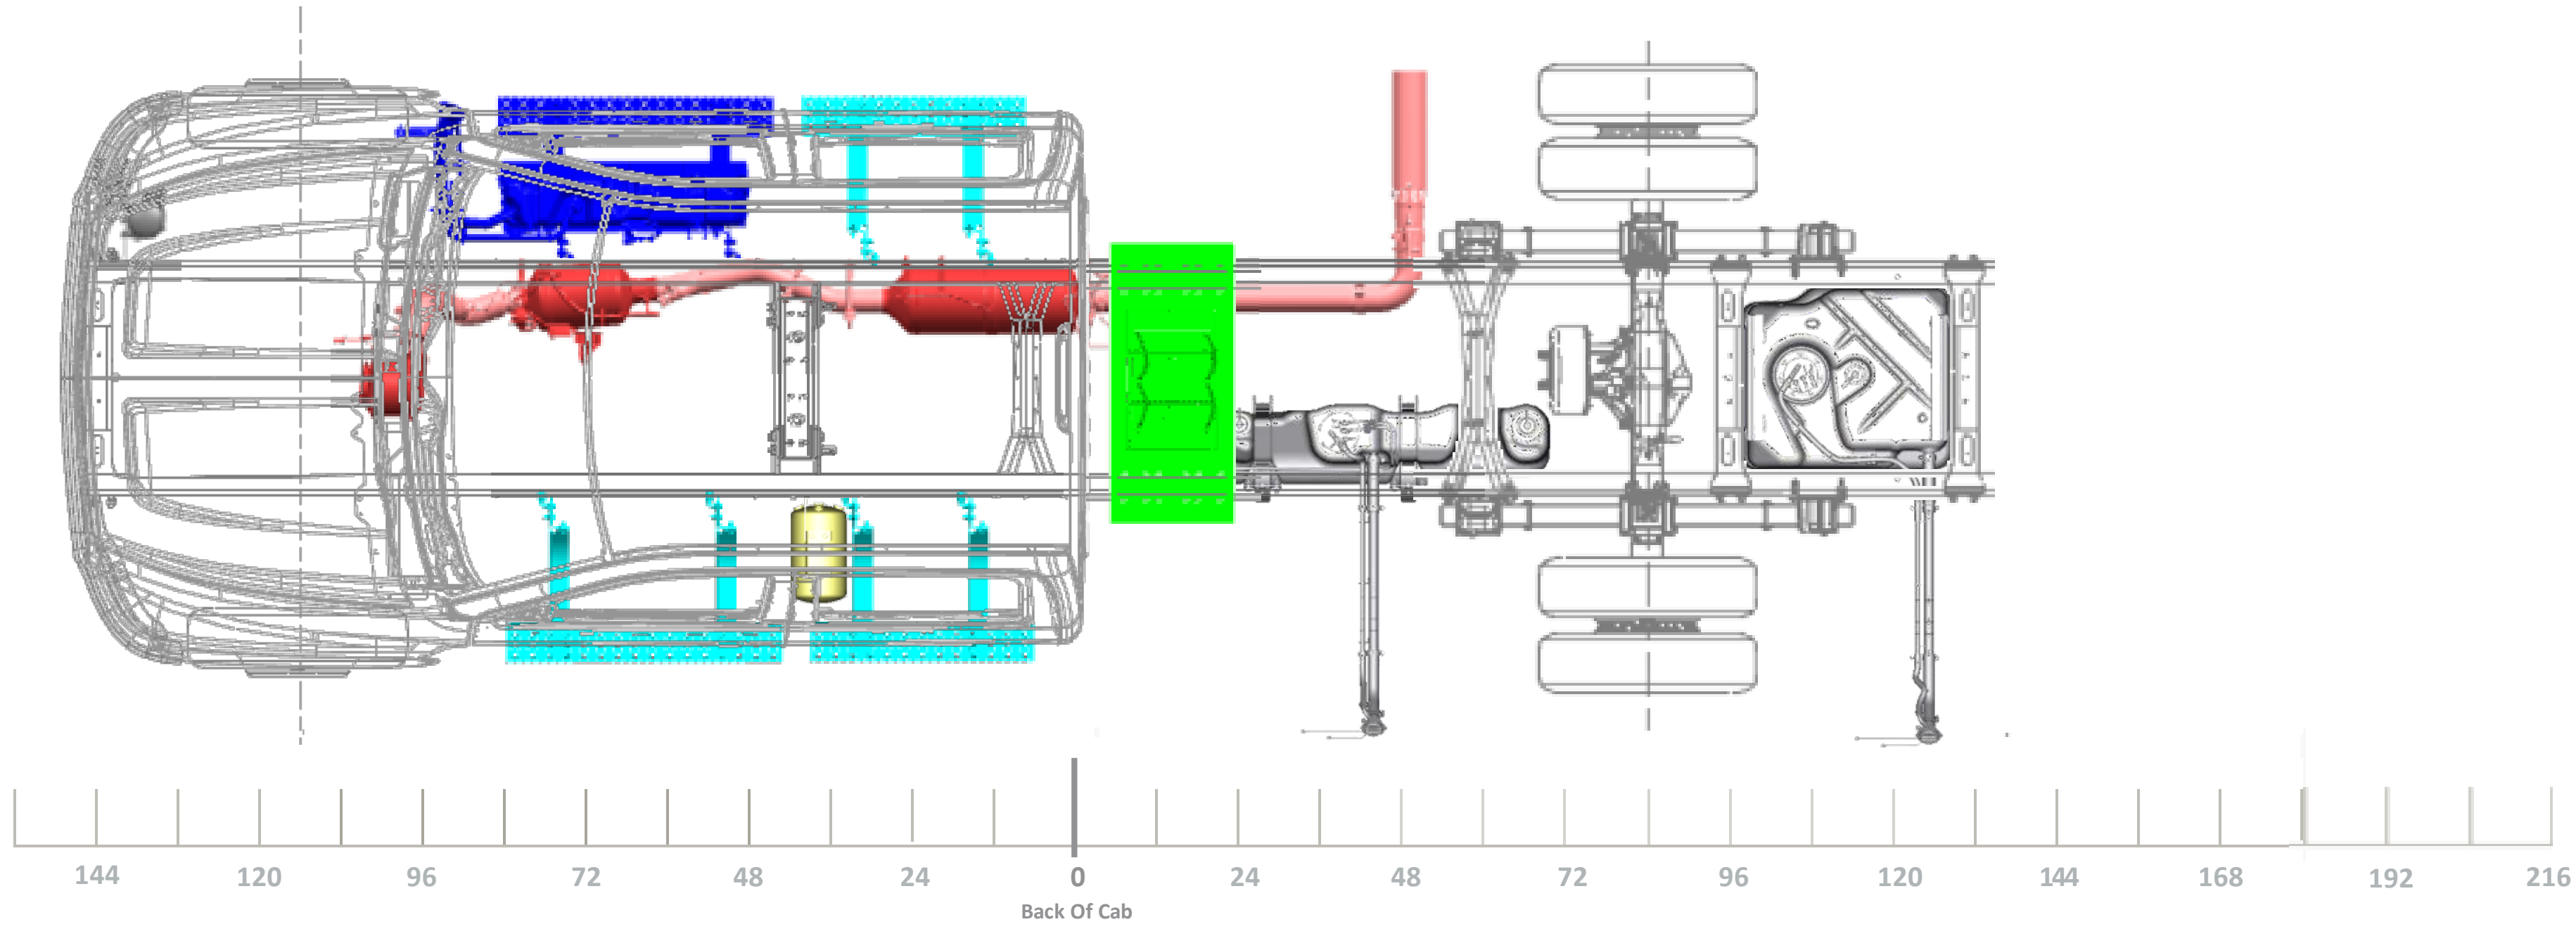

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
199” WB (84” CA) 63” AF

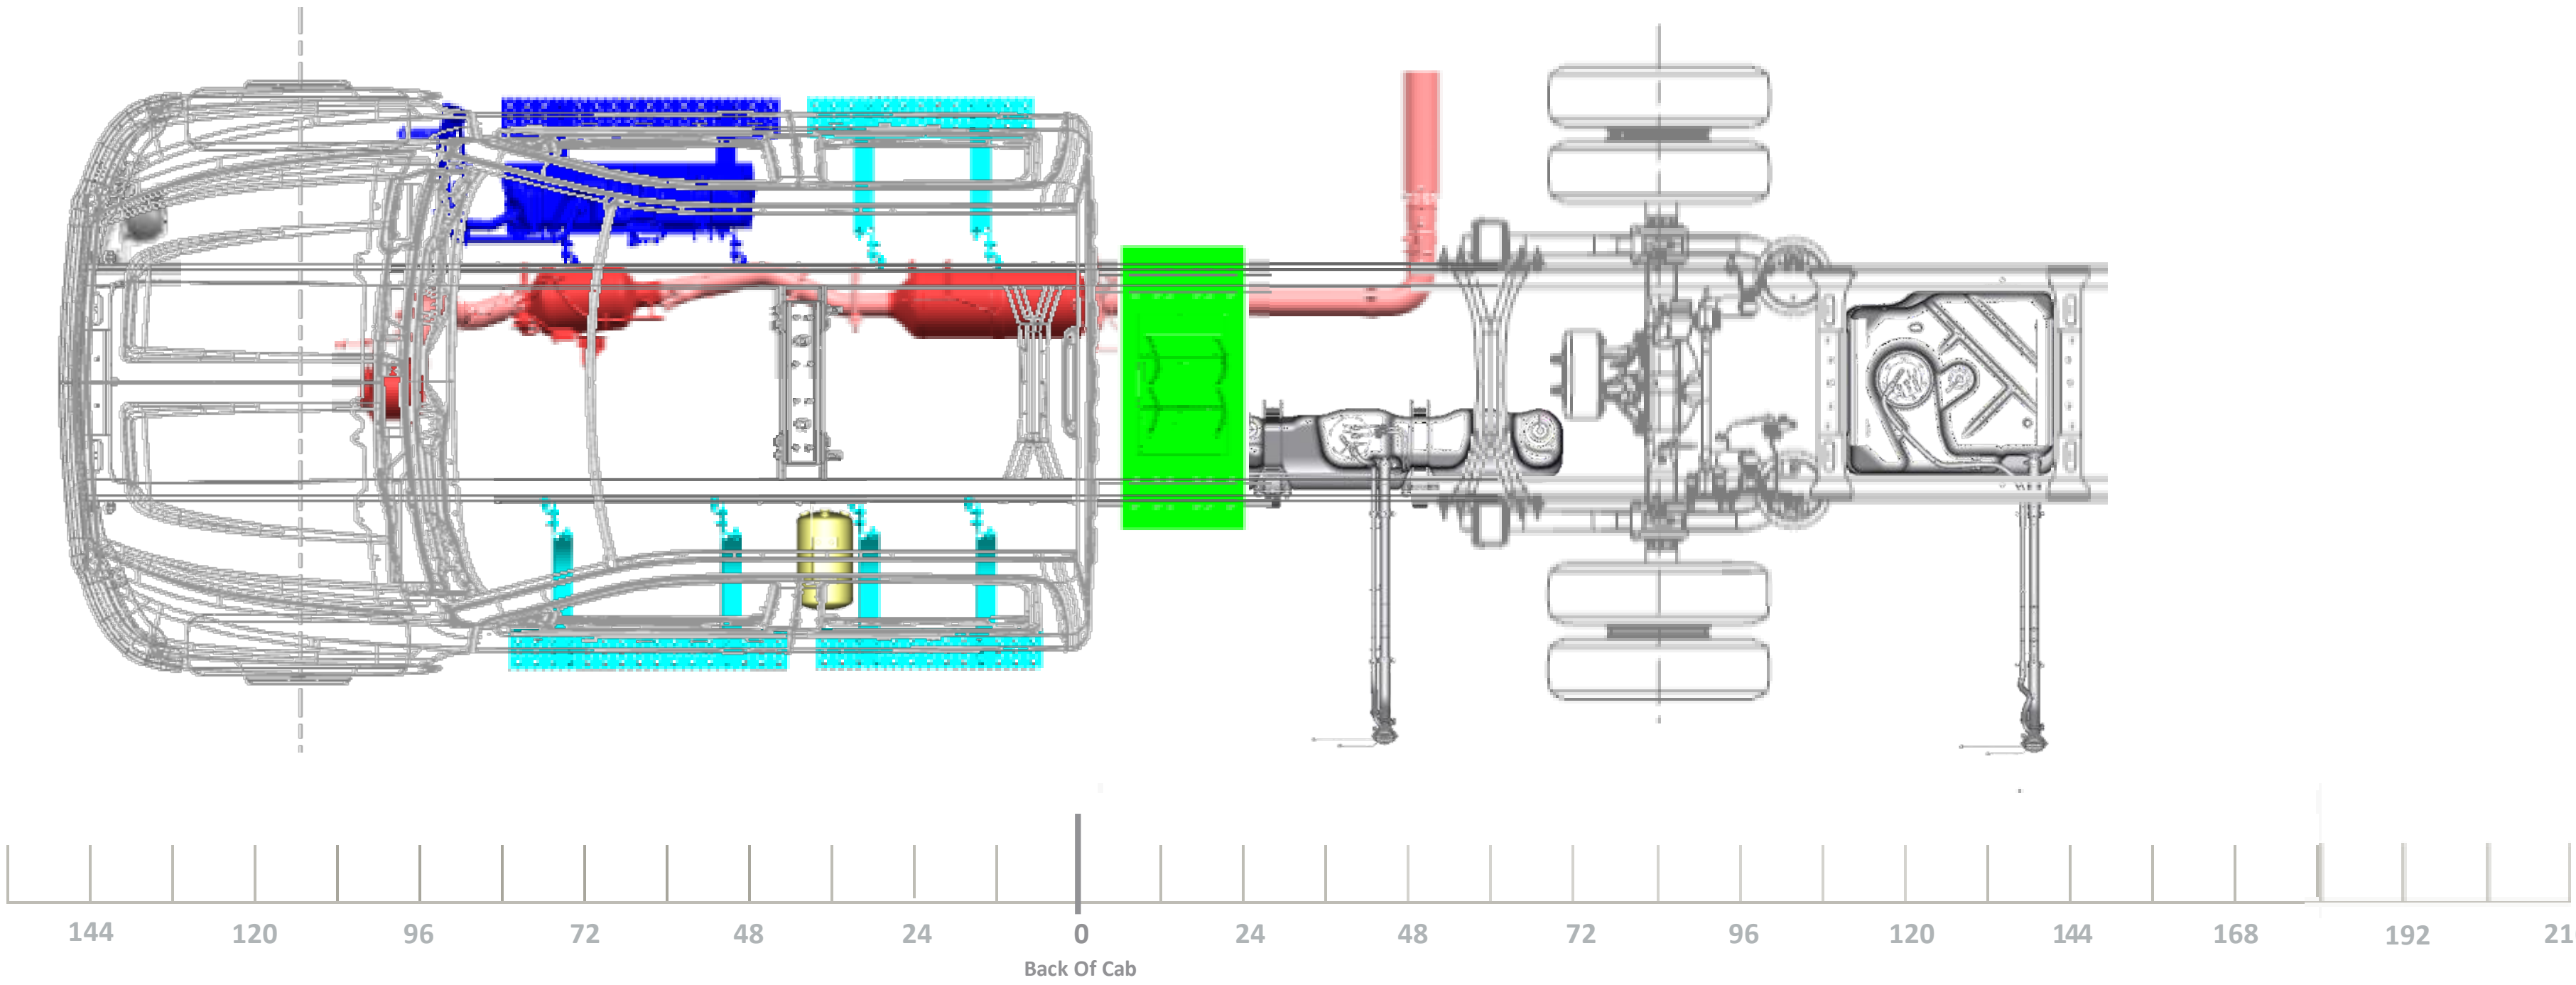

Crew Cab – 235” WB

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

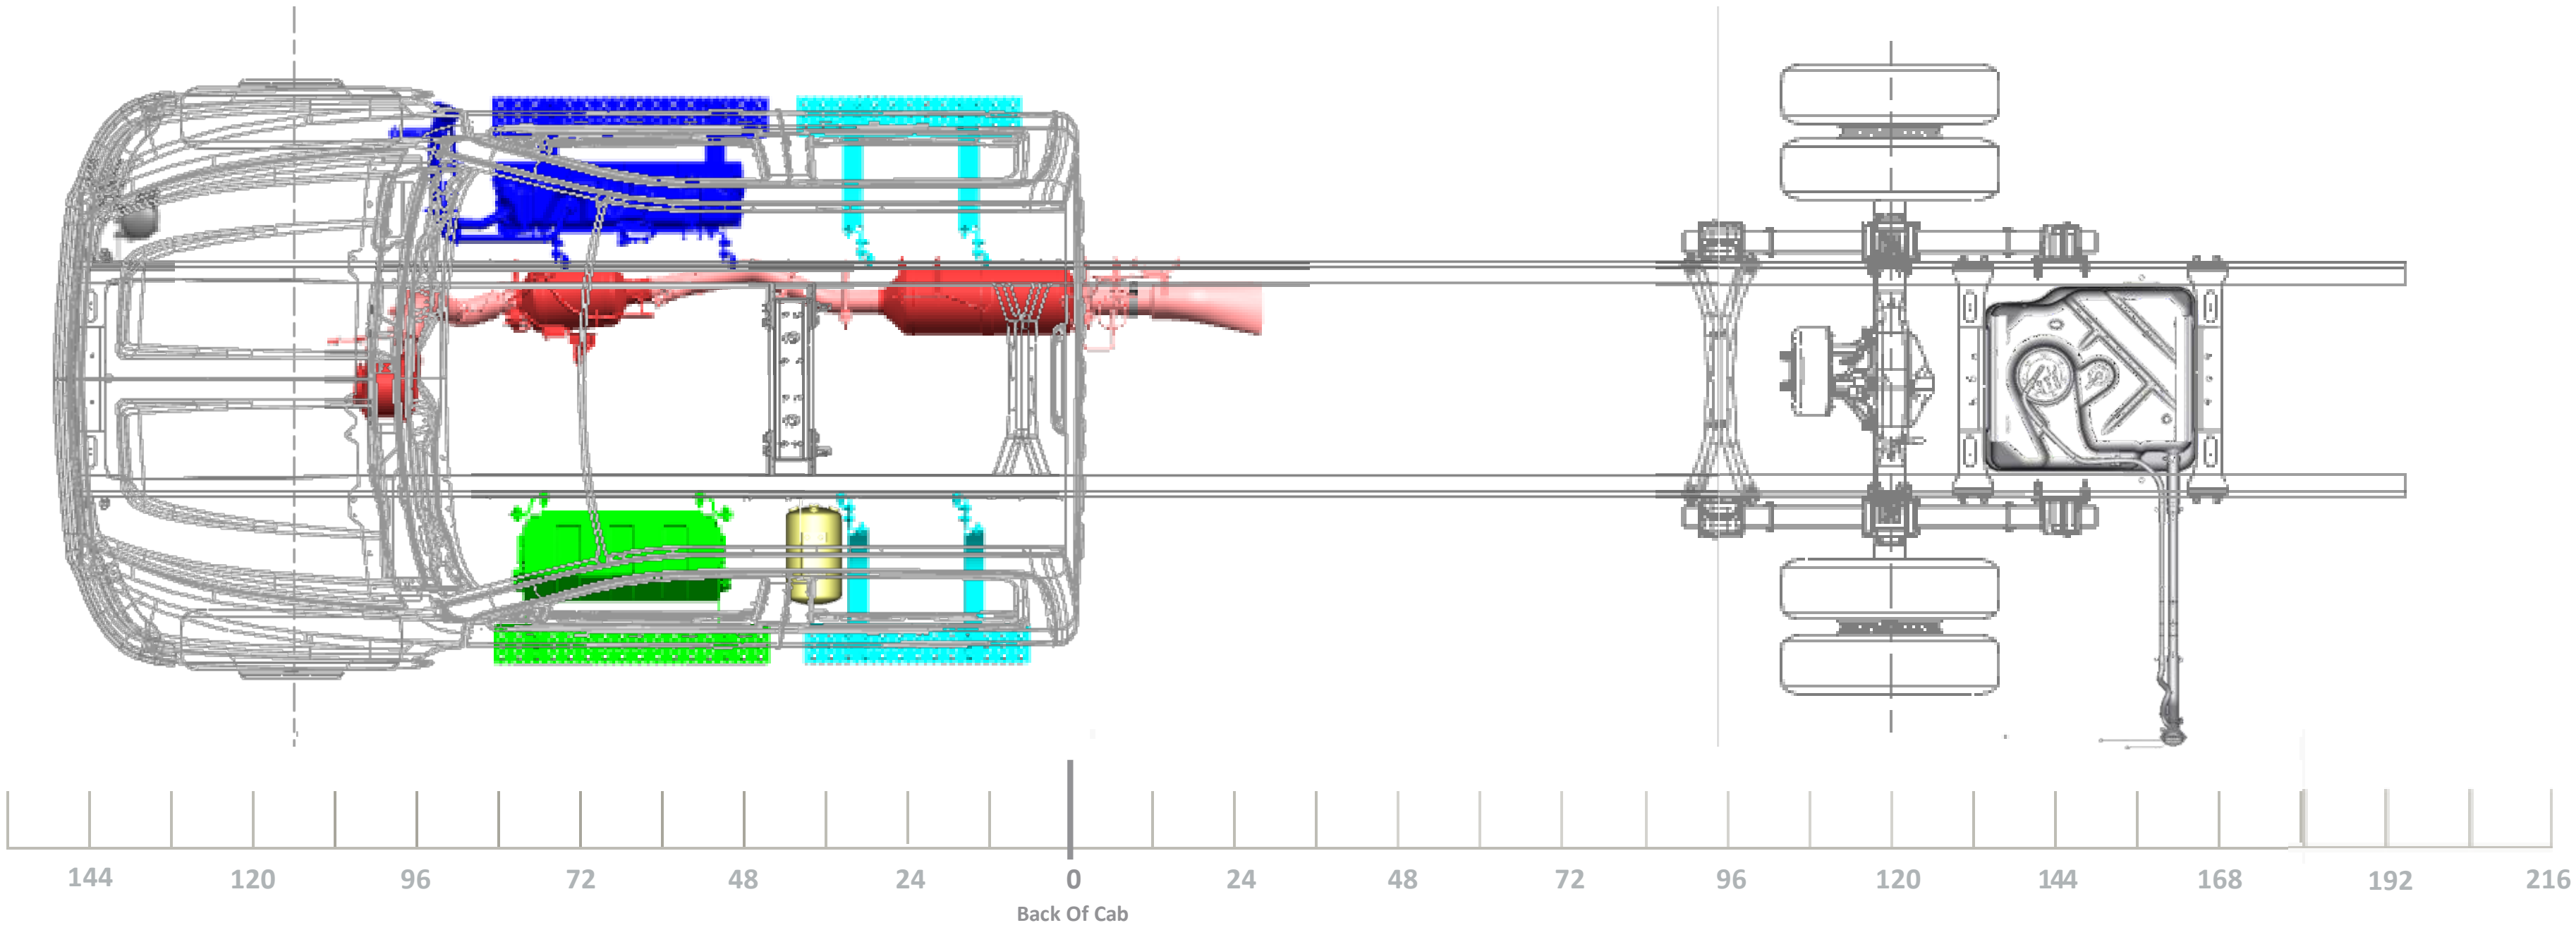

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

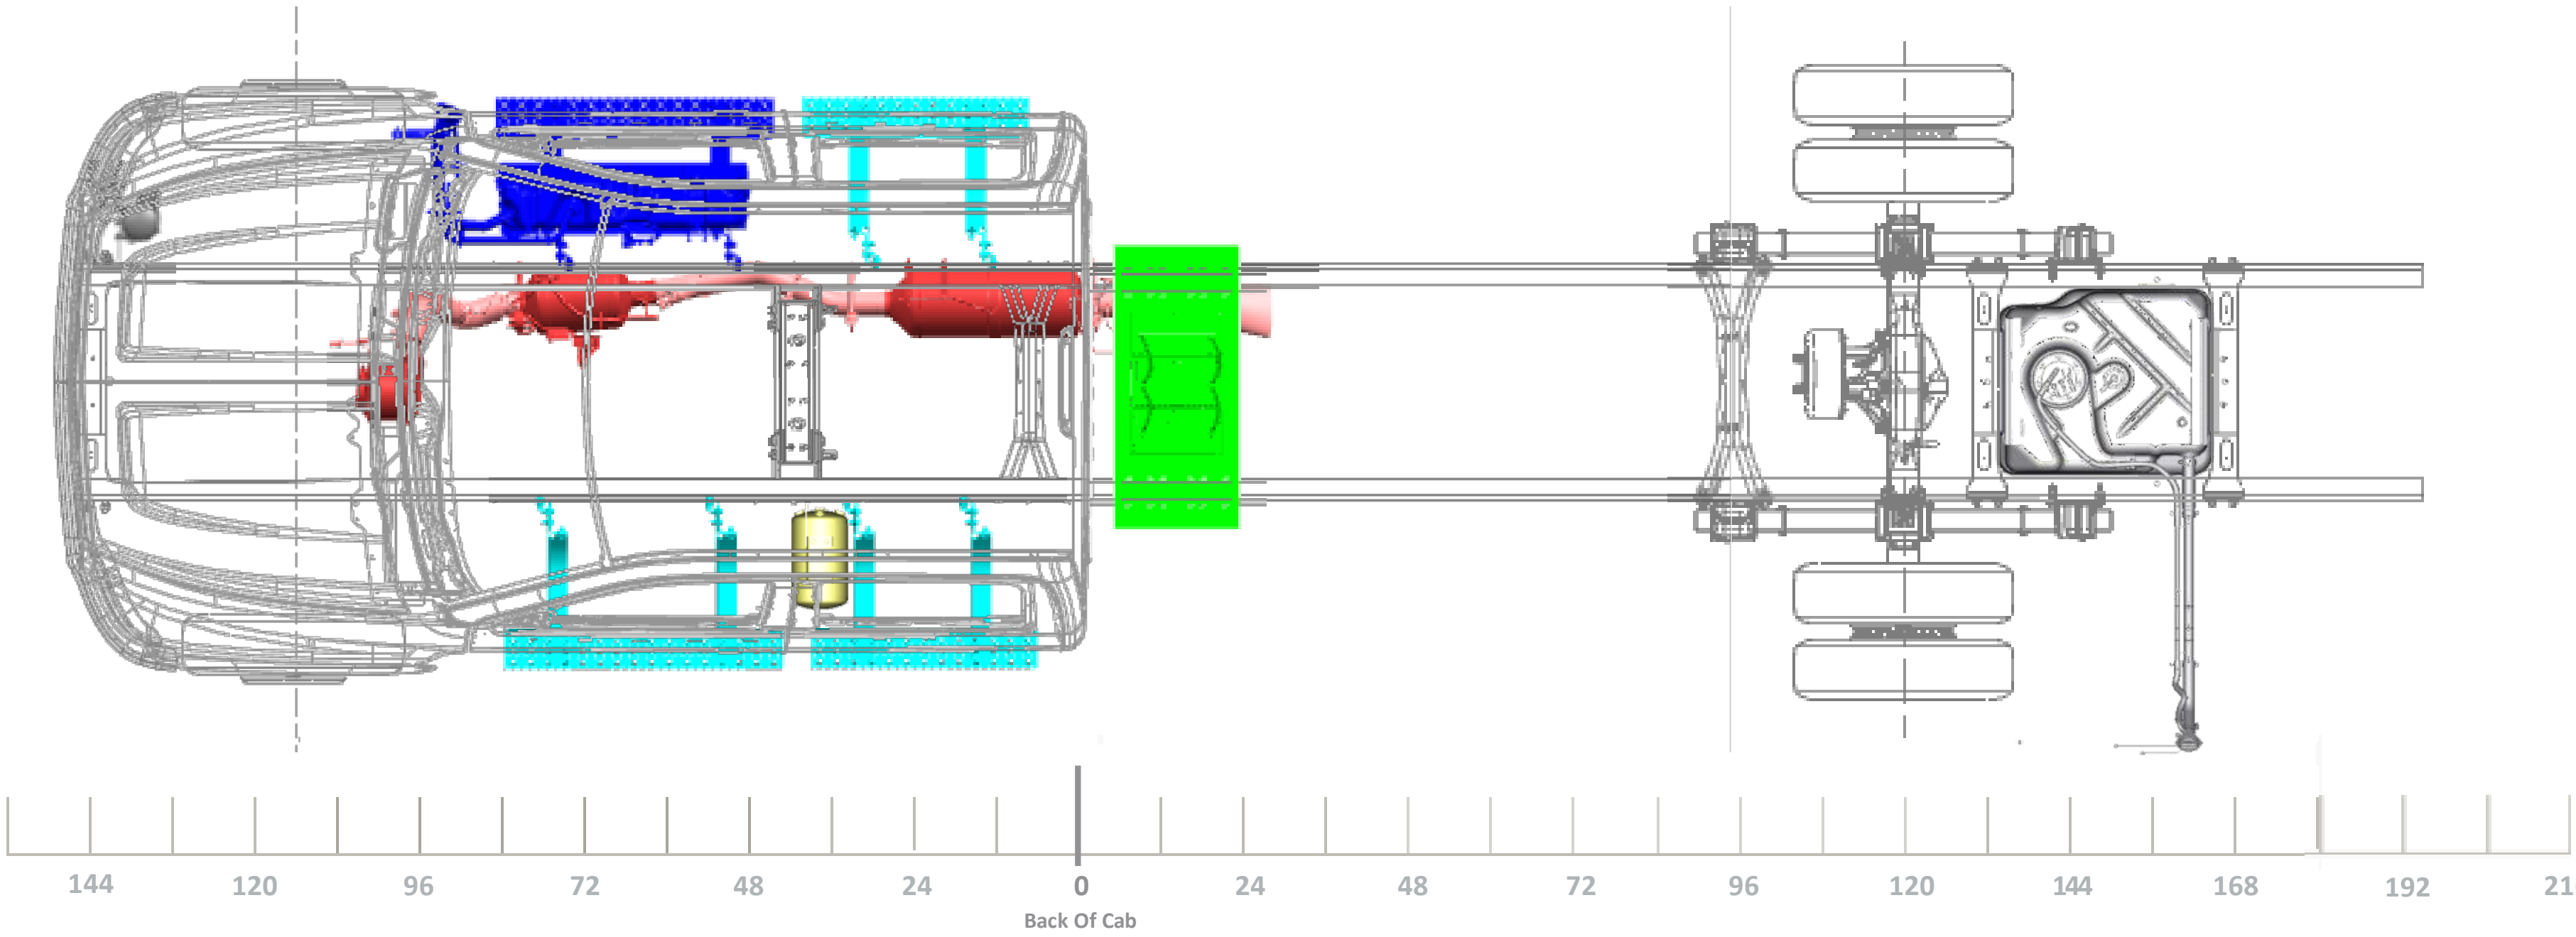
144
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

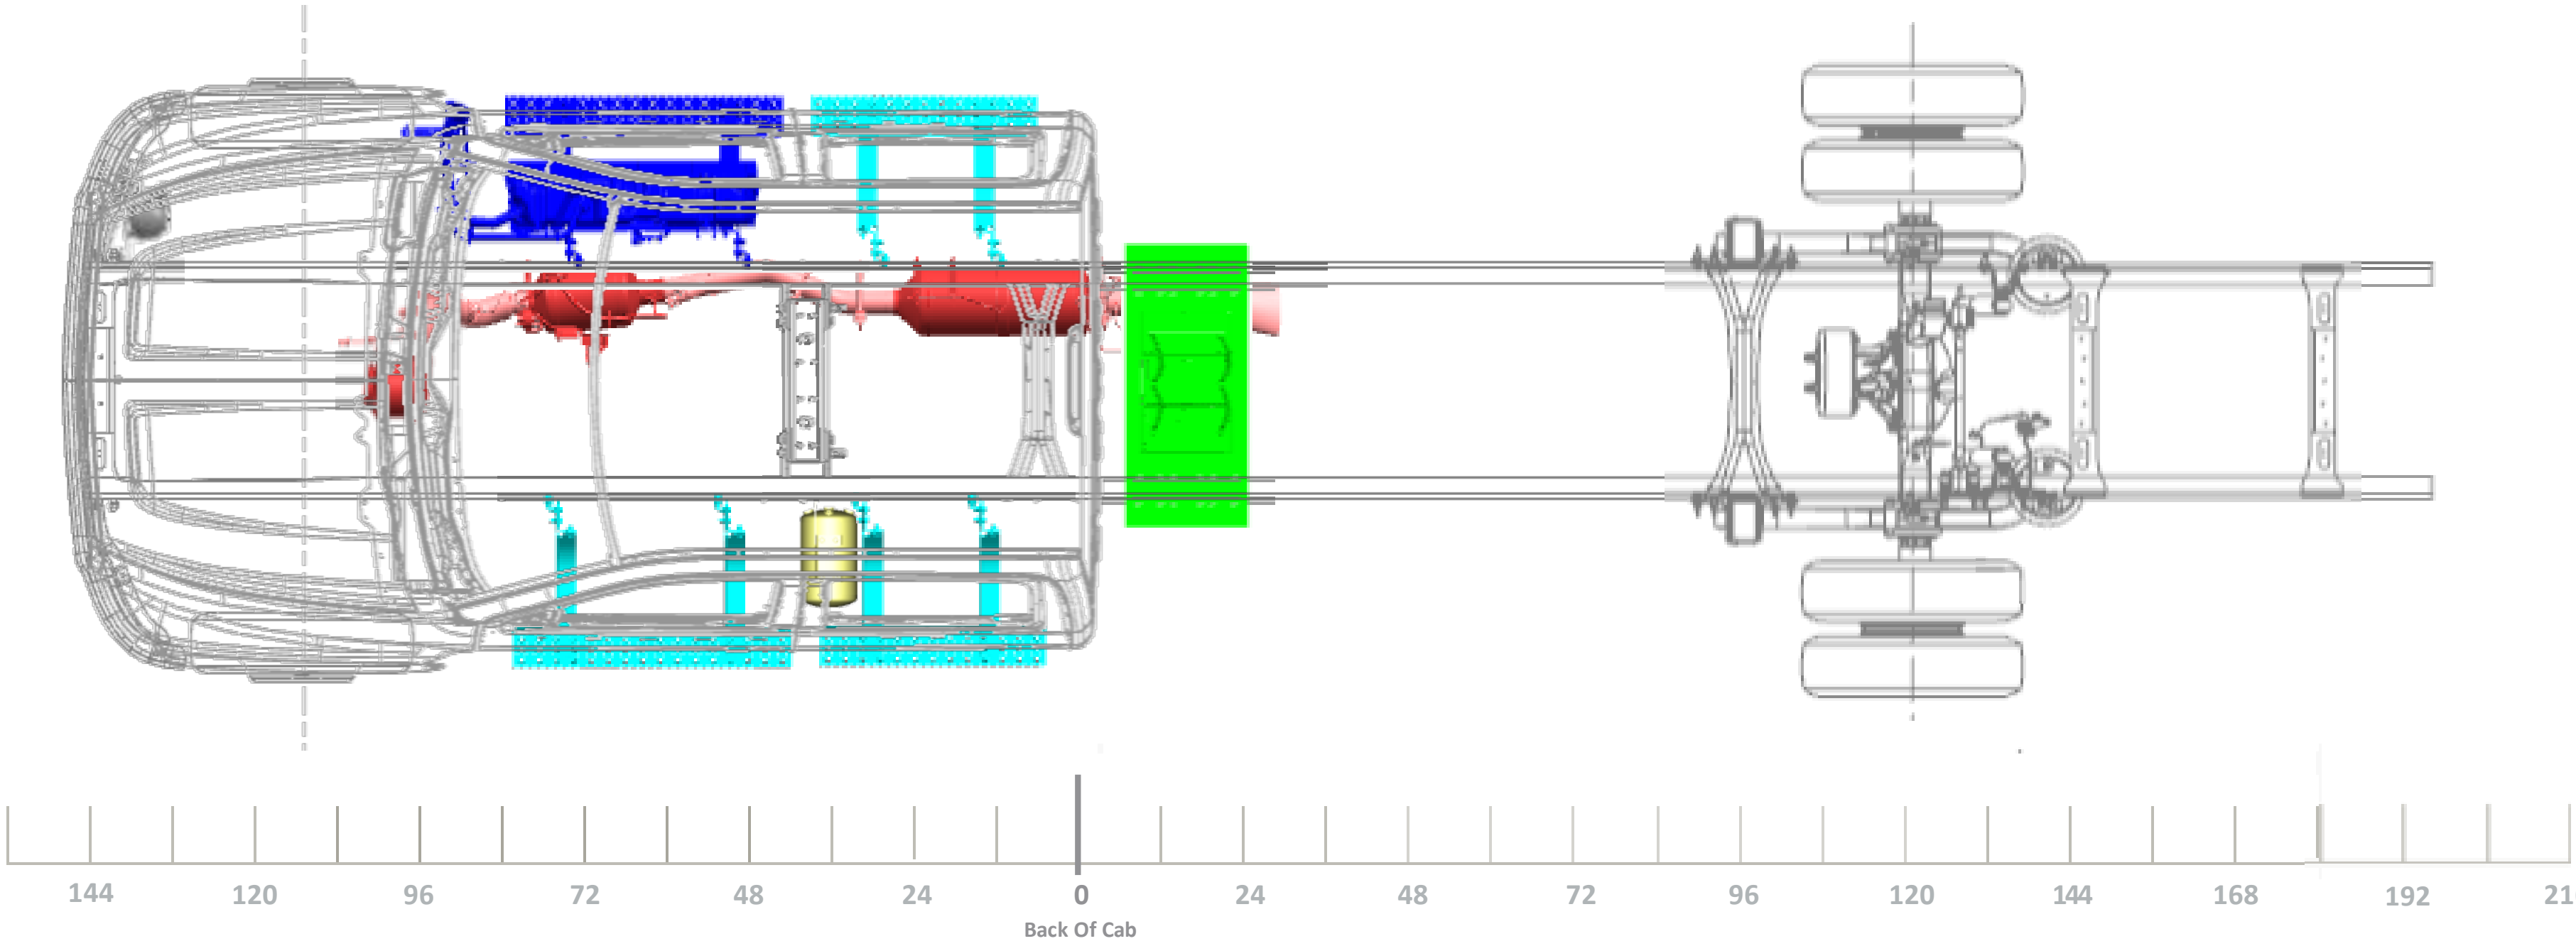

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

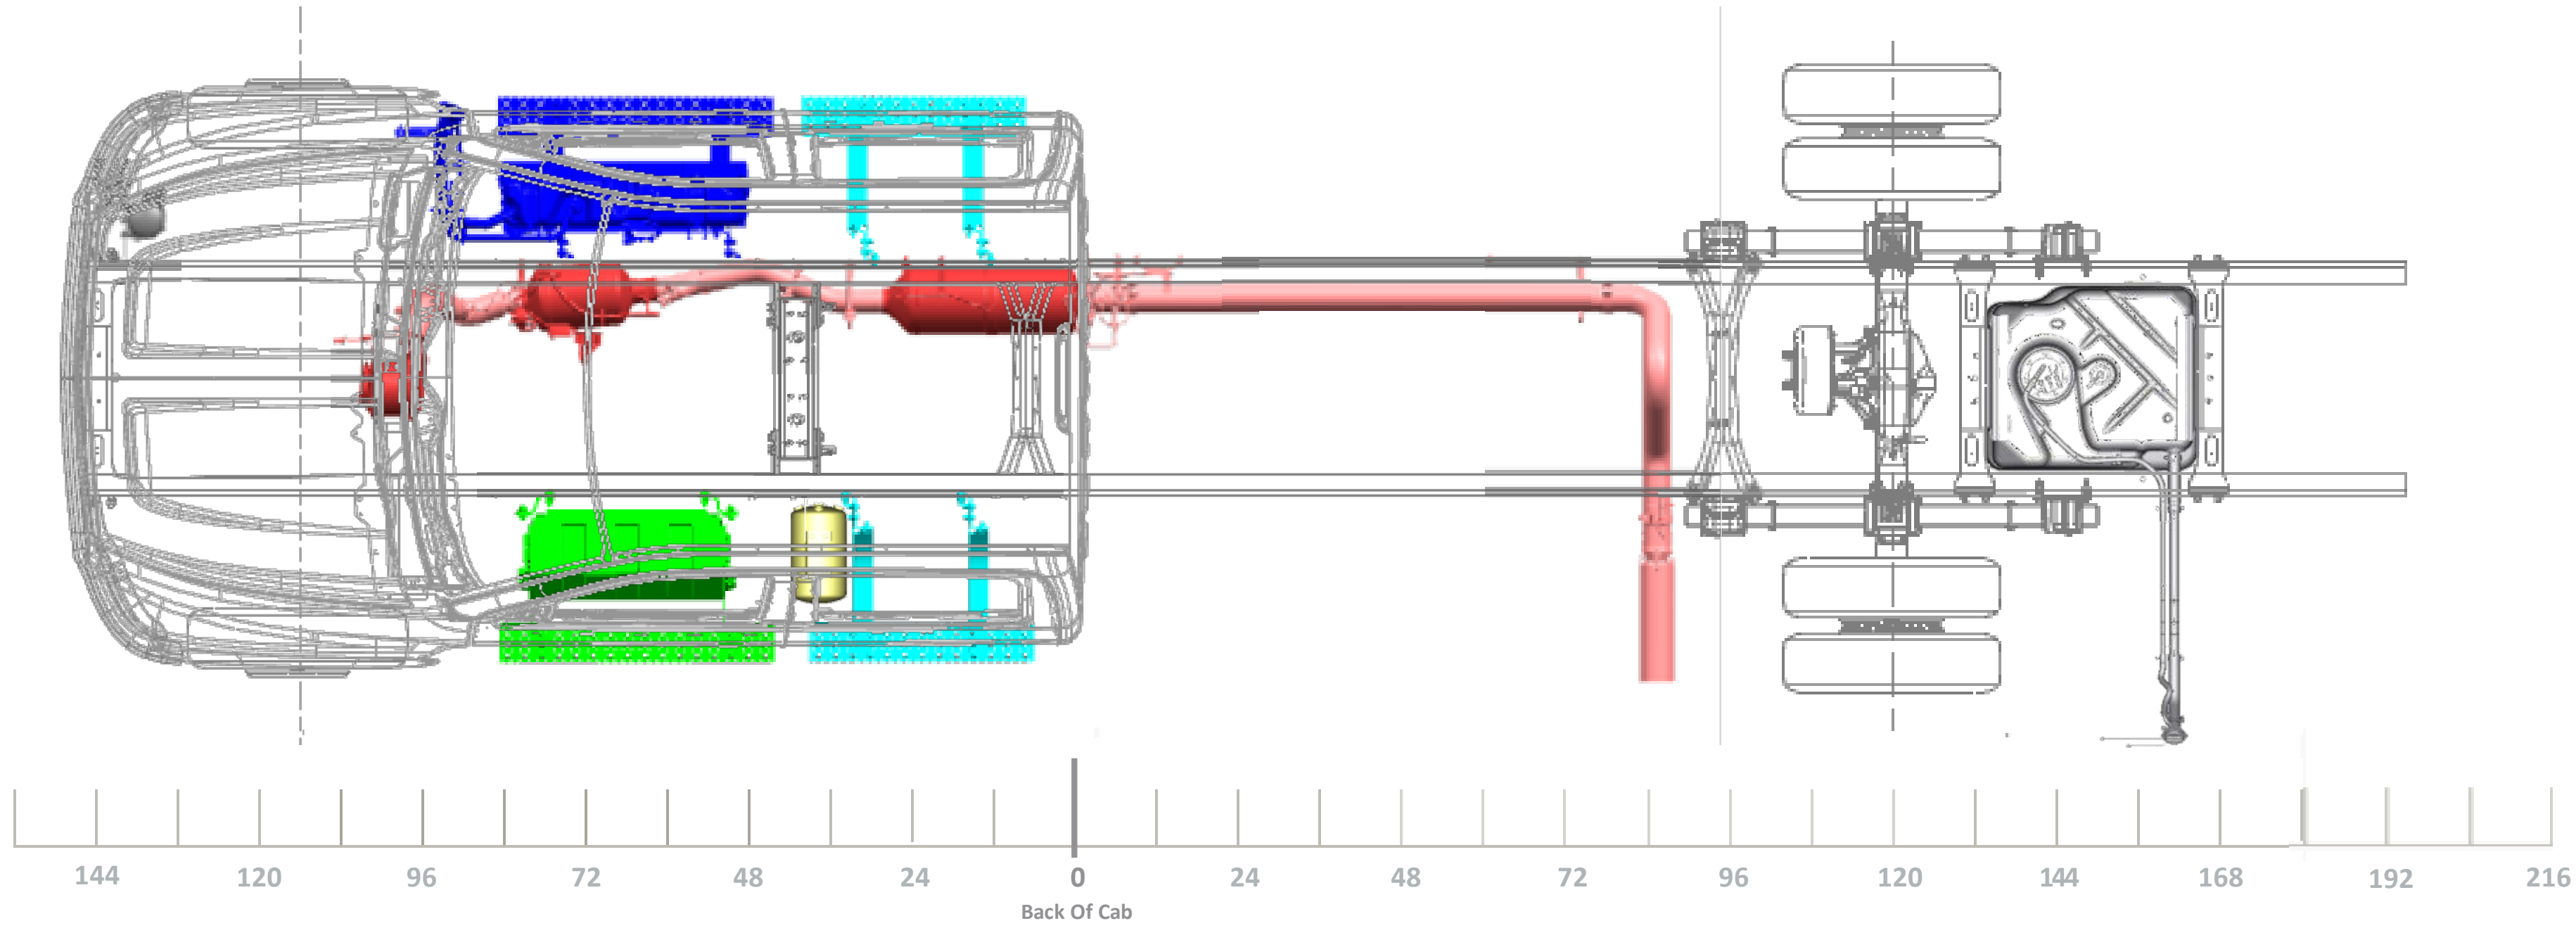

Model/Feature Information

Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
IROS REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

235” WB (120” CA)
75” AF

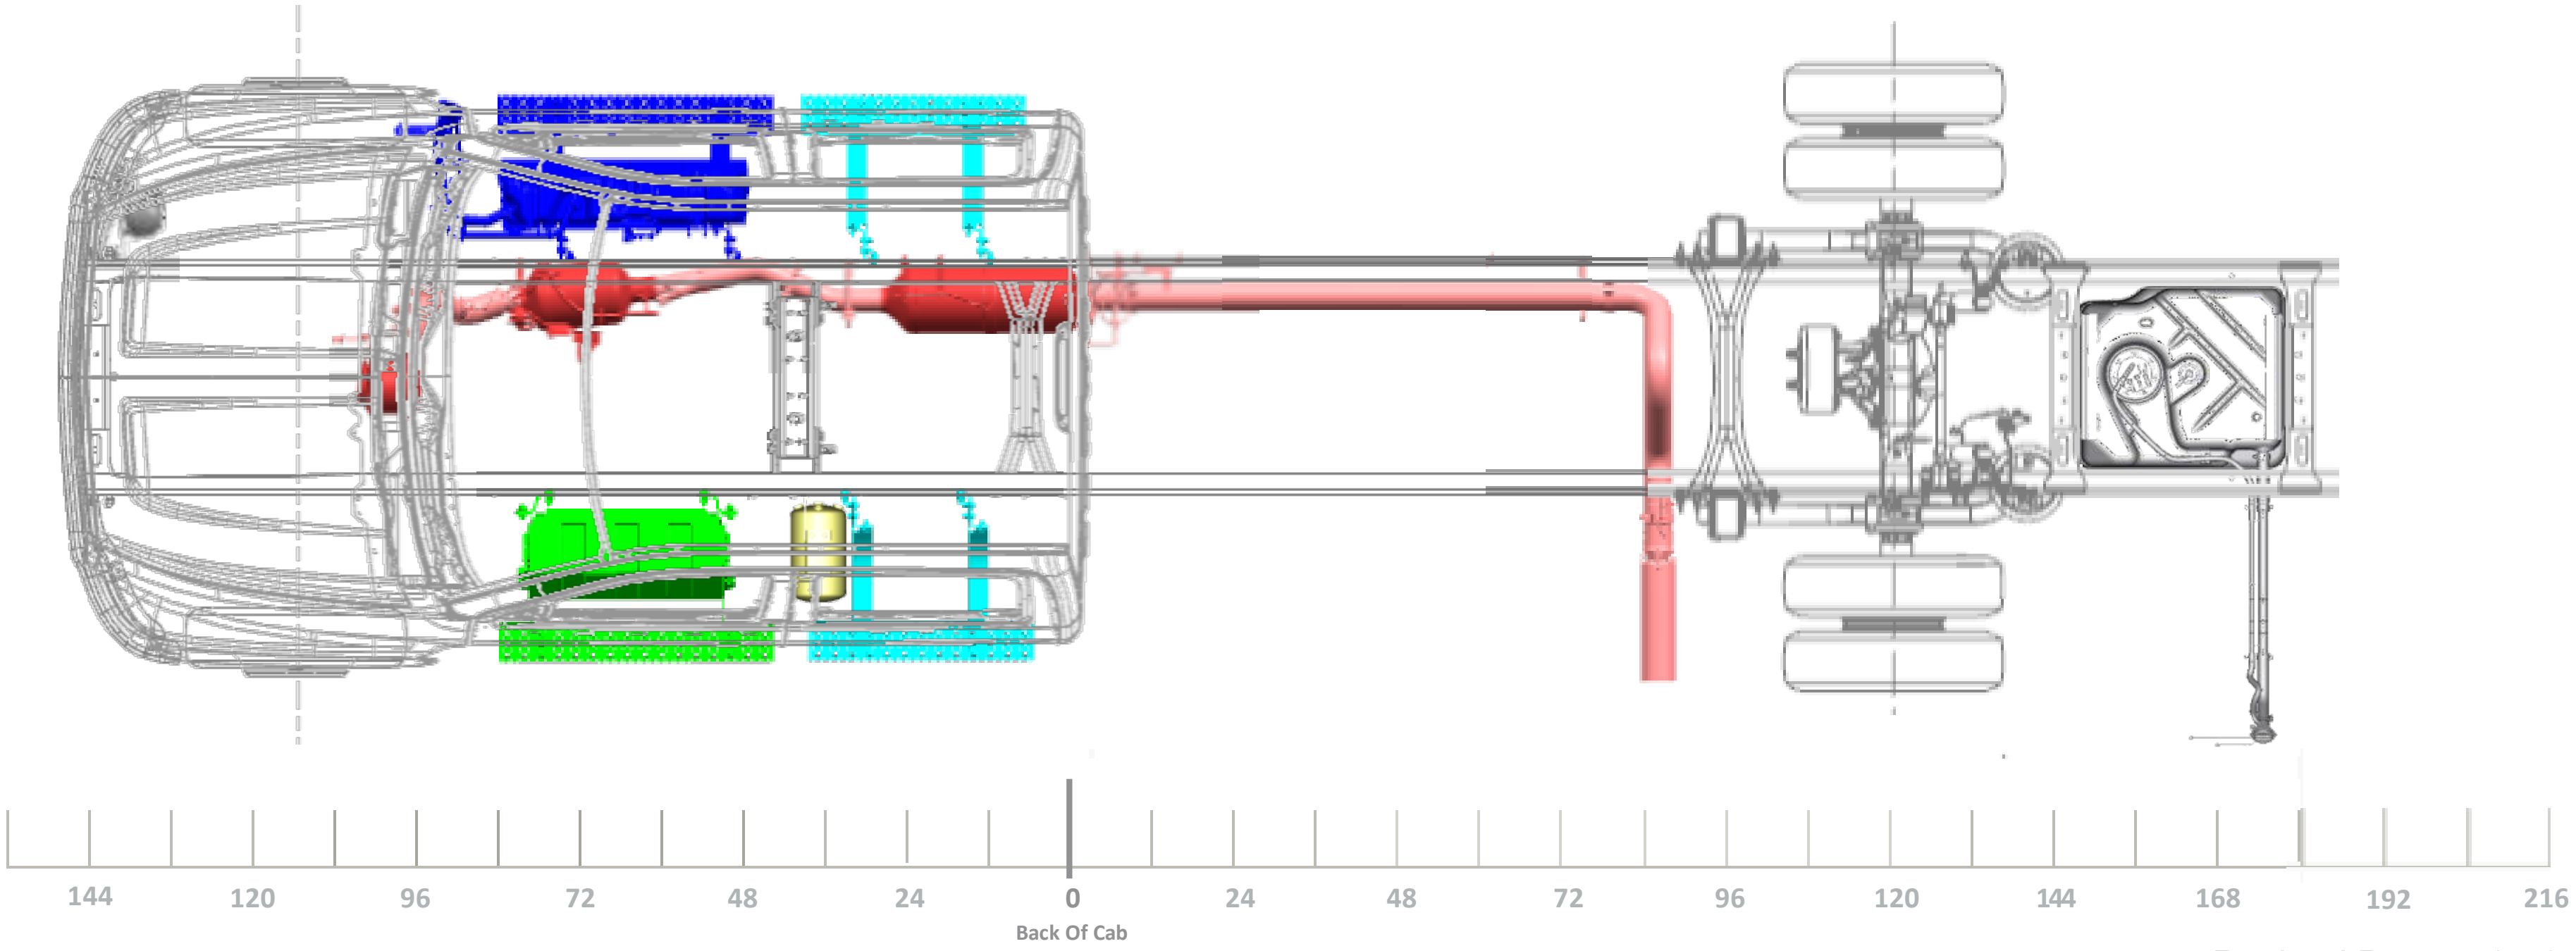

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

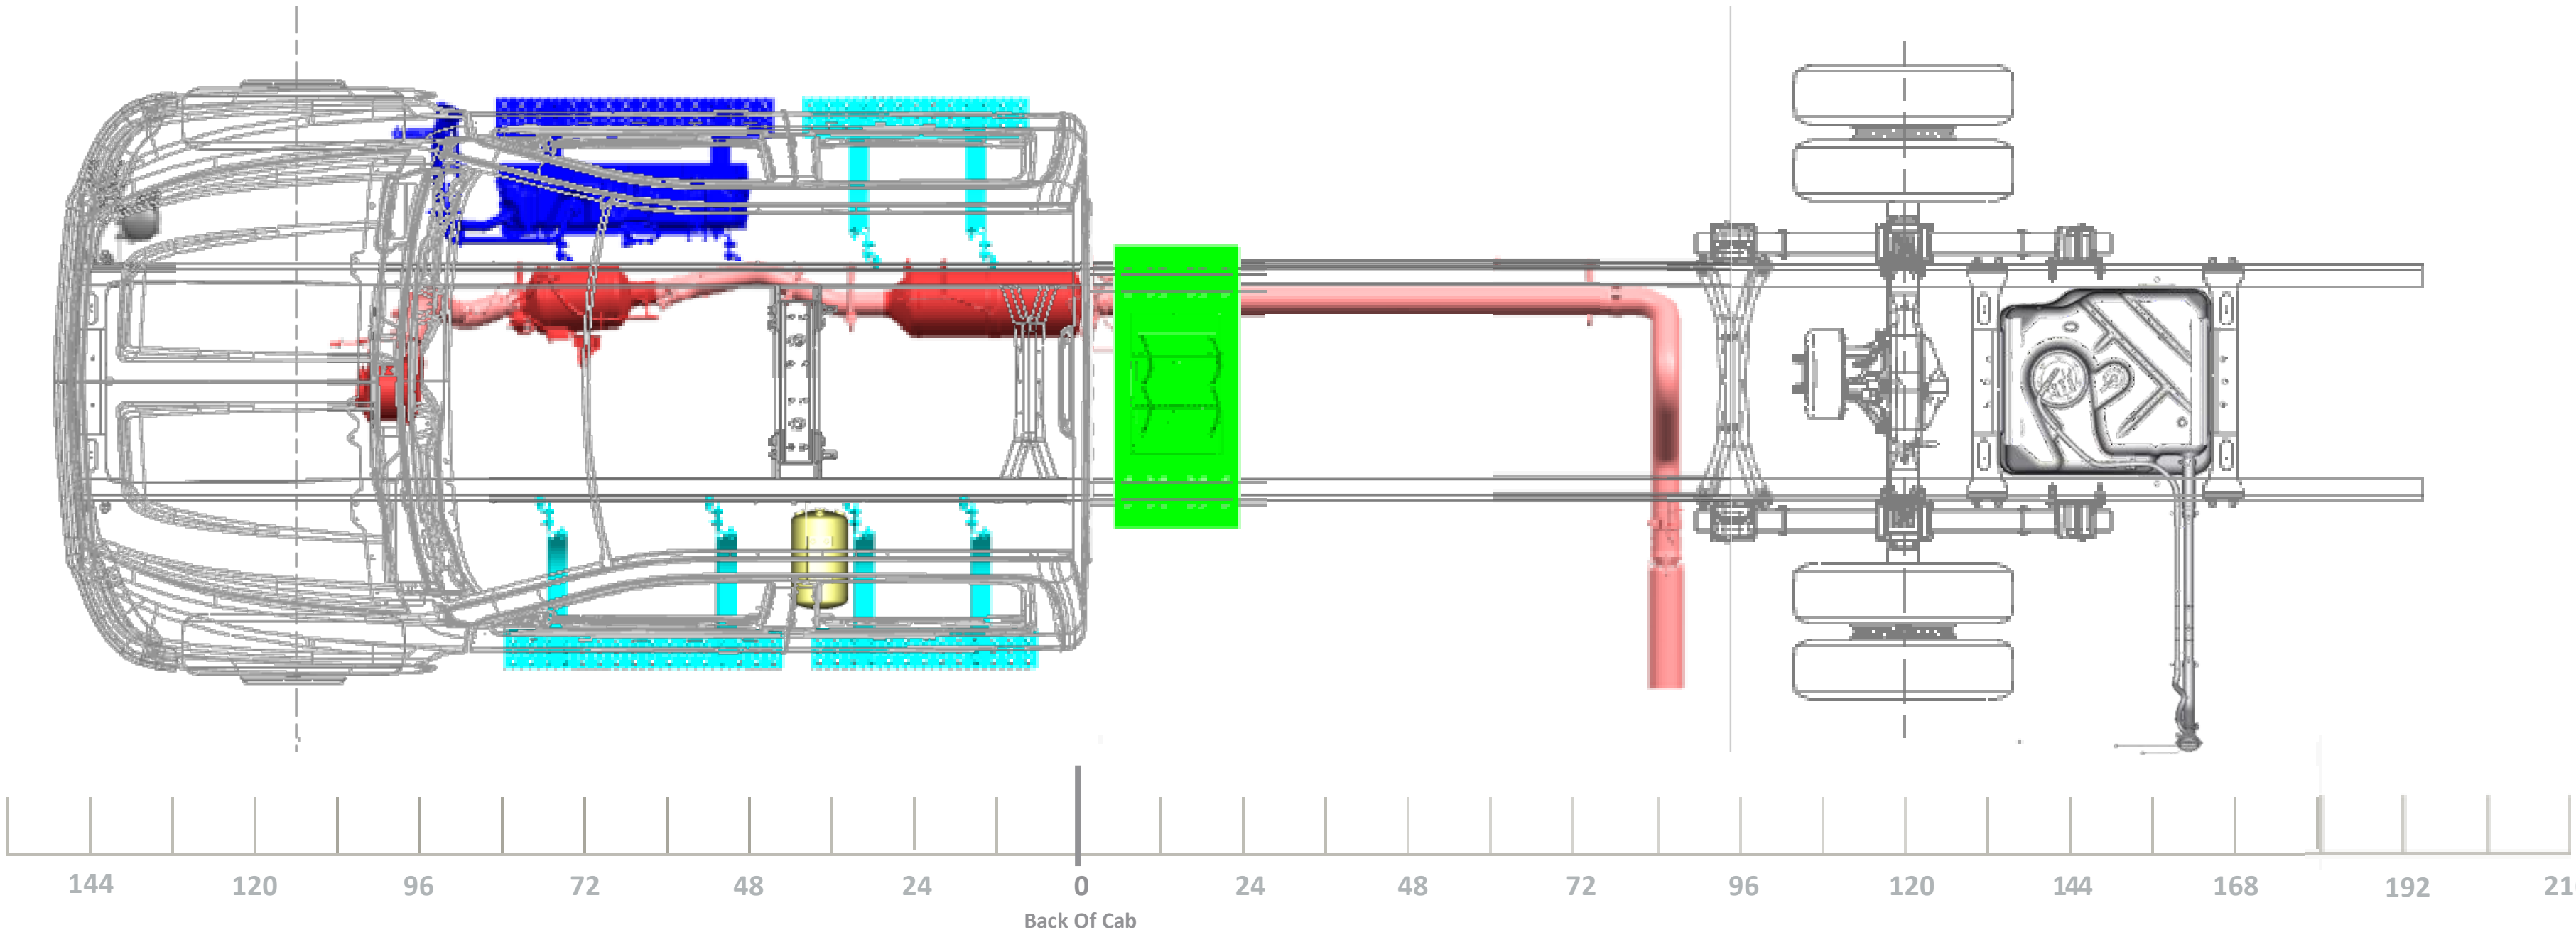

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, LT SIDE (RPO NPJ)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

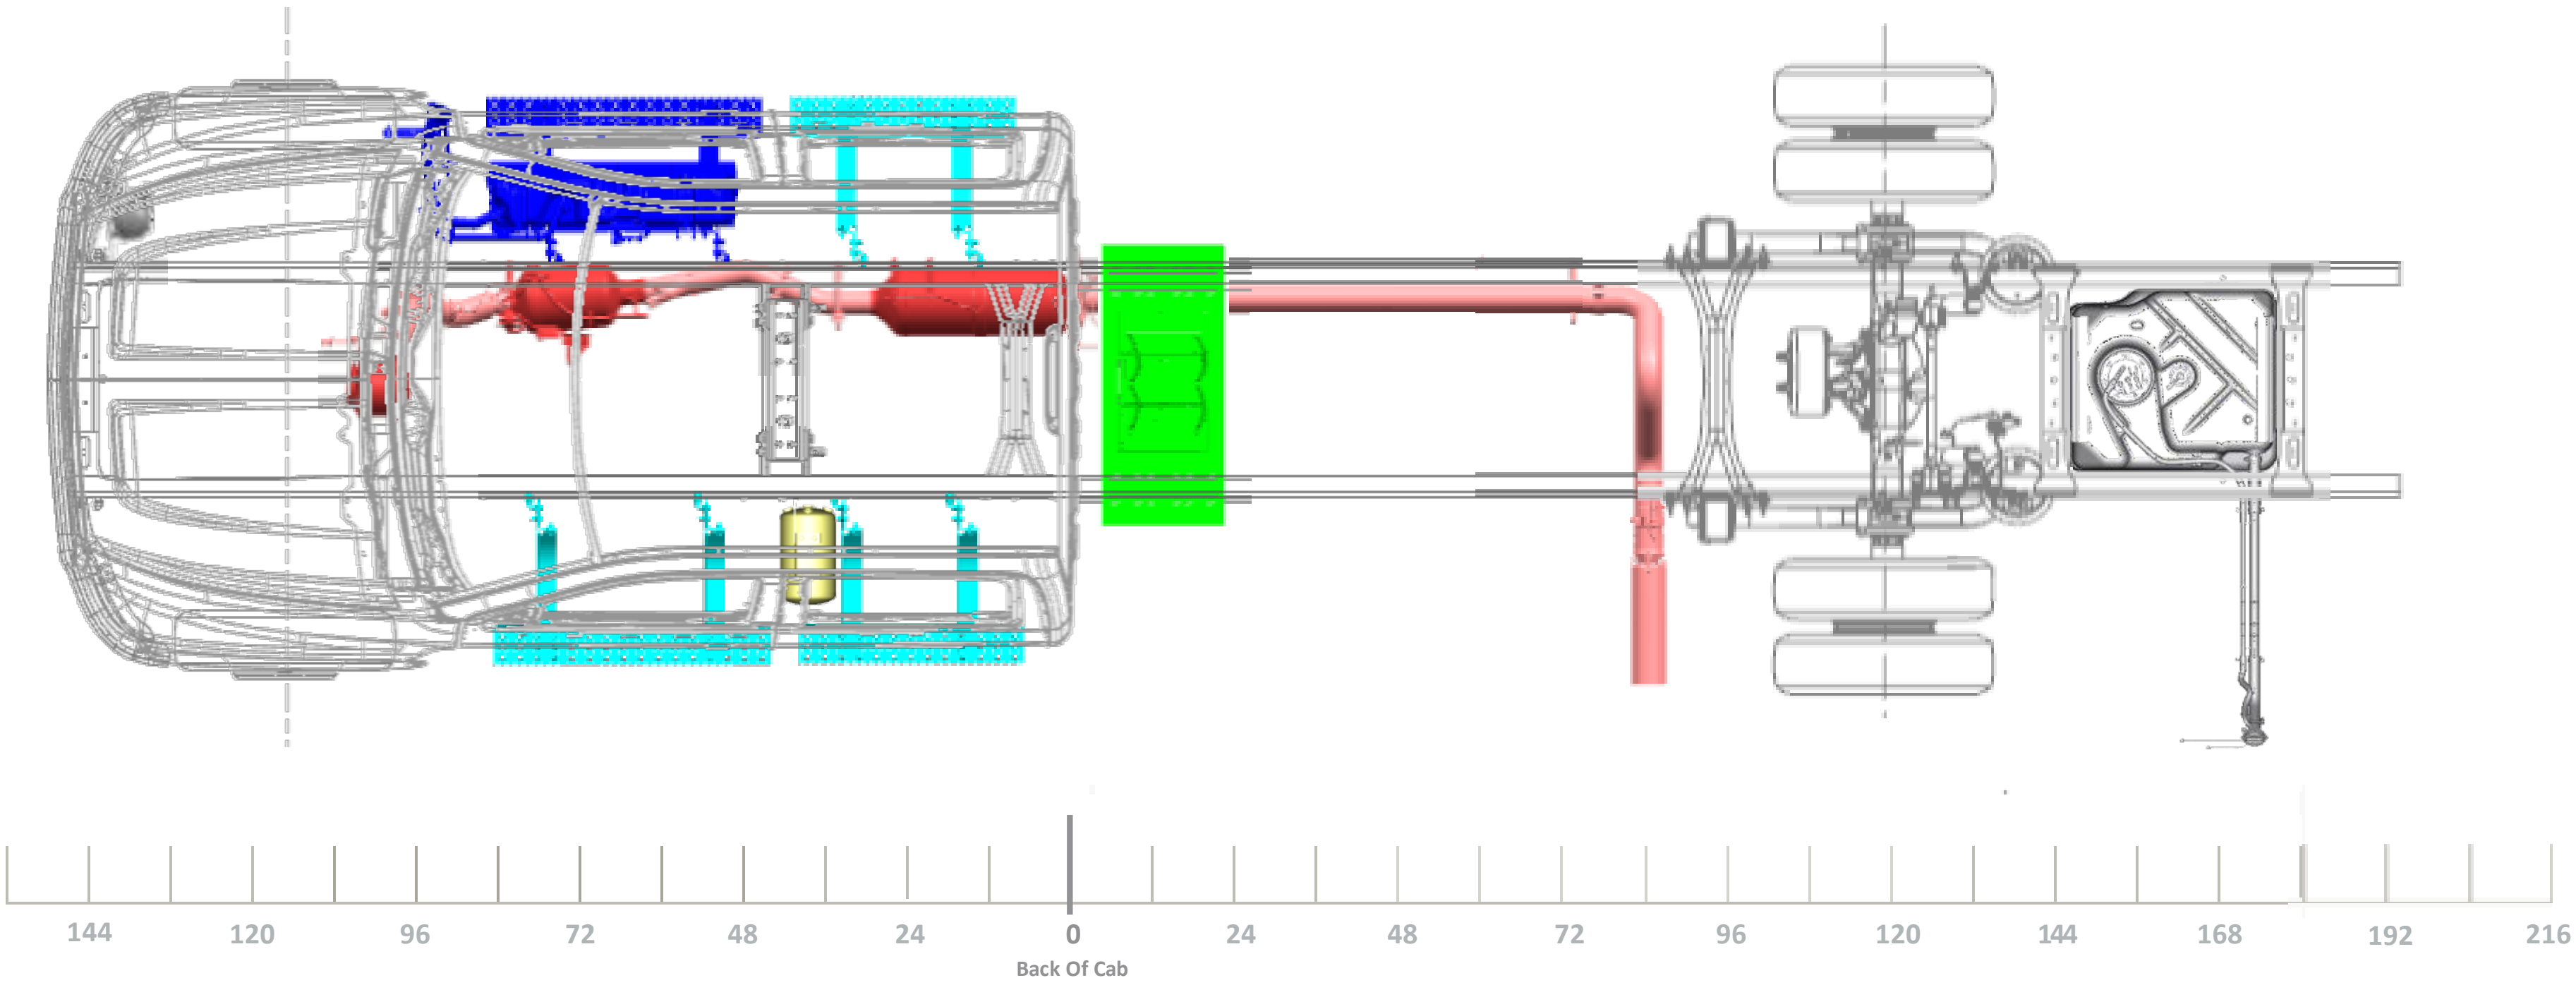

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

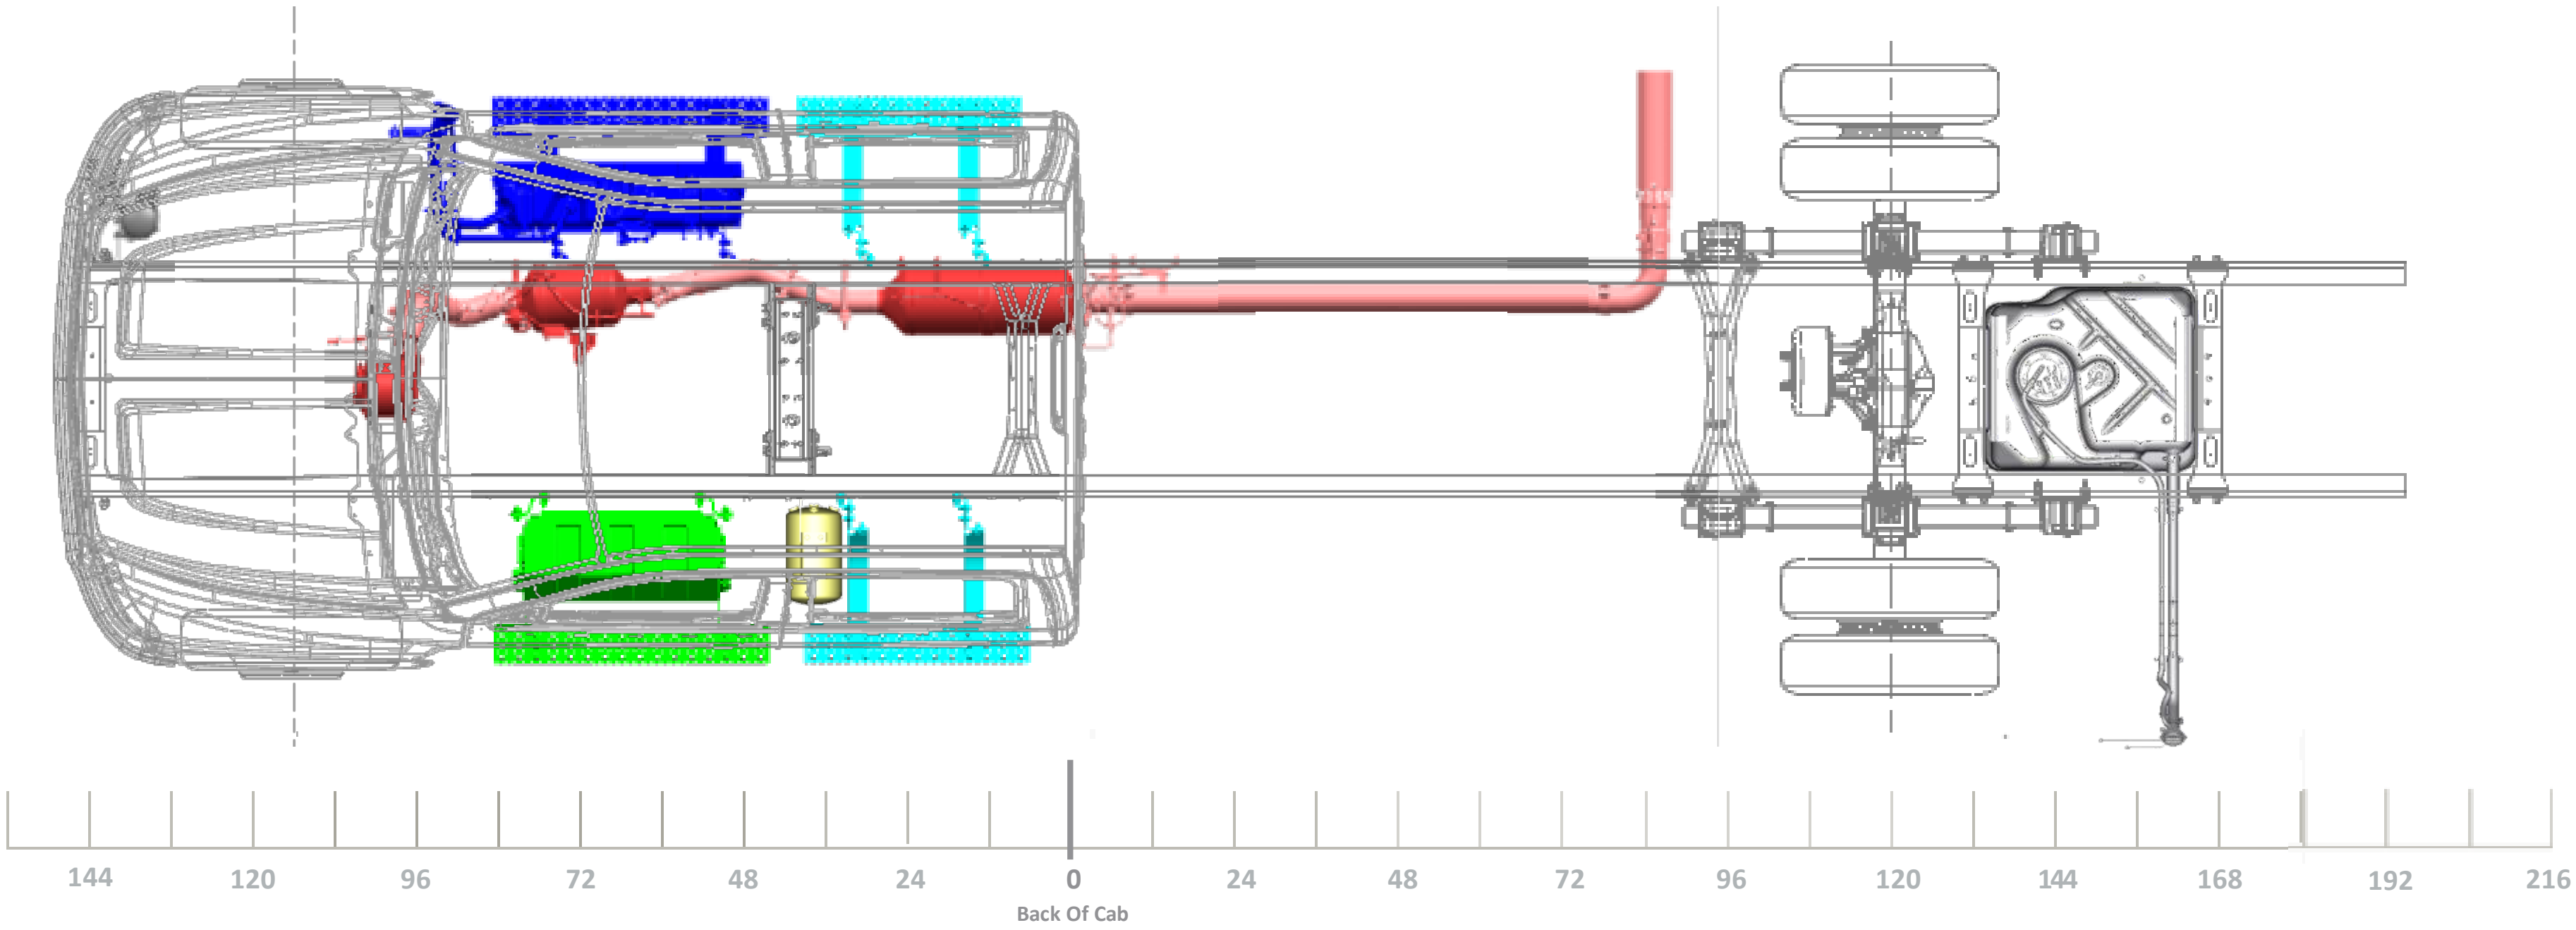

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

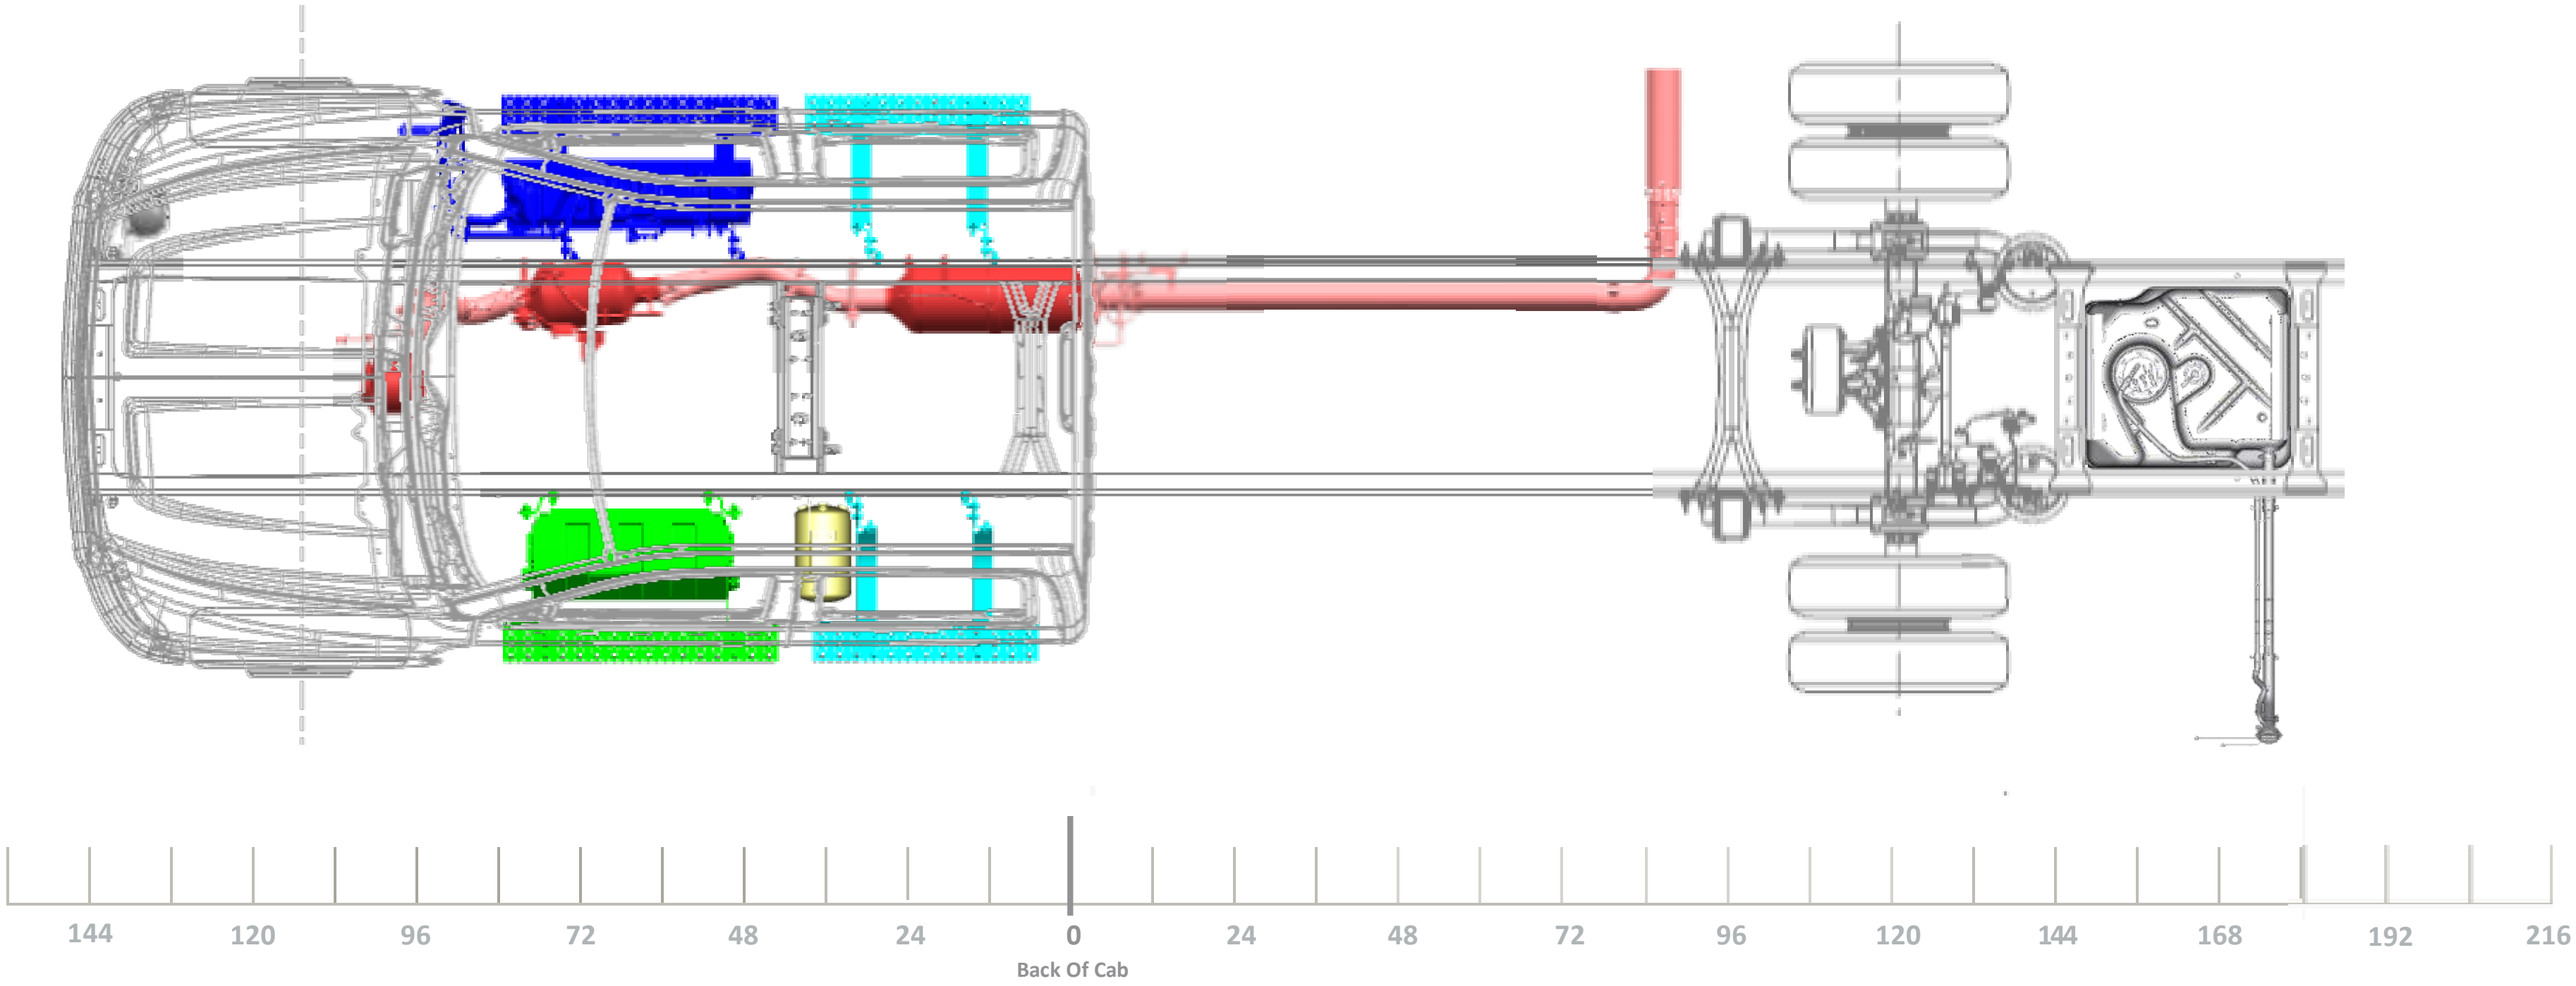

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

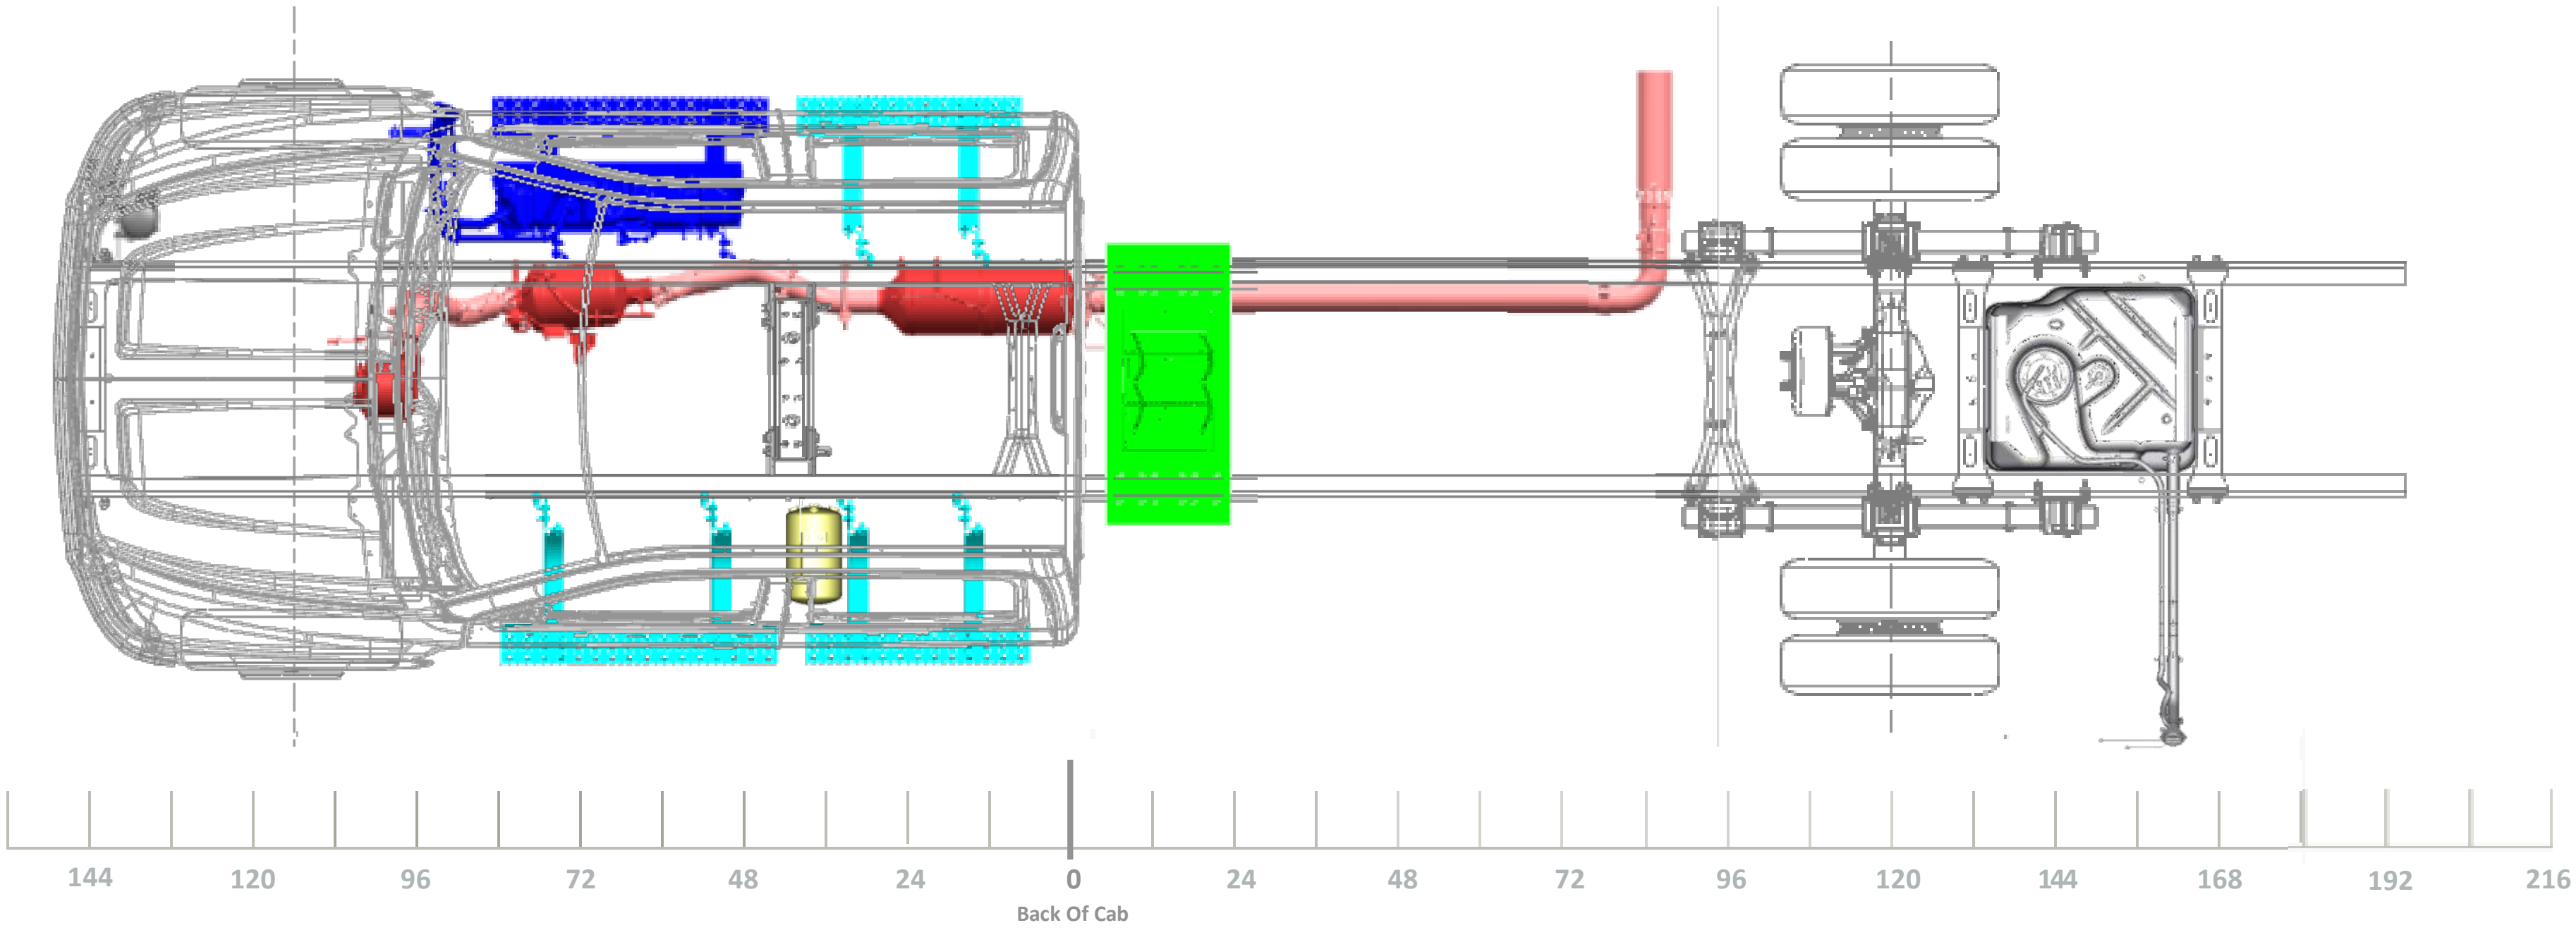

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO N2L	40 GAL, AF MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

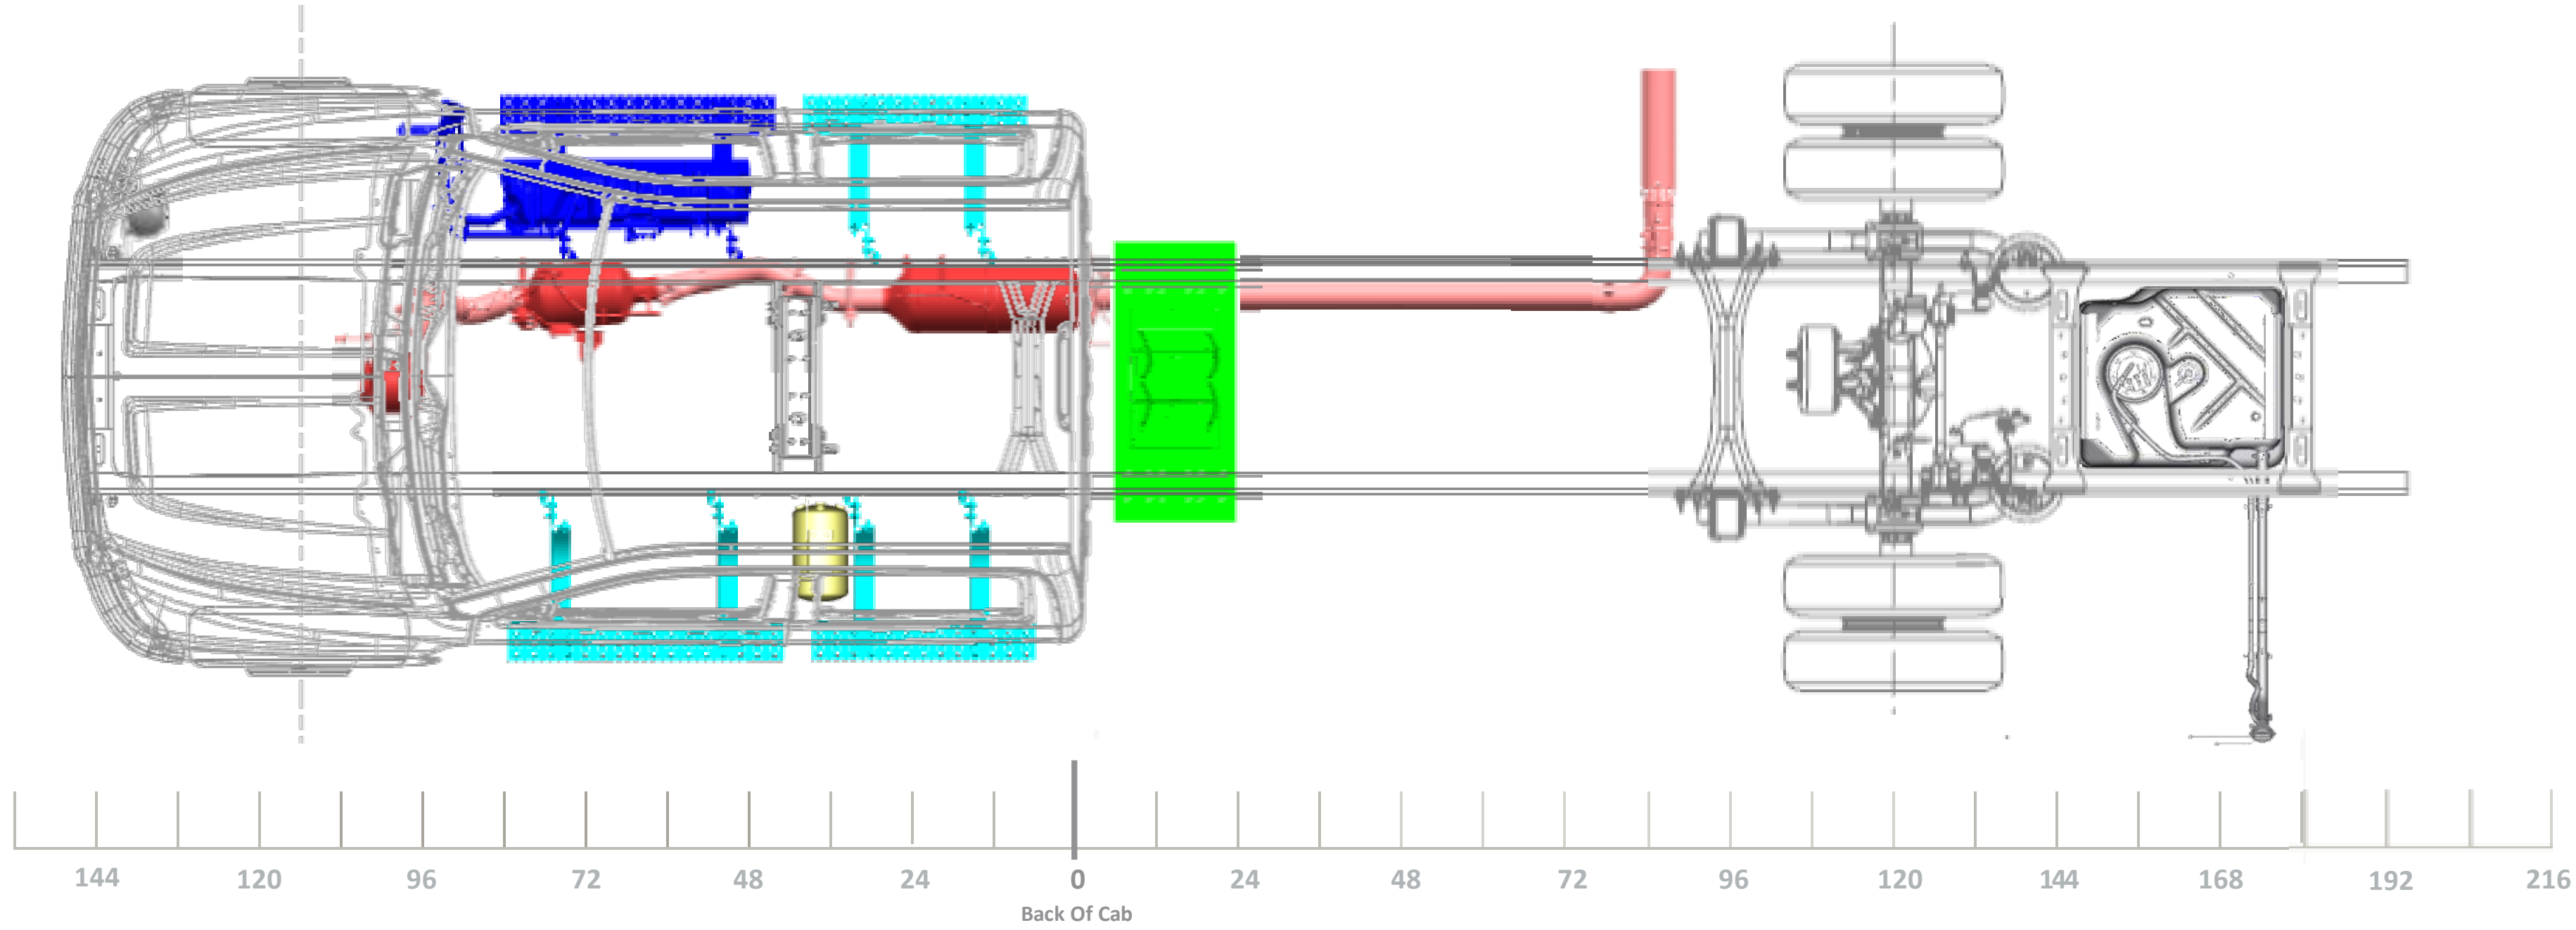

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

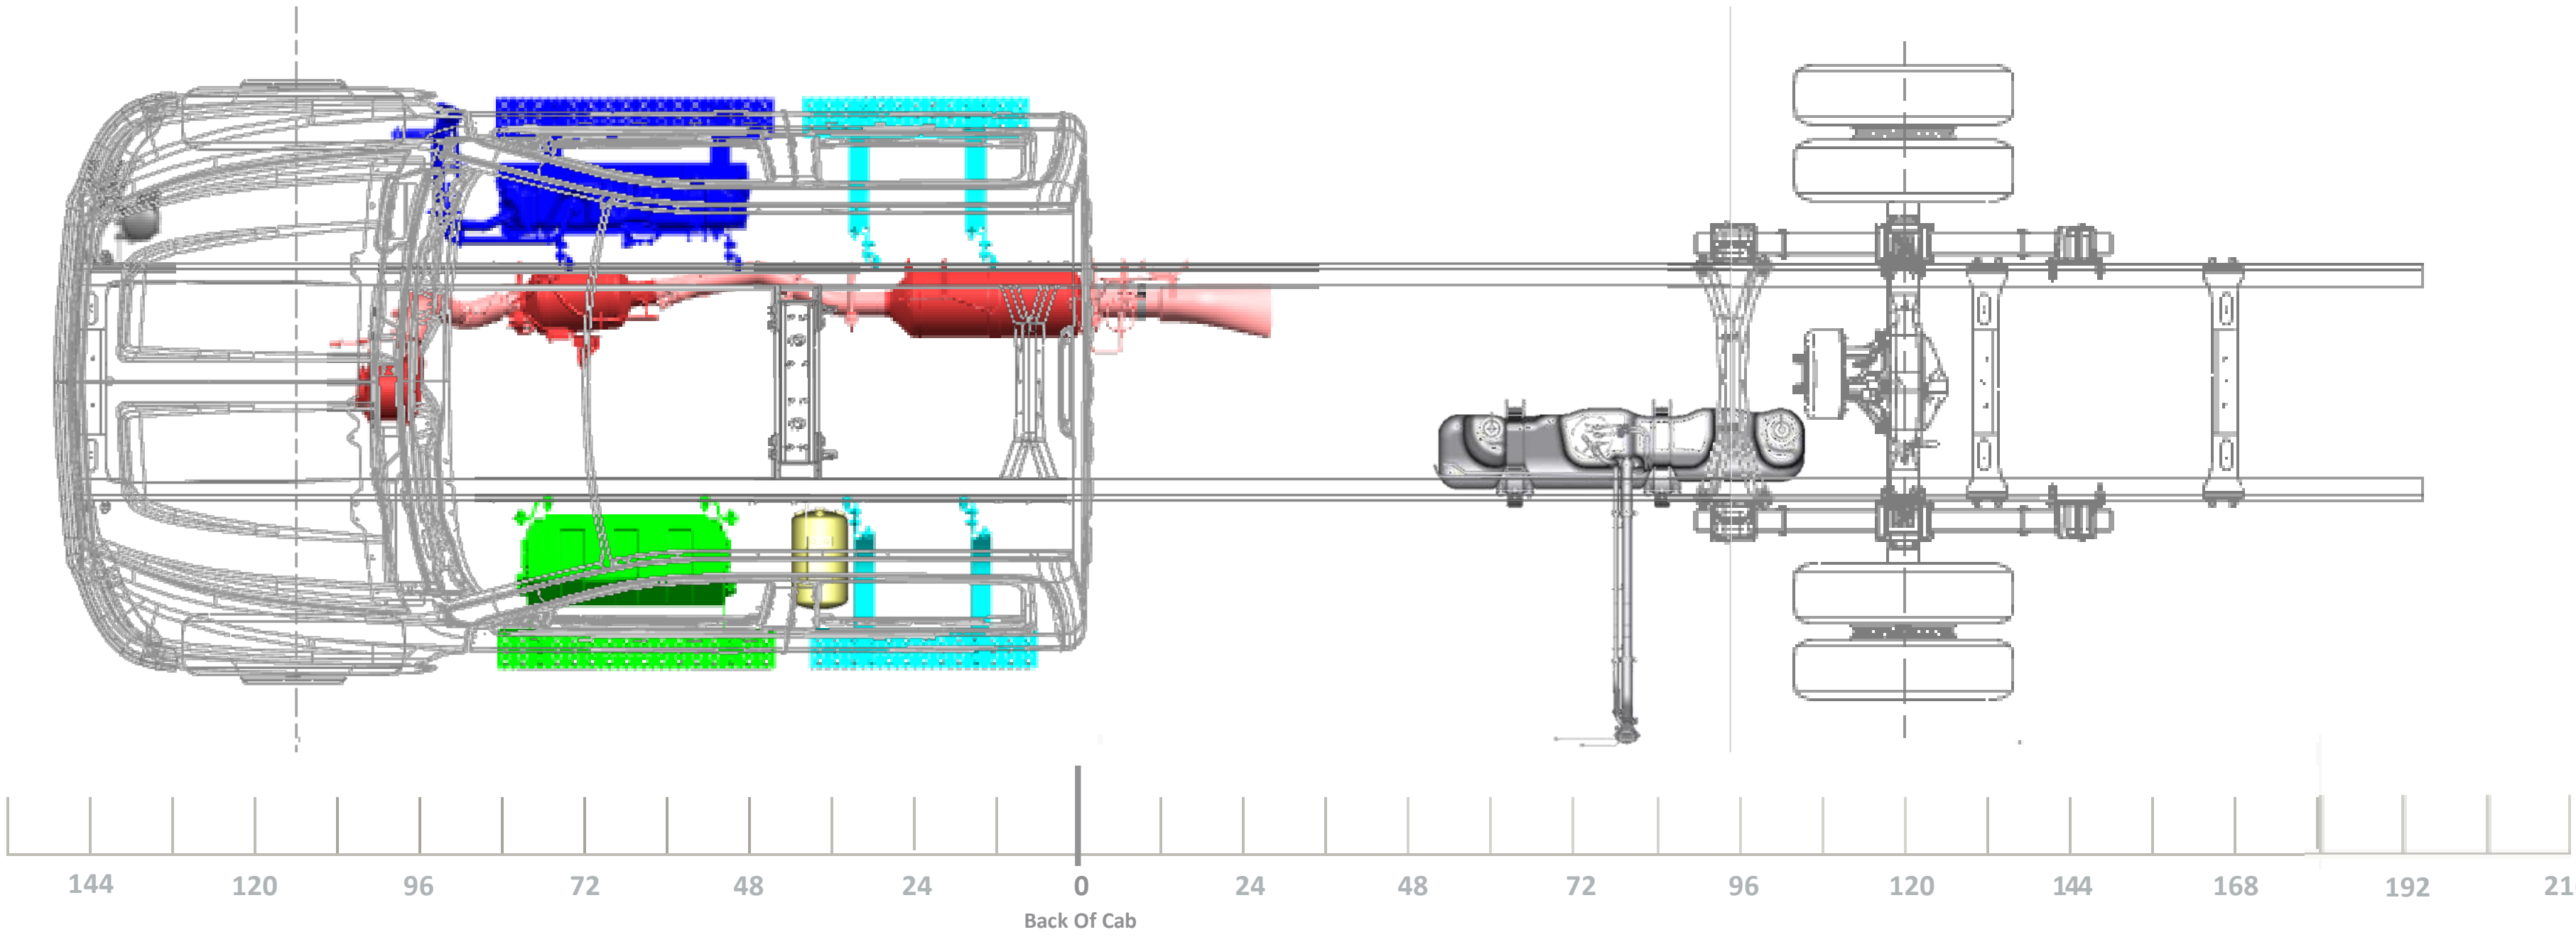

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235" WB (120" CA) 75" AF

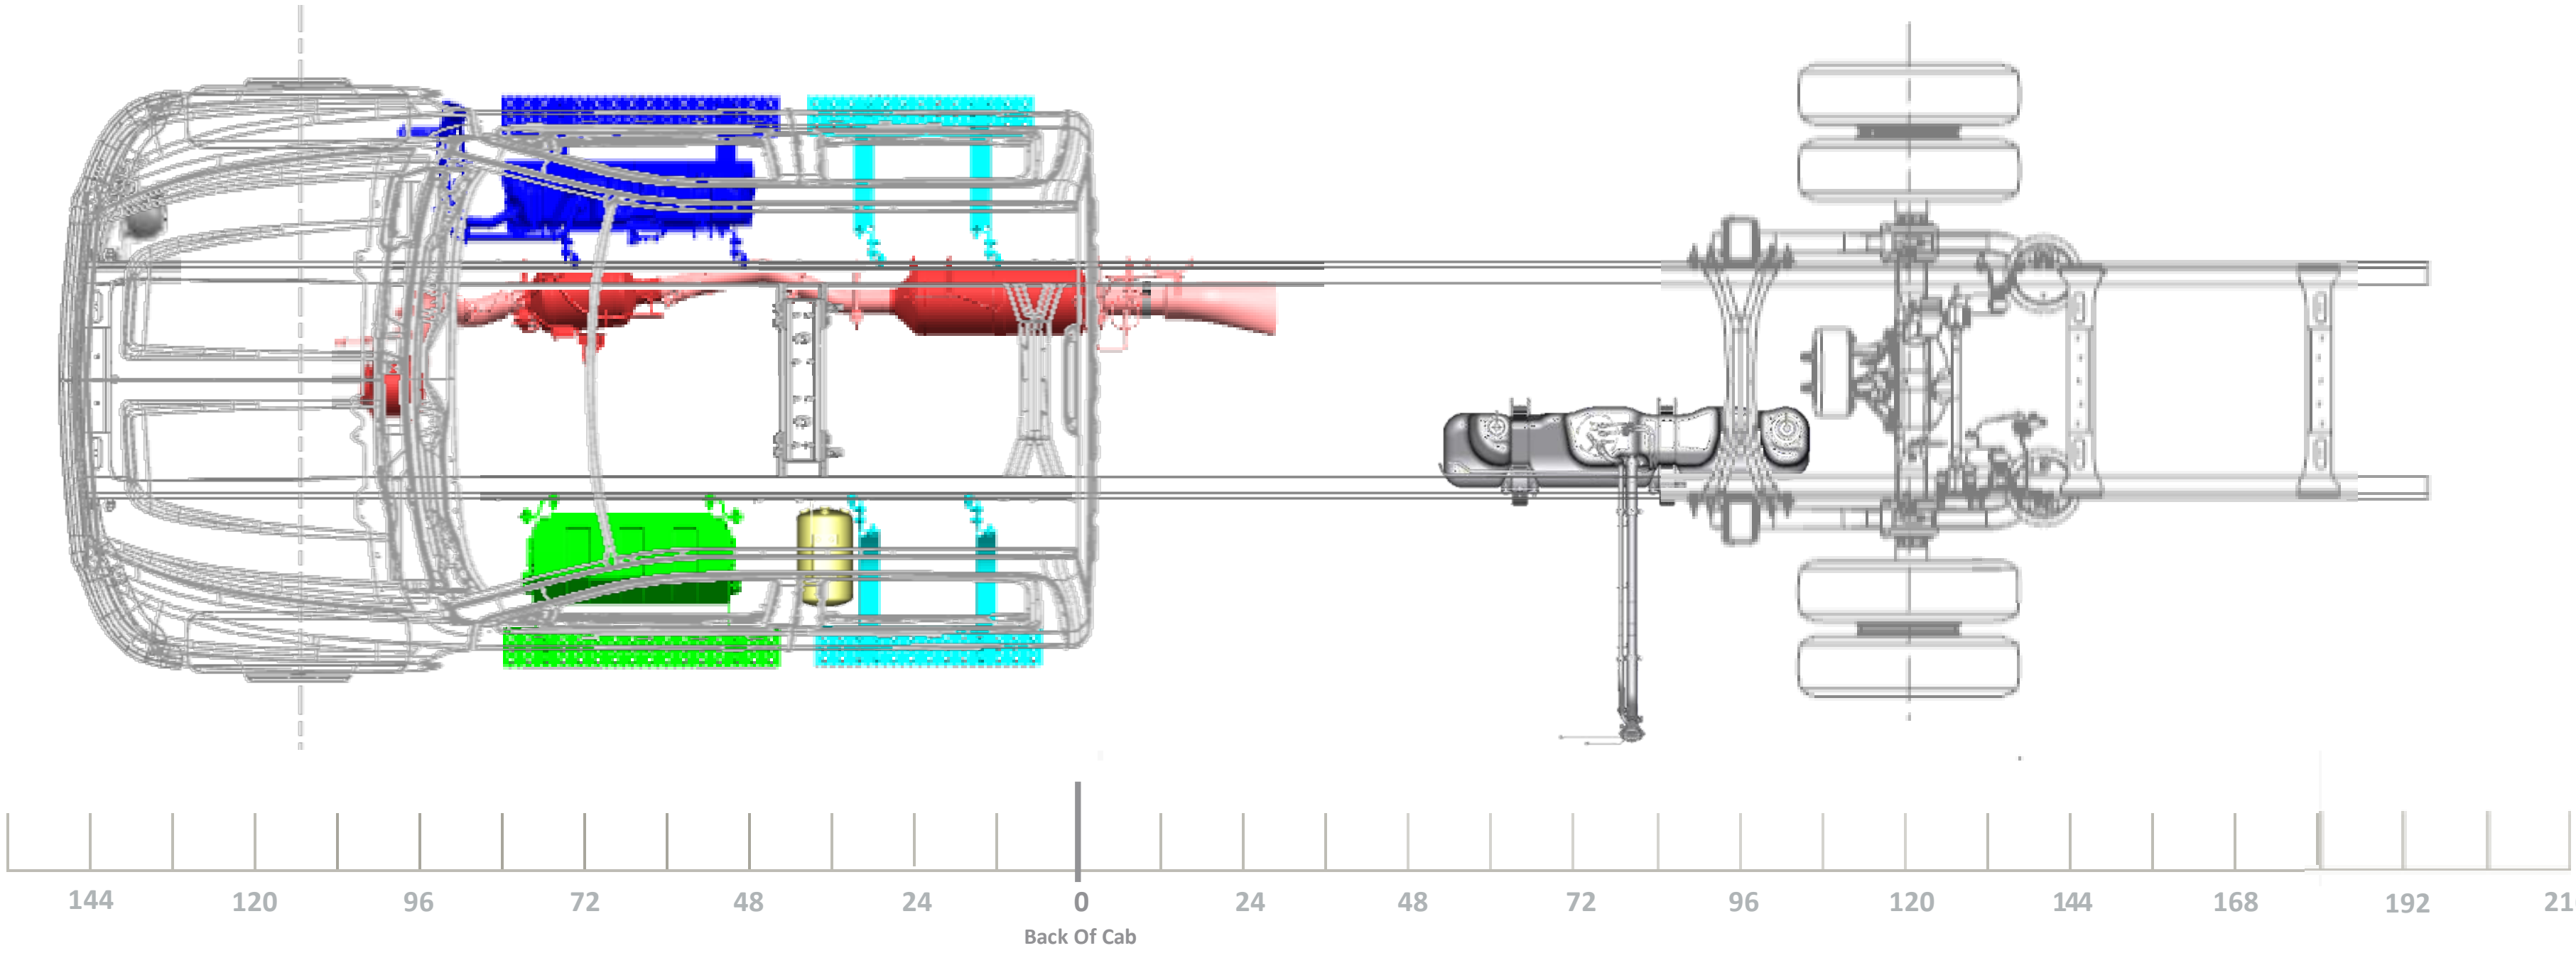

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

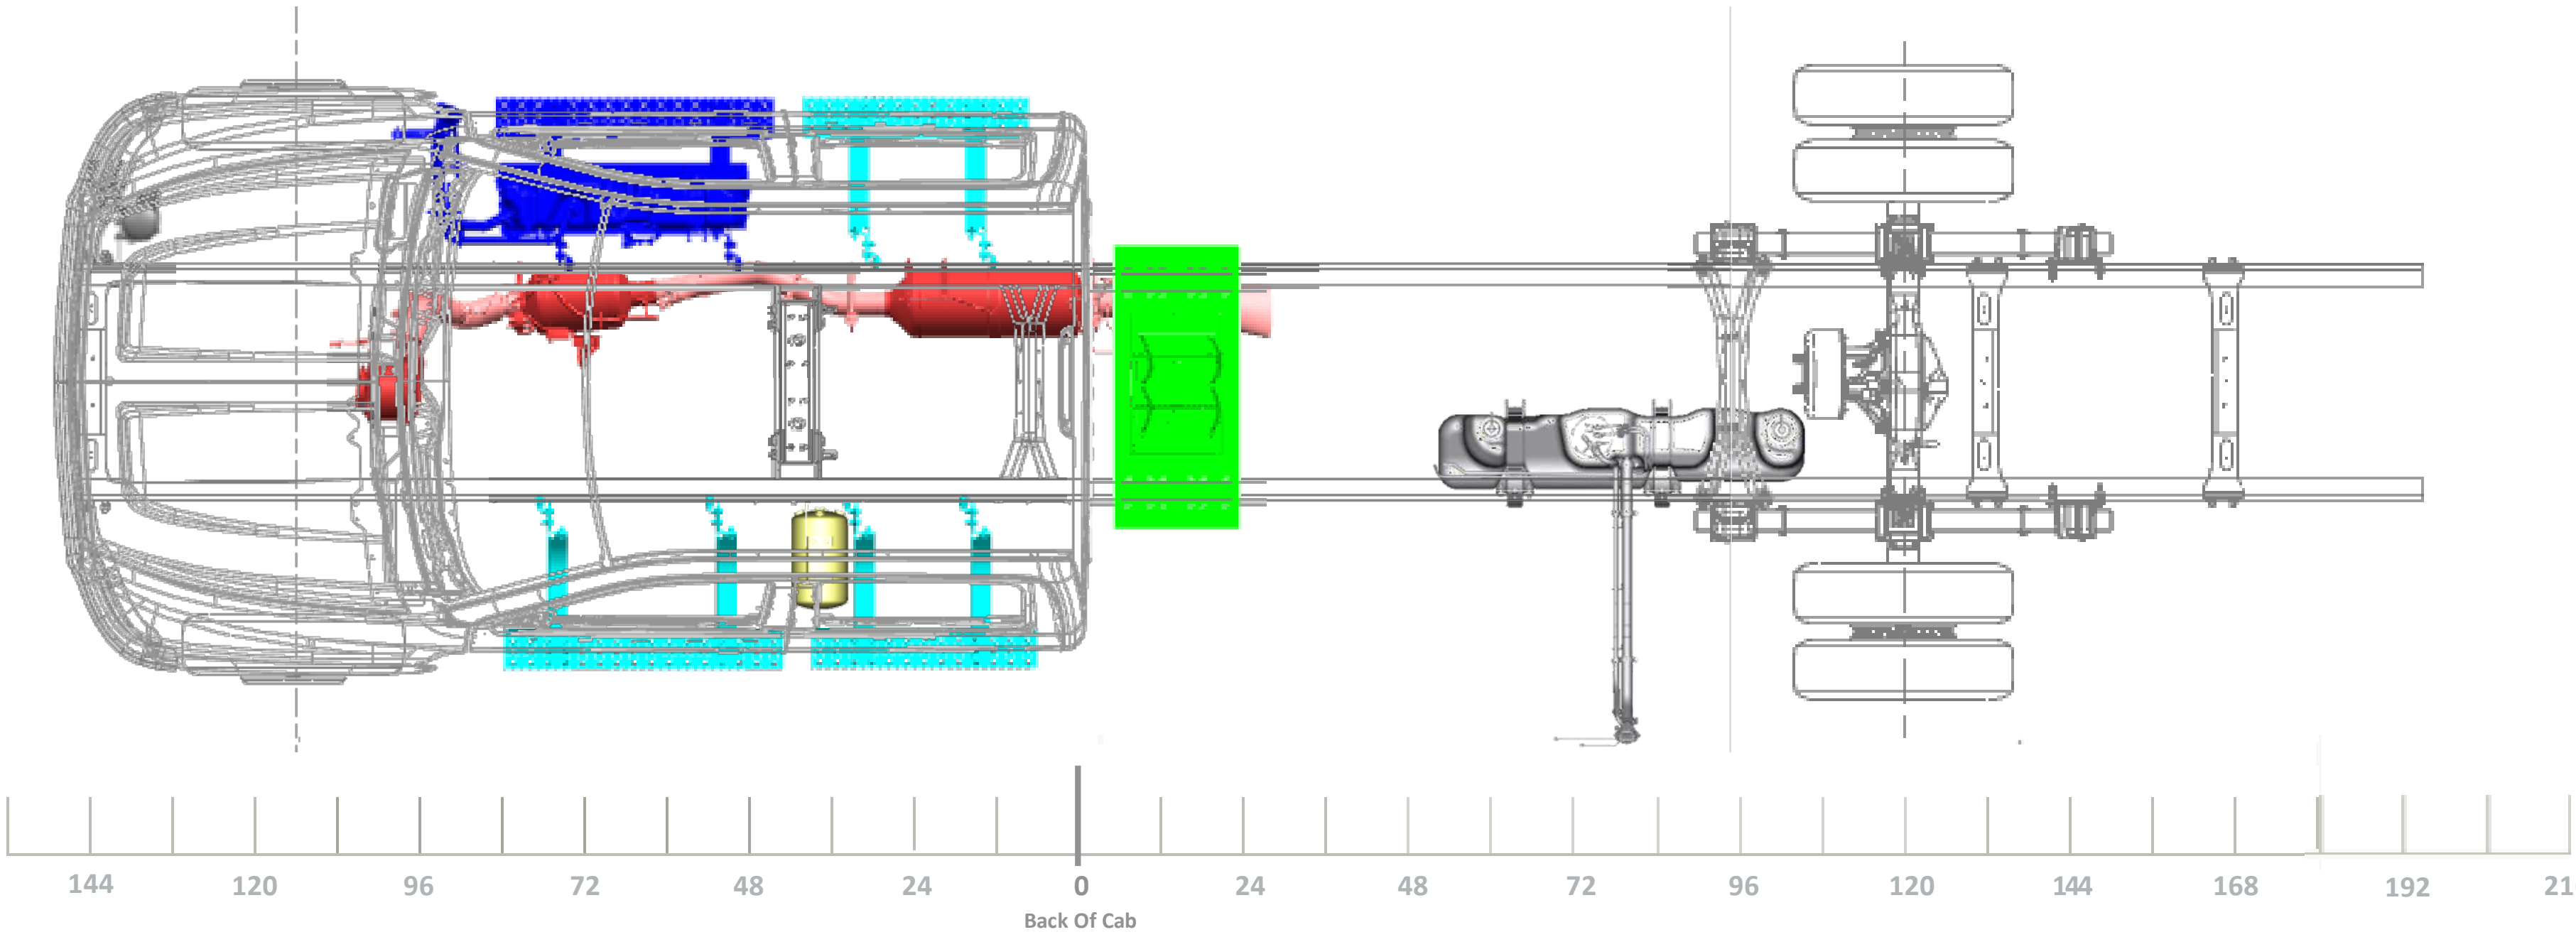
144
120
96
72
48
24
0
Back Of Cab
24
48
72
96
120
144
168
192
216

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

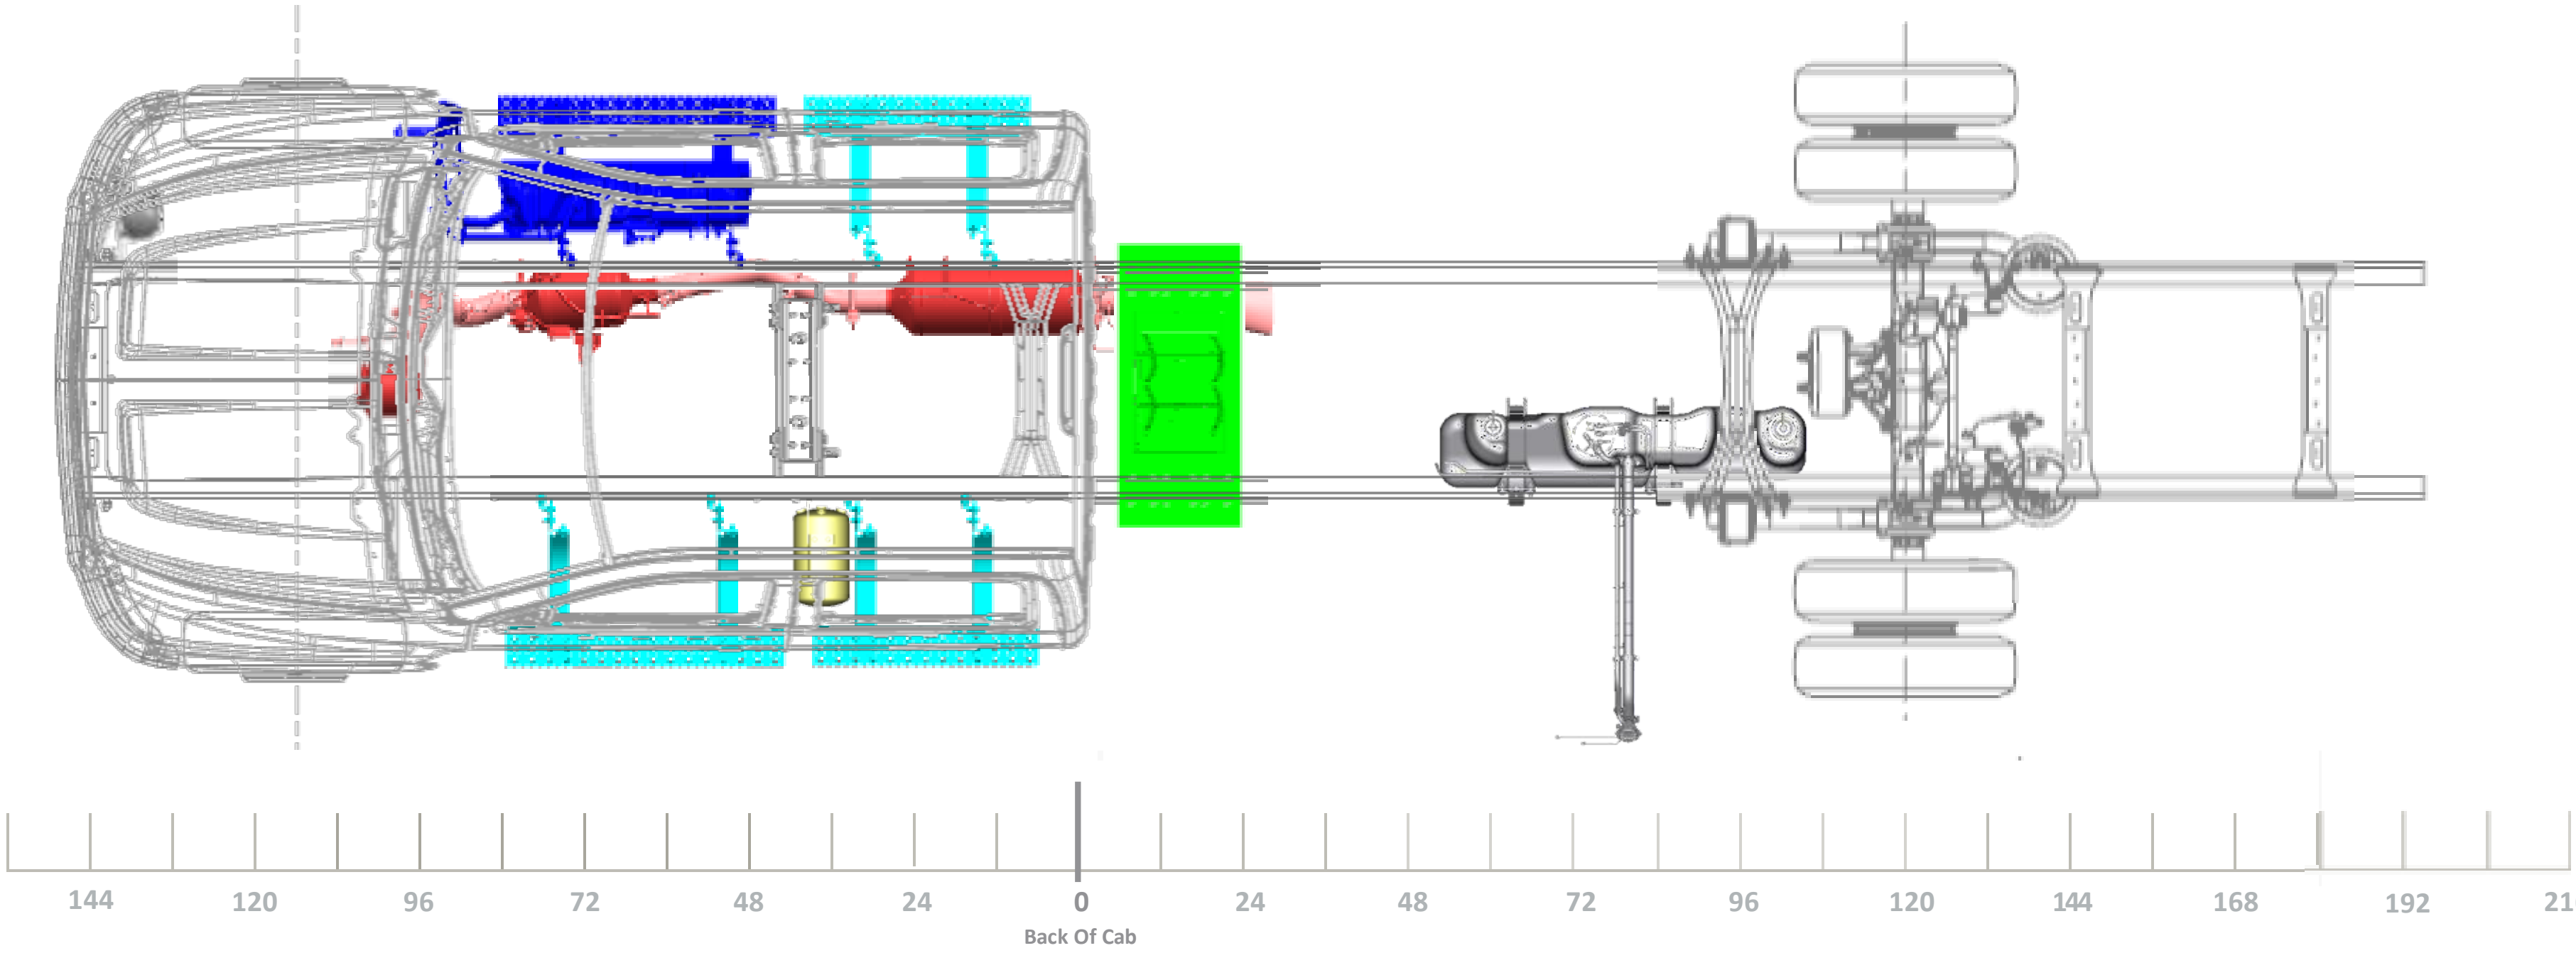

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

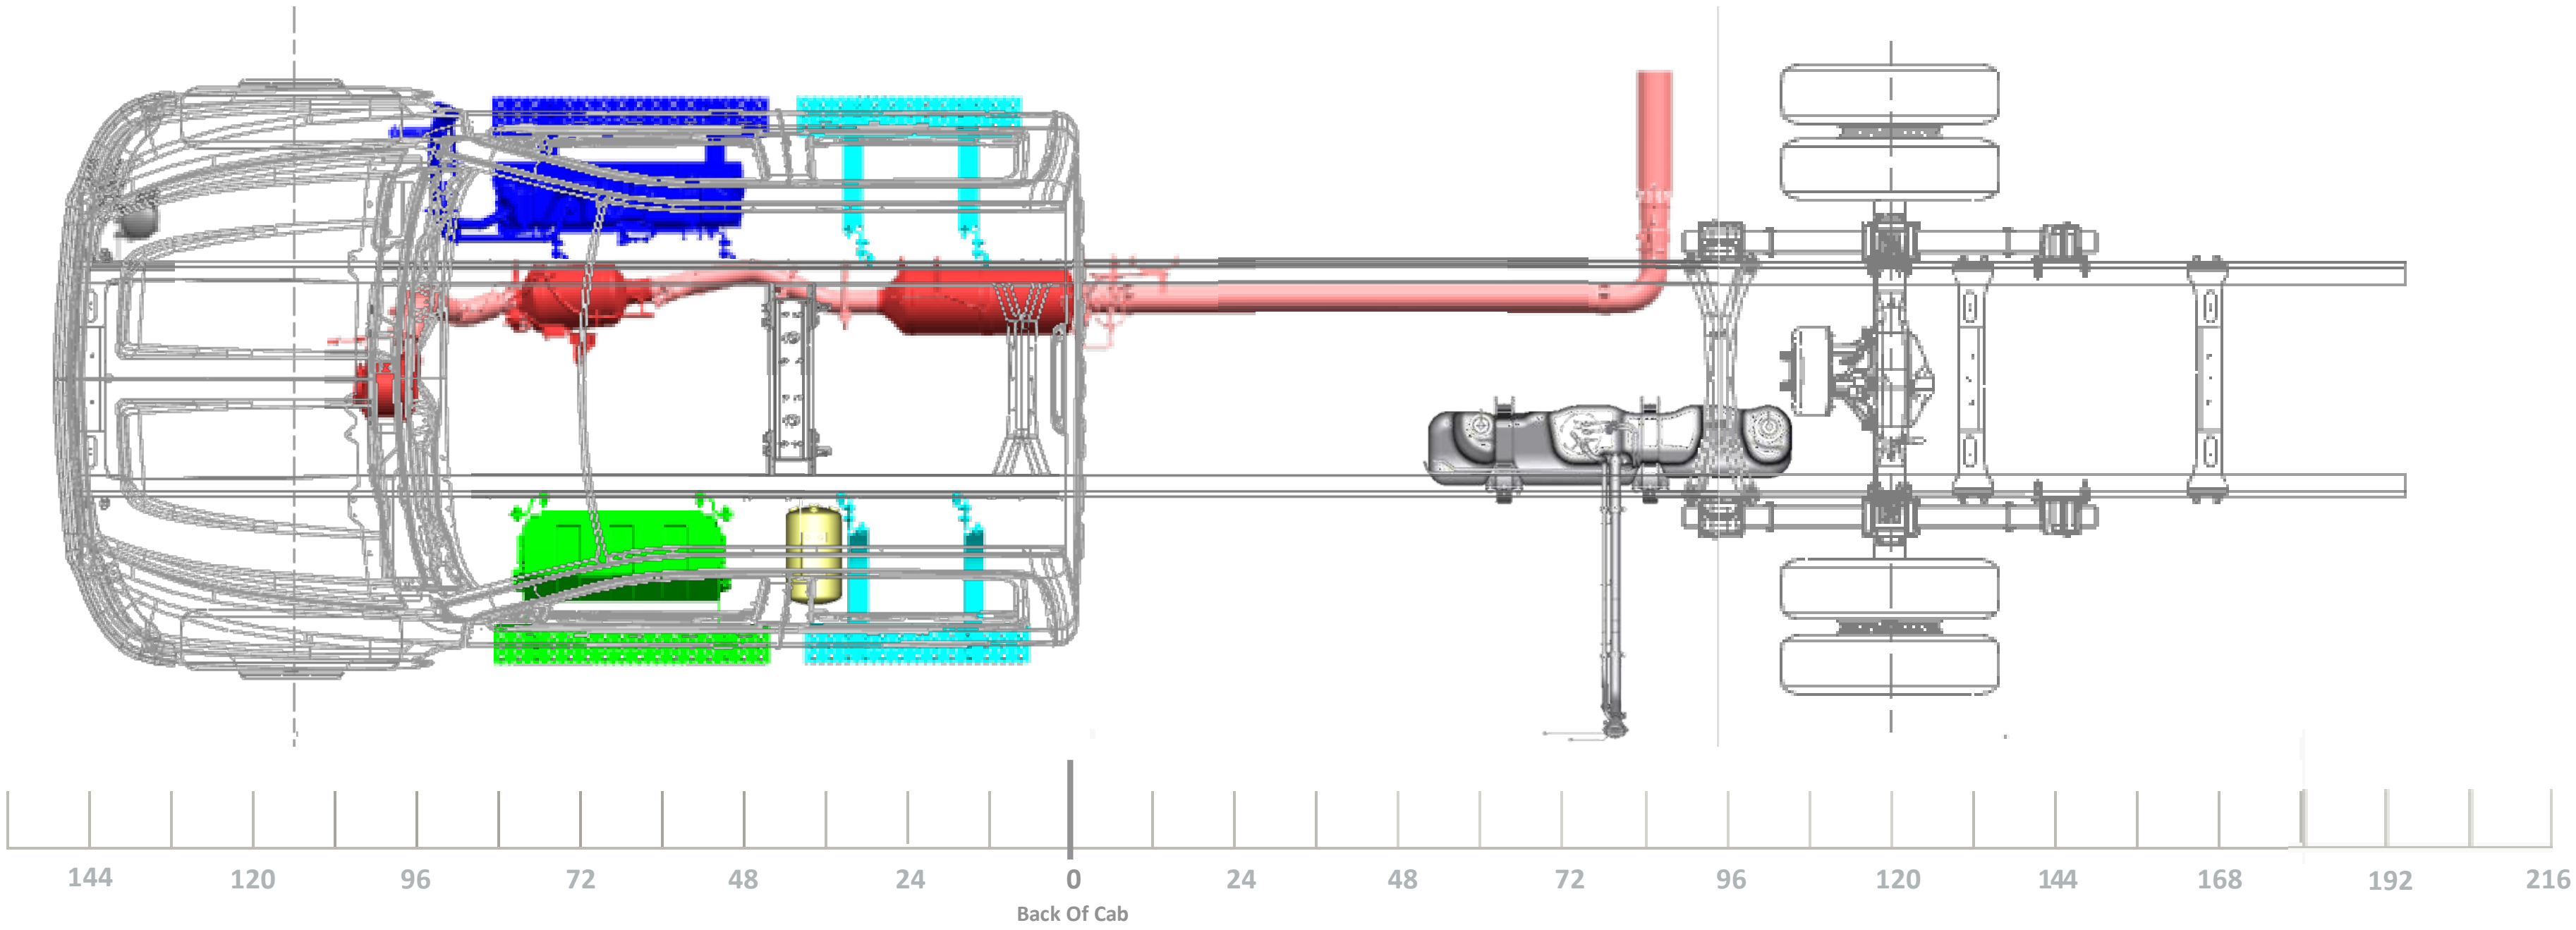

2020 Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

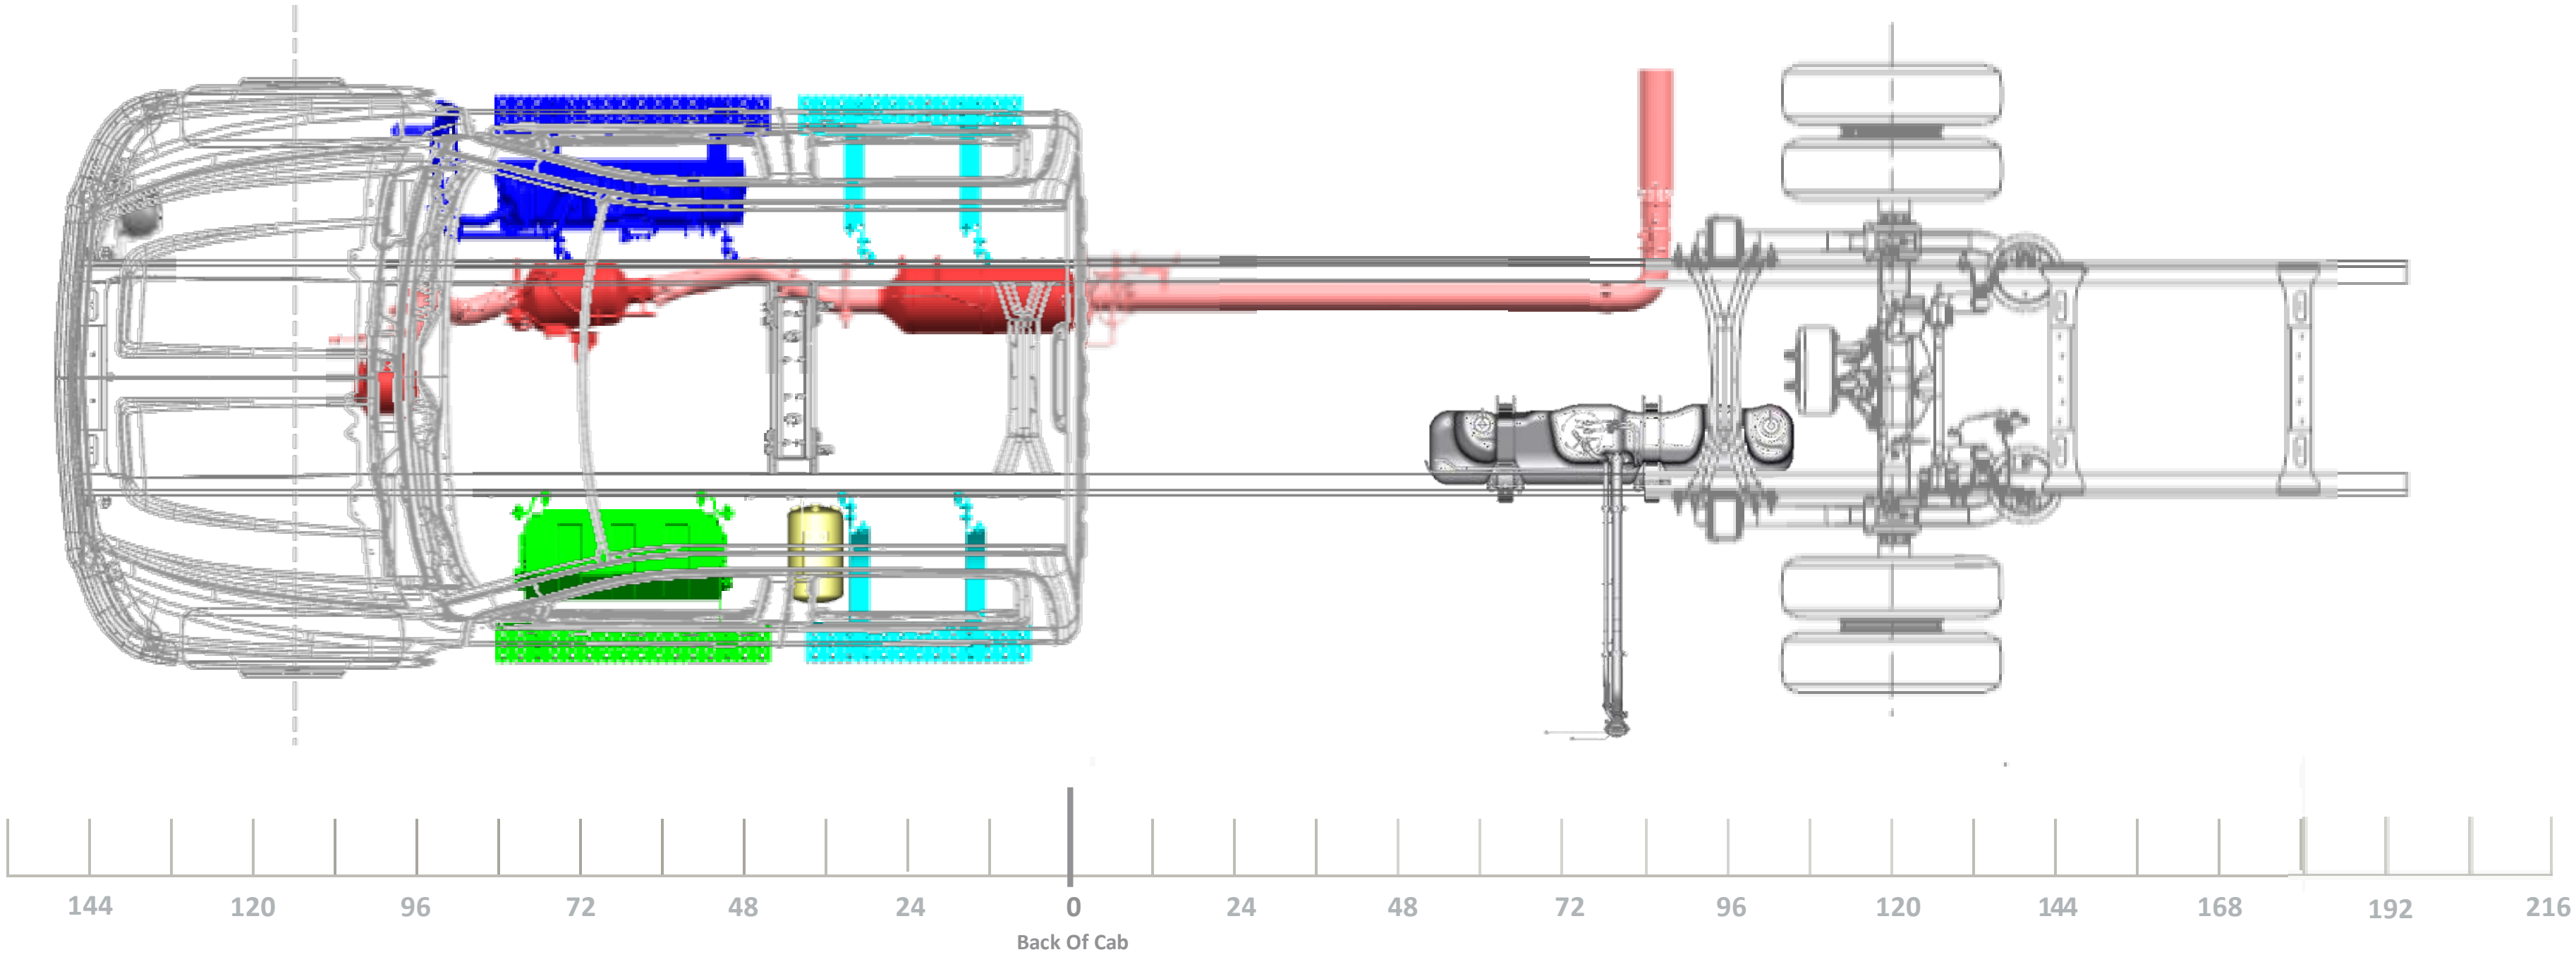

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

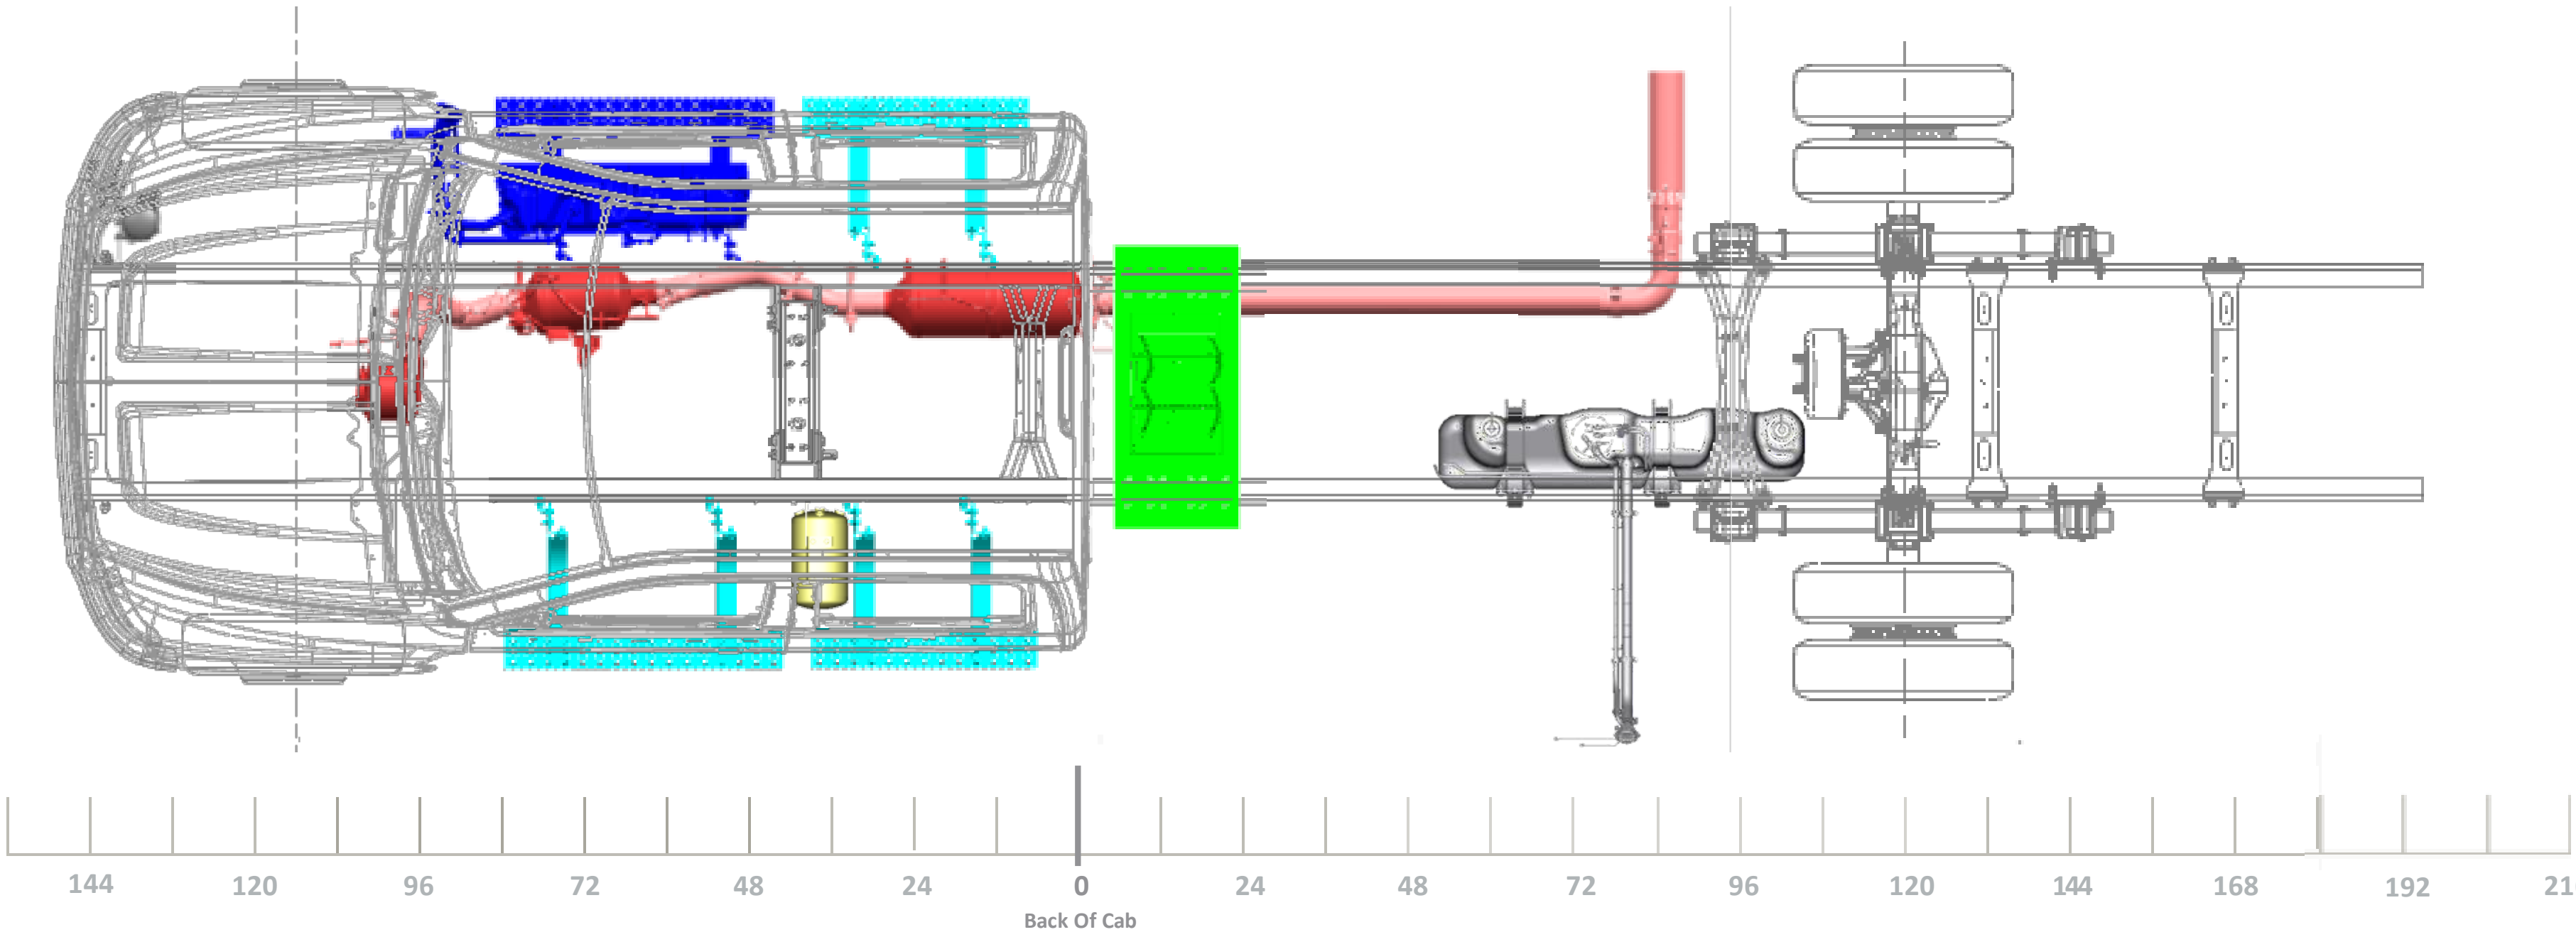

Model/Feature Information

Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NVK	25 GAL, CA MTD
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information

4X2 TRUCK CONFIGURATION
IROS REAR SUSPENSION

SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)

OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase

235” WB (120” CA)
75” AF

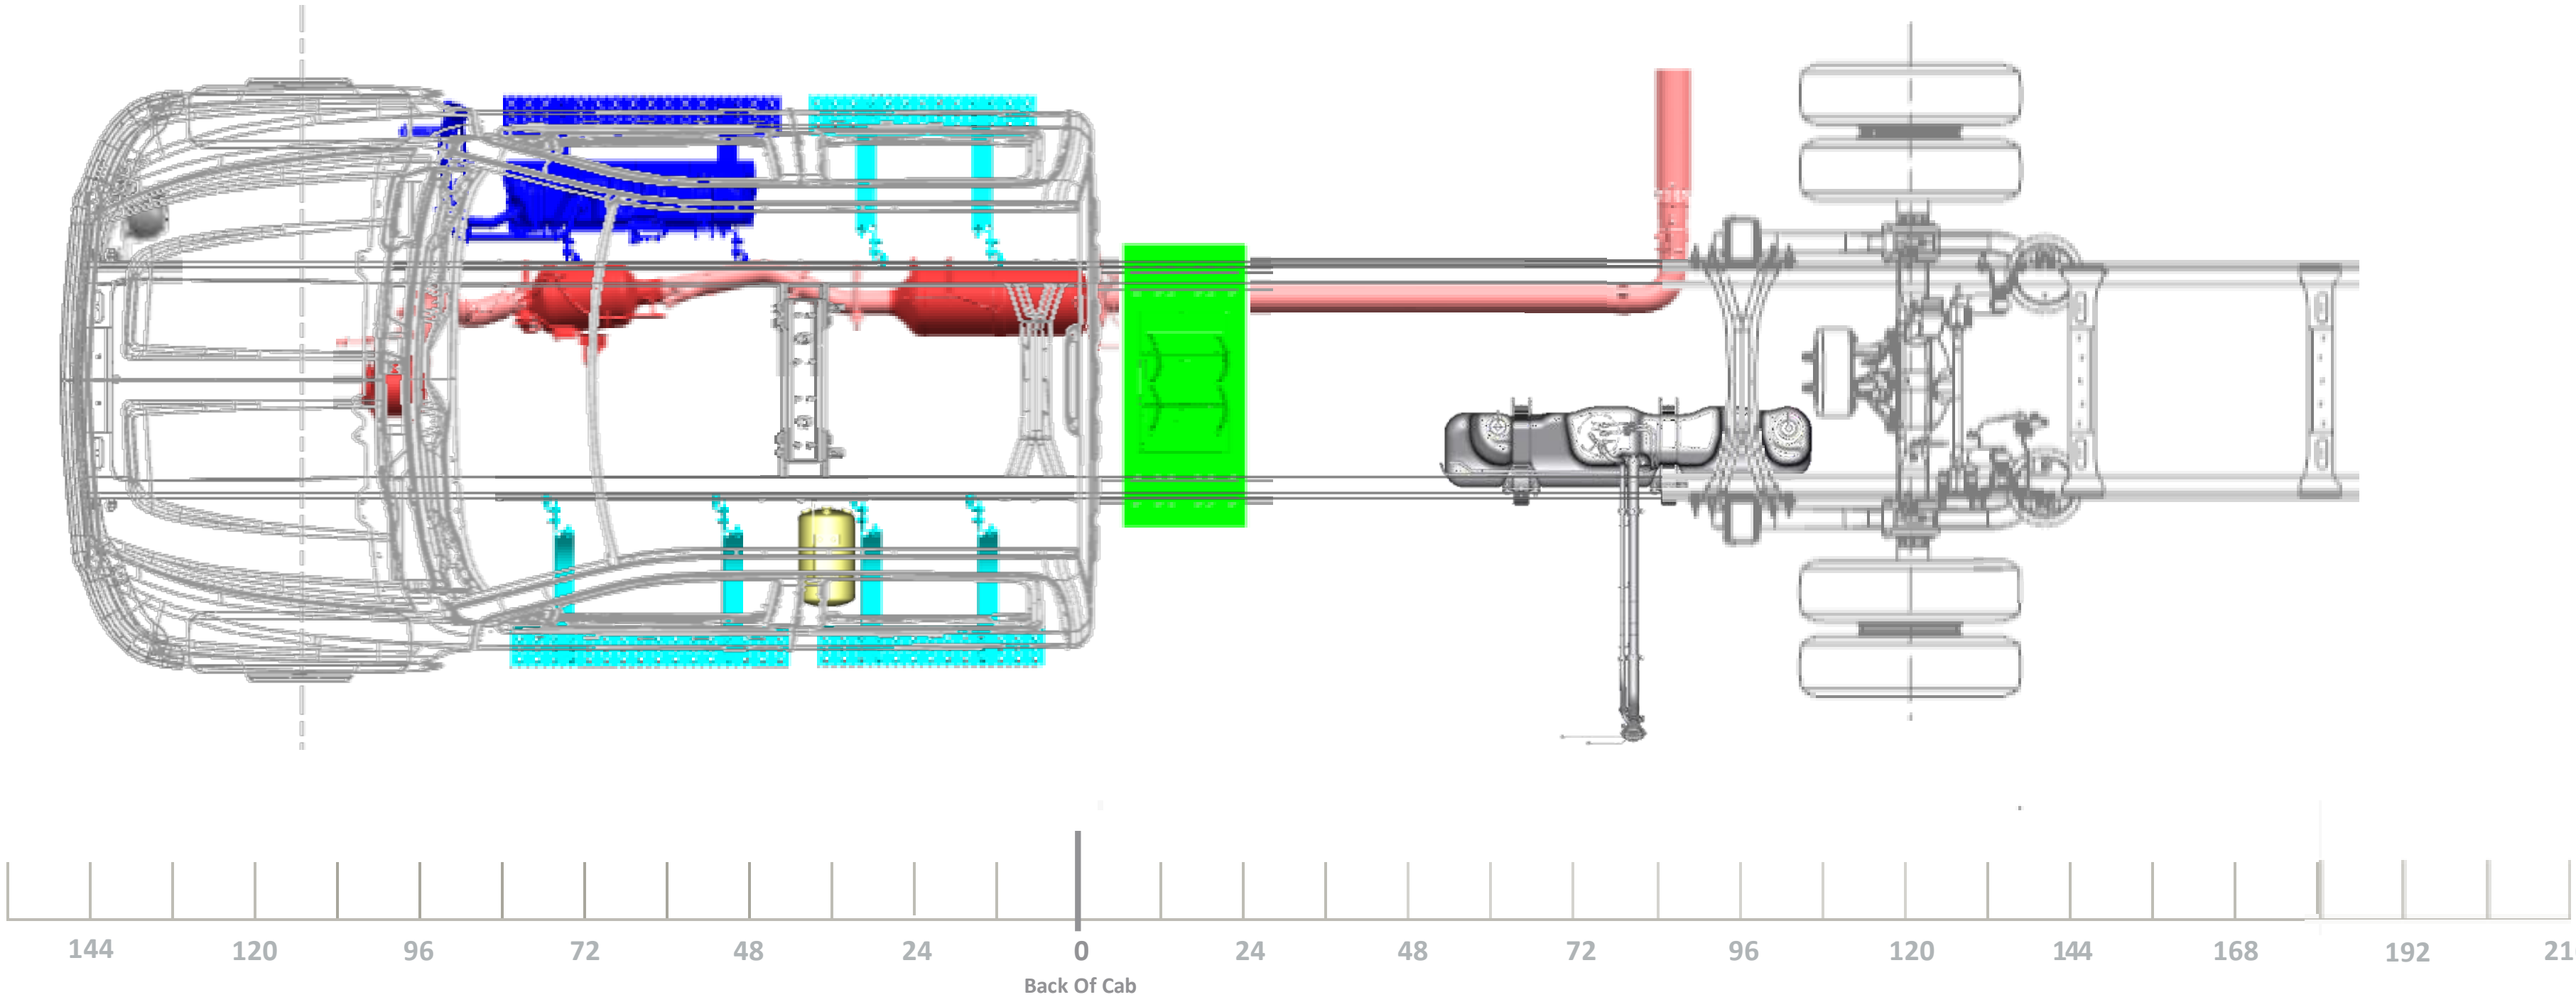

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

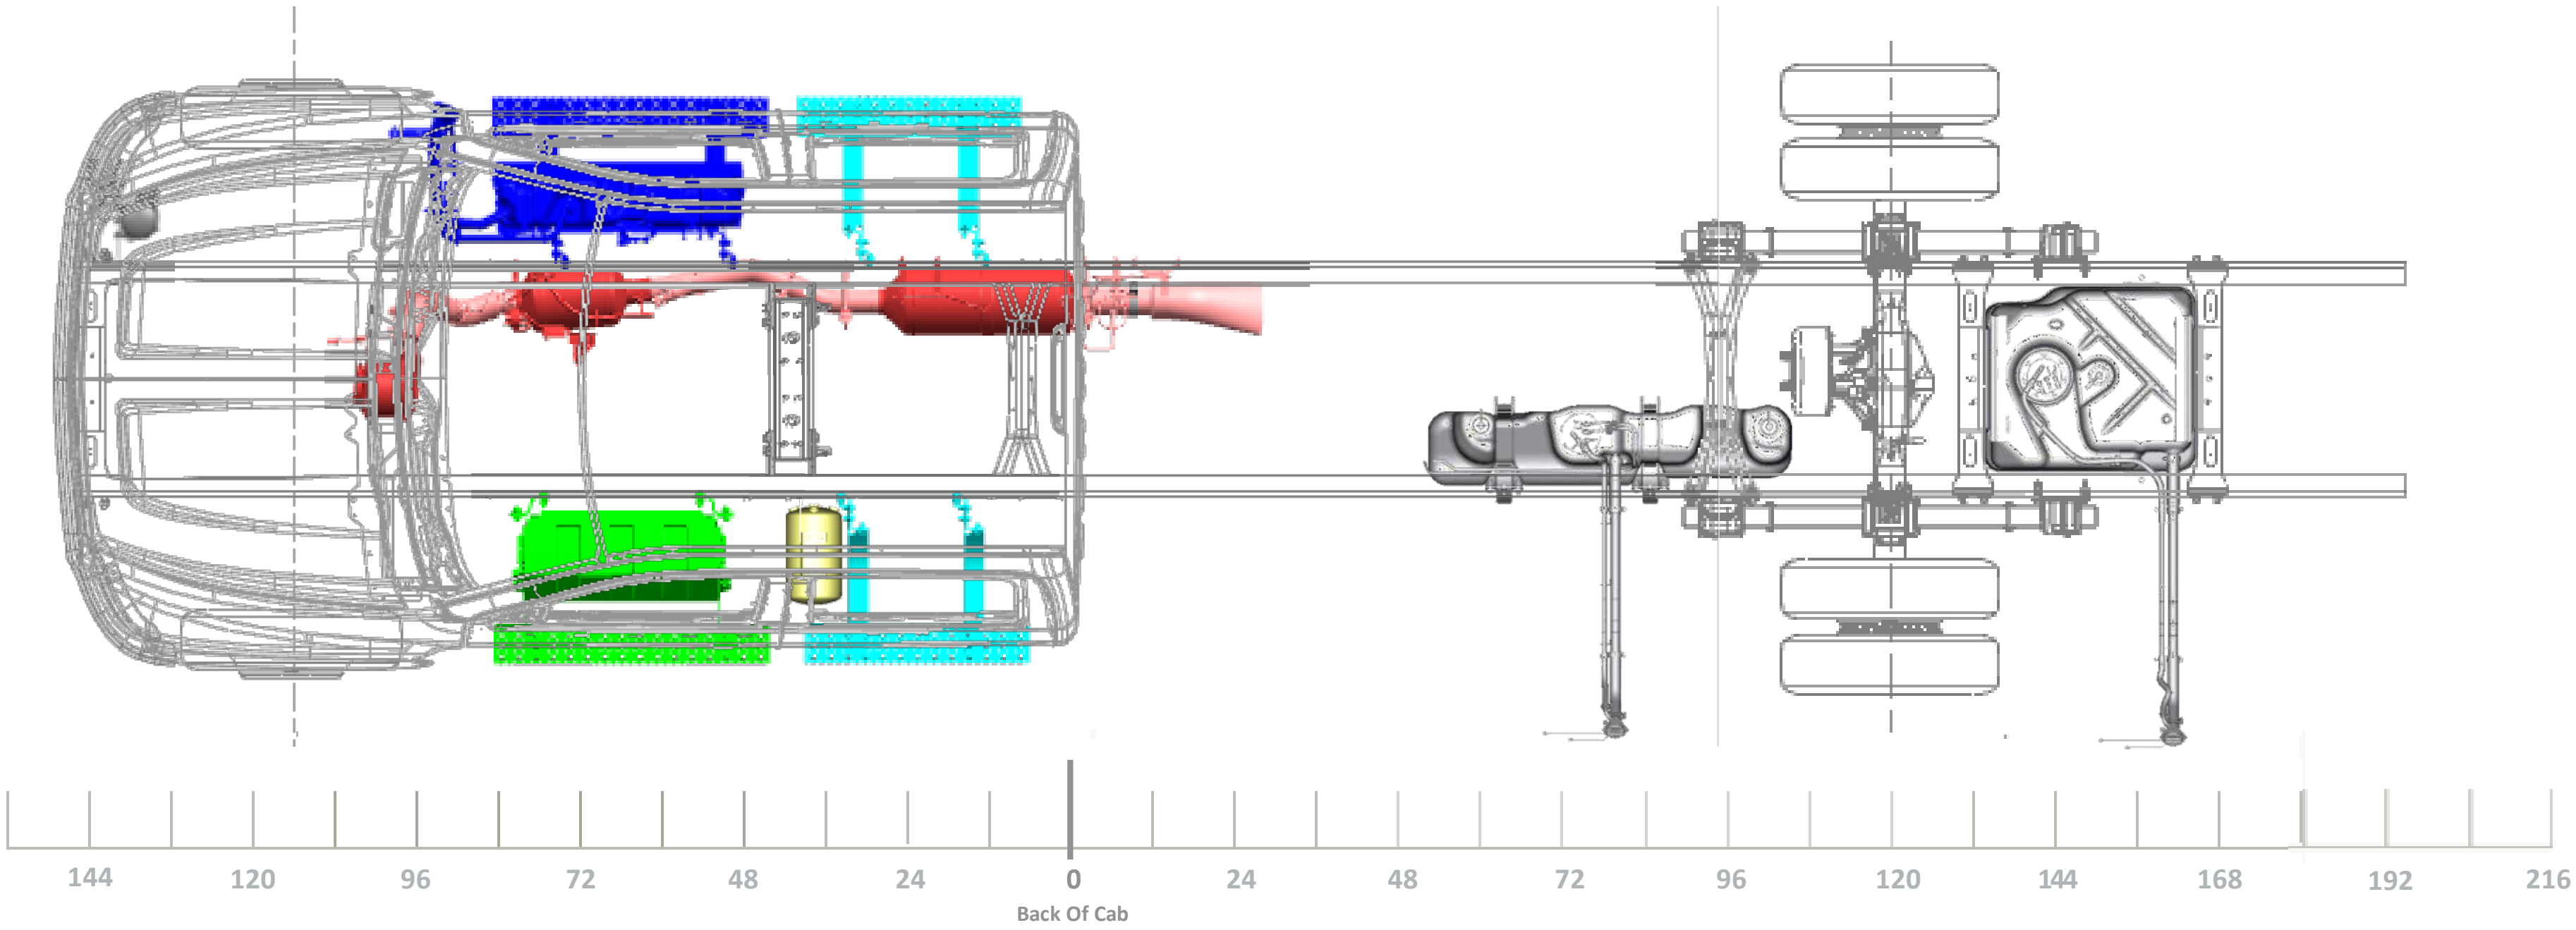

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

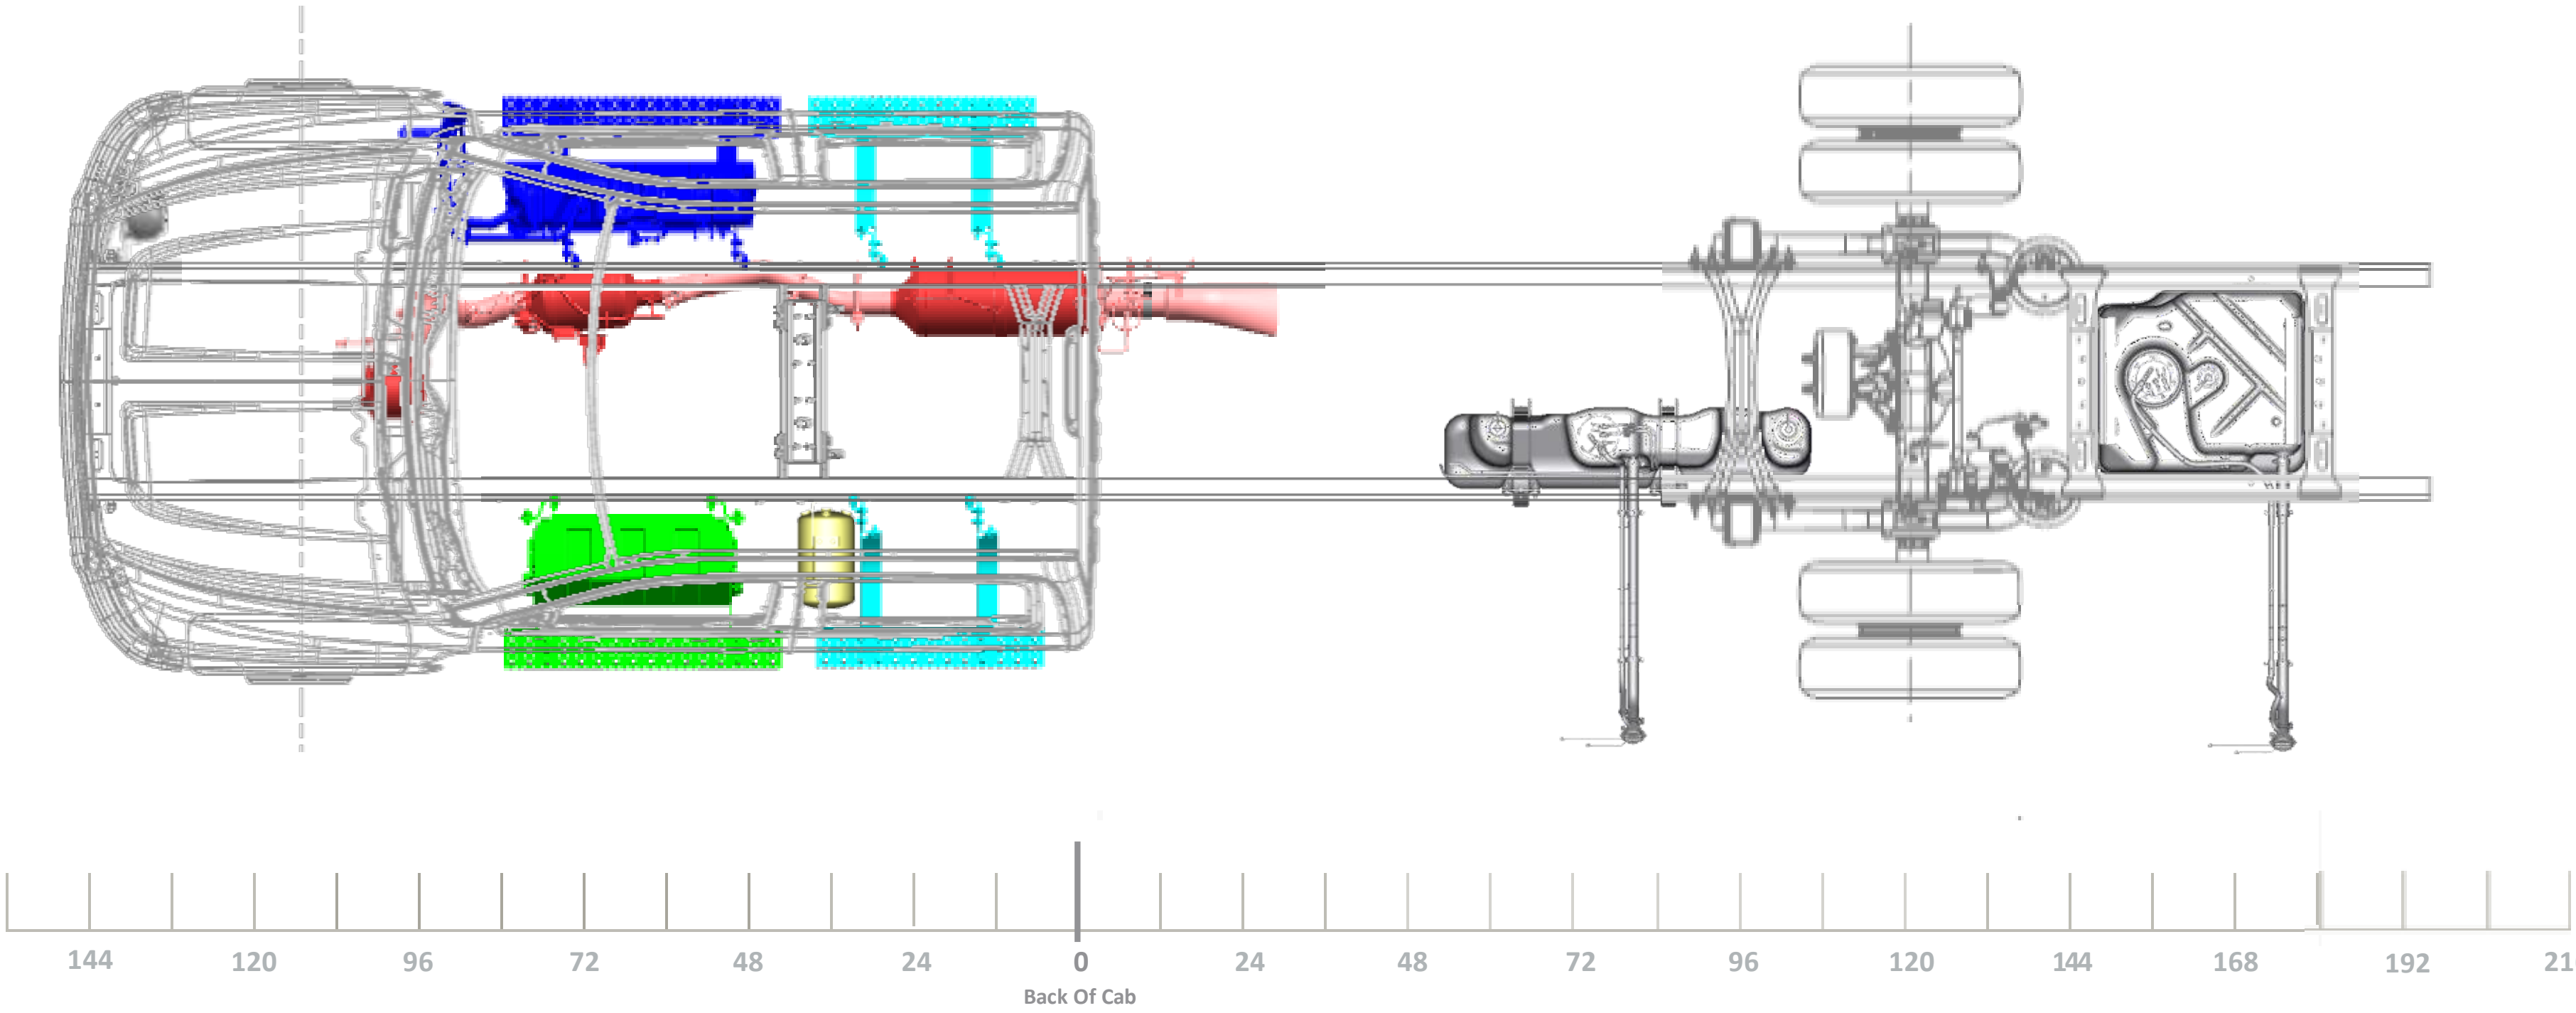

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

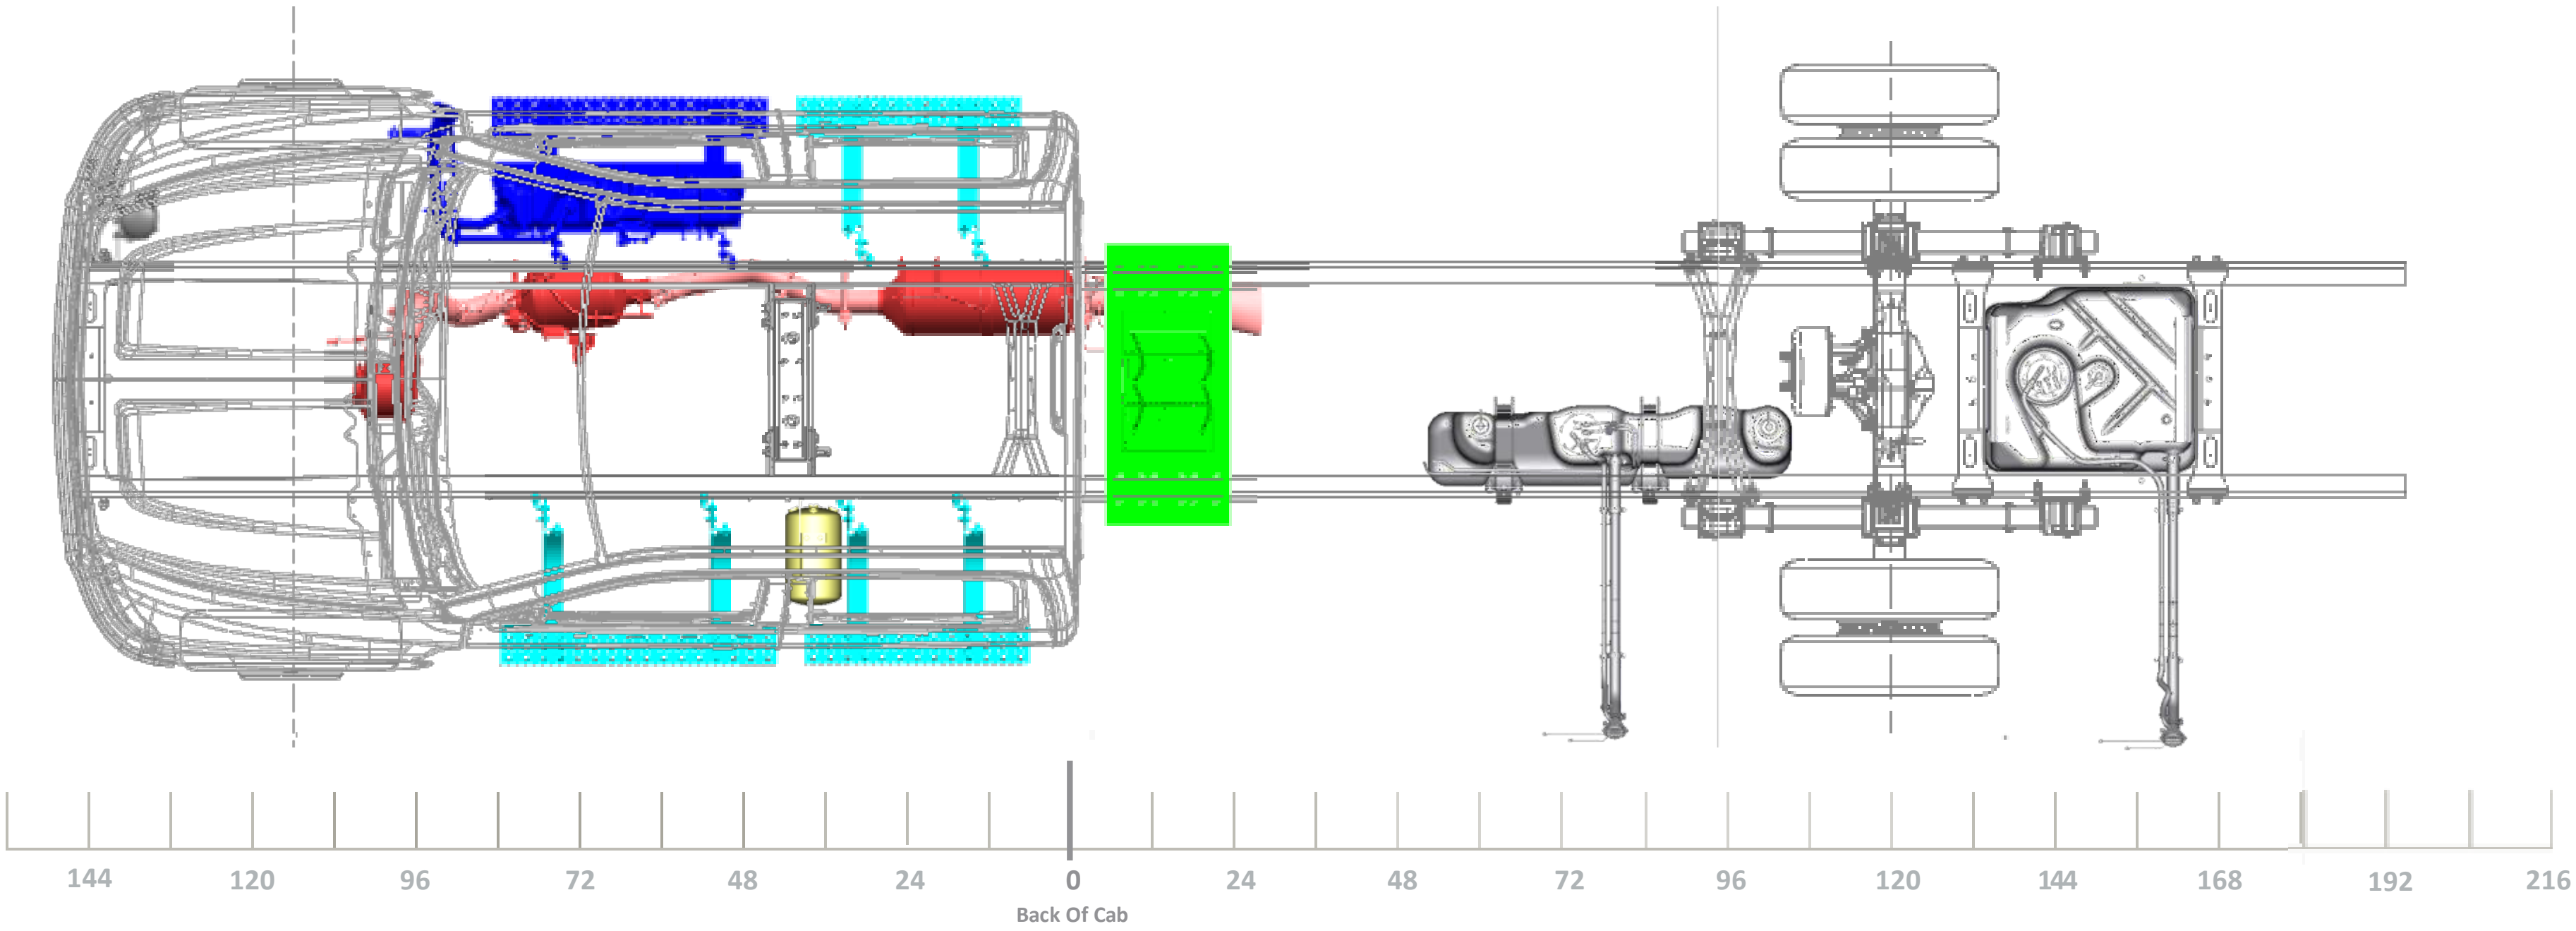

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
STRAIGHT TAILPIPE (RPO N12)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

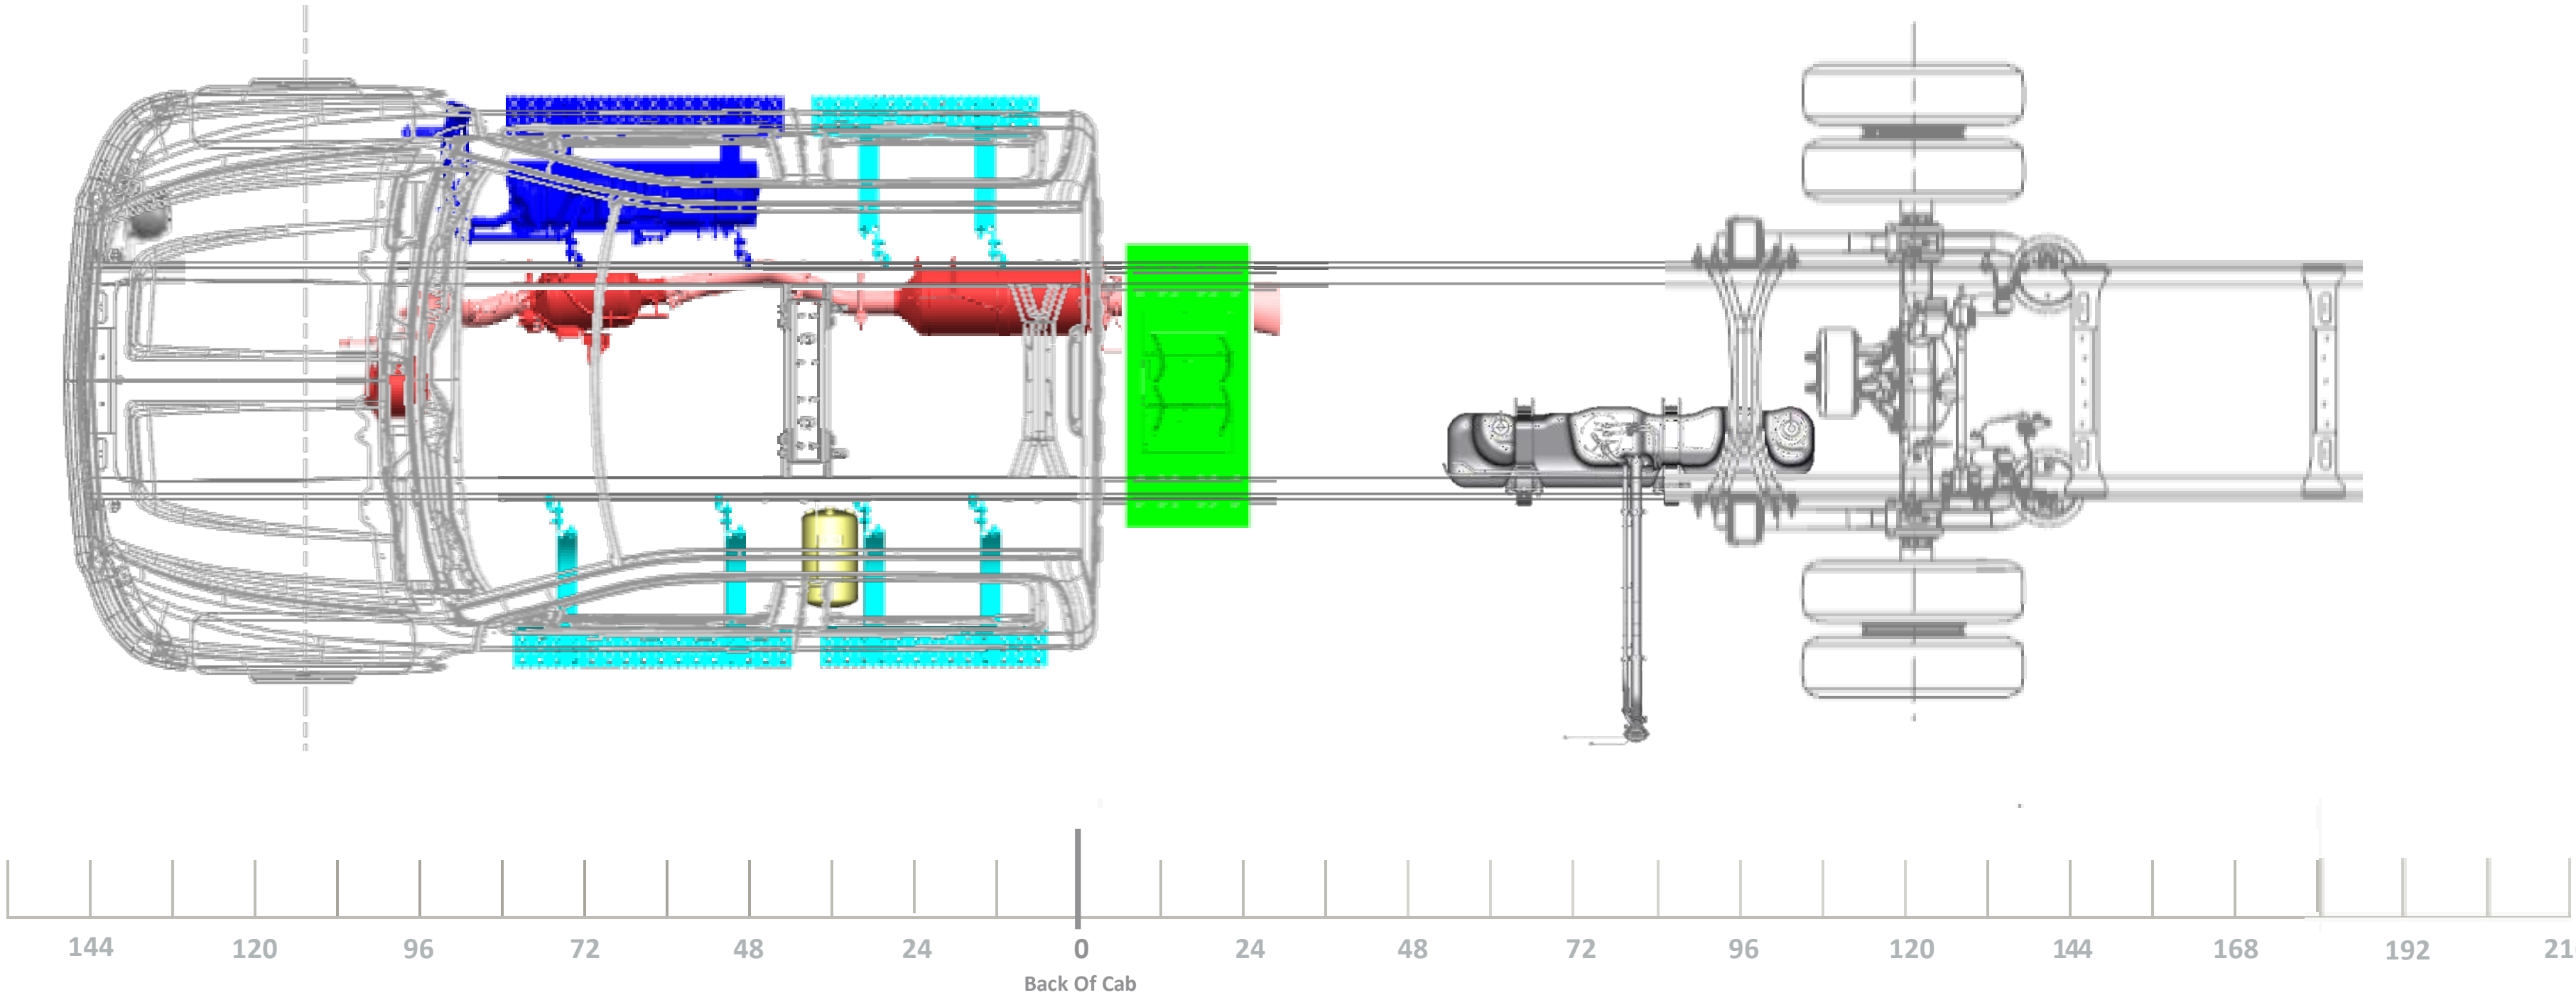

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28" STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235" WB (120" CA) 75" AF

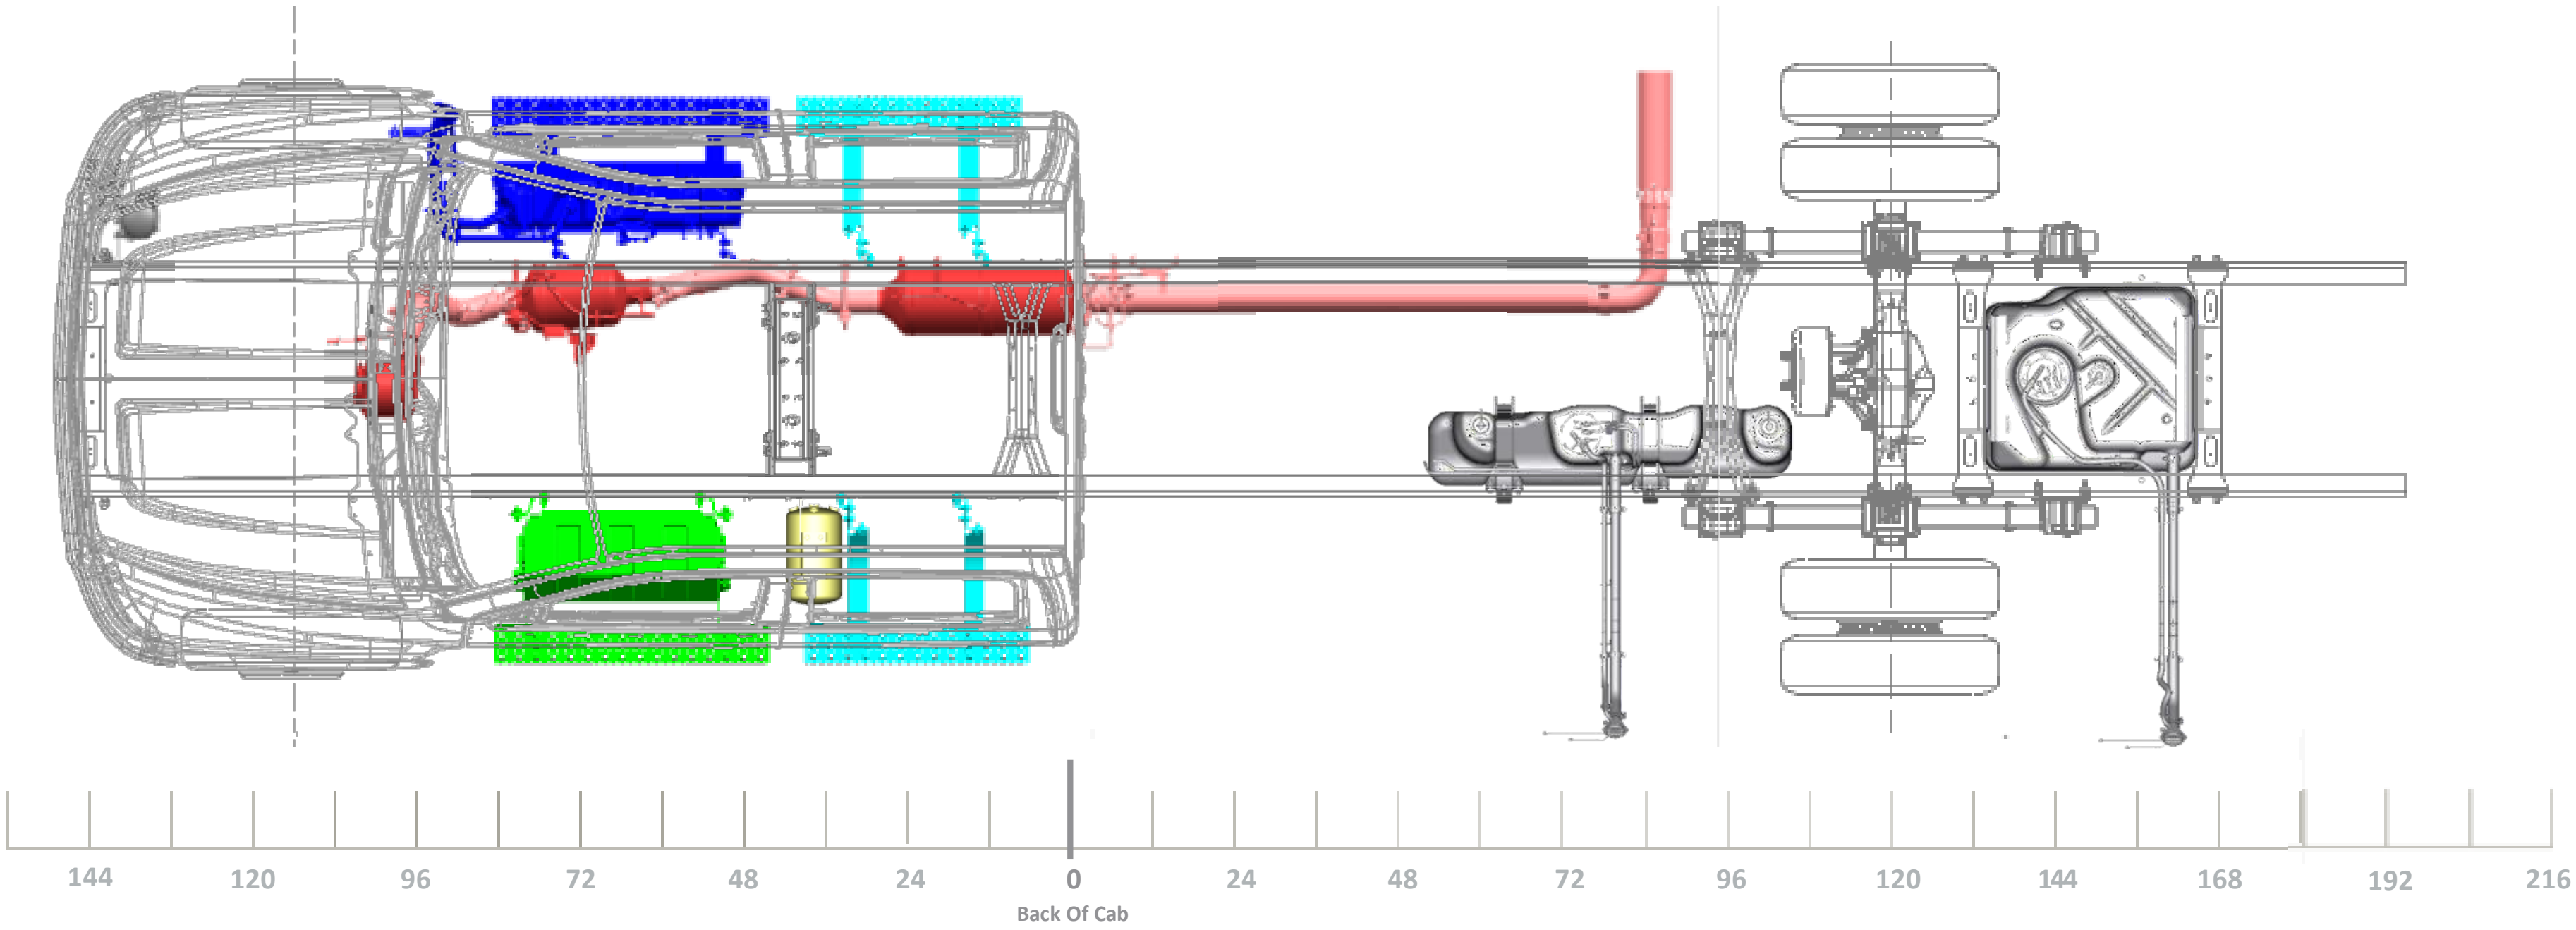

2020 Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y7/7Y8	28” STEEL, 2 BATTERIES
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

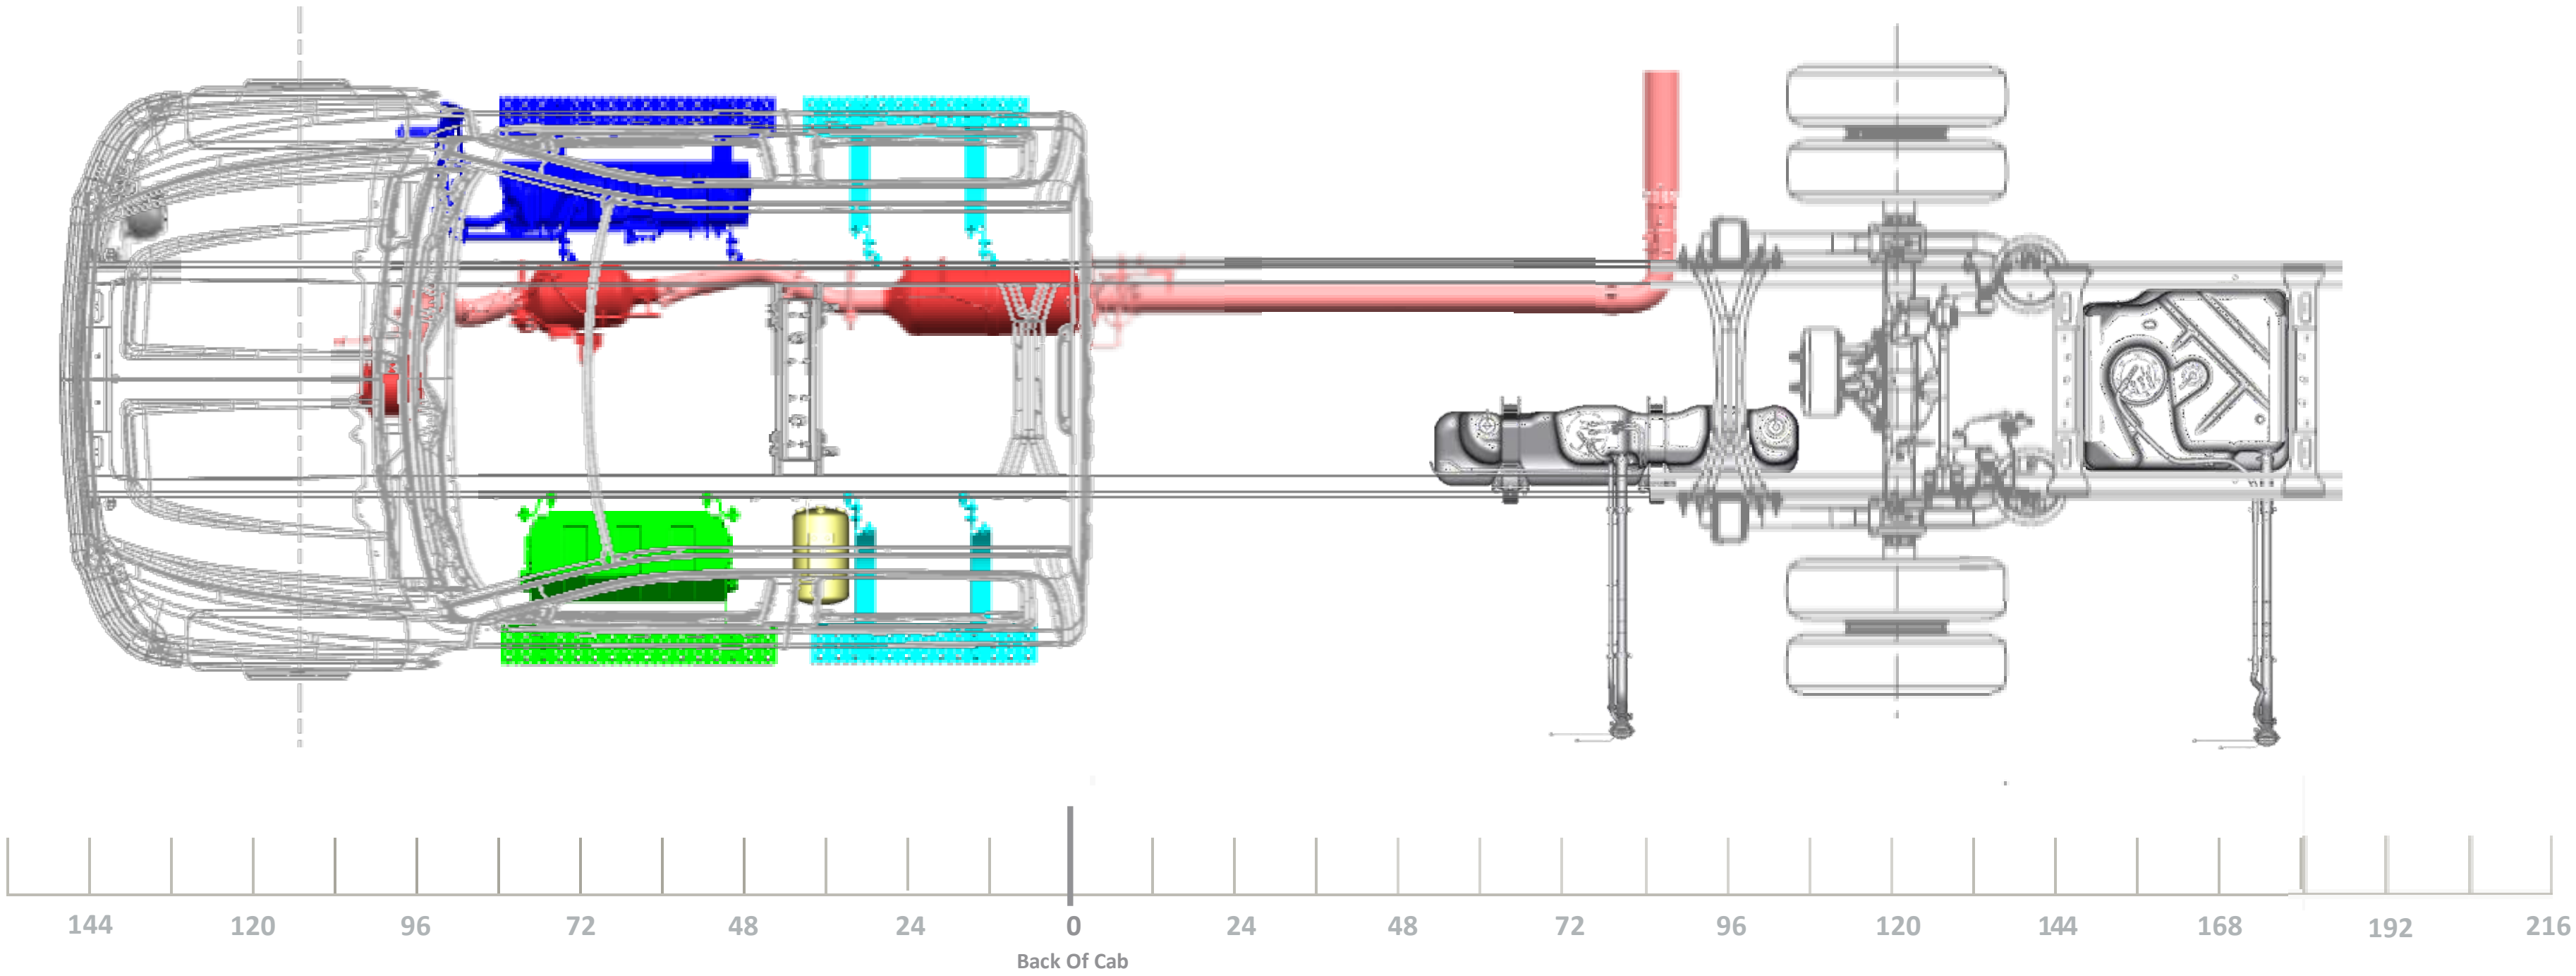

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 OR 4X4 TRUCK CONFIGURATION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

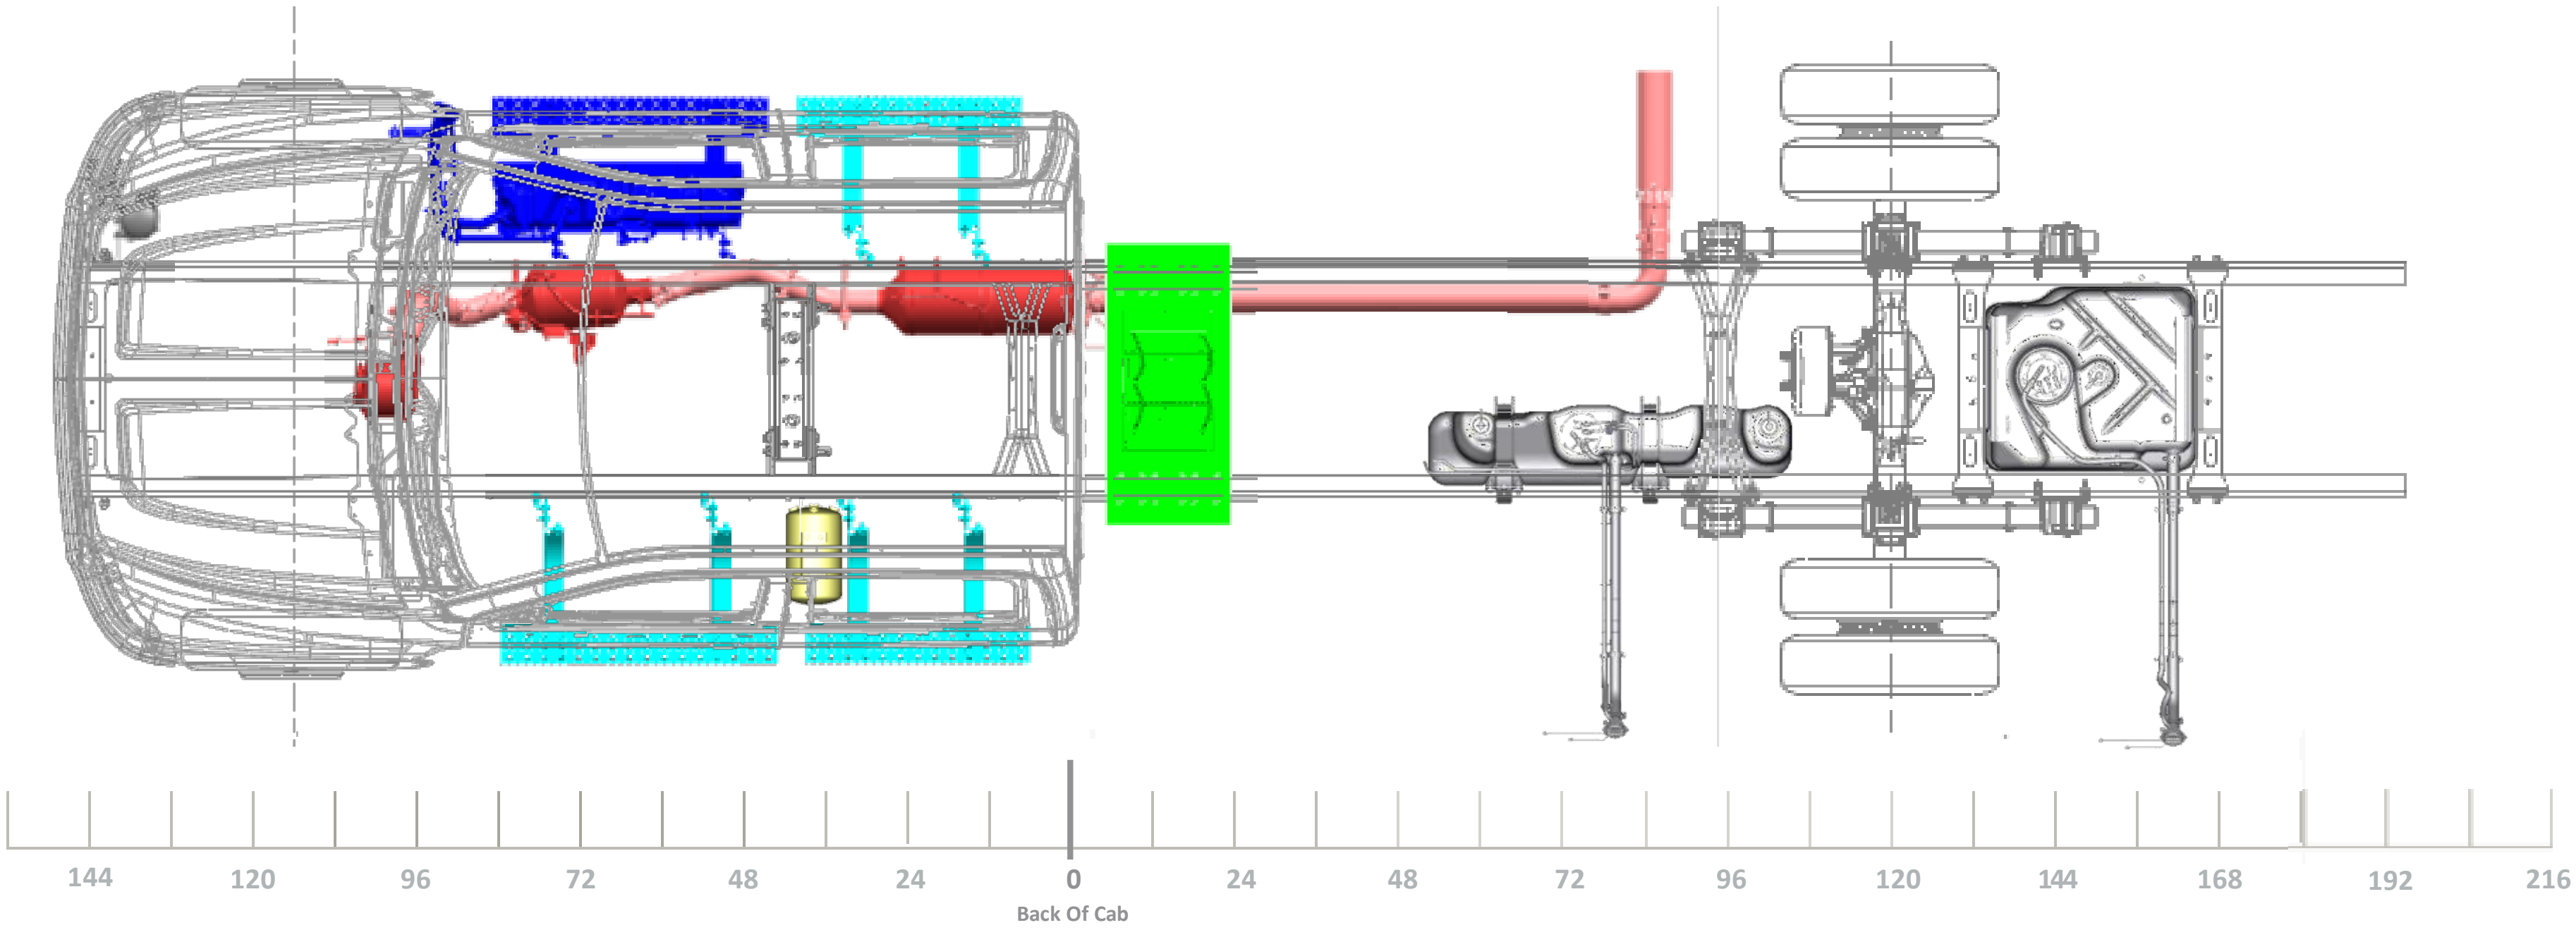

Silverado Medium Duty 4500HD/5500HD/6500HD

Model/Feature Information		
Model:		C56043 K56043
Cab:		CREW CAB
Aftertreatment:		HORIZONTAL
Fuel Tank:	RPO NSQ	DUAL 25G CA, 40G AF
Battery Box:	RPO 7Y9	TEMP MTD, 3 BATT
Air Tanks:		(1) OUTISDE LEFT
DEF Tank:		6.75 GAL
Engine:		6.6L GM DURAMAX

General Configuration Information
4X2 TRUCK CONFIGURATION IROS REAR SUSPENSION
SIDE EXIT TAILPIPE AHEAD OF REAR WHEELS, RT SIDE (RPO NPK)
OPTIONAL AIR DRYER FWD OUTSIDE RT (RPO KUT/JPY)

Minimum Wheelbase
235” WB (120” CA) 75” AF

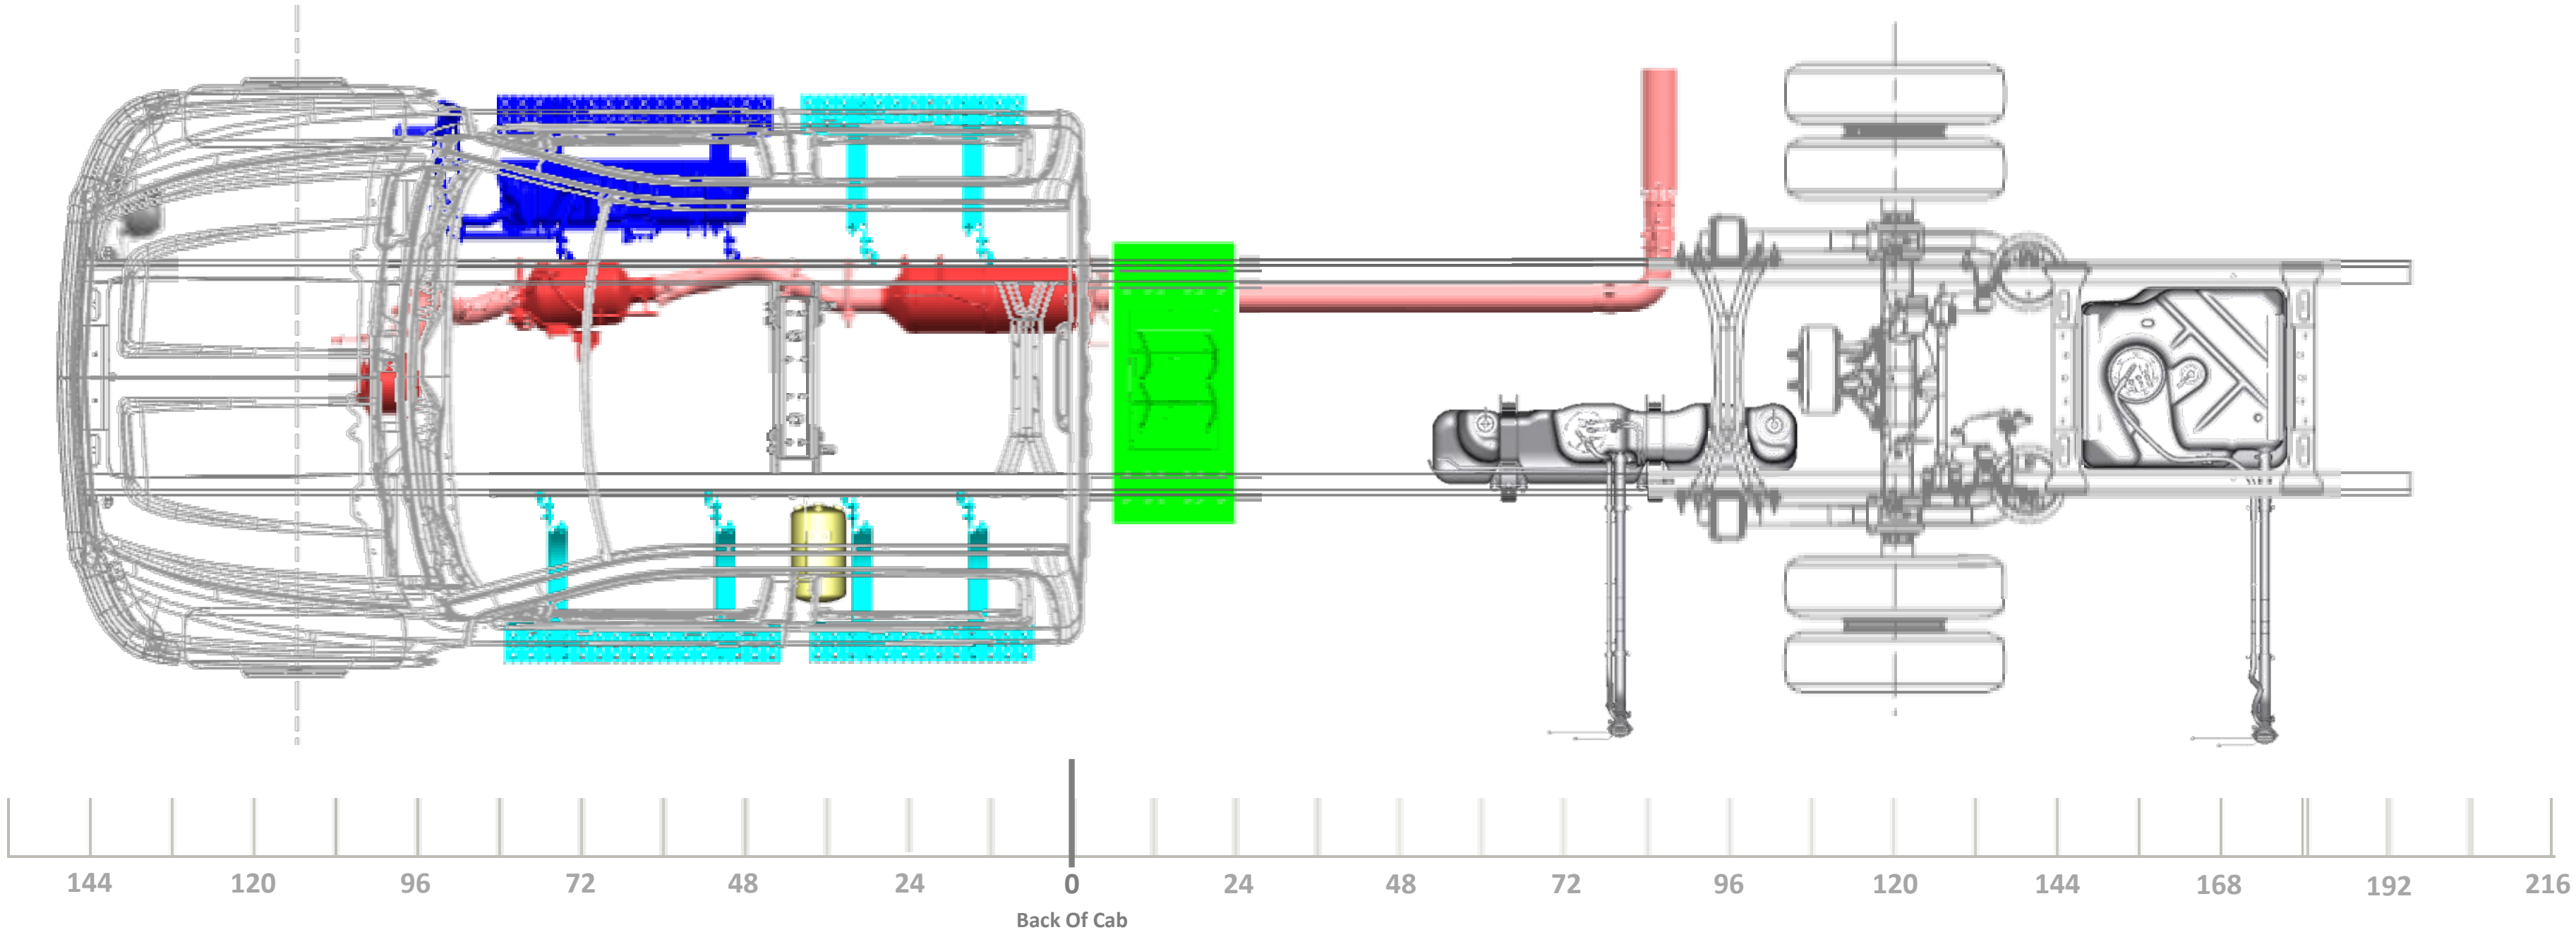

END OF BBM